

Kiske liye ye LECTURE hai? - C,C++,Java,Python

Use of JS

JS in frontend examples

Installation of VS Code, Node JS & Coderunner

Output, Difference b/w text and number, comments

Variables & Naming, updation of variables, increment, var let const, redef

Operators - +, -, *, /, **, %, ++, --, ===

Datatype, typeof

if-else, else if, ternary - can vote, even, rating, 3 digit number

thoda c++ and JS me Difference

Loops - for, while, do-while

Arrays - creation, output, indexing, forof, foreach, BuiltIn methods

map, filter, reduce

Strings, primitive & objects(for of), BuiltIn methods, template literals

Function basics, BuiltIn functions

Download Node.js®

Download Node.js the way you want.

[Prebuilt Installer](#) [Prebuilt Binaries](#) [Package Manager](#) [Source Code](#)

I want the v20.12.0 (LTS) version of Node.js for macOS running ARM64

 [Download Node.js v20.12.0](#)

Node.js includes [npm \(10.5.0\)](#).

[Read the changelog for this version](#)

[Read the blog post for this version](#)



Code Runner v0.12.1

Jun Han

25,679,036



Run C, C++, Java, JS, PHP, Pytho...

Disable

Uninstall



This extension is enabled globally.

JS helloWorld.js

```
1 console.log("Hello World");  
2 console.log("Hello PW");  
3 |
```

PROBLEMS

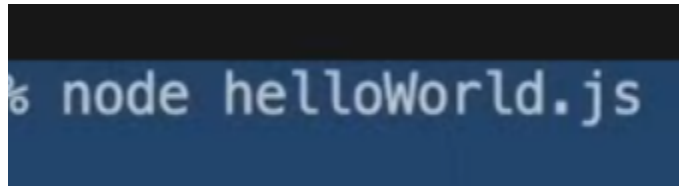
DEBUG CONSOLE

PORTS

TERMINAL

```
raghavgarg@Raghavs-MacBook-Pro JavaScript_Cou  
/JavaScript_Course/helloWorld.js"  
Hello World  
Hello PW
```

OPEN terminal shortcut = Ctrl + backtick(`)

A screenshot of a terminal window with a dark background. The text 'node helloWorld.js' is displayed in a light blue or white monospaced font. The 'n' is partially cut off on the left edge of the image.

```
% node helloWorld.js
```

For run in terminal

```
1 console.log(3)
2 console.log("3")
3
```

This is a three string text and
This is a number, this

raghavgarg@Raghavs-MacBook-Pro JavaScript_Course %
Course/JavaScript_Course/helloWorld.js"

3
3

```
1 console.log(3+4)
2 console.log("3+4")
3
```

Why 3 + 4 because this 3 + 4 is just
It

PROBLEMS DEBUG CONSOLE PORTS TERMINAL

- raghavgarg@Raghavs-MacBook-Pro JavaScript_Course %
Course/JavaScript_Course/helloWorld.js"
7
3+4
● raghavgarg@Raghavs-MacBook-Pro JavaScript_Course %

```
1 int a = 4;
2 float b = 3.14;
```

we do not define the data type,

```
1   a = 10.6;
2   console.log(a+3);
3   x = "raghav";
4   console.log(x);
```

PROBLEMS

DEBUG CONSOLE

PORTS

TERMINAL

- raghavgarg@Raghavs-MacBook-Pro JavaScript Course/JavaScript_Course/helloWorld.js" 13.6
raghav

```
1  a = 10;  
2  console.log(a);  
3  a = 20.7;  
4  console.log(a);
```

PROBLEMS

DEBUG CONSOLE

PORTS

TERMINAL

● raghavgarg@Raghavs-MacBook-Pro JavaScript
Course/JavaScript_Course/helloWorld.js"
10
20.7

```
1  a = 10;
2  console.log(a);
3  a = 20.7;
4  console.log(a);
5  a = "raghav";
6  console.log(a);
```

PROBLEMS

DEBUG CONSOLE

PORTS

TERMINAL

● raghavgarg@Raghavs-MacBook-Pro JavaScript
Course/JavaScript_Course/helloWorld.js

10

20.7

raghav


```
12  
13     a = 5;  
14     b = 6;  
15     c = 8;  
16     console.log(a,b,c);|
```

PROBLEMS

DEBUG CONSOLE

PORTS

TER

- raghavgarg@Raghavs-MacBook-Pro JavaScript_Course/JavaScript_Course/helloWorld.js"
5 6 8
- raghavgarg@Raghavs-MacBook-Pro JavaScript

```
18     console.log("raghav","garg","is","coding");
```

PROBLEMS

DEBUG CONSOLE

PORTS

TERMINAL

OUTPUT

- raghavgarg@Raghavs-MacBook-Pro JavaScript_Course % node 'Course/JavaScript_Course/helloWorld.js'
raghav garg is coding

```
19
20     age = 24;
21     console.log("My age is",age);
22
```

PROBLEMS DEBUG CONSOLE PORTS TERMINAL OUTPUT

```
● raghavgarg@Raghavs-MacBook-Pro JavaScript_Course % node '
Course/JavaScript_Course/helloWorld.js'
My age is 24
```

```
19
20     age = 24;
21     console.log("My age is"+age);
22
```

PROBLEMS DEBUG CONSOLE PORTS TERMINAL OUTPUT

```
● raghavgarg@Raghavs-MacBook-Pro JavaScript_Course % node '
Course/JavaScript_Course/helloWorld.js'
My age is24
```

```
20     age = 24;
21     console.log("My age is " +age + " and i am young");
22
23
24
```

PROBLEMS DEBUG CONSOLE PORTS TERMINAL OUTPUT

```
● raghavgarg@Raghavs-MacBook-Pro JavaScript_Course % node "/User
Course/JavaScript_Course/helloWorld.js"
My age is 24 and i am young
```

```
20   age = 24;  
21   console.log("My age is", age , "and i am young");  
22  
23  
24
```

PROBLEMS DEBUG CONSOLE PORTS TERMINAL OUTPUT

```
● raghavgarg@Raghavs-MacBook-Pro JavaScript_Course % node "/User  
Course/JavaScript_Course/helloWorld.js"  
My age is 24 and i am young
```

JS varLetConst.js > ...

```
1  var a = 4;  
2  console.log(a);  
3  a = 6;  I  
4  console.log(a);
```

PROBLEMS

DEBUG CONSOLE

P

- raghavgarg@Raghavs-MacBook-Pro
Course/JavaScript_Course/varLe

4

6

- raghavgarg@Raghavs-MacBook-Pro

JS varLetConst.js > ...

```
1  const a = 4;  
2  console.log(a);  
3  a = 6;  
4  console.log(a);
```

PROBLEMS

DEBUG CONSOLE

PO

✖ raghavgarg@Raghavs-MacBook-Pro J
Course/JavaScript_Course/varLetC

4

/Users/raghavgarg/Desktop/Dev_Co

a = 6;

^

I

TypeError: Assignment to constan

at Object.<anonymous> (/User

C++ test.cpp > main()

```
1  #include<iostream>
2  using namespace std;
3  int main(){
4      const int a = 4;
5      cout<<a<<endl;
6      a = 10;
7      cout<<a<<endl;
8  }
```

PROBLEMS

1

DEBUG CONSOLE

⊗ raghavgarg@Raghavs-MacBook-Pro J
urse/JavaScript_Course/" && g++
se/JavaScript_Course/"test
test.cpp:6:7: error: cannot assi
,

```
    a = 10;
```

```
    ~ ^
```

test.cpp:4:15: note: variable 'a'
const int a = 4;

JS varLetConst.js > ...

```
1  const a = 4;
2  console.log(a);
3  a = 10; // error
4  console.log(a);
5
6  console.log("after error")
```

PROBLEMS

DEBUG CONSOLE

POF

```
at Module._extensions..js (n
at Module.load (node:internal
at Module._load (node:intern
at Function.executeUserEntry
2)
at node:internal/main/run_ma
```

Node.js v20.9.0

○ raghavgarg@Raghavs-MacBook-Pro J

```
G++ test.cpp > main()
1  #include<iostream>
2  using namespace std;
3  int main(){
4      int a = 5;
5      cout<<a<<endl;
6      int a = 6;
7      cout<<a<<endl;
8  }
```

PROBLEMS

DEBUG CONSOLE

PORTS

TER

⊗ raghavgarg@Raghavs-MacBook-Pro JavaScript
urse/JavaScript_Course/" && g++ test.cpp
se/JavaScript_Course/"test

test.cpp:6:9: **error: redefinition of 'a'**
 int a = 6;
 ^

test.cpp:4:9: note: previous definition of
 int a = 5;
 ^


```
5  
6   var a = 5;  
7   console.log(a);  
8   var a = 7;  
9   console.log(a);
```

PROBLEMS

DEBUG CONSOLE

PORTS

TER

- raghavgarg@Raghavs-MacBook-Pro JavaScript Course/JavaScript_Course/varLetConst.js"

5

7

© raghavgarg@Raghavs-MacBook-Pro JavaScript

```
6   var a = 5;
7   console.log(a);
8   const a = 7;
9   console.log(a);
```

PROBLEMS

DEBUG CONSOLE

PORTS

TERMINAL

⊗ raghavgarg@Raghavs-MacBook-Pro JavaScript
Course/JavaScript_Course/varLetConst.js"
/Users/raghavgarg/Desktop/Dev_Course/Java
const a = 7;
 ^

SyntaxError: Identifier 'a' has already been declared
 at internalCompileFunction (node:internal

JS operators.js > ...

```
1   let a = 7;  
2   let b = 4;  
3  
4   console.log(a+b);  
5   console.log(a-b);  
6   console.log(a*b);  
7   console.log(a/b);
```

PROBLEMS

DEBUG CONSOLE

PORTS

TER

- raghavgarg@Raghavs-MacBook-Pro JavaScript Course/JavaScript_Course/operators.js"
11
3
28
1.75
- raghavgarg@Raghavs-MacBook-Pro JavaScript

```
1   let a = 7;
2   let b = 4;
3
4   console.log(a+b);
5   console.log(a-b);
6   console.log(a*b);
7   console.log(Math.floor(a/b));
8
```

PROBLEMS

DEBUG CONSOLE

PORTS

TER

- raghavgarg@Raghavs-MacBook-Pro JavaScript Course/JavaScript_Course/operators.js"

11

3

28

1

- raghavgarg@Raghavs-MacBook-Pro JavaScript

```
1 let a = 10;
2 let b = 4;
3
4 console.log(a+b);
5 console.log(a-b);
6 console.log(a*b);
7 console.log(a/b);
8 console.log(a%b);
9
```

PROBLEMS

DEBUG CONSOLE

PORTS

TER

- raghavgarg@Raghavs-MacBook-Pro JavaScript Course/JavaScript_Course/operators.js

14

6

40

2.5

2

```
9  
10 console.log(21*7)  
11
```

PROBLEMS

DEBUG CONSOLE

● raghavgarg@Raghavs-MacBook
Course/JavaScript_Course/o

14

6

40

2.5

2

128



File & Folder Icons

Nextbook

129,992



File- and folder-specific icons in ...

Set File Icon Theme

Disable

Uninstall

This extension is enabled globally.

js dataTypes.js

```
1  a = 4;  
2  b = 3.14;  
3  c = "raghav";  
4  d = true;  
5  e = 'q'  
6
```

```
6
7   console.log(a,typeof(a));
8   console.log(b,typeof(b));
9   console.log(c,typeof(c));
10  console.log(d,typeof(d));
11  console.log(e,typeof(e));
```

PROBLEMS

DEBUG CONSOLE

PORTS

- raghavgarg@Raghavs-MacBook-Pro JavaScript Course/JavaScript_Course/dataTypes.js'
4 number
3.14 number
raghav string
true boolean
q string
- raghavgarg@Raghavs-MacBook-Pro JavaScript

```
console.log('hello world');
```

```
console.log(b,typeof b);
```


JS conditionals.js

```
1   age = 2;  
2   if(age>=18) console.log("adult");  
3   else console.log("child");
```

PROBLEMS

DEBUG CONSOLE

PORTS

TERMINAL

- raghavgarg@Raghavs-MacBook-Pro JavaScript_Course/JavaScript_Course/conditionals.js
child

JS conditionals.js

```
1  num = 2;
2  if(num%2==0){
3      console.log("even number");
4  }
5  else
6      console.log("odd number");
```

PROBLEMS

DEBUG CONSOLE

PORTS

TERMINAL

- raghavgarg@Raghavs-MacBook-Pro JavaScript_Course/JavaScript_Course/conditionals.js
even number

JS tripleEqualTo.js

```
1   a = 5;  
2   b = 55;  
3   console.log(a==b);
```

PROBLEMS

DEBUG CONSOLE

PORT

- raghavgarg@Raghavs-MacBook-Pro JavaScript_Course/tripleEqu
false

JS tripleEqualTo.js

```
1   a = 5;  
2   b = '5';  
3   console.log(a==b);
```

PROBLEMS

DEBUG CONSOLE

PORT

● raghavgarg@Raghavs-MacBook-Pro JavaScript_Course/tripleEqu
true

JS tripleEqualTo.js

```
1   a = 5;  
2   b = '5'; // '5' : 53  
3   console.log(a==b);
```

PROBLEMS

DEBUG CONSOLE

PORT

- raghavgarg@Raghavs-MacBook-Pro JavaScript_Course/tripleEqu
true

```
C++ test.cpp > main()
1  #include<iostream>
2  using namespace std;
3  int main(){
4      int a = 5;
5      int b = '5';
6      cout<<(a==b)<<endl;
7  }
```

PROBLEMS

DEBUG CONSOLE

PORT

- raghavgarg@Raghavs-MacBook-Pro JavaScript_Course/" && g++ test.cpp -o test -std=c++11

Parses string to integer

C++ test.cpp >  main()

```
1  #include<iostream>
2  #include<string>
3  using namespace std;
4  int main(){
5      string s = "54";
6      int x = stoi(s);
7      cout<<x;
8  }
```

PROBLEMS

DEBUG CONSOLE

PO

- raghavgarg@Raghavs-MacBook-Pro J
urse/JavaScript_Course/" && g++
se/JavaScript_Course/"test
54%

● raghavgarg@Raghavs-MacBook-Pro 7

JS tripleEqualTo.js

```
1   a = 5;  
2   b = '5'; // '5' : 53  
3   console.log(a==b);  
4   console.log(a===b);
```

PROBLEMS

DEBUG CONSOLE

PO

- raghavgarg@Raghavs-MacBook-Pro J
Course/JavaScript_Course/tripleE
true
false

© raghavgarg@Raghavs-MacBook-Pro 7

JS loops.js > ...

```
1  // for(let i=1;i<=10;i++){
2  //     console.log(i);
3  // }
4
5  // let i = 1;
6  // while(i<=15){
7  //     console.log(i);
8  //     i++;
9  // }
10
11  let i = 1;
12  do{
13      console.log(i);
14      i++;
15  } while(i<=15);
```