

Create the Checkout Page

project and we're going to click this
cart icon in

cart icon in the top
right and this will take us

amazon Checkout (3 items)

Review your order

Order Summary	
Items (3):	\$42.75
Shipping & handling:	\$4.99
Total before tax:	\$47.74
Estimated tax (10%):	\$4.77
Order total:	\$52.51



Checkout (3 items)

page which is the checkout page so on this page we can see the products

Review your order

Delivery date: Tuesday, June 21



Black and Gray Athletic Cotton Socks - 6 Pairs
\$10.90
Quantity: 2 [Update](#) [Delete](#)

Choose a delivery option:

☒ **Tuesday, June 21**
FREE Shipping

☐ **Wednesday, June 15**
\$4.99 - Shipping

☐ **Monday, June 13**

Order Summary

Items (3):	\$42.75
Shipping & handling:	\$4.99
Total before tax:	\$47.74
Estimated tax (10%):	\$4.77
Order total:	\$52.51

 **Cart** Uses a link element
cart icon works it basically uses is an HTML element called a link element

```
<a href="https://youtube.com">...</a>
```

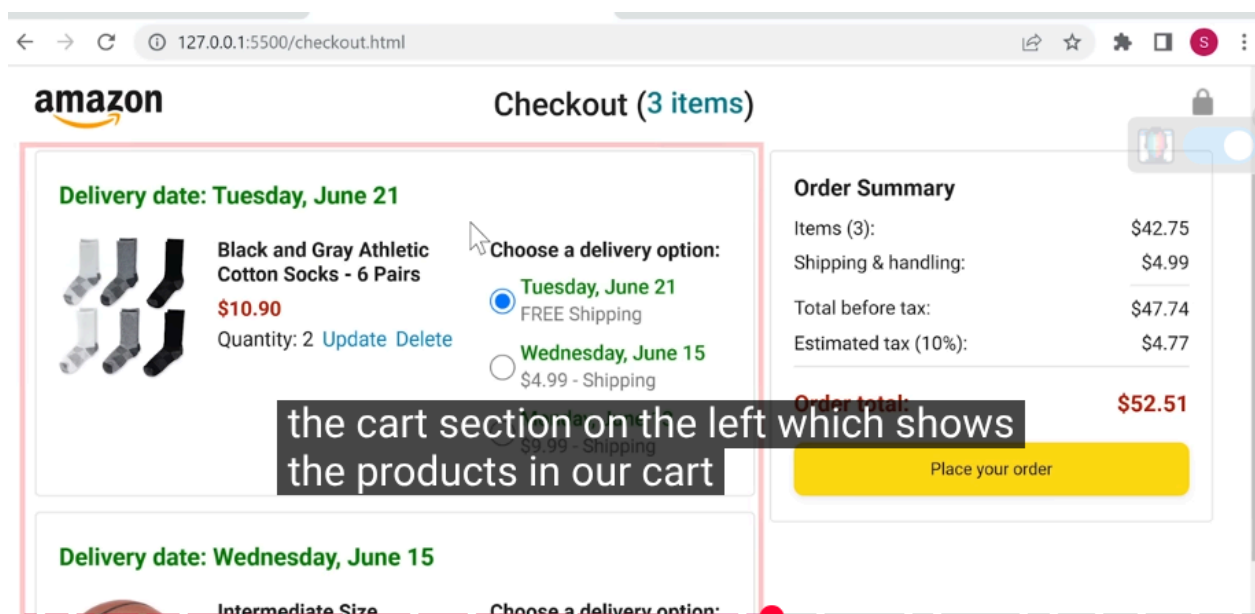
looks like this link elements have a special attribute called href

```
<a href="https://youtube.com">...</a>
```


click a link element whatever is inside the href



```
<script type="module" src="scripts/checkout.js"></script>
</body>
</html>
```



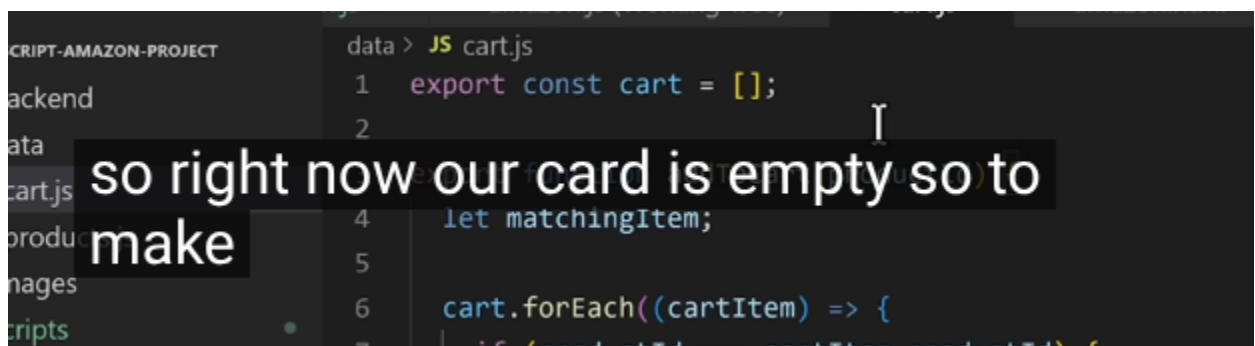have the payment section on the right which calculates the cost of our order



```
SCRIPT-AMAZON-PROJECT
backend
data
cart.js
products.js
scripts
data > JS cart.js
1 export const cart = [];
2
3
4 let matchingItem;
5
6 cart.forEach((cartItem) => {
7   if (product.id === cartItem.product.id) {
```

make it easier for us to develop we're just going to add some default values

```
SCRIPT-AMAZON-PROJECT
backend
data
cart.js
products.js
scripts
data > JS cart.js
1 export const cart = [];
2
3
4 let matchingItem;
5
6 cart.forEach((cartItem) => {
7   if (product.id === cartItem.product.id) {
```

into this array so inside here let's create

127.0.0.1:5500/checkout.html

Checkout (3 items)
into our card first so looking at this page, June 21

amazon

Delivery date: Tuesday, June 21



Black and Gray Athletic Cotton Socks - 6 Pairs

\$10.90

Quantity: 2 [Update](#) [Delete](#)

Delivery date: Wednesday, June 20

Choose a delivery option:

Order Summary

Items (3):

Shipping & handling:

JAVASCRIPT-AMAZON-P...

- backend
- data
 - JS cart.js
 - JS products.js
- images
- scripts
 - JS amazon.js
 - JS checkout.js
- styles
 - amazon.html
 - checkout.html
 - orders.html
 - tracking.html

```
data > JS products.js
1 export const products = [
2   {
3     id:
4     "e43638ce-6aa0-4b85-b27f-e1d07eb6
5     image: "images/products/
6     athletic-cotton-socks-6-pairs.jpg
7     name: "Black and Gray Athletic Co
8     Socks - 6 Pairs",
9     rating: {
10      stars: 4.5,
11      count: 87
12    },
13    priceCents: 1090,
14    keywords: [
15      "socks",
16      "sports",
17      "apparel"
```

ID right click copy and then

Black and Gray Athletic
Cotton Socks - 6 Pairs

cart and remember we structured our data so that each card item

```
data > JS cart.js
export const cart = [{
  productId:
    'e43638ce-6aa0-4b85-b27f-e1d07eb678c6',
  quantity: 2,
}, {
  productId:
    '15b6fc6f-327a-4ec4-896f-486349e85a3d' |
}];
```

product's image the name and the price so how come we're not saving these into

our data and that's because we're using a special technique

the product's ID and then we can use this ID to search for this

this ID to search for this product inside the products array here

the ID we can find all the other details of the product like the image the name

this data twice inside the products array and inside the cart array

have to do is save the ID of the product that we want and then search for it

this technique is called duplicating the data or normalizing the data




The screenshot shows a web browser on the left displaying an Amazon checkout page. The page includes the Amazon logo, a delivery date of Tuesday, June 21, and a product listing for 'Black and Gray Athletic Cotton Socks - 6 Pairs' priced at \$10.90 with a quantity of 2. Below this, another delivery date of Wednesday, June 15 is visible. On the right, a code editor shows the HTML structure of the checkout page, with a focus on the 'cart-item-container' divs. The code editor also displays a JavaScript file named 'checkout.js' which imports a 'cart' object from 'data/cart.js' and uses 'cart.forEach' to iterate over the cart items.

```
cart.forEach((cartItem)=>{  
  ,  
  ,  
  ,  
  // we need to paset cart-item-container html code  
  here  
  ,  
});
```

```
cart.forEach((cartItem)=>{  
  
  // now we need to extract name,image,  
  price from product id  
  const productId = cartItem.productId;
```

```
import {cart} from '../data/cart.js';  
import {products} from '../data/products.js';
```
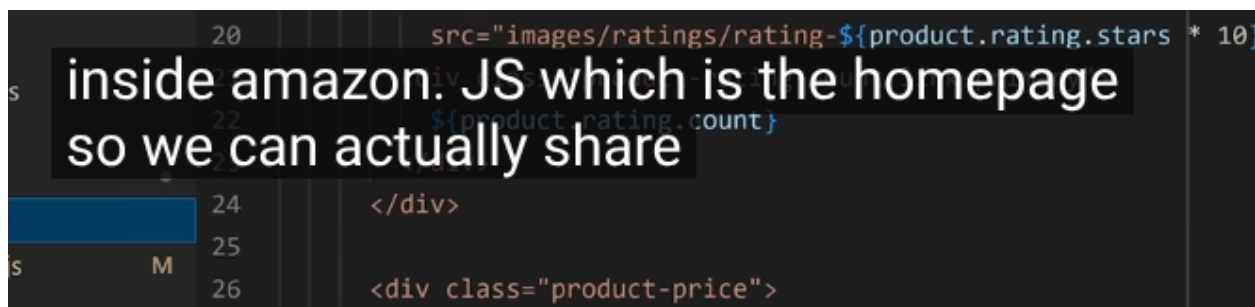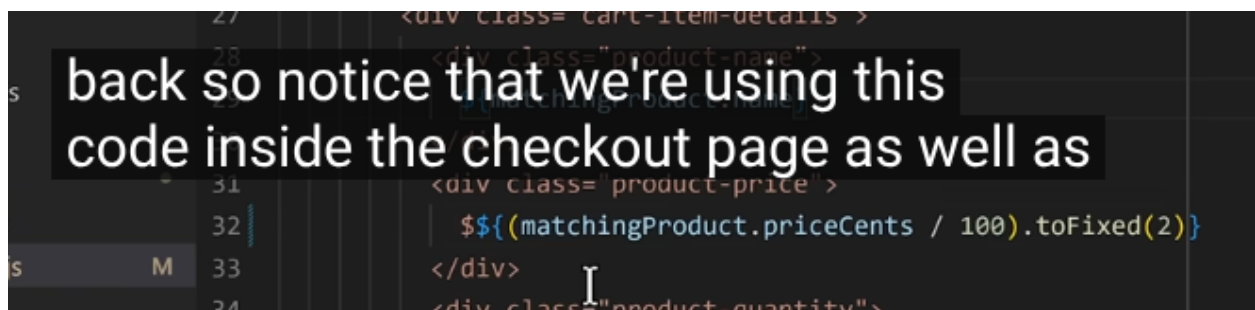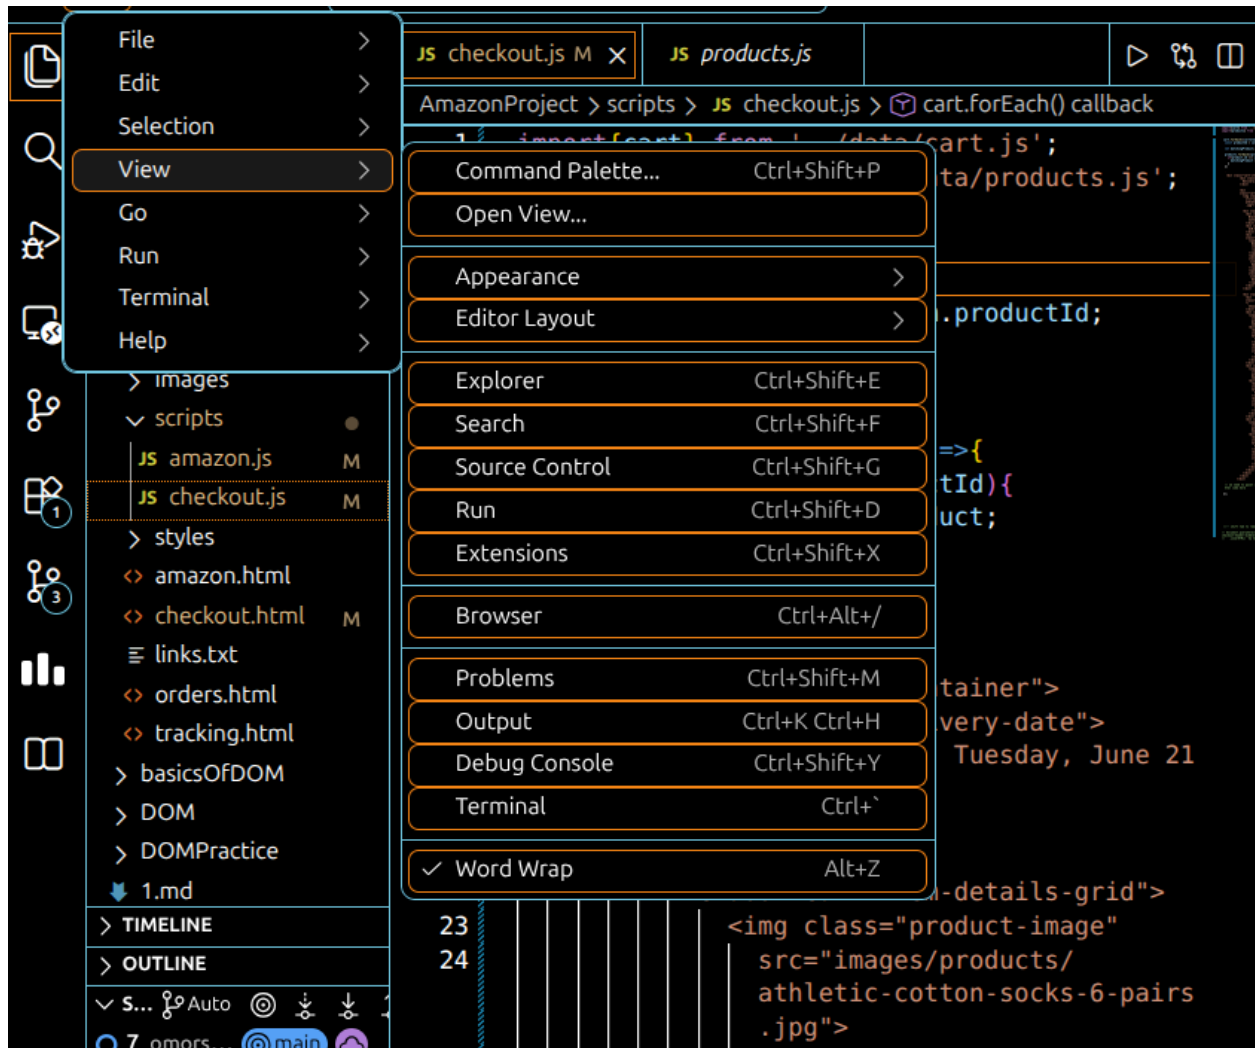
```
cart.forEach((cartItem)=>{  
  const productId = cartItem.productId;  
  
  let matchingProduct;  
  
  products.forEach((product)=>{  
    if(product.id === productId){  
      matchingProduct = product;  
    }  
  })
```

between the two files so we don't have to repeat it

to repeat it and to do that we can use modules so let's open checkout.

thing as this code and then we can share this function between the two files

contain this shared function so we're going to go to our

utils and press enter so we're naming it utils because

this code is sort of like a useful utility

to have different types of utils so let's create a new

```
AmazonProject > scripts > utils > JS money.js > formatCurrency
```

```
1 export function formatCurrency(priceCents){  
2   (priceCents/100).toFixed(2);  
3 }
```

```
import { formatCurrency } from './utils/  
money.js';
```

```
onProject > scripts > utils > JS money.js > formatCurrency
```

```
export function formatCurrency(priceCents){  
  return [(priceCents/100)].toFixed(2);  
}
```

```
<div class="product-price">  
  ${formatCurrency(product.  
priceCents)}  
</div>
```

and then here the delivery options are shared between the two products

want each product to choose its own delivery

Checkout (3 items)

Choose a delivery option:

- ☐ Tuesday, June 21
FREE Shipping
- ☒ Wednesday, June 22
\$4.99 - Shipping
- ☐ Monday, June 20
\$9.99 - Shipping

radio selector

```
<input type="radio" name="name1">
```

same name = we can only select 1 of them

quantity-link

the top have one name and the three at the bottom have a different name

Checkout (3 items)

Choose a delivery option:

- ☐ Tuesday, June 21
FREE Shipping
- ☐ Wednesday, June 15
\$4.99 - Shipping
- ☒ Monday, June 13
\$9.99 - Shipping

```
<input type="radio" name="name1">  
<input type="radio" name="name1">  
<input type="radio" name="name1">
```

Place your order

21

Choose a delivery option:

- ☐ Tuesday, June 21
FREE Shipping
- ☐ Wednesday, June 15
\$4.99 - Shipping
- ☐ Monday, June 13
\$9.99 - Shipping

```
<input type="radio" name="name222">  
<input type="radio" name="name222">  
<input type="radio" name="name222">
```

```
type="radio" checked=""
"delivery-option-input"
delivery-option-${matchingProduct.id}">

class="delivery-option-date">
day, June 21

class="delivery-option-price">
Shipping

="delivery-option">
type="radio"
"delivery-option-input"
delivery-option-${matchingProduct.id}">
```

☐ \$4.99 - Shipping

☒ **Monday, June 13**
\$9.99 - Shipping

Delivery date: Tuesday, June 21



Intermediate Size Basketball

\$20.95

Quantity: 5 [Update](#) [Delete](#)

Choose a delivery option:

☒ **Tuesday, June 21**
FREE Shipping

☐ **Wednesday, June 15**

```
document.querySelectorAll('.js-delete-link')
  .forEach((link) => {
    link.addEventListener('click', () => {
    });
  });
```

1. Remove the product from the cart
2. Update the HTML

How do we know which product to remove?

```
document.querySelectorAll('.  
js-delete-quantity-link')  
  .forEach((link)=>{  
    link.addEventListener('click', ()=>{  
      const deleteId= link.dataset.deleteId;  
      console.log(deleteId);  
    });  
  });
```



```
document.querySelectorAll('.  
js-delete-quantity-link')  
.forEach((link)=>{  
  link.addEventListener('click',()=>{  
    const deleteId= link.dataset.deleteId;  
    console.log(deleteId);  
  
    const index = cart.findIndex( item  
=> item.productId === deleteId);  
  
    if(index !== -1){  
      cart.splice(index, 1);  
    }  
    console.log(cart.length);  
  
    for( let product of cart){  
      // console.log(cart.length);  
      console.log(product.productId);  
    }  
  
  });  
});
```

```
export function removeFromCart(deleteId){  
  
  const index = cart.findIndex( item =>  
    item.productId === deleteId);  
  
  if(index !== -1){  
    cart.splice(index, 1);  
    console.log(`product deleted product  
    id is= ${deleteId}`);  
  }  
  console.log(`No of products in the cart  
  are ${cart.length}. They are: `);  
  
  for( let product of cart){  
    // console.log(cart.length);  
    console.log(product.productId);  
  }  
}
```

2. Delete by value

⌞ JavaScript

```
const arr = ['a', 'b', 'c', 'd'];

const index = arr.indexOf('c');

if (index !== -1) {
  arr.splice(index, 1);
}

console.log(arr);
// ['a', 'b', 'd']
```

1. Delete by index (most common)

⌞ JavaScript

```
const arr = ['a', 'b', 'c', 'd'];

arr.splice(1, 1); // Remove 1 element at index 1

console.log(arr);
// ['a', 'c', 'd']
```

3. Delete an object from an array

JavaScript



```
const cart = [
  { productId: '1', quantity: 2 },
  { productId: '2', quantity: 1 }
];

const productIdToDelete = '2';

const index = cart.findIndex(item => item.productId === productIdToDelete);

if (index !== -1) {
  cart.splice(index, 1);
}

console.log(cart);
```



```
export function removeFromCart(deleteId){
  const index = cart.findIndex( item =>
    item.productId === deleteId);

  if(index !== -1){
    cart.splice(index, 1);
    console.log(`product deleted product
    id is= ${deleteId}`);
  }
  console.log(cart);
}
```

Steps

1. Use the DOM to get the element to remove
2. Use `.remove()` method

remove so every element that we get from the Dom has a method called remove

```
const button = document.querySelector('button');  
button.remove();
```

these two products are represented by these two divs here with

te: Tuesday, June 21

Black and Gray Athletic

Choose

these two divs here with the class cart--

te: Tuesday, June 21

Black and Gray Athletic

Choose

cart--

Check

container so one way to identify which

te: Tuesday, June 21

Black and Gray Athletic

Choose

```
<div class="page-title">Review your order</div>  
<div class="checkout-grid"> grid
```

```
<div class="order-summary js-order-summary">  
  <div class="cart-item-container"> ...  
</div> == $0  
  <div class="cart-item-container"> ... </div>  
</div>
```

```
<div class="page-title">Review your order</div>  
<div class="checkout-grid"> grid
```

```
<div class="order-summary js-order-summary">  
  <div class="cart-item-container"> ...  
</div> == $0  
  <div class="cart-item-container"> ... </div>  
</div>
```

```
<div class="page-title">Review your order</div>  
<div class="checkout-grid"> grid
```

```
<div class="order-summary js-order-summary">  
  <div class="cart-item-container"> ...  
</div> == $0  
  <div class="cart-item-container"> ... </div>  
</div>
```

product this is for is to add a special class to this element and

te: Tuesday, June 21

Black and Gray Athletic
Cotton Socks - 6 Pairs
\$10.90
Quantity: 2 Update Delete

Add a special class

class="js-cart-item-container-e43638ce-..."

will contain the product
ID and

the
bottom when we click delete we have

```
95 }  
96  
97 document.querySelector('.js-order-summary')  
98 .innerHTML = cartSummaryHTML;  
99  
100 document.querySelectorAll('.js-delete-link')  
101 .forEach((link) => {  
102   link.addEventListener('click', () => {  
103     const productId = link.dataset.productId;  
104     removeFromCart(productId);
```

bottom when we click delete we have the
product ID here so we can use this

```
95 }  
96  
97 document.querySelector('.js-order-summary')  
98 .innerHTML = cartSummaryHTML;  
99  
100 document.querySelectorAll('.js-delete-link')  
101 .forEach((link) => {  
102   link.addEventListener('click', () => {  
103     const productId = link.dataset.productId;  
104     removeFromCart(productId);
```

select that special class that we're going to add

```
95 });
96 document.querySelector('.js-order-summary')
97   .innerHTML = cartSummaryHTML;
98
99
100 document.querySelectorAll('.js-delete-link')
101   .forEach((link) => {
102     link.addEventListener('click', () => {
103       const productId = link.dataset.productId;
104       removeFromCart(productId);
105     });
106   });
```

going to add so first let's add that special class to each of these elements

```
95 });
96 document.querySelector('.js-order-summary')
97   .innerHTML = cartSummaryHTML;
98
99
100 document.querySelectorAll('.js-delete-link')
101   .forEach((link) => {
102     link.addEventListener('click', () => {
103       const productId = link.dataset.productId;
104       removeFromCart(productId);
105     });
106   });
```

```
<div class="cart-item-container"
  js-cart-item-container-${matchingProduct.id}>
  <div class="delivery-date">
    Delivery date: Tuesday, June 21
```

```
document.querySelector(
  `js-cart-item-container-${productId}`
);
```



```

document.querySelectorAll('.
js-delete-quantity-link')
  .forEach((link)=>{
    link.addEventListener('click',()=>{
      const deleteId= link.dataset.deleteId;
      removeFromCart(deleteId);
      const container = document.
        querySelector(`.
        js-cart-item-conatiner-${deleteId}
        `);
      console.log(container);
    });
  });

```

```

document.querySelectorAll('.
js-delete-quantity-link')
  .forEach((link)=>{
    link.addEventListener('click',()=>{
      const deleteId= link.dataset.deleteId;
      removeFromCart(deleteId);
      const container = document.
        querySelector(`.
        js-cart-item-conatiner-${deleteId}
        `);
      container.remove();
    });
  });

```

Add localStorage to the Cart

so remember that local storage can only save strings so to save our cart

```
1 export let cart = [{
2   productId: '15b6fc6f-327a-4ec4-896f-486349e85a3d',
3   quantity: 1
4 }];
5
6
7
8
9 function saveToStorage() {
10   localStorage.setItem('cart', []);
11 }
```

```
function saveToStorage(){
  localStorage.setItem('cart', JSON.stringify
    (cart));
}
```

```
function addToCart(productId: any): void {
```

Whenever we update the cart,
we need to save it to localStorage

```
export function addToCart(productId){  
  else{  
    cart.push ({  
      productId: productId, // use  
      productId instead of productName  
      quantity : 1  
    });  
  }  
  saveToStorage();  
};  
  
export function removeFromCart(deleteId){  
  const index = cart.findIndex( item =>  
    item.productId === deleteId);  
  
  if(index !== -1){  
    cart.splice(index, 1);  
    console.log(`product deleted product  
id is= ${deleteId}`);  
  }  
  console.log(cart);  
  saveToStorage();  
}
```