

3. Make it interactive

interactive so when we click a delivery option we need to do two things

1. Update deliveryOptionId in the cart.

2. Update the page.

JS so because we're modifying the cart a best

```
4 | cart = {  
6 |   quantity: 2,  
7 |   deliveryOptionId: '1'
```

best practice is to put the code inside this file

```
4 | cart = {  
6 |   quantity: 2,  
7 |   deliveryOptionId: '1'
```

this file this file should contain all the code that manages the cart

```
4 | cart = {  
6 |   quantity: 2,  
7 |   deliveryOptionId: '1'
```

Steps

1. Loop through the cart and find the product
2. Update the deliveryOptionId of the product

```
function updateDeliveryOption(productId, deliveryOptionId) {  
  
export function updateDeliveryOption(productId,  
deliveryOptionId){  
  let matchingItem;  
  let cart: any  
  cart.forEach((cartItem)=>{  
    if(productId === cartItem.productId){  
      matchingItem = cartItem;  
    }  
  })  
  
  matchingItem.deliveryOptionId = deliveryOptionId;  
  
  saveToStorage();  
}
```

JS and then in our project we need to
add event listeners to

e: Monday, October 9

Order Sum

add event listeners to each of these delivery options

Monday, October 9

Order Sur

delivery options so we run some code when we click them so inside our

Monday, October 9

Order Sur

```
... js (Working Tree) M JS checkout.js (Working Tree) M • JS money.js (Working Tree)
AMAZON-PROJECT scripts > JS checkout.js
105 const isChecked = deliveryOption.id === cartItem.deliveryOptionId
106
107 html += `
108   <div class="delivery-option">
109     <input type="radio"
110       ${isChecked ? 'checked' : ''}
111       class="delivery-option-input"
112       name="delivery-option-${matchingProduct.id}">
113     <div>
114       <div class="delivery-option-date">
115         ${dateString}
```

```
... js (Working Tree) M JS checkout.js (Working Tree) M • JS money.js (Working Tree)
AMAZON-PROJECT scripts > JS checkout.js
105 const isChecked = deliveryOption.id === cartItem.deliveryOptionId
106
107 html += `
108   <div class="delivery-option js-delivery-option">
109     <input type="radio"
110       ${isChecked ? 'checked' : ''}
111       class="delivery-option-input"
112       name="delivery-option-${matchingProduct.id}">
113     <div>
114       <div class="delivery-option-date">
115         ${dateString}
```

```

document.querySelectorAll('.js-delivery-option')
  .forEach((element) => {
    element.addEventListener('click', () => {
      updateDeliveryOption(productId, deliveryOptionId);
    });
  });

```

we picked but how do we get these two values

Data attributes

```

107   html += `
108     <div class="delivery-option js-delivery-option"
109       data-product-id="${matchingProduct.id}"
110     >
111       <input type="radio"
112         name="delivery-option-${matchingProduct.id}">
113       <div>

```

insert the product ID which is matching product. ID and we're also going to

```

107   html += `
108     <div class="delivery-option js-delivery-option"
109       data-product-id="${matchingProduct.id}"
110       data-delivery-option-id="${deliveryOption.id}">
111       <input type="radio"
112         ${isChecked ? 'checked' : ''}
113       class="delivery-option-input"
114       name="delivery-option-${matchingProduct.id}">
115       <div>

```

option.

as well as the delivery option

```
147 .forEach((element) => {  
148   element.addEventListener('click', () => {  
149     const {productId, deliveryOptionId} = element.dataset;  
150     updateDeliveryOption(productId, deliveryOptionId);  
151   });  
152 });
```

property it does the same

```
147 .forEach((element) => {  
148   element.addEventListener('click', () => {  
149     const {productId, deliveryOptionId} = element.dataset;  
150     updateDeliveryOption(productId, deliveryOptionId);  
151   });  
152 });
```

Shorthand Property

```
const productId = element.dataset.productId;  
const deliveryOptionId = element.dataset.deliveryOptionId;
```

when we click a delivery option we need to refresh the page

Monday, October 9

On

when we click a delivery option we need to refresh the page to update immediately

Monday, October 9

On

one way we solve this problem is once we click this we're going to use a Dom

Monday, October 9

Order Sun

get this element here and then update the text

Monday, October 9

Order Sum

Problem: we need to update the page one-by-one

Quantity: 2 [Update](#) [Delete](#)

now we're going to learn a better way to update the page

Thursday, October 5

Estimated tax (10%)

\$4.99 - Shipping

Tuesday, October 3

Order total:

\$9.99 - Shipping

is after we update our data we just need to rerun all this

to rerun all this code and regenerate all this HTML

first we're going to put all of this code inside a function so we can rerun

to display on the page

```
const today = dayjs();
const deliveryDate = today.add(7, 'days');
console.log(deliveryDate.format('dddd, MMMM D'));

function renderOrderSummary() {
  // ...
}
```

```
document.querySelectorAll('.js-delivery-option')
  .forEach((element)=>{
    element.addEventListener('click', ()=>{
      const productId = any
      const {productId, deliveryOptionId} = element.dataset
      updateDeliveryOption(productId, deliveryOptionId);
      renderOrderSummary();
    })
  });
```

the previous HTML and replacing it so we need to add the event listeners

A function can call / re-run itself

1. Update the data
 2. Regenerate all the HTML
- = MVC
- Model - View - Controller

MVC

Split our code into 3 parts

1. Model = saves and manages the data

data so in our project all the code in this data folder is called the model

this data folder is called the model because this code saves and manages

because this code saves and manages our data the second part of MVC is the view

MVC

2. View = takes the data and displays it on the page

project if we open checkout. JS and scroll to the top here we have code that

takes our data and then generates all the HTML so this code


the HTML so this code is called the view the last part of MVC

MVC

3. Controller = runs some code when we interact with the page

```
4 document.querySelectorAll('.js-delete-link')
5   .forEach((link) => {
6     link.addEventListener('click', () => {
7       const productId = link.dataset.productId;
8       removeFromCart(productId);
9
10      // bottom these event listeners here would
11      // be called the controller
12
13      container.remove();
14    });
15  });
16
17 document.querySelectorAll('.js-delivery-option')
18   .forEach((element) => {
19     element.addEventListener('click', () => {
20       const {productId, deliveryOptionId} = element.dataset;
```

MVC

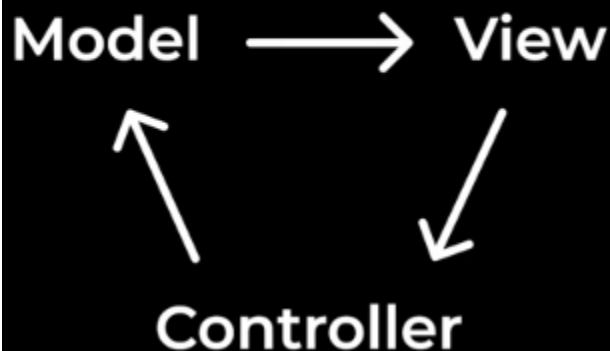

view so in our code that's what we did
here we took the model or the

```
10 const today = dayjs();  
11 const deliveryDate = today.add(1, 'day');  
12 console.log(deliveryDate.format('dddd, MMMM D'));  
13  
14 function renderOrderSummary() {  
15   let cartSummaryHTML = '';  
16  
17   cart.forEach((cartItem) => {  
18     const productId = cartItem.productId;  
19  
20     let matchingProduct;  
21  
22     products.forEach((product) => {  
23       if (product.id === productId) {  
24         matchingProduct = product;  
25       }  
26     });  
27  
28     if (matchingProduct) {  
29       cartSummaryHTML += `<div>  
30         <div>${matchingProduct.name}</div>  
31         <div>${matchingProduct.price}</div>  
32         <div>${matchingProduct.quantity}</div>  
33       </div>`;  
34     }  
35   });  
36  
37   return cartSummaryHTML;  
38 }  
39  
40 document.querySelector('#order-summary').innerHTML = renderOrderSummary();
```

here we took the model or the data which
is our cart and then we generated

```
30 let deliveryOption;  
31  
32 deliveryOptions.forEach((option) => {  
33   if (option.deliveryDays === 1) {  
34     deliveryOption = option;  
35   }  
36 });  
37  
38 const today = dayjs();  
39 const deliveryDate = today.add(  
40   deliveryOption.deliveryDays,  
41   'days'  
42 );  
43 const dateString = deliveryDate.format(  
44   'dddd, MMMM D'45 );
```

```

143     container.remove();
144   });
145   });
146   the controller we just updated our data
147   using
148   document.querySelectorAll('.js-delivery-option')
149   .forEach((element) => {
150     element.addEventListener('click', () => {
151       const {productId, deliveryOptionId} = element.dataset;
152       updateDeliveryOption(productId, deliveryOptionId);
153       renderOrderSummary();
154     });
155   });

```

```

143     container.remove();
144   });
145   });
146   function and finally we use the updated
147   model to regenerate The
148   document.querySelectorAll('.js-delivery-option')
149   .forEach((element) => {
150     element.addEventListener('click', () => {
151       const {productId, deliveryOptionId} = element.dataset;
152       updateDeliveryOption(productId,
153       renderOrderSummary();
154     });
155   });

```

MVC

Model →

**MVC = makes sure the page
always matches the data**

```

3 import {formatCurrency} from './utils/money.js';
4 file paths need to be updated do do
5 import dayjs from 'https://unpkg.com/dayjs@1.11.10/esm/index.js';
6 slash is now inside the scripts folder
7
8 hello();

```