

BasicsOfDOM

! -> for initial html code

For link a css file(bottom of the head) -> `<link rel "stylesheet" href "style.css">`

For link a js file -> `<script src "script.js"></script>`

Bottom of the body.

Need to load the file to see changes


```
*{  
  margin:0%;  
  padding:0%;  
  box-sizing: border-box;  
}  
  
html,body{  
  height: 100%;  
  width: 100%;  
}
```

```
basicsOfDOM > # style.css > ...
```

```
1  
2 h1{  
3   color: red;  
4 }
```

```
basicsOfDOM > Js script.js
```

```
1 console.log("Hello Bhai");|
```

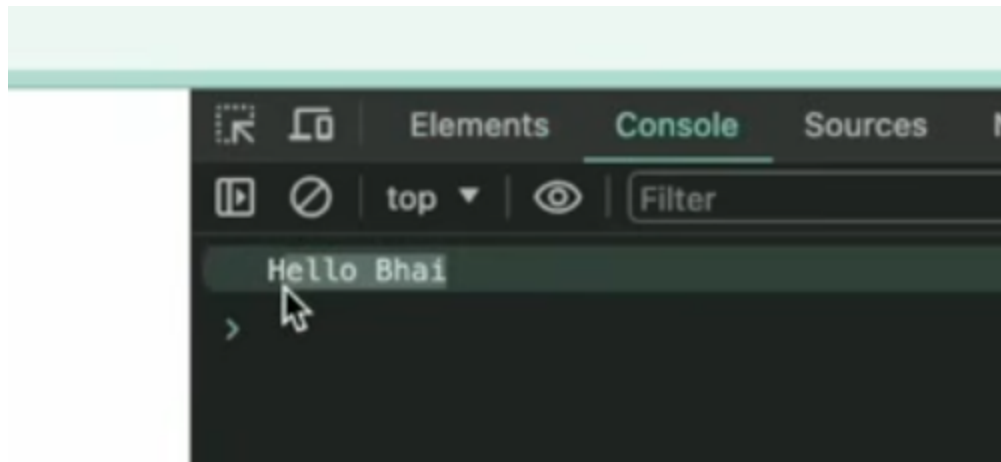

, Element Selection,

```
<link rel="stylesheet" href="style.css">
</head>
<body>
  <h1>Hello One</h1>
  <h2>Hello Two</h1>
  <h3>Hello Three</h1>
  <script src="script.js"></script>
</body>
```

Hello One
Hello Two
Hello Three

```
let x = document.querySelector("h1");
```

```
<body>
  <h1>Hello One</h1>
  <h2>Hello Two</h2>
  <h1>Hello One again</h1>
  <script src="script.js"></script>
```

```
<h1>Hello One</h1>
```

```
let x = document.querySelectorAll("h1");
console.log(x);
```

```
▼ NodeList(2) [h1, h1] i
  ▶ 0: h1
  ▶ 1: h1
  length: 2
  ▶ [[Prototype]]: NodeList
```

```
<h1 class="yes">Hello One</h1>
<h2 class="yes">Hello Two</h2>
<h1 class="yes">Hello One again</h1>
```

```
let x = document.querySelectorAll(".yes");
console.log(x);
```

```
▼ NodeList(3) [h1.yes, h2.yes, h1.yes] i
  ▶ 0: h1.yes
  ▶ 1: h2.yes
  ▶ 2: h1.yes
  length: 3
  ▶ [[Prototype]]: NodeList
```

top Filter Default levels No Issues

✖ ▶ Uncaught TypeError: Cannot set properties of undefined
(setting 'color')
at [script.js:4:15](#)

> | `ctrl` `i` to turn on code suggestions. [Don't show again](#) NEW

```
let x = document.querySelector("h2");  
// all not worked  
// x.style.color = red ; // not works  
  
x.style.color = "red";
```

Hello One

Hello Two

Hello One again

CORDOM > JS script.js > ...

```
let x = document.querySelector("h2");  
// all not worked  
// x.style.color = red ; // not works  
  
x.style.color = "red";  
x.style.fontFamily = "arial";
```

```
x.innerHTML = "changed";
```

Hello One

changed

Hello One again

```
//---Want to change the text after two second-----//  
  
setTimeout(function(){  
  x.innerHTML = "Changed after two second"  
},2000);
```

Event Listeners – agar main kisi element ko click karoon, ya fir hover karoon, ya element se mouse ko bahar kar doon to kuch changes ho

```
<h1 id="ele1">Pickachu</h1>  
<h1 id="ele2">Chirazart</h1>  
<h1 id="ele3">Mewtwo</h1>
```


```
let x = document.querySelector("#ele1");  
x.innerHTML = "jiglypuff";
```

```
// let x = document.querySelector("#ele1"); // it works  
let x = document.getElementById("ele1"); // best. if not give "" it not works  
  
x.addEventListener('click',function(){  
  x.style.color = 'yellow';  
});
```

Pickachu Pickachu


```
let y = document.getElementById("ele2");  
  
y.addEventListener('mousemove', function(){  
  y.style.color = 'white';  
  y.style.backgroundColor = 'orange';  
});
```

```
<script>  
  document.body.innerHTML = 'hello';  
</script>
```



The screenshot shows a web browser's developer console with the 'Console' tab selected. The console displays three lines of code: line 9: `<script>`, line 10: `document.body.innerHTML = 'hello';`, and line 11: `document.title = 'Good job!';`. The code is highlighted in blue, and a cursor is visible at the end of the third line.

The document object represents / models the webpage.

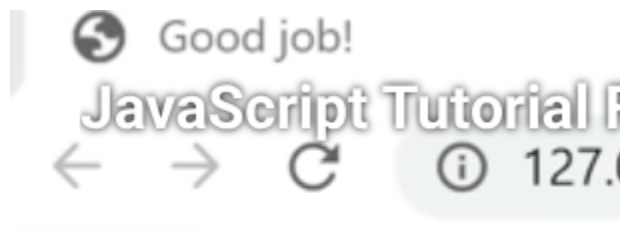

The screenshot shows a web browser with a notification that says 'Good job!'. Below the notification, the text 'JavaScript Tutorial P' is visible. The browser's address bar shows a back arrow, a forward arrow, a refresh arrow, and a URL starting with '127.0'.

hello

document object is that it is linked to the web page

document also has methods

```
document.querySelector('button');
```

most important features of JavaScript we can have

We can have HTML elements inside JavaScript

```
hello</button>
```

The DOM combines JavaScript and HTML together

is that when an HTML element is inside a JavaScript like this the

The HTML element is converted into a JavaScript object

```
</button>
```


```
console.log(typeof document.body);
```

method = function saved inside an object

`document.querySelector()`

- lets us get any element from the page
and put it inside JavaScript

button this will get the first button
element from the page

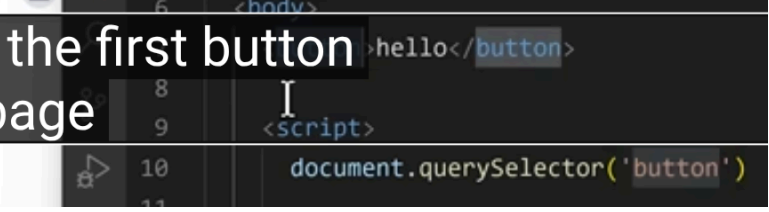

```
6 <body>  
7 >hello</button>  
8  
9 <script>  
10 document.querySelector('button')  
11
```

Every HTML element has
a property `.innerHTML`

```
console.log(document.querySelector('button').  
innerHTML);
```

hello



Element



top ▼

Default levels ▼

N

hello



```
document.querySelector('button').innerHTML =  
'Changed';
```

```
document.querySelector('button')  
  .innerHTML = 'Changed';
```

```
<button>hello</button>  
<button>Second button</button>
```

page but document. query selector will only get the first button on the page

solution is that we're going to add an attribute

attribute to this button called the class attribute

```

<button>hello</button>
<button class="js-button">Second button</button>

<script>
  console.log(document.querySelector('button').
    innerHTML);
  document.querySelector('button')
    .innerHTML = 'Changed';

  console.log(document.querySelector('.
    js-button'));

```

string and also a common practice is to start the class with

js- to make it clear that this class is being used

JavaScript and again HTML elements are JavaScript objects so this second button

is also just an object and remember objects are values

objects are values and we can save them inside a variable so instead of

```
const buttonElement = document.querySelector('.js-button');  
console.log(buttonElement);
```