



Experiment No. 7

Aim: To implement Line Clipping Algorithm: Liang Barsky

Objective:

To understand the concept of Liang Barsky algorithm to efficiently determine the portion of a line segment that lies within a specified clipping window. This method is particularly effective for lines predominantly inside or outside the window.

Theory:

This Algorithm was developed by Liang and Barsky. It is used for line clipping as it is more efficient because it uses more efficient parametric equations to clip the given line.

These parametric equations are given as:

$$x = x_1 + tdx$$

$$y = y_1 + tdy, 0 \leq t \leq 1$$

Where $dx = x_2 - x_1$ & $dy = y_2 - y_1$

Algorithm

1. Read 2 endpoints of line as $p_1 (x_1, y_1)$ & $p_2 (x_2, y_2)$.
2. Read 2 corners (left-top & right-bottom) of the clipping window as $(x_{wmin}, y_{wmin}, x_{wmax}, y_{wmax})$.

3. Calculate values of parameters p_i and q_i for $i = 1, 2, 3, 4$ such that

$$p_1 = -dx, q_1 = x_1 - x_{wmin}$$

$$p_2 = dx, q_2 = x_{wmax} - x_1$$

$$p_3 = -dy, q_3 = y_1 - y_{wmin}$$

$$p_4 = dy, q_4 = y_{wmax} - y_1$$

4. if $p_i = 0$ then line is parallel to i th boundary



if $q_i < 0$ then line is completely outside boundary so discard line

else, check whether line is horizontal or vertical and then check the line endpoints with the corresponding boundaries.

5. Initialize t_1 & t_2 as

$t_1 = 0$ & $t_2 = 1$



6. Calculate values for q_i/p_i for $i = 1, 2, 3, 4$.

7. Select values of q_i/p_i where $p_i < 0$ and assign maximum out of them as t_1 .

8. Select values of q_i/p_i where $p_i > 0$ and assign minimum out of them as t_2 .

9. if ($t_1 < t_2$)

{

$xx_1 = x_1 + t_1 dx$

$xx_2 = x_1 + t_2 dx$

$yy_1 = y_1 + t_1 dy$

$yy_2 = y_1 + t_2 dy$

line (xx_1, yy_1, xx_2, yy_2)

}

10. Stop.

Program:

```
#include<stdio.h>
```

```
#include<graphics.h>
```

```
#include<math.h>
```



Vidyavardhini's College of Engineering & Technology

Department of Artificial Intelligence and Data Science

```
#include<dos.h>
```

```
int main()
```

```
{
```

```
int i,gd=DETECT,gm;
```

```
int x1,y1,x2,y2,xmin,xmax,ymin,ymax,xx1,xx2,yy1,yy2,dx,dy;
```

```
float t1,t2,p[4],q[4],temp;
```

```
x1=120;
```

```
y1=120;
```

```
x2=300;
```

```
y2=300;
```

```
xmin=100;
```

```
ymin=100;
```

```
xmax=250;
```

```
ymax=250;
```

```
initgraph(&gd,&gm," ");
```

```
rectangle(xmin,ymin,xmax,ymax);
```

```
dx=x2-x1;
```

```
dy=y2-y1;
```

```
p[0]=-dx;
```

```
p[1]=dx;
```

```
p[2]=-dy;
```

```
p[3]=dy;
```

```
q[0]=x1-xmin;
```



Vidyavardhini's College of Engineering & Technology

Department of Artificial Intelligence and Data Science

```
q[1]=xmax-x1;
q[2]=y1-ymin;
q[3]=ymax-y1;
for(i=0;i<4;i++)
{
if(p[i]==0)
{
printf("line is parallel to one of the clipping boundary");
if(q[i]>=0)
{
if(i<2)
{
if(y1<ymin)
{
y1=ymin;
}
if(y2>ymax)
{
y2=ymax;
}
line(x1,y1,x2,y2);
}
if(i>1)
{
```



Vidyavardhini's College of Engineering & Technology


Department of Artificial Intelligence and Data Science

```
if(x1<xmin)
{
x1=xmin;
}
if(x2>xmax)
{
x2=xmax;
}
line(x1,y1,x2,y2);
}
}
}
}
t1=0;
t2=1;
for(i=0;i<4;i++)
{
temp=q[i]/p[i];
if(p[i]<0)
{
if(t1<=temp)
t1=temp;
}
else
```



```
{  
if(t2>temp)  
t2=temp;  
}  
}  
if(t1<t2)  
{  
xx1 = x1 + t1 * p[1];  
xx2 = x1 + t2 * p[1];  
yy1 = y1 + t1 * p[3];  
yy2 = y1 + t2 * p[3];  
line(xx1,yy1,xx2,yy2);  
}  
delay(5000);  
closegraph();  
}
```

Output:

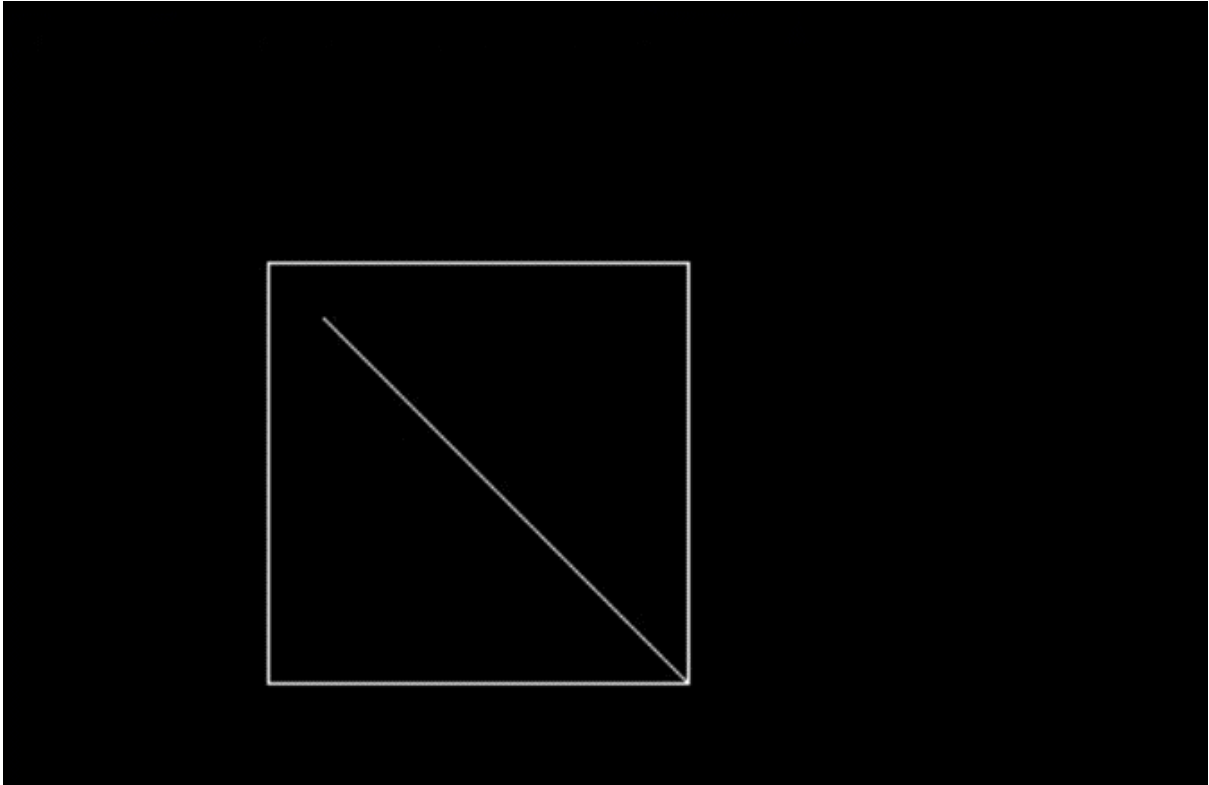

Conclusion:

The Liang-Barsky line clipping algorithm efficiently determines the portion of a line segment that lies within a specified clipping window. This algorithm, developed by Liang and Barsky, uses parametric equations for effective line clipping, making it a valuable tool for graphics and computer-aided design applications.