

# *Your first ASP.NET Core application*

---

## ***This chapter covers***

- Using ASP.NET Core to create an application that **accepts RSVP responses**
- Creating a **simple data model**
- Creating a **controller** and **view** that presents and **processes a form**
- **Validating user data** and displaying validation errors
- Applying **CSS styles** to the HTML generated by the application

Now that you are set up for ASP.NET Core development, it is time to create a **simple application**. In this chapter, you'll create a **data-entry application** using ASP.NET Core. My goal is to demonstrate ASP.NET Core in action, so I will pick up the pace a little and skip over some of the explanations as to how things work behind the scenes. But don't worry; I'll revisit these topics in-depth in later chapters.

## **3.1 Setting the scene**

Imagine that a friend has decided to host a New Year's **Eve party** and that she has asked me to **create a web app** that allows her invitees to **electronically RSVP**. She has asked for these four key features:

- A **home page** that shows information about the party
- A **form** that can be used to RSVP
- **Validation** for the RSVP form, which will display a **thank-you page**
- A **summary page** that shows who is coming to the party

In this chapter, I create an ASP.NET Core project and use it to create a simple application that contains these features; once everything works, I'll apply some styling to improve the appearance of the finished application.

## 3.2 *Creating the project*

Open a PowerShell command prompt from the Windows Start menu, navigate to a convenient location, and run the commands in listing 3.1 to create a project named PartyInvites.

**TIP** You can download the example project for this chapter—and for all the other chapters in this book—from <https://github.com/manningbooks/pro-asp.net-core-7>. See chapter 1 for how to get help if you have problems running the examples.

### Listing 3.1 Creating a new project

```
dotnet new globaljson --sdk-version 7.0.100 --output PartyInvites
dotnet new mvc --no-https --output PartyInvites --framework net7.0
dotnet new sln -o PartyInvites
dotnet sln PartyInvites add PartyInvites
```

These are the same commands I used to create the project in chapter 2. These commands ensure you get the right project starting point that uses the required version of .NET.

### 3.2.1 *Preparing the project*

Open the project (by opening the `PartyInvites.sln` file with Visual Studio or the `PartyInvites` folder in Visual Studio Code) and change the contents of the `launchSettings.json` file in the `Properties` folder, as shown in listing 3.2, to set the port that will be used to listen for HTTP requests.

### Listing 3.2 Setting ports in the launchSettings.json file in the Properties folder

```
{
  "iisSettings": {
    "windowsAuthentication": false,
    "anonymousAuthentication": true,
    "iisExpress": {
      "applicationUrl": "http://localhost:5000",
      "sslPort": 0
    }
  },
  "profiles": {
    "PartyInvites": {
      "commandName": "Project",
```

```

        "dotnetRunMessages": true,
        "launchBrowser": true,
        "applicationUrl": "http://localhost:5000",
        "environmentVariables": {
            "ASPNETCORE_ENVIRONMENT": "Development"
        }
    },
    "IIS Express": {
        "commandName": "IISExpress",
        "launchBrowser": true,
        "environmentVariables": {
            "ASPNETCORE_ENVIRONMENT": "Development"
        }
    }
}
}
}

```

Replace the contents of the `HomeController.cs` file in the `Controllers` folder with the code shown in listing 3.3.

### Listing 3.3 The new contents of the `HomeController.cs` file in the `Controllers` folder

```

using Microsoft.AspNetCore.Mvc;

namespace PartyInvites.Controllers {
    public class HomeController : Controller {

        public IActionResult Index() {
            return View();
        }
    }
}

```

This provides a clean starting point for the new application, defining a **single action method** that selects the default view for rendering. To provide a welcome message to party invitees, open the `Index.cshtml` file in the `Views/Home` folder and replace the contents with those shown in listing 3.4.

### Listing 3.4 Replacing the contents of the `Index.cshtml` file in the `Views/Home` folder

```

@{
    Layout = null;
}

<!DOCTYPE html>
<html>
<head>
    <meta name="viewport" content="width=device-width" />
    <title>Party!</title>
</head>
<body>
    <div>
        <div>
            We're going to have an exciting party.<br />
            (To do: sell it better. Add pictures or something.)
        </div>
    </div>

```

```

        </div>
    </div>
</body>
</html>


```

Run the command shown in listing 3.5 in the `PartyInvites` folder to compile and execute the project.

#### Listing 3.5 Compiling and running the project

```
dotnet watch
```

Once the project has started, a new browser window will be opened, and you will see the details of the party (well, the placeholder for the details, but you get the idea), as shown in figure 3.1.

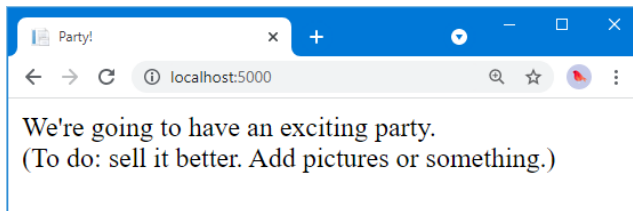

**Figure 3.1**  
Adding to the  
view HTML

Leave the `dotnet watch` command running. As you make changes to the project, you will see that the code is automatically recompiled and that changes are automatically displayed in the browser.

If you make a mistake following the examples, you may find that the `dotnet watch` command indicates that it can't automatically update the browser. If that happens, select the option to restart the application.

### 3.2.2 Adding a data model

The data model is the **most important part** of any ASP.NET Core application. The **model** is the **representation of the real-world objects, processes, and rules** that define the subject, known as the **domain**, of the application. The model, often referred to as a **domain model**, contains the **C# objects** (known as *domain objects*) that make up the universe of the application and the **methods** that manipulate them. In most projects, the job of the ASP.NET Core application is to provide the user with access to the data model and the features that allow the user to interact with it.

The **convention** for an ASP.NET Core application is that the data model classes are defined in a folder named **Models**, which was added to the project by the **template** used in listing 3.1.

I don't need a **complex model** for the `PartyInvites` project because it is such a **simple application**. I need just one domain class that I will call `GuestResponse`. This object will represent an RSVP from an invitee.

If you are using Visual Studio, right-click the **Models** folder and select **Add > Class** from the pop-up menu. Set the name of the class to **GuestResponse.cs** and click the

Add button. If you are using Visual Studio Code, right-click the `Models` folder, select `New File`, and enter `GuestResponse.cs` as the file name. Use the new file to define the class shown in listing 3.6.

### Listing 3.6 The contents of the `GuestResponse.cs` file in the `Models` folder

```
namespace PartyInvites.Models {
    public class GuestResponse {
        public string? Name { get; set; }
        public string? Email { get; set; }
        public string? Phone { get; set; }
        public bool? WillAttend { get; set; }
    }
}
```

Notice that all the properties defined by the `GuestResponse` class are nullable. I explain why this is important in the “Adding Validation” section later in the chapter.

### Restarting the automatic build

You may see a warning produced by the `dotnet watch` command telling you that a hot reload cannot be applied. The `dotnet watch` command can’t cope with every type of change, and some changes cause the automatic rebuild process to fail. You will see this prompt at the command line:

```
watch : Do you want to restart your app
        - Yes (y) / No (n) / Always (a) / Never (v)?
```

Press `a` to always rebuild the project. Microsoft makes frequent improvements to the `dotnet watch` command and so the actions that trigger this problem change.

## 3.2.3 Creating a second action and view

One of my application goals is to include an `RSVP form`, which means I need to define an `action method` that can `receive requests` for that `form`. A single controller class can define multiple action methods, and the convention is to group related actions in the same controller. Listing 3.7 adds a new action method to the `Home` controller. Controllers can return different result types, which are explained in later chapters.

### Listing 3.7 Adding an action in the `HomeController.cs` file in the `Controllers` folder

```
using Microsoft.AspNetCore.Mvc;

namespace PartyInvites.Controllers {
    public class HomeController : Controller {
        public IActionResult Index() {
            return View();
        }
    }
}
```

```

    public IActionResult RsvpForm() {
        return View();
    }
}

```

Both action methods invoke the `View` method without arguments, which may seem odd, but remember that the **Razor view engine** will use the name of the action method when looking for a **view file**, as explained in chapter 2. That means the result from the `Index` action method tells **Razor** to look for a view called `Index.cshtml`, while the result from the `RsvpForm` action method tells Razor to look for a view called `RsvpForm.cshtml`.

If you are using Visual Studio, right-click the `Views/Home` folder and select **Add > New Item** from the pop-up menu. Select the **Razor View – Empty** item, set the name to `RsvpForm.cshtml`, and click the **Add** button to create the file. Replace the contents with those shown in listing 3.8.

If you are using Visual Studio Code, right-click the `Views/Home` folder and select **New File** from the pop-up menu. Set the name of the file to `RsvpForm.cshtml` and add the contents shown in listing 3.8.

#### Listing 3.8 The contents of the `RsvpForm.cshtml` file in the `Views/Home` folder

```


@{
    Layout = null;
}

<!DOCTYPE html>

<html>
<head>
    <meta name="viewport" content="width=device-width" />
    <title>RsvpForm</title>
</head>
<body>
    <div>
        This is the RsvpForm.cshtml View
    </div>
</body>
</html>

```

This content is just static HTML for the moment. Use the browser to request `http://localhost:5000/home/rsvpform`. The Razor view engine locates the `RsvpForm.cshtml` file and uses it to produce a response, as shown in figure 3.2.

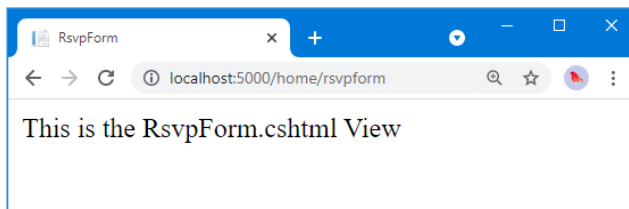

**Figure 3.2**  
Rendering a  
second view

### 3.2.4 Linking action methods

I want to be able to create a link from the Index view so that guests can see the RsvpForm view **without having to know the URL** that targets a specific action method, as shown in listing 3.9.


**Listing 3.9** Adding a link in the Index.cshtml file in the Views/Home folder

```
@{
    Layout = null;
}

<!DOCTYPE html>
<html>
<head>
    <meta name="viewport" content="width=device-width" />
    <title>Party!</title>
</head>
<body>
    <div>
        <div>
            We're going to have an exciting party.<br />
            (To do: sell it better. Add pictures or something.)
        </div>
        <a asp-action="RsvpForm">RSVP Now</a>
    </div>
</body>
</html>
```

The addition to the listing is an **a element** that has an **asp-action attribute**. The attribute is an example of a **tag helper attribute**, which is an **instruction** for Razor that will be performed when the view is rendered. The **asp-action attribute** is an **instruction** to add an **href attribute** to the **a element** that contains a **URL** for an **action method**. I explain how tag helpers work in chapters 25–27, but this tag helper tells Razor to insert a URL for an action method defined by the same controller for which the current view is being rendered.

Use the browser to request `http://localhost:5000`, and you will see the link that the helper has created, as shown in figure 3.3.

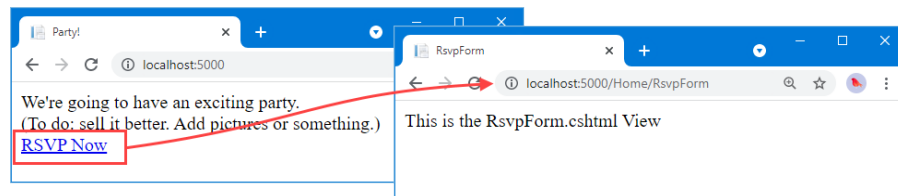

**Figure 3.3** Linking between action methods

Roll the mouse over the RSVP Now link in the browser. You will see that the link points to `http://localhost:5000/Home/RsvpForm`.

There is an **important principle** at work here, which is that you should use the features provided by **ASP.NET Core to generate URLs**, rather than **hard-code them** into your views. When the **tag helper** created the **href attribute** for the `a` element, it inspected the configuration of the application to **figure out what the URL should be**. This allows the configuration of the application to be changed to **support different URL formats** without needing to update any views.

### 3.2.5 Building the form

Now that I have created the view and can reach it from the `Index` view, I am going to build out the contents of the `RsvpForm.cshtml` file to turn it into an HTML form for editing `GuestResponse` objects, as shown in listing 3.10.

**Listing 3.10** Creating a form view in the `RsvpForm.cshtml` file in the `Views/Home` folder

```
@model PartyInvites.Models.GuestResponse
@{
    Layout = null;
}

<!DOCTYPE html>

<html>
<head>
    <meta name="viewport" content="width=device-width" />
    <title>RsvpForm</title>
</head>
<body>
    <form asp-action="RsvpForm" method="post">
        <div>
            <label asp-for="Name">Your name:</label>
            <input asp-for="Name" />
        </div>
        <div>
            <label asp-for="Email">Your email:</label>
            <input asp-for="Email" />
        </div>
        <div>
            <label asp-for="Phone">Your phone:</label>
            <input asp-for="Phone" />
        </div>
        <div>
            <label asp-for="WillAttend">Will you attend?</label>
            <select asp-for="WillAttend">
                <option value="">Choose an option</option>
                <option value="true">Yes, I'll be there</option>
                <option value="false">No, I can't come</option>
            </select>
        </div>
        <button type="submit">Submit RSVP</button>
    </form>
</body>
</html>
```



The `@model` expression specifies that the `view` expects to receive a `GuestResponse` object as its view model. I have defined a label and input element for each property of the `GuestResponse` model class (or, in the case of the `WillAttend` property, a select element). Each element is associated with the `model property` using the `asp-for` attribute, which is another tag helper attribute. The tag helper attributes configure the elements to tie them to the view model object. Here is an example of the HTML that the tag helpers produce:

```
<p>
  <label for="Name">Your name:</label>
  <input type="text" id="Name" name="Name" value="">
</p>
```

The `asp-for` attribute on the label element sets the value of the `for` attribute. The `asp-for` attribute on the input element sets the `id` and `name` elements. This may not look especially useful, but you will see that associating elements with a model property offers additional advantages as the application functionality is defined.

Of more immediate use is the `asp-action` attribute applied to the `form` element, which uses the application's `URL routing configuration` to set the `action` attribute to a URL that will target a specific action method, like this:

```
<form method="post" action="/Home/RsvpForm">
```

As with the helper attribute I applied to the `a` element, the benefit of this approach is that when you `change the system of URLs` that the application uses, the content generated by the tag helpers will `reflect the changes automatically`.

Use the browser to request `http://localhost:5000` and click the `RSVP Now` link to see the form, as shown in figure 3.4.

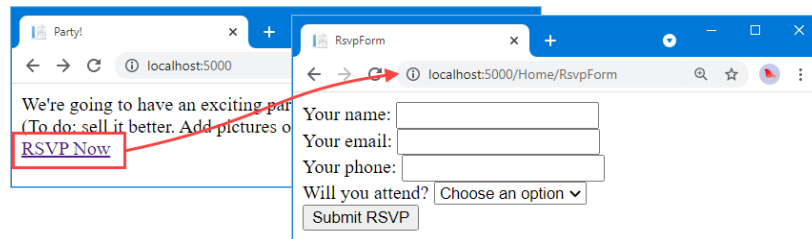


Figure 3.4 Adding an HTML form to the application

### 3.2.6 Receiving form data

I have not yet told ASP.NET Core `what I want to do` when the form is posted to the `server`. As things stand, `clicking` the `Submit RSVP` button just clears any values you have entered in the form. That is because the form `posts` back to the `RsvpForm` `action method` in the `Home` controller, which just renders the `view again`. To receive and process submitted form data, I am going to use an important feature of `controllers`. I will add a `second RsvpForm action method` to create the following:

- A method that responds to **HTTP GET requests**: A **GET request** is what a browser issues **normally** each time someone clicks a link. This version of the action will be responsible for **displaying the initial blank form** when someone first visits `/Home/RsvpForm`.
- A method that responds to **HTTP POST requests**: The form element defined in listing 3.10 sets the method attribute to post, which causes the **form data** to be **sent** to the server as a **POST request**. This version of the action will be responsible for **receiving submitted data** and **deciding** what to do with it.

Handling GET and POST requests in **separate C# methods** helps to keep my controller code **tidy** since the two methods have different responsibilities. Both action methods are invoked by the **same URL**, but ASP.NET Core makes sure that the appropriate method is called, based on whether I am dealing with a GET or POST request. Listing 3.11 shows the changes to the `HomeController` class.

**Listing 3.11** Adding a method in the **`HomeController.cs`** file in the **Controllers** folder

```
using Microsoft.AspNetCore.Mvc;
using PartyInvites.Models;

namespace PartyInvites.Controllers {
    public class HomeController : Controller {

        public IActionResult Index() {
            return View();
        }

        [HttpGet]
        public ViewResult RsvpForm() {
            return View();
        }

        [HttpPost]
        public ViewResult RsvpForm(GuestResponse guestResponse) {
            // TODO: store response from guest
            return View();
        }
    }
}
```

I have added the **HttpGet** attribute to the existing `RsvpForm` action method, which declares that this method **should be used only for GET requests**. I then added an overloaded version of the `RsvpForm` method, which **accepts a GuestResponse object**. I applied the **HttpPost** attribute to this method, which declares it will **deal with POST requests**. I explain how these additions to the listing work in the following sections. I also imported the `PartyInvites.Models` namespace—this is just so I can refer to the `GuestResponse` model type without needing to qualify the class name.

## UNDERSTANDING MODEL BINDING

The first overload of the `RsvpForm` action method renders the same view as before—the `RsvpForm.cshtml` file—to generate the `form` shown in figure 3.4. The second overload is more interesting because of the `parameter`, but given that the action method will be invoked in response to an `HTTP POST request` and that the `GuestResponse` type is a C# class, how are the two connected?

The answer is `model binding`, a useful ASP.NET Core `feature` whereby incoming data is `parsed` and `the key-value pairs` in the `HTTP request` are used to populate properties of `domain model types`.

Model binding is a `powerful` and `customizable` feature that eliminates the grind of dealing with `HTTP requests directly` and lets you `work with C# objects` rather than dealing with `individual data values sent by the browser`. The `GuestResponse` object that is passed as the parameter to the action method is automatically populated with the data from the form fields. I dive into the details of model binding in chapter 28.

To demonstrate how model binding works, I need to do some preparatory work. One of the application goals is to `present a summary page` with details of who is attending the party, which means that I need to keep track of the responses that I receive. I am going to do this by creating an `in-memory collection of objects`. This isn't useful in a real application because the response data will be lost when the application is stopped or restarted, but this approach will allow me to keep the focus on ASP.NET Core and create an application that can easily be reset to its initial state. Later chapters will demonstrate persistent data storage.

Add a class file named `Repository.cs` to the `Models` folder and use it to define the class shown in listing 3.12.

### Listing 3.12 The contents of the `Repository.cs` file in the `Models` folder

```
namespace PartyInvites.Models {
    public static class Repository {
        private static List<GuestResponse> responses = new();

        public static IEnumerable<GuestResponse> Responses => responses;

        public static void AddResponse(GuestResponse response) {
            Console.WriteLine(response);
            responses.Add(response);
        }
    }
}
```

The `Repository` class and its members are `static`, which will make it easy for me to `store and retrieve data` from different places in the application. ASP.NET Core provides a more sophisticated approach for defining `common functionality`, called *dependency injection*, which I describe in `chapter 14`, but a static class is a good way to get started for a simple application like this one.

If you are using Visual Studio, saving the contents of the `Repository.cs` file will trigger a warning produced by the `dotnet watch` command telling you that a hot reload

cannot be applied, which is the same warning described earlier in the chapter for Visual Studio Code users. You will see this prompt at the command line:

```
watch : Do you want to restart your app
      - Yes (y) / No (n) / Always (a) / Never (v)?
```

Press a to always rebuild the project.

### STORING RESPONSES

Now that I have somewhere to store the data, I can update the action method that receives the HTTP POST requests, as shown in listing 3.13.

#### Listing 3.13 Updating an action in the HomeController.cs file in the Controllers folder

```
using Microsoft.AspNetCore.Mvc;
using PartyInvites.Models;

namespace PartyInvites.Controllers {
    public class HomeController : Controller {

        public IActionResult Index() {
            return View();
        }

        [HttpGet]
        public IActionResult RsvpForm() {
            return View();
        }

        [HttpPost]
        public IActionResult RsvpForm(GuestResponse guestResponse) {
            Repository.AddResponse(guestResponse);
            return View("Thanks", guestResponse);
        }
    }
}
```

Before the POST version of the `RsvpForm` method is invoked, the ASP.NET Core **model binding feature** extracts values from the HTML form and assigns them to the properties of the **GuestResponse object**. The result is used as the argument when the method is invoked to handle the HTTP request, and all I have to do to deal with the form data sent in a request is to work with the `GuestResponse` object that is passed to the action method—in this case, to pass it as an argument to the `Repository.AddResponse` method so that the **response can be stored**.

### 3.2.7 Adding the Thanks view

The call to the `View` method in the `RsvpForm` action method creates a `ViewResult` that selects a view called `Thanks` and uses the `GuestResponse` object created by the model binder as the view model. Add a **Razor View** named `Thanks.cshtml` to the `Views/Home` folder with the content shown in listing 3.14 to present a response to the user.

## Listing 3.14 The contents of the Thanks.cshtml file in the Views/Home folder

```

@model PartyInvites.Models.GuestResponse
@{
    Layout = null;
}

<!DOCTYPE html>

<html>
<head>
    <meta name="viewport" content="width=device-width" />
    <title>Thanks</title>
</head>
<body>
    <div>
        <h1>Thank you, @Model?.Name!</h1>
        @if (Model?.WillAttend == true) {
            @:It's great that you're coming.
            @:The drinks are already in the fridge!
        } else {
            @:Sorry to hear that you can't make it,
            @:but thanks for letting us know.
        }
    </div>
    Click <a asp-action="ListResponses">here</a> to see who is coming.
</body>
</html>

```

The HTML produced by the `Thanks.cshtml` view depends on the values assigned to the `GuestResponse` view model provided by the `RsvpForm` action method. To access the value of a property in the domain object, I use an `@Model.<PropertyName>` expression. So, for example, to get the value of the `Name` property, I use the `@Model.Name` expression. Don't worry if the Razor syntax doesn't make sense—I explain it in more detail in chapter 21.

Now that I have created the `Thanks` view, I have a basic working example of handling a form. Use the browser to request `http://localhost:5000`, click the `RSVP Now` link, add some data to the form, and click the `Submit RSVP` button. You will see the response shown in figure 3.5 (although it will differ if your name is not Joe or you said you could not attend).

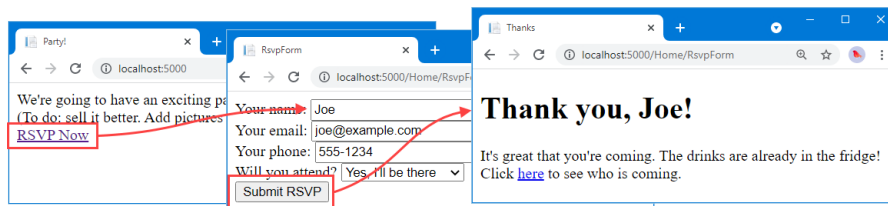


Figure 3.5 The Thanks view

### 3.2.8 Displaying responses

At the end of the `Thanks.cshtml` view, I added an `a` element to create a link to display the list of people who are coming to the party. I used the `asp-action` tag helper attribute to create a URL that targets an action method called `ListResponses`, like this:

```
...
Click <a asp-action="ListResponses">here</a> to see who is coming.
...
```

If you hover the mouse over the link that is displayed by the browser, you will see that it targets the `/Home/ListResponses` URL. This doesn't correspond to any of the action methods in the `HomeController`, and if you click the link, you will see a 404 Not Found error response.

To add an endpoint that will handle the URL, I need to add another action method to the `HomeController`, as shown in listing 3.15.

#### Listing 3.15 Adding an action in the `HomeController.cs` file in the `Controllers` folder

```
using Microsoft.AspNetCore.Mvc;
using PartyInvites.Models;

namespace PartyInvites.Controllers {
    public class HomeController : Controller {

        public IActionResult Index() {
            return View();
        }

        [HttpGet]
        public ViewResult RsvpForm() {
            return View();
        }

        [HttpPost]
        public ViewResult RsvpForm(GuestResponse guestResponse) {
            Repository.AddResponse(guestResponse);
            return View("Thanks", guestResponse);
        }

        public ViewResult ListResponses() {
            return View(Repository.Responses
                .Where(r => r.WillAttend == true));
        }
    }
}
```

The new action method is called `ListResponses`, and it calls the `View` method, using the `Repository.Responses` property as the argument. This will cause Razor to render the default view, using the action method name as the name of the view file, and to use the data from the repository as the view model. The view model data is filtered using LINQ so that only positive responses are provided to the view.

Add a Razor View named `ListResponses.cshtml` to the `Views/Home` folder with the content shown in listing 3.16.

**Listing 3.16** Displaying data in the `ListResponses.cshtml` file in the `Views/Home` folder

```
@model IEnumerable<PartyInvites.Models.GuestResponse>
@{
    Layout = null;
}

<!DOCTYPE html>

<html>
<head>
    <meta name="viewport" content="width=device-width" />
    <title>Responses</title>
</head>
<body>
    <h2>Here is the list of people attending the party</h2>
    <table>
        <thead>
            <tr><th>Name</th><th>Email</th><th>Phone</th></tr>
        </thead>
        <tbody>
            @foreach (PartyInvites.Models.GuestResponse r in Model!) {
                <tr>
                    <td>@r.Name</td>
                    <td>@r.Email</td>
                    <td>@r.Phone</td>
                </tr>
            }
        </tbody>
    </table>
</body>
</html>
```

Razor view files have the `.cshtml` file extension to denote a mix of C# code and HTML elements. You can see this in listing 3.16 where I have used an `@foreach` expression to process each of the `GuestResponse` objects that the action method passes to the view using the `View` method. Unlike a normal C# `foreach` loop, the body of a Razor `@foreach` expression contains HTML elements that are added to the response that will be sent back to the browser. In this view, each `GuestResponse` object generates a `tr` element that contains `td` elements populated with the value of an object property.

Use the browser to request `http://localhost:5000`, click the `RSVP Now` link, and fill in the form. Submit the form and then click the link to see a summary of the data that has been entered since the application was first started, as shown in figure 3.6. The view does not present the data in an appealing way, but it is enough for the moment, and I will address the styling of the application later in this chapter.

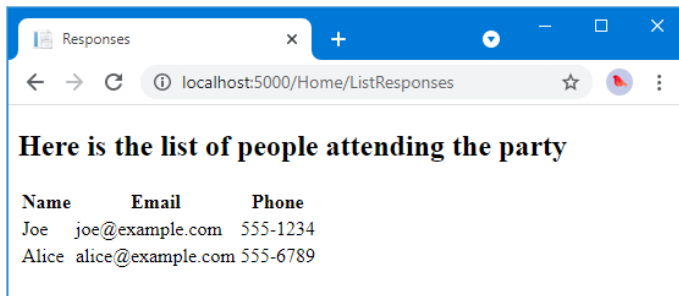


Figure 3.6 Showing a list of party attendees

### 3.2.9 Adding validation

I can now add data validation to the application. Without validation, users could enter **nonsense data** or even submit an empty form. In an ASP.NET Core application, validation rules are **defined** by **applying attributes** to model classes, which means the same validation rules can be applied **in any form** that uses that class. ASP.NET Core relies on attributes from the `System.ComponentModel.DataAnnotations` namespace, which I have applied to the `GuestResponse` class in listing 3.17.

#### Listing 3.17 Applying validation in the `GuestResponse.cs` file in the Models folder

```
using System.ComponentModel.DataAnnotations;

namespace PartyInvites.Models {

    public class GuestResponse {

        [Required(ErrorMessage = "Please enter your name")]
        public string? Name { get; set; }

        [Required(ErrorMessage = "Please enter your email address")]
        [EmailAddress]
        public string? Email { get; set; }

        [Required(ErrorMessage = "Please enter your phone number")]
        public string? Phone { get; set; }

        [Required(ErrorMessage = "Please specify whether you'll attend")]
        public bool? WillAttend { get; set; }

    }

}
```

ASP.NET Core detects the attributes and uses them to **validate data** during the **model-binding process**.

As noted earlier, I used nullable types to define the `GuestResponse` properties. This is useful for denoting properties that **may not be assigned values**, but it has a special value for the `WillAttend` property because it allows the `Required` validation attribute



to work. If I had used a `regular non-nullable bool`, the value I received through model-binding could be only `true` or `false`, and I would not be able to tell whether the user had selected a value. A nullable `bool` has three possible values: `true`, `false`, and `null`. The value of the `WillAttend` property will be `null` if the user has `not selected a value`, and this causes the `Required` attribute to report a validation error. This is a nice example of how ASP.NET Core elegantly blends C# features with HTML and HTTP.

I check to see whether there has been a validation problem using the `ModelState.IsValid` property in the action method that receives the form data, as shown in listing 3.18.

### Listing 3.18 Checking for errors in the HomeController.cs file in the Controllers folder

```
using Microsoft.AspNetCore.Mvc;
using PartyInvites.Models;

namespace PartyInvites.Controllers {
    public class HomeController : Controller {

        public IActionResult Index() {
            return View();
        }

        [HttpGet]
        public IActionResult RsvpForm() {
            return View();
        }

        [HttpPost]
        public IActionResult RsvpForm(GuestResponse guestResponse) {
            if (ModelState.IsValid) {
                Repository.AddResponse(guestResponse);
                return View("Thanks", guestResponse);
            } else {
                return View();
            }
        }

        public IActionResult ListResponses() {
            return View(Repository.Responses
                .Where(r => r.WillAttend == true));
        }
    }
}
```

The `Controller` base class provides a `property` called `ModelState` that provides details of the `outcome` of the `model binding process`. If the `ModelState.IsValid` property returns `true`, then I know that the `model binder` has been able to `satisfy the validation constraints` I specified through the attributes on the `GuestResponse` class. When this happens, I `render the Thanks view`, just as I did previously.

If the `ModelState.IsValid` property returns `false`, then I know that there are `validation errors`. The object returned by the `ModelState` property provides details of

each problem that has been encountered, but I don't need to get into that level of detail because I can rely on a useful feature that automates the process of asking the user to address any problems by calling the `View` method without any parameters.

When it renders a view, Razor has access to the details of any validation errors associated with the request, and tag helpers can access the details to display validation errors to the user. Listing 3.19 shows the addition of validation tag helper attributes to the `RsvpForm` view.

### Listing 3.19 Adding a summary to the `RsvpForm.cshtml` file in the `Views/Home` folder

```
@model PartyInvites.Models.GuestResponse
@{
    Layout = null;
}

<!DOCTYPE html>

<html>
<head>
    <meta name="viewport" content="width=device-width" />
    <title>RsvpForm</title>
</head>
<body>
    <form asp-action="RsvpForm" method="post">
        <div asp-validation-summary="All"></div>
        <div>
            <label asp-for="Name">Your name:</label>
            <input asp-for="Name" />
        </div>
        <div>
            <label asp-for="Email">Your email:</label>
            <input asp-for="Email" />
        </div>
        <div>
            <label asp-for="Phone">Your phone:</label>
            <input asp-for="Phone" />
        </div>
        <div>
            <label asp-for="WillAttend">Will you attend?</label>
            <select asp-for="WillAttend">
                <option value="">Choose an option</option>
                <option value="true">Yes, I'll be there</option>
                <option value="false">No, I can't come</option>
            </select>
        </div>
        <button type="submit">Submit RSVP</button>
    </form>
</body>
</html>
```

The `asp-validation-summary` attribute is applied to a `div` element, and it displays a list of validation errors when the view is rendered. The value for the `asp-validation-summary` attribute is a value from an enumeration called `ValidationSummary`, which specifies what types of validation errors the summary will contain. I specified `All`, which is a good starting point for most applications, and I describe the other values and explain how they work in chapter 29.

To see how the validation summary works, run the application, fill out the `Name` field, and submit the form without entering any other data. You will see a summary of validation errors, as shown in figure 3.7.

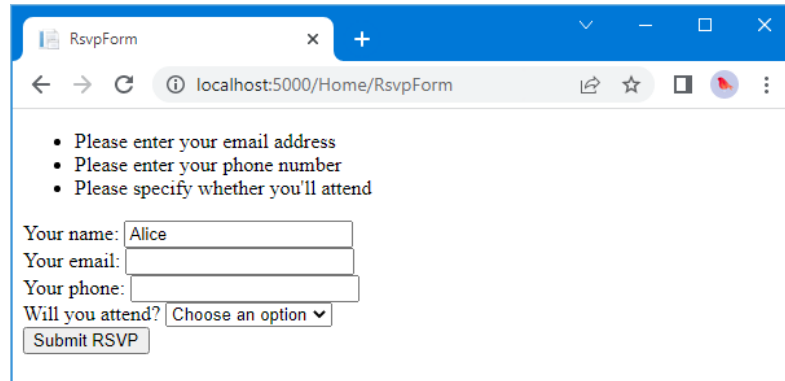


Figure 3.7 Displaying validation errors

The `RsvpForm` action method will not render the `Thanks` view until all the validation constraints applied to the `GuestResponse` class have been satisfied. Notice that the data entered in the `Name` field was preserved and displayed again when Razor rendered the view with the validation summary. This is another benefit of model binding, and it simplifies working with form data.

#### HIGHLIGHTING INVALID FIELDS

The tag helper attributes that associate model properties with elements have a handy feature that can be used in conjunction with model binding. When a model class property has failed validation, the helper attributes will generate slightly different HTML. Here is the input element that is generated for the `Phone` field when there is no validation error:

```
<input type="text" data-val="true"
      data-val-required="Please enter your phone number" id="Phone"
      name="Phone" value="">
```

For comparison, here is the same HTML element after the user has submitted the form without entering data into the text field (which is a validation error because I applied the `Required` attribute to the `Phone` property of the `GuestResponse` class):


```
<input type="text" class="input-validation-error"
      data-val="true" data-val-required="Please enter your phone number" id="Phone"
      name="Phone" value="">
```

I have highlighted the difference: the `asp-for` tag helper attribute added the `input` element to a class called `input-validation-error`. I can take advantage of this feature by creating a stylesheet that contains CSS styles for this class and the others that different HTML helper attributes use.

The **convention** in ASP.NET Core projects is that static content is placed into the `wwwroot` folder and organized by content type so that CSS stylesheets go into the `wwwroot/css` folder, JavaScript files go into the `wwwroot/js` folder, and so on.

**TIP** The project template used in listing 3.1 creates a `site.css` file in the `wwwroot/css` folder. You can ignore this file, which I don't use in this chapter.

If you are using Visual Studio, right-click the `wwwroot/css` folder and select **Add > New Item** from the pop-up menu. Locate the **Style Sheet item template**, as shown in figure 3.8; set the name of the file to `styles.css`; and click the Add button.

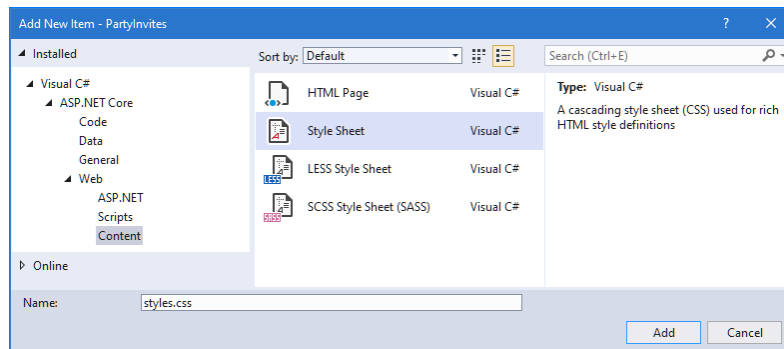

**Figure 3.8** Creating a CSS stylesheet

If you are using Visual Studio Code, right-click the `wwwroot/css` folder, select **New File** from the pop-up menu, and use `styles.css` as the file name. Regardless of which editor you use, replace the contents of the file with the styles shown in listing 3.20.

#### Listing 3.20 The contents of the `styles.css` file in the `wwwroot/css` folder

```
.field-validation-error {
    color: #f00;
}

.field-validation-valid {
    display: none;
}

.input-validation-error {
    border: 1px solid #f00;
    background-color: #fee;
}

.validation-summary-errors {
```

```

    font-weight: bold;
    color: #f00;
}

.validation-summary-valid {
    display: none;
}

```

To apply this stylesheet, I added a `link` element to the head section of the `RsvpForm` view, as shown in listing 3.21.

**Listing 3.21 Applying a stylesheet in the `RsvpForm.cshtml` file in the `Views/Home` folder**

```

...
<head>
    <meta name="viewport" content="width=device-width" />
    <title>RsvpForm</title>
    <link rel="stylesheet" href="/css/styles.css" />
</head>
...

```

The `link` element uses the `href` attribute to specify the location of the stylesheet. Notice that the `wwwroot` folder is omitted from the URL. The default configuration for ASP.NET includes support for serving static content, such as images, CSS stylesheets, and JavaScript files, and it maps requests to the `wwwroot` folder automatically. With the application of the stylesheet, a more obvious validation error will be displayed when data is submitted that causes a validation error, as shown in figure 3.9.

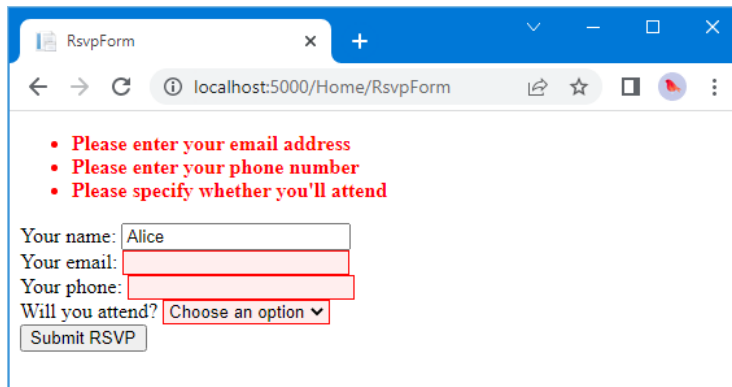


Figure 3.9 Automatically highlighted validation errors

### 3.2.10 Styling the content

All the functional goals for the application are complete, but the overall appearance of the application is poor. When you create a project using the `mvc` template, as I did for the example in this chapter, some common client-side development packages are

installed. While I am not a fan of using **template projects**, I do like the client-side libraries that Microsoft has chosen. One of them is called **Bootstrap**, which is a good CSS framework originally developed by **Twitter** that has become a major open-source project and a mainstay of web application development.

### STYLING THE WELCOME VIEW

The basic Bootstrap features work by applying classes to elements that correspond to CSS selectors defined in the files added to the `wwwroot/lib/bootstrap` folder. You can get full details of the classes that Bootstrap defines from <http://getbootstrap.com>, but you can see how I have applied some basic styling to the `Index.cshtml` view file in listing 3.22.

**Listing 3.22** Adding Bootstrap to the `Index.cshtml` file in the `Views/Home` folder

```
@{
    Layout = null;
}


<!DOCTYPE html>

<html>
<head>
    <meta name="viewport" content="width=device-width" />
    <link rel="stylesheet" href="/lib/bootstrap/dist/css/bootstrap.css" />
    <title>Index</title>
</head>
<body>
    <div class="text-center m-2">
        <h3> We're going to have an exciting party!</h3>
        <h4>And YOU are invited!</h4>
        <a class="btn btn-primary" asp-action="RsvpForm">RSVP Now</a>
    </div>
</body>
</html>
```

I have added a `link` element whose `href` attribute loads the `bootstrap.css` file from the `wwwroot/lib/bootstrap/dist/css` folder. The **convention** is that third-party CSS and JavaScript packages are installed into the `wwwroot/lib` folder, and I describe the tool that is used to manage these packages in **chapter 4**.

Having **imported** the Bootstrap stylesheets, I need to style my elements. This is a simple example, so I need to use only a small number of Bootstrap CSS classes: `text-center`, `btn`, and `btn-primary`.

The `text-center` class centers the contents of an element and its children. The `btn` class styles a button, input, or a element as a pretty button, and the `btn-primary` class specifies which of a range of colors I want the button to be. You can see the effect by running the application, as shown in figure 3.10.

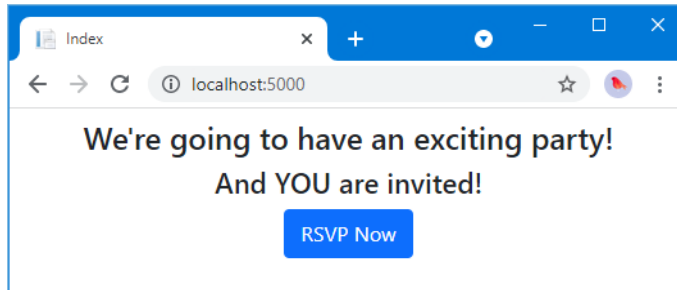

**Figure 3.10**  
Styling a view

It will be obvious to you that I am not a web designer. In fact, as a child, I was excused from art lessons on the basis that I had absolutely no talent whatsoever. This had the happy result of making more time for math lessons but meant that my artistic skills have not developed beyond those of the average 10-year-old. For a real project, I would seek a professional to help design and style the content, but for this example, I am going it alone, and that means applying Bootstrap with as much restraint and consistency as I can muster.

### STYLING THE FORM VIEW

Bootstrap defines classes that can be used to style forms. I am not going to go into detail, but you can see how I have applied these classes in listing 3.23.

#### Listing 3.23 Adding styles to the RsvpForm.cshtml file in the Views/Home folder

```
@model PartyInvites.Models.GuestResponse
@{
    Layout = null;
}

<!DOCTYPE html>


<html>
<head>
    <meta name="viewport" content="width=device-width" />
    <title>RsvpForm</title>
    <link rel="stylesheet" href="/lib/bootstrap/dist/css/bootstrap.css" />
    <link rel="stylesheet" href="/css/styles.css" />
</head>
<body>
    <h5 class="bg-primary text-white text-center m-2 p-2">RSVP</h5>
    <form asp-action="RsvpForm" method="post" class="m-2">
        <div asp-validation-summary="All"></div>
        <div class="form-group">
            <label asp-for="Name" class="form-label">Your name:</label>
            <input asp-for="Name" class="form-control" />
        </div>
        <div class="form-group">
            <label asp-for="Email" class="form-label">Your email:</label>
            <input asp-for="Email" class="form-control" />
        </div>
        <div class="form-group">
```

```

        <label asp-for="Phone" class="form-label">Your phone:</label>
        <input asp-for="Phone" class="form-control" />
    </div>
    <div class="form-group">
        <label asp-for="WillAttend" class="form-label">
            Will you attend?
        </label>
        <select asp-for="WillAttend" class="form-select">
            <option value="">Choose an option</option>
            <option value="true">Yes, I'll be there</option>
            <option value="false">No, I can't come</option>
        </select>
    </div>
    <button type="submit" class="btn btn-primary mt-3">
        Submit RSVP
    </button>
</form>
</body>
</html>

```

The Bootstrap classes in this example create a header, just to give structure to the layout. To style the form, I have used the `form-group` class, which is used to style the element that contains the `label` and the associated `input` or `select` element, which is assigned to the `form-control` class. You can see the effect of the styles in figure 3.11.

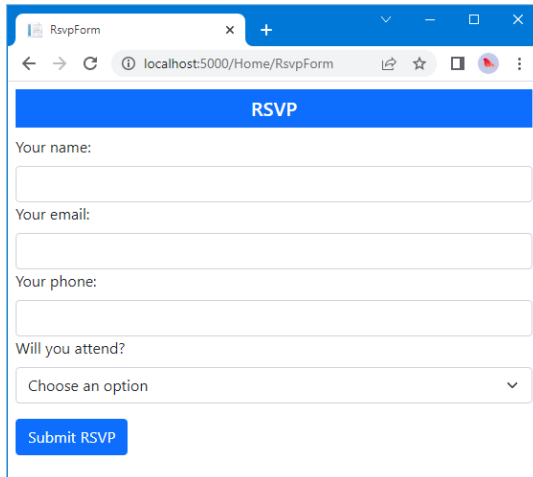

The screenshot shows a web browser window with the title 'RsvpForm'. The address bar shows 'localhost:5000/Home/RsvpForm'. The form itself has a blue header bar with the text 'RSVP'. Below the header, there are four labeled input fields: 'Your name:', 'Your email:', 'Your phone:', and 'Will you attend?'. The 'Will you attend?' field is a dropdown menu with the text 'Choose an option' and a downward arrow. At the bottom of the form is a blue button with the text 'Submit RSVP'.

**Figure 3.11**  
Styling the  
RsvpForm view

### STYLING THE THANKS VIEW

The next view file to style is `Thanks.cshtml`, and you can see how I have done this in listing 3.24, using CSS classes that are similar to the ones I used for the other views. To make an application easier to manage, it is a good principle to avoid duplicating code and markup wherever possible. ASP.NET Core provides several features to help reduce duplication, which I describe in later chapters. These features include Razor layouts (Chapter 22), partial views (Chapter 22), and view components (Chapter 24).



**Listing 3.24 Applying styles to the Thanks.cshtml file in the Views/Home folder**

```


@model PartyInvites.Models.GuestResponse
@{
    Layout = null;
}

<!DOCTYPE html>

<html>
<head>
    <meta name="viewport" content="width=device-width" />
    <title>Thanks</title>
    <link rel="stylesheet"
        href="/lib/bootstrap/dist/css/bootstrap.css" />
</head>
<body class="text-center">
    <div>
        <h1>Thank you, @Model?.Name!</h1>
        @if (Model?.WillAttend == true) {
            @:It's great that you're coming.
            @:The drinks are already in the fridge!
        } else {
            @:Sorry to hear that you can't make it,
            @:but thanks for letting us know.
        }
    </div>
    Click <a asp-action="ListResponses">here</a> to see who is coming.
</body>
</html>

```

Figure 3.12 shows the effect of the styles.

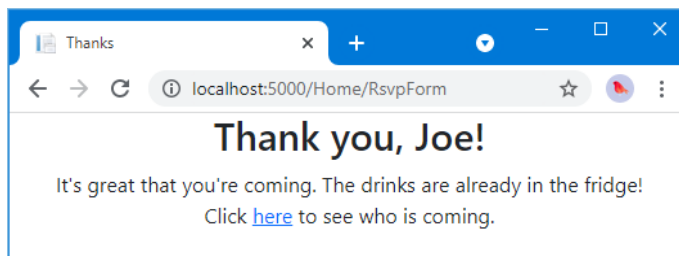

**Figure 3.12 Styling the Thanks view**

### STYLING THE LIST VIEW

The final view to style is `ListResponses`, which presents the list of attendees. Styling the content follows the same approach as used for the other views, as shown in listing 3.25.

## Listing 3.25 Adding styles to the ListResponses.cshtml file in the Views/Home folder

```


@model IEnumerable<PartyInvites.Models.GuestResponse>
@{
    Layout = null;
}

<!DOCTYPE html>

<html>
<head>
    <meta name="viewport" content="width=device-width" />
    <title>Responses</title>
    <link rel="stylesheet" href="/lib/bootstrap/dist/css/bootstrap.css" />
</head>
<body>
    <div class="text-center p-2">
        <h2 class="text-center">
            Here is the list of people attending the party
        </h2>
        <table class="table table-bordered table-striped table-sm">
            <thead>
                <tr><th>Name</th><th>Email</th><th>Phone</th></tr>
            </thead>
            <tbody>
                @foreach (PartyInvites.Models.GuestResponse r in Model!) {
                    <tr>
                        <td>@r.Name</td>
                        <td>@r.Email</td>
                        <td>@r.Phone</td>
                    </tr>
                }
            </tbody>
        </table>
    </div>
</body>
</html>

```

Figure 3.13 shows the way that the table of attendees is presented. Adding these styles to the view completes the example application, which now meets all the development goals and has an improved appearance.

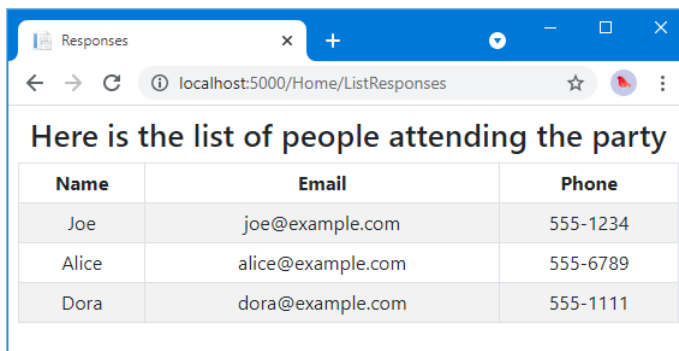

**Figure 3.13**  
Styling the  
ListResponses  
view

## Summary

- ASP.NET Core projects are created with the `dotnet new` command.
- **Controllers** define **action methods** that are used to handle HTTP requests.
- **Views** generate **HTML content** that is used to respond to HTTP requests.
- Views can contain **HTML elements** that are bound to **data model** properties.
- Model binding is the process by which request data is **parsed** and assigned to the **properties of objects** that are passed to **action methods** for processing.
- The data in the request can be **subjected to validation and errors** can be displayed to the user within the same HTML form that was used to submit the data.
- The HTML content generated by views can be **styled** using the same CSS features that are applied to **static HTML content**.