



pointer to pointer

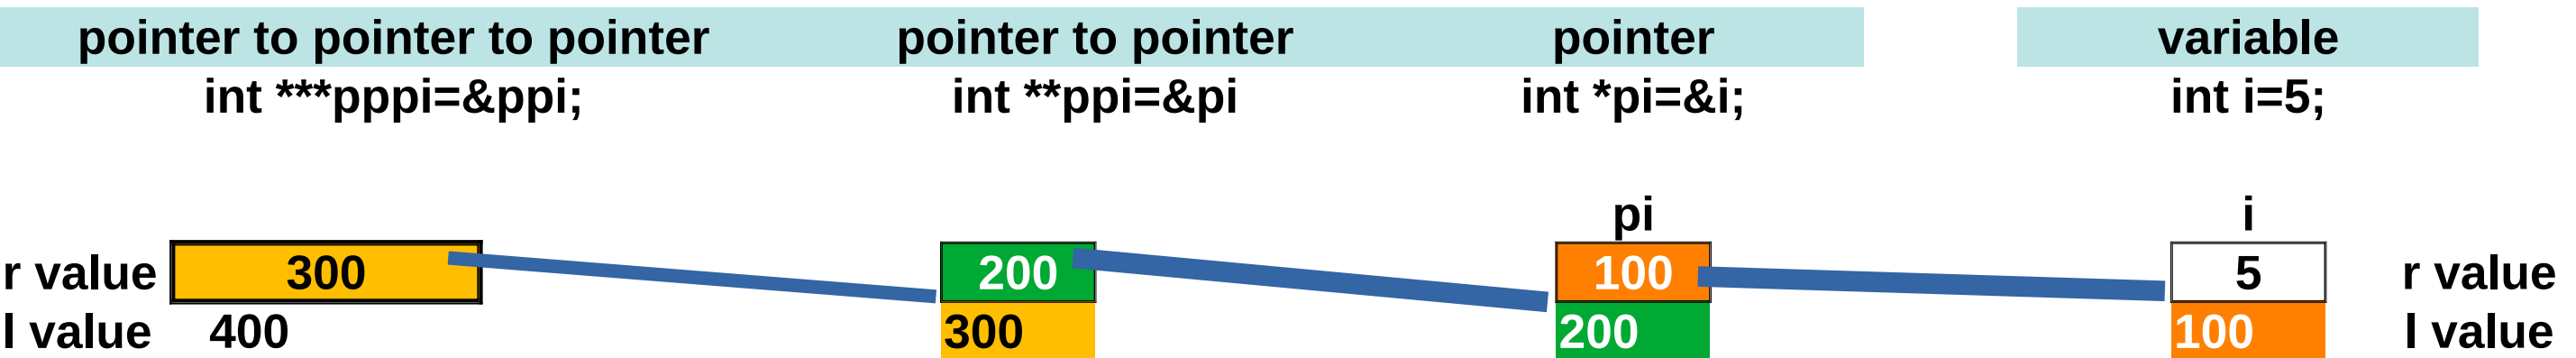

i = 5; *(&i)==*(100)==5; *pi==*(100)=5;
 **ppi== **200 == *(*200) == *(100) == 5


&i=100; pi=100 ; &pi=200; ppi=200;

****ppi=10; *(*200)= *(100)=10; setting value**

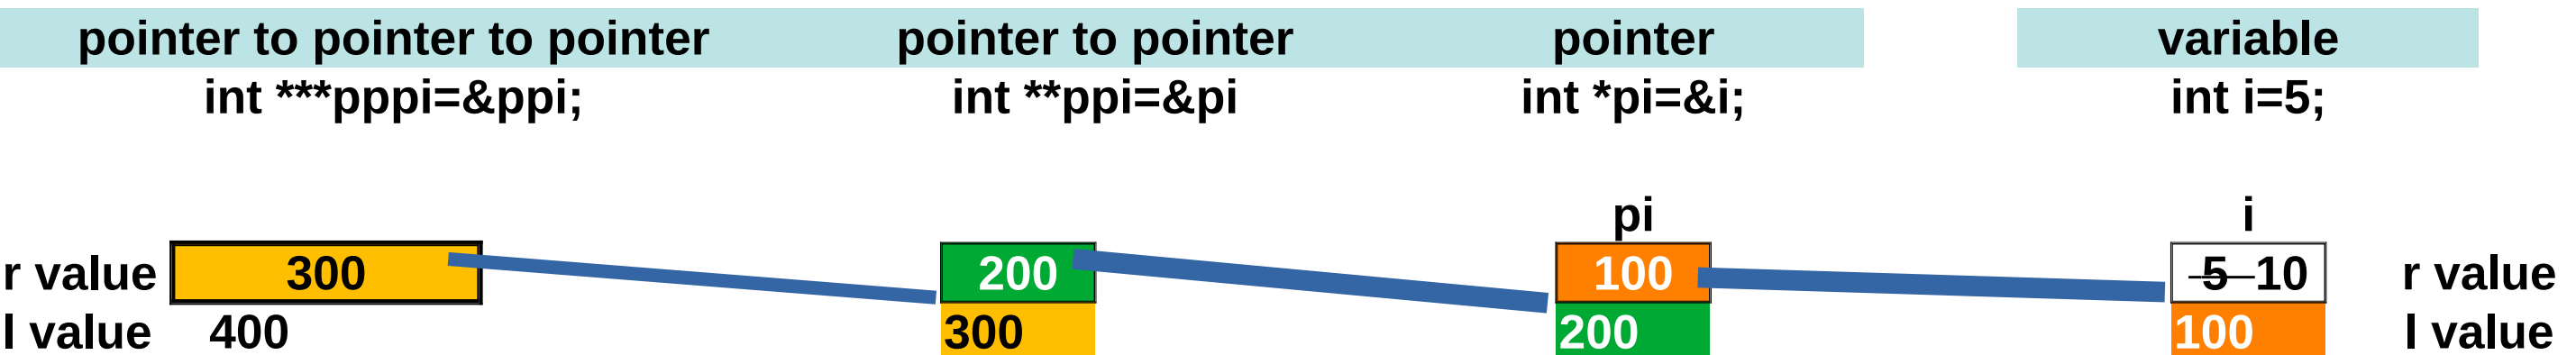

i =10; *(&i)==*(100)==10; *pi==*(100)==10;
****ppi== **200 == *(*200) == *(100) == 10**

&i=100; pi=100 ; &pi=200; ppi=200;

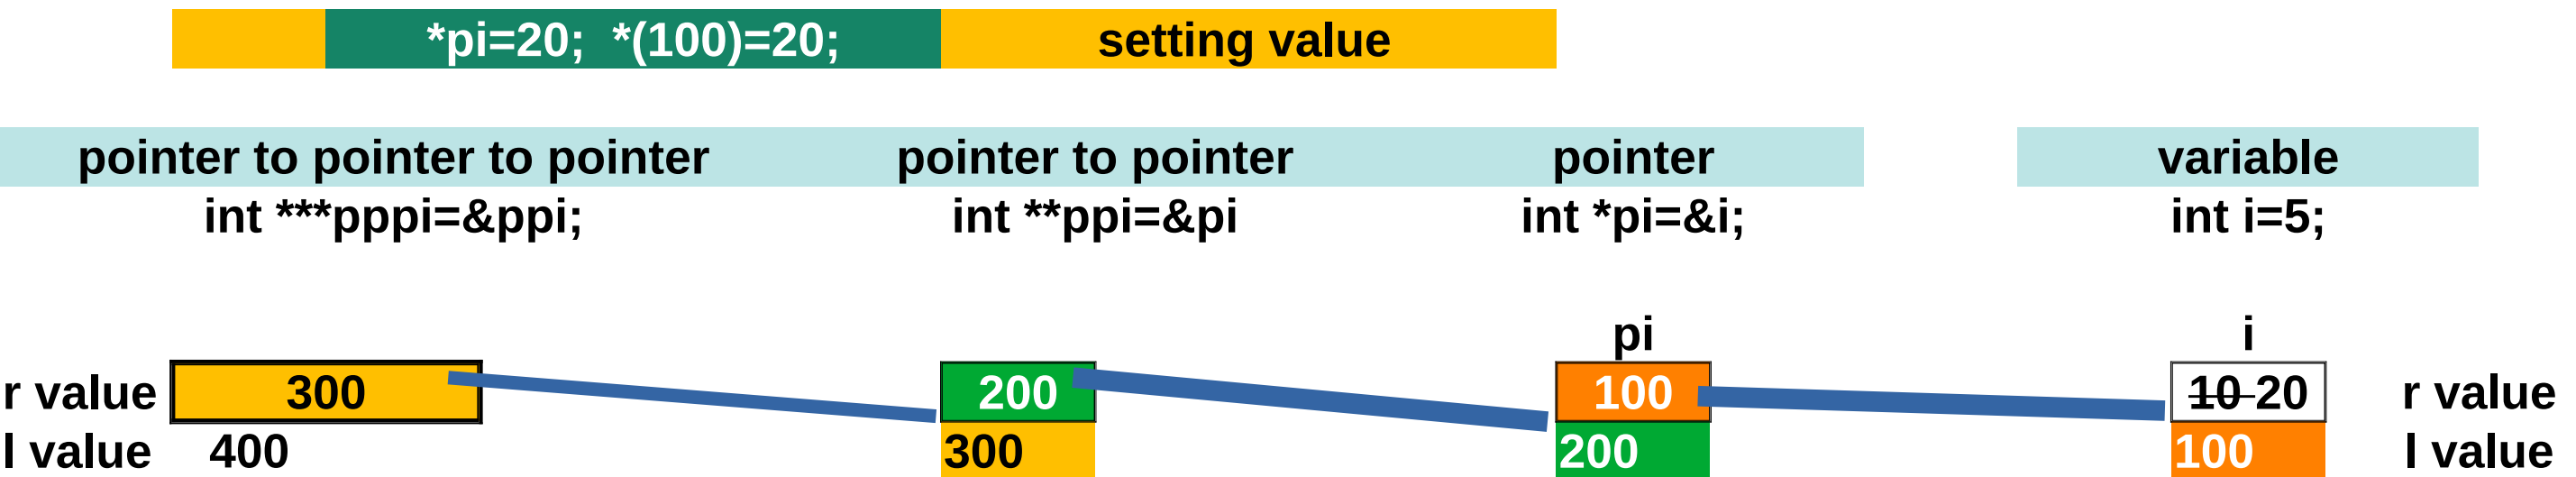

i =20; *(&i)==*(100)==20; *pi==*(100)==20;
 **ppi== **200 == *(*200) == *(100) == 20

&i=100; pi=100 ; &pi=200; ppi=200;

