

Conservatism and Over-conservatism in Grammatical Error Correction

Abstract

Grammatical Error Correction systems (henceforth, *correctors*) aim to correct ungrammatical text, while changing it as little as possible. However, while such conservatism is a virtue for correctors, we find that state-of-the-art systems make substantially less changes to the source sentences than needed. Analyzing the distribution of possible corrections for a given sentence, we show that this over-conservatism likely stems from the common use of very few reference corrections in training and evaluation. We demonstrate the feasibility of two approaches to address this gap, one by increasing the number of references, and the other by using semantic evaluation.

1 Introduction

Grammatical Error Correction (GEC) is a challenging research field, which interfaces with many other application areas of linguistics. The field is receiving considerable interest recently, notably through the GEC-HOO (Dale and Kilgarriff, 2011; Dale et al., 2012) and CoNLL shared tasks (Kao et al., 2013; Ng et al., 2014). Within GEC, considerable effort has been placed on system evaluation (Tetreault and Chodorow, 2008; Madnani et al., 2011; Dahlmeier and Ng, 2012; Felice and Briscoe, 2015; Napoles et al., 2015), a notoriously difficult topic, in part due to the many valid corrections each source sentence may have (Chodorow et al., 2012).

An important criterion in the evaluation of correctors is their ability to generate corrections that are faithful to meaning of the source. In fact, many would prefer a somewhat cumbersome or even an

occasionally ungrammatical correction over a correction that alters the meaning of the source (Brockett et al., 2006). As a result, often when compiling gold standard corrections for the task, annotators are instructed to be conservative in their corrections (e.g., in the Treebank of Learner English (Nicholls, 2003)). A recent attempt to formally capture this precision/recall asymmetry has been the standardized use of $F_{0.5}$ over F_1 , where Precision is emphasized over Recall (Dahlmeier and Ng, 2012).

However, penalizing over-correction more harshly than under-correction may lead to reluctance of correctors to make any changes (henceforth, *over-conservatism*). Using one or two reference corrections, which is a common practice in GEC **development data**, compounds this problem (Bryant and Ng, 2015), as correctors are not only harshly penalized for making incorrect changes, but are often penalized for making correct changes not found in the reference.(§3.5)

We present results that indicate that current state of the art systems do suffer from over-conservatism. Evaluating the output of all 12 systems that participated in the recent CoNLL2014 shared task, we find that all of them substantially under-predict corrections relative to the gold standard (§2).

We first assess whether the undue penalization of valid corrections can be solved by increasing the amount of references, which we denote by M (§3). We start by estimating the number of corrections that exist for each sentence and their frequencies, resulting with the astounding average of above 1,000 corrections per short sentence. We further consider two representative measures for assessing the validity of a proposed correction relative to a set of references, and characterize the distribution of their scores as a

function of M . **Our findings suggest that the effect of M saturates suggesting increasing M is beneficial only to a certain point.**

As increasing M seems not to solve the problem, we pursue a reference-less semantic evaluation approach which assesses the extent to which a correction faithfully represents the semantics of the source, by measuring the **similarity of their semantic structures (§4)**. **This approach can be combined with reference-less grammatic evaluation as the one recently proposed by (Napoles et al., 2016).**

Our experiments support the feasibility of this proposed approach, by showing that (1) semantic structural annotation can be consistently applied to learner’s language (LL), and (2) that the proposed measure is less prone to undue penalization of valid corrections.

The two approaches address the insufficiency of using too few references from complementary angles. The first attempts to cover more of the probability mass of valid corrections by taking a larger M , while the second uses semantic instead of string similarity, in order to abstract away from some of the formal variation between different valid corrections.

2 Over-Conservatism in GEC Systems

We demonstrate that current correctors suffer from over-conservatism: they tend to make too few changes to the source.

2.1 Notation

¹ We assume each source sentence x has a set of valid corrections $Correct_x$, and a discrete distribution \mathcal{D}_x over them, where $P_{\mathcal{D}_x}(y)$ for $y \in Correct_x$ is the probability a human annotator would correct x as y .

Let X be the evaluated set of source LL sentences where X consists of the sentences $x_1 \dots x_N$, each independently sampled from some distribution \mathcal{L} over LL sentences. For each x_i , denote with \mathcal{D}_i its distribution of corrections. Each x_i is paired with M corrections $Y = \{y_i^1, \dots, y_i^M\}$, which are independently sampled from \mathcal{D}_i .²

¹LC: now we need the notation both for the discussion and for the rest of the paper, where would be a good place to put it?

²Our analysis assumes M is fixed across source sentences. Generalizing the analysis to sentence-dependent M values is straightforward.

A corrector C is a function from LL sentences to proposed corrections (strings). A corrector’s output is a set of proposed corrections $\{C(x_1), \dots, C(x_N)\}$. An assessment measure is a function from X , Y and C to a real number. We use the term “true measure” to refer to the measure’s output where the references include all possible corrections, i.e., $y_i = Correct_i$ for every i .

Experimental Setup. Our experiments are on the NUCLE dataset, a parallel corpus of LL essays and their corrected versions, which is the de facto standard in GEC. The corpus contains 1,414 essays in LL, each of about 500 words.

We evaluate all participating systems in the CoNLL 2014 shared task, in addition to the best performing system on this dataset (Rozovskaya and Roth, 2014). The participating systems and their abbreviations are: Adam Mickiewicz University (AMU), University of Cambridge (CAMB), Columbia University and the University of Illinois at Urbana-Champaign (CUUI), Indian Institute of Technology, Bombay (IITB), Instituto Politecnico Nacional (IPN), National Tsing Hua University (NTHU), Peking University (PKU), Pohang University of Science and Technology (POST), Research Institute for Artificial Intelligence, Romanian Academy (RAC), Shanghai Jiao Tong University (SJTU), University of Franche-Comte (UFC), University of Macau (UMC), and the best performing system by Rozovskaya and Roth (2016, RoRo). All are trained and tested on the NUCLE corpus.

We compare the prevalence of changes made to the source by the correctors, relative to their prevalence in the NUCLE reference. In order to focus on the more substantial changes, we exclude from our evaluation all non-alphanumeric characters, both within tokens or as token of their own.

Measures of Conservatism. We consider three types of divergences between the source and the reference. First, we measure to what extent *words* were changed: altered, deleted or added. To do so, we compute word alignment between the source and the reference, casting it as a weighted bipartite matching problem, between the source’s words and the correction’s. Edge weights are assigned to be the

edit distance between the tokens.³ We note that aligning words in GEC is much simpler than in machine translation, as most of the words are kept unchanged, deleted fully, added, or changed slightly. Following word alignment, we define the WORD-CHANGE measure as the number of unaligned words and aligned words that were changed in any way.

Second, we quantify word *order* differences by computing Spearman’s ρ between the order of the words in the source sentence, and the order of their corresponding words in the correction according to the word alignment. $\rho = 0$ where the word order is uncorrelated, and $\rho = 1$ where the orders exactly match. We report the average ρ over all source sentences pairs.

Third, we report how many source sentences were split and how many concatenated by the references and by each of the correctors.

Results. Figure 1 presents the outcome of the three measures. Results show that the reference corrections make changes to considerably more source sentences than any of the correctors, and within each changed sentence changes more words and makes more word order changes, often an order of magnitude more. For example, in the reference corrections there are 44 sentences which have 5 words corrections, where the most sentences with 5 word corrections by any corrector is 11.

For completeness, we also measured the prevalence of changes in another corpus, the TreeBank of Learner English (Yannakoudakis et al., 2011), and obtain similar results to those obtained on NUCLE.

2.2 Discussion

⁴ The common practice of using one or two references in GEC evaluation yields a substantial underestimation of system’s performance using F -score (Bryant and Ng, 2015) or other reference-based measures (§3). Theoretically this under estimation could lead to over-conservatism. In the case of detection, the reason is straightforward. If for a given

³When breaking ties, we favor alignments where the place in the sentence is closer.

⁴LC: in the introduction the order is in reverse, we first discuss and then we show this is indeed the case, is that a problem? It somehow seems more structured this way, after experiments and more fluent from a birds eye view to first reason why we check it and the say it is true.

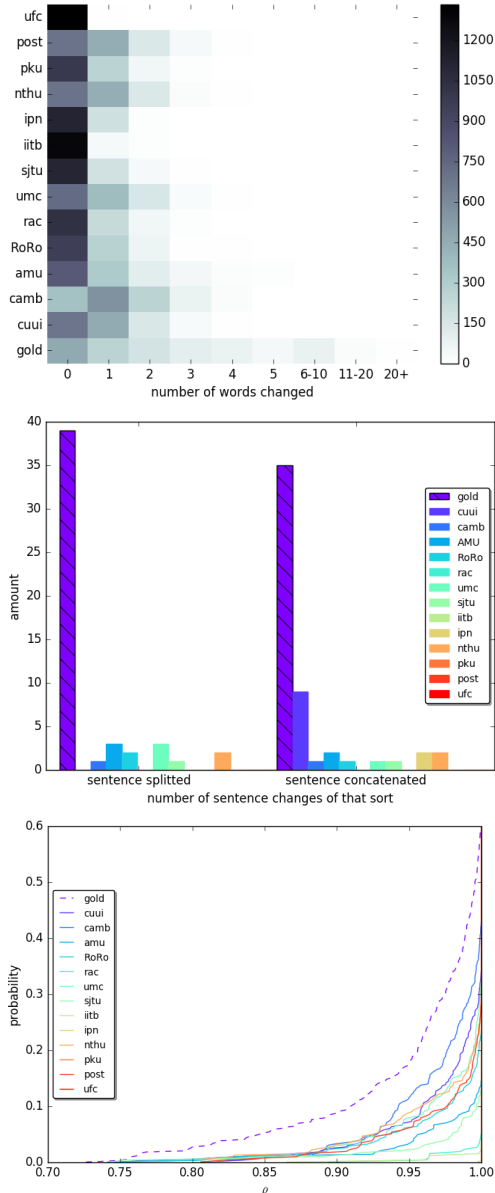


Figure 1: The prevalence of changes of different types in corrector’s output and in the NUCLE references. The top figure presents the number of sentence pairs (heat) for each number of word changes (x-axis; measured by WORDCHANGE) for each of the different systems and the references (y-axis). The middle figure presents the percentage of sentence pairs (y-axis) where the Spearman ρ values do not exceed a certain threshold (x-axis). The bottom figure presents the number of source sentences (y-axis) split (right bars) or concatenated (left bars) in the references (striped column) and in the corrector’s output (colored columns). See Section 2.1 for a legend of the correctors. The three figures show that under all measures, the gold standard references make substantially more changes to the source sentences than any of the correctors, in some cases an order of magnitude more.

type of error t there is less than 50% agreement in the gold standard about whether this should be detected as an error or not. Than a perfect corrector will not detect t errors.

The same holds for corrections, which we see is the case for a small M (Bryant and Ng, 2015). Importantly, low coverage of the reference set, in conjunction with asymmetric evaluation measures that penalize over-correction more severely than under-correction, result in evaluation measures that further incentivize correctors not to correct. Assume that for a given source sentence x , references $Y \sim \mathcal{D}_x$, and proposed correction c , a given evaluation measure increases by α if $c \in Y$, and decreases by $\beta > \alpha$ if $c \notin Y$. If the covered probability mass $P(y \in Y)$ for Y of size M and y sampled from \mathcal{D}_x the expected utility of the corrector from producing y is

$$\begin{aligned} &P(y \in Y|y \in \text{correct})P(y \in \text{correct}) \cdot \alpha - P(y \notin Y) \cdot \beta \\ &= P(y \in Y|y \in \text{correct})P(y \in \text{correct}) \cdot \alpha - \\ &((P(y \notin \text{correct}) + P(y \in \text{correct})P(y \notin Y)) \cdot \beta = \\ &P(y \in Y|y \in \text{correct})P(y \in \text{correct}) \cdot \alpha - \\ &(1 - P(y \in \text{correct})P(y \in Y)) \cdot \beta = \end{aligned}$$

⁵ For example (if we see in bryant probabillity X for that Y for that, etc. when we will be sure about the formula I will write it.) This implies that a corrector optimized in such circumstances will result in over-conservatism. We hypothesize this is a main reasons for the results shown in this section.

3 Multi-Reference Measures

In this section we check to which extent increasing the number of references M leads to a smaller bias in evaluation. We find that while increasing M reduces the bias it is unlikely to be enough to solve the problem of over-conservatism.

3.1 Data

Our analysis assumes that we have a reliable estimate for the distribution of corrections \mathcal{D}_x for the source sentences we evaluate. Our experiments in the following section are run on a random sample 52 sentences with a maximum length of 15 from the NUCLE test data. The length restriction was introduced to avoid introducing too many independent errors that may drastically increase the number of an-

notations variants (as every combination of corrections to these errors are possible), thus resulting in an unreliable estimation for \mathcal{D}_x . Sentences with less than 6 words were discarded, as they were mostly a result of sentence segmentation errors.

Crowdsourcing has proven effective in GEC evaluation (Madnani et al., 2011; Napoles et al., 2015) and in related tasks such as machine translation (Zaidan and Callison-Burch, 2011; Post et al., 2012). We thus use crowdsourcing for obtaining a sample from \mathcal{D}_x . Specifically, for each of the 52 source sentences, we elicited 50 corrections by Amazon Mechanical Turk workers. To correct grammaticality and not fluency we told the workers that there is no need to rephrase for styling, and that when unnecessary the sentence or parts of it should be left like the original. 4 sentences did not need require any correction according to a large part of the workers and were hence discarded.

3.2 Estimating The Distribution of Corrections

We begin by estimating \mathcal{D}_x for each sentence, using the crowdsourced corrections. We use UNSEEN-EST (Zou et al., 2015), a non-parametric algorithm that estimates a multinomial distribution, in which the individual values do not matter, only the distribution of probabilities across values. UNSEENEST was originally developed for assessing how many variants a gene might have, including undiscovered ones, which is a similar estimation problem to the one tackled here. Our Manual tests of unseenEst with small artificially created frequencies showed satisfactory results.⁶

By the estimates from UNSEENEST, most source sentences have a large number of corrections with low probability accounting for the bulk of the probability mass and a rather small number of frequent corrections. The estimated distributions tend to have steps, with many corrections with the same (low) frequency. Table 1 presents the mean numbers of different corrections with frequency at least γ (for different values of γ), and their total probability mass. For instance, 8.72 corrections account for 58% of the total probability mass of the corrections,

⁵LC: I used the opposites (I-P) on the last step, how did you simplify it further?

⁶All data we collected, along with the estimated distributions can be found in <to be disclosed upon publication>

each occurring with a probability of 0.01 or higher.⁷⁸

	Frequency Threshold (γ)			
	0	0.001	0.01	0.1
Variants	1351.24	74.34	8.72	1.35
Mass	1	0.75	0.58	0.37

Table 1: Estimating the distribution of corrections \mathcal{D}_x . The table presents the mean number of corrections with a probability of more than γ (top row), as well as their total probability mass (bottom row).

3.3 Under-estimation as a function of M

In the previous section we presented empirical assessment of the distribution of corrections to a sentence. We now turn to estimating the resulting bias, namely the under-estimation of reference-based similarity measures, for different values of M .

We discuss two similarity measures. One is the sentence-level accuracy (also called “Exact Match”) and the other is the GEC F -score.

Sentence-level Accuracy. Sentence-level accuracy is the number of sentences whose corrections exactly matches one of the references (also called “Exact Match”). While this measure, in its raw form, is not commonly used as an evaluation measure in GEC, it is a basic, interpretable measure, and extensions of which have been recently proposed for GEC evaluation (Felice and Briscoe, 2015). It is also closely related to the 0-1 loss function used for training statistical GEC systems (Chodorow et al., 2012; Rozovskaya and Roth, 2013).

Formally, given test sentences $X = \{x_1, \dots, x_N\}$, their references Y_1, \dots, Y_N , and proposed corrections $\{C(x_1), \dots, C(x_N)\}$, we define C ’s accuracy to be

$$Acc(C; X, Y) = \frac{1}{N} \sum_{i=1}^n \mathbb{1}_{C(x_i) \in Y_i}. \quad (1)$$

⁷OA: maybe the graph to show is the total probability mass of the k most frequent variants, where $k = 1, 2, 3, 4 \dots$?

⁸LC: you win some you lose some... It might be pretty if you do it on the mean, you won’t know the variant numbers and the steps which is one of the interesting factors.

Note that C ’s accuracy is in fact an estimate of C ’s probability to produce a valid correction for a sentence, or C ’s *true accuracy*. Formally:

$$TrueAcc(C) = P_{x \sim L}(C(x) \in Correct_x). \quad (2)$$

The bias of $Acc(C; X, Y)$ for a sample of N sentences, each paired with M references is then

$$TrueAcc(C) - \mathbb{E}_{X, Y}[Acc(C; X, Y)] = \quad (3)$$

$$TrueAcc(C) - P(C(x) \in Y) = \quad (4)$$

$$Pr(C(x) \in Correct_x) \cdot \quad (5)$$

$$(1 - Pr(C(x) \in Y | C(x) \in Correct_x)) \quad (6)$$

It is easy to see that the bias is not affected by N , only by M . As M grows, Y becomes a better approximation of $Correct_x$, and b_M tends to 0.

In order to gain insight about the evaluation measure and the GEC task (and not the idiosyncrasies of specific systems), we consider an idealized learner, which, when correct, produces a valid correction with the same distribution as a human annotator (i.e., according to \mathcal{D}_x). Formally, we assume that, if $C(x) \in Correct_x$ then $C(x) \sim \mathcal{D}_x$. Hence the bias (Equation 6) can be re-written as

$$P(C(x) \in Correct_x) \cdot (1 - P_{\mathcal{D}_x}(y \in Y)). \quad (7)$$

We will from now on assume that C is perfect (i.e., its true accuracy $Pr(C(x) \in Correct_x)$ is 1), and denote its bias with b_M . It is easy to see that assuming any other value for C ’s true accuracy would simply scale the bias by that accuracy. Similarly, assuming only a percentage p of the sentences require correction will scale the bias by p .

We estimate b_M empirically using its empirical mean on our experimental corpus:

$$\hat{b}_M = 1 - \frac{1}{N} \sum_{i=1}^N P_{Y \sim \mathcal{D}_i^M, y \sim \mathcal{D}_i}(y \in Y). \quad (8)$$

Using the UNSEENEST estimations of \mathcal{D}_i , we can compute \hat{b}_M for any size of Y_i (value of M).

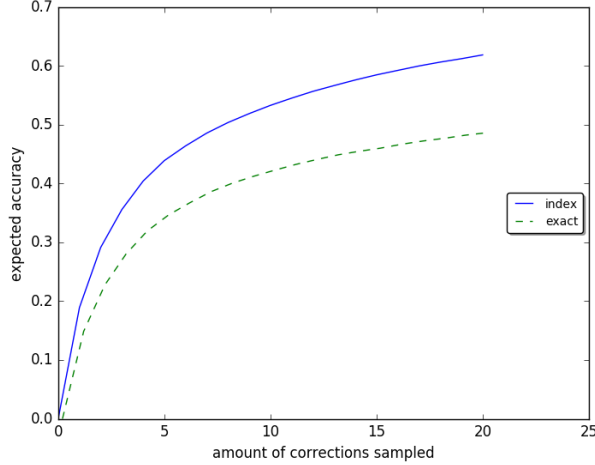


Figure 2: Accuracy and Exact Index Match values for a perfect corrector (y-axis) as a function of the number of references M (x-axis).

However, as this computation is highly computationally demanding, we estimate it using sampling. Specifically, for every $M = 1, \dots, 20$ and x_i , we sample Y_i 1000 times (with replacement), and estimate $P(y \in Y_i)$ as the covered probability mass $P_{\mathcal{D}_i}\{y : y \in Y_i\}$.

We repeated all our experiments where Y_i is sampled without replacement, in order to simulate a case where reference corrections are collected by a single annotator, and are thus not repeated. We find similar trends with faster increase in accuracy reaching above 0.7 with $M = 20$.

Figure 2 presents the expected accuracy values for our perfect corrector (i.e., $1 - \hat{b}_M$) for different values of M . Results show that even for values of M which are much larger than those considered in the GEC literature (e.g., $M = 20$), the expected accuracy is only of about 0.5. **As M increases the contribution of each additional correction gets smaller to the point it hardly contributes to the accuracy.**

We also experiment with a more relaxed measure, *Exact Index Match*, which is only sensitive to the identity of the changed words and not to what they were changed to. **This measure can be seen as an estimator for error detection agreement**⁹. Formally, two proposed corrections c and c' over a source sentence x match if their word

⁹LC: need to see if anyone mentioned that, I don't think so, as we would cite it in this context even if he was talking about detection and we about correction

alignments with the source (computed as above) $a : \{1, \dots, |x|\} \rightarrow \{1, \dots, |c|, Null\}$ and $a' : \{1, \dots, |x|\} \rightarrow \{1, \dots, |c'|, Null\}$, it holds that $c_{a(i)} \neq x_i$ iff $c'_{a'(i)} \neq x_i$ (y_{NULL} and y'_{NULL} are empty strings). Figure 2 also presents the expected accuracy in this case for different values of M , which indicate that while scores of a perfect corrector are somewhat higher, still with $M = 5$ it is no less than 0.5.

The analytic tools we have developed support the computation of the entire distribution of the accuracy, and not only its expected values. From Equation 1 we see that Accuracy has a Poisson Binomial distribution (i.e., it is a sum of independent Bernoulli variables with different success probabilities), whose success probabilities are $P_{y,Y \sim \mathcal{D}_i}(y \in Y)$, which can be computed, as before, using UNSEENEST's estimate for \mathcal{D}_i . Estimating the density function allows for the straightforward creations of significance tests for the measure, and can be performed efficiently (Hong, 2013).¹⁰

F-Score. While accuracy is commonly used as a loss function for training GEC systems, the F_α score is standard when reporting system performance **and assessing it in development**.

Computing F -score for GEC is not at all straightforward. The score is computed in terms of *edit* matches between the correction and the reference, where edits are sub-strings of the source that are replaced in the correction/reference. Since correctors do not normally produce edits, F -score is defined optimistically, maximizing over all possible ways to annotate the source with edits, so as to end up with the correction.¹¹ The resulting optimization problem is NP-hard, but designated scorers have been developed to estimate it, notably the M^2 scorer (Dahlmeier and Ng, 2012).

The complexity of the measure prohibits an analytic analysis, and we instead use a bootstrapping approach to estimate the bias incurred by not being able to exhaustively enumerate the set of valid corrections. As with accuracy, in order to avoid confounding our results with system-specific biases, we

¹⁰An implementation of this method and the estimated density functions will be released upon publication.

¹¹Since our crowdsourced corrections do not include an explicit annotation of edits, we produce edits heuristically.

assume the evaluated corrector is perfect and samples its corrections from the human distribution of corrections \mathcal{D}_x .

Concretely, given a value for M and for N , we uniformly sample from our experimental corpus source sentences x_1, \dots, x_N , and M corrections for each Y_1, \dots, Y_N (with replacement). Setting a realistic value for N in our experiments is important for obtaining comparable results to those obtained on the NUCLE corpus (see below), as the expected value of F -score may depend on N (unlike Accuracy, it is not additive). In accordance with the NUCLE’s test set, we set $N = 1312$ and assume that 136 of the sentences require no correction. The latter reduce the overall bias by their frequency in the corpus, and are thus important to include for obtaining comparable results.

The bootstrapping procedure is carried out by the accelerated bootstrap procedure (Efron, 1987), with 1000 iterations. We also report confidence intervals ($p = .95$), computed using the same procedure.¹²

Figure 3 presents the results of this procedure, which provide further indication for the insufficiency of M values of 1 or 2 in obtaining a reliable estimation of a corrector’s performance. For instance, the $F_{0.5}$ score for our perfect corrector, whose true F -score is 1, is only 0.42 with $M = 2$. **Moreover, the saturation effect that was evident from the discussion of accuracy and with close examination of the results of Bryant and Ng (2015) is replicated and evident.**

While our experiments focus on the accuracy and F -score measures, we expect our results to generalize to other reference-based measures (see Section 5).

3.4 Significance of Real-World Correctors

The bootstrapping method for computing the significance of the F -score can also be useful for assessing the significance of the differences in corrector’s performance reported in the literature. We report results with the bootstrapping protocol (§3.3) to compute the confidence interval of different correctors with the current NUCLE test data ($M = 2$).

¹²We use the standard Python scikits.bootstrap implementation of this method.

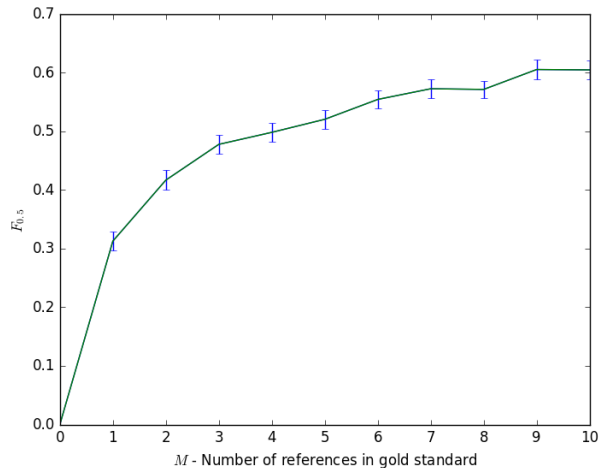


Figure 3: $F_{0.5}$ values for a perfect corrector (y-axis) as a function of the number of references M (x-axis). Each data point is paired with a confidence interval ($p = .95$).

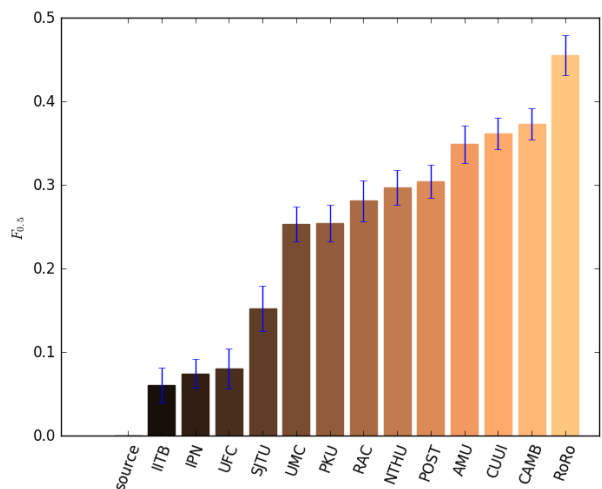


Figure 4: $F_{0.5}$ values for different correctors, including confidence interval ($p = .95$). The left-most column (“source”) presents the F -score of a corrector that doesn’t make any changes to the source sentences. See Section 2.1 for a legend of the correctors.

Figure 4 shows our results, which present a mixed picture: some of the differences between previously reported F -scores are indeed significant and some are not. For example, the best performing corrector is significantly better than the second, but the latter is not significantly better than the third and fourth.

3.5 Discussion

Our empirical results show that the number of corrections needed for a reliable reference-based estimation is considerably greater than was previously expected. There are hundreds of valid corrections with very low probability and accuracy and F -score analysis shows diminishing returns (carefully analyzing Bryant and Ng (2015) data suggests the same). All these findings suggest that it is too costly to increase M in development data to the extent asymmetric evaluation will not lead to over-conservatism. The exact index match analysis also suggests $M = 1, 2$ coverage is also low for detection. When detection is separate from correction this might result in over-conservatism.

Bryant and Ng (2015) mention some of the annotations suggested not to correct sentences. This is another surprising problem with increasing M , the more annotators in the gold standard the more probable a correction to be ignored by one of the annotators. For example, out of the 52 sentences we gathered 39 had at least one annotator suggesting it shouldn't be corrected. We note that we report a somewhat lower F -score than Bryant and Ng (2015), it might be due to the fact that there are more sentences that does not need correction than we predicted as suggested by the 4(7%) sentences we discarded.¹³

As we have seen above, the expected coverage (which is equal to the accuracy depicted in Figure 2) is often lower than 0.5 for $M = 2$, which suggests that the incentivization given in 2.2 for over-conservatism is likely to be pervasive. Considering the F -score of the best performing systems in Figure 4, and comparing them to the F -score of a perfect corrector with $M = 2$, we find that their scores are comparable, where RoRo in fact surpass a perfect corrector's F -score. While it is possible that such systems outperform the perfect corrector by learning

how to correct a sentence in the same way as one of the NUCLE annotators did, we view this possibility as unlikely as our results (§2) show that the output of these systems considerably diverges from NUCLE's references. A more likely possibility is that these systems high performance relative to a perfect corrector's is due to these correctors having learned to predict when not to correct.

Finally, While taking a large enough value of N may yield statistically significant results for comparing the different systems (§3.4), low values of M , and the low coverage they entail, lead to other problems that cannot be mended in the same way. Comparing to human performance might be a good solution (Bryant and Ng, 2015), even that as we noted, it might result with a score of more than 100% (without even being a perfect corrector). More importantly, if used for development it seems both theoretically and empirically probable to result in over-conservatism.

4 Semantic Faithfulness Measure

In this section we explore a reference-less semantic approach to overcoming the bias introduced by the multitude of different valid corrections for an LL sentence. The measure is based on the semantic similarity of the source and the proposed correction, measured as graph similarity between their semantic representations. Such a measure needs to be complemented with an error detection procedure, as it only captures the faithfulness dimension, namely the extent to which the meaning of the source is preserved in the correction, and not the correction's grammaticality. See (Napoles et al., 2016) for a proposal of a complementary grammaticality measure based on automatic error detection.

As a test case, we use UCCA to define the semantic structures (Abend and Rappoport, 2013), motivated by its recent use in semantic machine translation evaluation (Birch et al., 2016).

We conduct two experiments that support the feasibility of our approach. First, we show that semantic annotation can be consistently applied to LL, through inter-annotator agreement (IAA) experiments. Second, we show that a perfect corrector scores high on this measure.

¹³LC: all true, but not written well

4.1 Structural Representation in LL

While linguistic theories propose that each learner makes consistent use of syntax (Huebner, 1985; Tarone, 1983), this use may not conform the syntax of the learned language, or of any other known language. This entails difficulties in defining syntactic annotation for LL, as, on the face of it, the language of each learner has to be annotated in its own terms.

LL resources differ as to how they annotate syntactic errors. Berzak et al. (2016) and Ragheb and Dickinson (2012) annotate syntactic structures according to the syntax used by the learner, even if this use is not grammatical. Such annotation may be unreliable as a source of semantic information, as semantically similar sentences, formulated by different learners, may have considerably different structures. Nagata and Sakaguchi (2016) take an opposite approach, and attempt to be faithful to the syntax intended by the learner. However, such an approach faces difficulties due to the multitude of different syntactic structures that can be used to express a similar meaning.

In this section, we use semantic annotation to structurally represent LL text. Semantic structures are faithful to the intended meaning of the sentence, and not its formal realization, and thus face less conflicts where the syntactic structure used diverges from the one intended. We are not aware of any previous attempts to semantically annotate LL text.

UCCA. UCCA is a semantic annotation scheme that builds on typological and cognitive linguistic theories. The scheme’s aims are to provide a coarse-grained, cross-linguistically applicable representation. Importantly, UCCA’s categories directly reflect semantic, rather than distributional distinctions. For instance, UCCA is not sensitive to POS distinctions: a Scene’s main relation can be a verb but also an adjective (“He is **thin**”) or a noun (“John’s **decision**”). Indeed, Sulem et al. (2015) has found that UCCA structures are preserved remarkably well across English-French translations.

UCCA structures are directed acyclic graphs, where the words in the text correspond to (a subset of) their leaves. The nodes of the graphs, called *units*, are either terminals or several elements jointly viewed as a single entity according to some semantic or cognitive consideration. The edges bear one or

more categories, indicating the role of the sub-unit in the relation that the parent represents.

UCCA views the text as a collection of *Scenes* and relations between them. A Scene, the most basic notion of this layer, describes a movement, an action or a state which is persistent in time. Every Scene contains one main relation, zero or more *Participants*, which are interpreted in a broad sense, and include locations, destinations and complement clauses, and *Adverbials*, such as manner or temporal descriptions.

4.2 Experimental Setup

We employ two annotators, trained by annotating both LL and standard English passages, until a high enough agreement was reached (6 hours of training in total). Training passages were excluded from the evaluation. We use UCCA’s standard annotation guidelines,¹⁴ without introducing any adaptations.

We experiment on 7 essays and their corrections from NUCLE, each of about 500 tokens. In order to measure IAA, we assigned 4 of these essays to both annotators and compute their agreement. In order to measure the faithfulness score for a perfect corrector, we annotate both the source and the corrected version for 6 essays, some of which were annotated by both annotators.

4.3 Semantic Similarity Measures

IAA Measure. We define a similarity measure over UCCA annotations G_1 and G_2 over the same set of leaves (tokens) W . For a node v in either graph, define its yield $yield(v) \subseteq W$ as its set of leaf descendants. Define a pair of edges $(v_1, u_1) \in G_1$ and $(v_2, u_2) \in G_2$ to be matching if $yield(u_1) = yield(u_2)$ and they have the same label. Labeled precision and recall are defined by dividing the number of matching edges in G_1 and G_2 by $|E_1|$ and $|E_2|$, respectively, and the *DAG F-score* is their harmonic mean. We note that the measure collapses to the common parsing *F-score* if G_1 and G_2 are trees.

Semantic Faithfulness Measure. Computing a faithfulness measure is slightly more involved, as the source sentence graph G_s and its correction G_c do

¹⁴<http://www.cs.huji.ac.il/~oabend/ucca/guidelines.pdf>

not share the same set of leaves.¹⁵

We assume a (possibly partial, possibly many-to-1) alignment between G_s and G_c , $A \subset V_s \times V_c$. An edge $(v_1, v_2) \in E_c$ is said to match an edge $(u_1, u_2) \in E_s$ if they have the same label and $(v_2, u_2) \in A$. Recall (Precision) is defined as the ratio of edges in E_s (E_c) that have a match in E_c (E_s) respectively, and F -score is their harmonic mean. We note that this measure indeed collapses to the DAG F -score discussed above where A includes all pairs of nodes in E_s and E_c that have the same yield.

In order to define the alignment between V_s and V_c , we begin by aligning the leaves (tokens) in V_s and V_c using the same method detailed in Section 2. Denote the results leaf alignment with $A_l \subset \text{Leaves}_s \times \text{Leaves}_c$. We now extend A_l to define the node alignment A , by aligning each non-leaf $v \in V_s$ with the node $u \in V_c$ that maximizes

$$w(v, u) = \frac{|A_l \cap (\text{yield}(u) \times \text{yield}(v))|}{|\text{yield}(u)|}. \quad (9)$$

We exclude from A pairs v, u such that $w(v, u) = 0$. The resulting F -score measure, using the resulting A is called UCCA Similarity (UCCASIM). As the resulting alignment may differ when aligning nodes from V_c to V_s and the other way around, we report the resulting F -score in both directions.

Note that UCCASIM is somewhat more relaxed than DAG F -score defined above, as it also aligns nodes whose yields are not in perfect alignment with one another, unlike DAG F -score which requires a perfect match. While this relaxation is necessary, given that corrections often add or removes nodes, thus eliminating the possibility of a perfect alignment, in order to obtain comparable IAA scores, we report IAA using UCCASIM as well.

For completeness, we also replicate the protocol used by Sulem et al. (2015) for comparing the UCCA annotations of English-French translations, which we call Distributional Similarity (DISTSIM). For a given UCCA label l , denote $c_i(l)$ the number of l -labeled UCCA nodes in the i -th source sentence, and $d_i(l)$ the number of l -labeled

UCCA nodes in its corresponding correction. We define DISTSIM(l) between these sentences to be $\frac{1}{N} \sum_{i=1}^N |c_i(l) - d_i(l)|$, where N is the total number of sentence pairs.

4.4 The Faithfulness of a Perfect Corrector

We obtain an IAA DAG F -score of 0.845 (Precision 0.834, Recall 0.857), which is comparable to the IAA reported for English Wikipedia texts by (Abend and Rappoport, 2013). As another point of comparison, we doubly annotate 3 corrected NUCLE passages, obtaining a similar IAA.

These results suggest that annotating LL with UCCA does not lead to any degradation of IAA, and can be applied as consistently to LL text as to standard English text.

Table 2 (left side) presents the UCCASIM scores obtained by comparing the NUCLE references and the source sentences, or equivalently the UCCASIM score of a perfect corrector. In order to control for differences between the annotators, we explore both a setting where both sides were annotated by the same annotator, and a setting where they were annotated by different ones. As an upper bound on the score of a perfect corrector (using different annotators), we also report the IAA on source sentences, computed using UCCASIM.

Our results indicate that a perfect corrector obtains a score comparable to the IAA, which indicates that UCCASIM is indeed insensitive to the surface divergence between a source sentence and its valid correction. However, more work is required to establish whether the converse holds, namely that the measure is sensitive enough to unfaithfulness of a proposed correction. This, of course, depends on the scope of distinctions covered by the semantic annotation. In UCCA’s case, it is predicate-argument structures, the inter-relations between them, as well as the semantic heads of complex arguments.

Our attempts to conduct experiments to determine UCCASIM’s sensitivity to correction errors introduced by the correctors described in Section 2 were unsuccessful, as these systems make only very few structural (rather than word-level) corrections (see Figure 1). We expect that once the over-conservatism of existing correctors is resolved, such evaluation will be more informative.

Finally, the right-hand side of Table 2 presents

¹⁵The use of graph kernels as a similarity measure between UCCA structures is unsuitable here due to the small size of UCCA DAGs (Kashima et al., 2003).

DISTSIM between the source and reference sentences. Our results are similar to the ones obtained by Sulem et al. (2015), who compared standard English sentences and their French translations.

	UCCASIM			DISTSIM	
	s→r	r→s	Avg	A+D	Scene
Different	0.85	0.83	0.84	0.96	0.93
Same	0.92	0.91	0.92	0.97	0.96
IAA	0.85	0.81	0.83	-	-
SAR15	-	-	-	0.95	0.96

Table 2: The faithfulness of a perfect corrector. The left-hand side presents results with UCCASIM where the alignment is computed from the source to the reference (s→r), the opposite direction (r→s), and their average (Avg). The right-hand side presents DISTSIM for the UCCA categories Participants and Adverbials, considered together (A+D), and for Scene units (Scene), as reported by Sulem et al. (2015). The rows show values when the source and reference are annotated by the same annotator or by different ones. As a point of reference, we report IAA computed using UCCASIM (IAA row). Results show that the faithfulness of a perfect corrector is comparable with the IAA. The bottom row presents the results reported by Sulem et al. (SAR15) on English-French translations, which are comparable to ours.

5 Previous Work

A number of evaluation measures have been proposed for GEC. An earlier version of F -score was used in the HOO shared task, which required that the proposed corrections include edits (markings of phrases that were changed in the source) explicitly. The M^2 measure, used for the CoNLL shared tasks and the standard measure since, automatically produces edits on the corrections, thus relieving correctors from the need to do so.

Felice and Briscoe (2015) proposed the I-MEASURE, which introduces some novel features to GEC evaluation, such as distinguishing different quality levels of ungrammatical corrections (e.g., some improve the quality of the source, while others degrade it), and restricting edits to only consist of single words, rather than phrases. Napoles et al. (2015) compares the system ranking of different correctors inspired by M^2 and I-measure, relative crowdsourced human rankings. They find a low correlation between these rankings, and propose the

GLEU measure (an adaptation of BLEU), which is shown to correlate much better with human rankings. Sakaguchi et al. (2016) proposes to construct reference annotations that emphasize fluency over conservatism.

We expect that our findings, that reference-based measures substantially under-estimate the performance of correctors, to generalize to these reference-based measures, as they all apply string similarity measures relative to a small number of references. These measures thus address orthogonal gaps in GEC evaluation from the ones presented here.

Napoles et al. (2016) address the insufficiency of reference-based measures and propose to combine reference-based measures for assessing faithfulness and grammatical error detection systems for measuring grammaticality. We complement their efforts by proposing a faithfulness measure based on semantic similarity.

6 Conclusion

This paper addresses the shortcomings of existing reference-based evaluation protocols in GEC. We demonstrated that state of the art GEC systems suffer from over-conservatism and hypothesize that this over-conservatism results from the use of measures that not only more harshly penalize over-correction over under-correction, but also often penalize correctors for proposing perfectly valid corrections. In fact, in many cases systems are more likely to be penalized for a valid correction than to receive credit for it, due to the small number of references taken into account.

We explored two approaches for addressing this caveat, one by increasing the number of references, and the other by employing a semantic similarity measure for estimating the semantic faithfulness of the correction to the source. We compute the scores a perfect corrector would receive with both approaches, which suggest that increasing the number of references and using semantic faithfulness measures are feasible solutions.

Future work will assess the relative importance, ascribed by users of GEC systems, to different evaluation criteria of the output. We believe that in terms of conservatism, end users will be tolerant to (possi-

bly necessary) changes in the sentence structure, i.e., violation of conservatism, but much less tolerant to changes in the sentence’s meaning, i.e., violation of faithfulness. A better understanding of how these factors interact may lead to improved protocols of semantic evaluation, that will alleviate the requirement for a high number of references.

References

- Omri Abend and Ari Rappoport. 2013. Universal conceptual cognitive annotation (ucca). In *ACL (1)*, pages 228–238.
- Yevgeni Berzak, Jessica Kenney, Carolyn Spadine, Jing Xian Wang, Lucia Lam, Keiko Sophie Mori, Sebastian Garza, and Boris Katz. 2016. Universal dependencies for learner english. *arXiv preprint arXiv:1605.04278*.
- Alexandra Birch, Omri Abend, Ondrej Bojar, and Barry Haddow. 2016. Hume: Human ucca-based evaluation of machine translation. *arXiv preprint arXiv:1607.00030*.
- Chris Brockett, William B Dolan, and Michael Gamon. 2006. Correcting esl errors using phrasal smt techniques. In *Proceedings of the 21st International Conference on Computational Linguistics and the 44th annual meeting of the Association for Computational Linguistics*, pages 249–256. Association for Computational Linguistics.
- Christopher Bryant and Hwee Tou Ng. 2015. How far are we from fully automatic high quality grammatical error correction? In *ACL (1)*, pages 697–707.
- Martin Chodorow, Markus Dickinson, Ross Israel, and Joel R Tetreault. 2012. Problems in evaluating grammatical error detection systems. In *COLING*, pages 611–628. Citeseer.
- Daniel Dahlmeier and Hwee Tou Ng. 2012. Better evaluation for grammatical error correction. In *Proceedings of the 2012 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 568–572. Association for Computational Linguistics.
- Robert Dale and Adam Kilgarriff. 2011. Helping our own: The hoo 2011 pilot shared task. In *Proceedings of the 13th European Workshop on Natural Language Generation*, pages 242–249. Association for Computational Linguistics.
- Robert Dale, Ilya Anisimoff, and George Narroway. 2012. Hoo 2012: A report on the preposition and determiner error correction shared task. In *Proceedings of the Seventh Workshop on Building Educational Applications Using NLP*, pages 54–62. Association for Computational Linguistics.
- Bradley Efron. 1987. Better bootstrap confidence intervals. *Journal of the American statistical Association*, 82(397):171–185.
- Mariano Felice and Ted Briscoe. 2015. Towards a standard evaluation method for grammatical error detection and correction. In *HLT-NAACL*, pages 578–587.
- Yili Hong. 2013. On computing the distribution function for the poisson binomial distribution. *Computational Statistics & Data Analysis*, 59:41–51.
- Thorn Huebner. 1985. System and variability in inter-language syntax. *Language Learning*, 35(2):141–163.
- Ting-Hui Kao, Yu-Wei Chang, Hsun-Wen Chiu, Tzu-Hsi Yen, J Boisson, J-c Wu, and JS Chang. 2013. Conll-2013 shared task: Grammatical error correction nthu system description. In *Proceedings of the Seventeenth Conference on Computational Natural Language Learning: Shared Task*, pages 20–25.
- Hisashi Kashima, Koji Tsuda, and Akihiro Inokuchi. 2003. Marginalized kernels between labeled graphs. In *ICML*, volume 3, pages 321–328.
- Nitin Madnani, Joel Tetreault, Martin Chodorow, and Alla Rozovskaya. 2011. They can help: Using crowdsourcing to improve the evaluation of grammatical error detection systems. In *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies: short papers-Volume 2*, pages 508–513. Association for Computational Linguistics.
- Ryo Nagata and Keisuke Sakaguchi. 2016. Phrase structure annotation and parsing for learner english.
- Courtney Napoles, Keisuke Sakaguchi, Matt Post, and Joel Tetreault. 2015. Ground truth for grammatical error correction metrics. In *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing*, volume 2, pages 588–593.
- Courtney Napoles, Keisuke Sakaguchi, and Joel Tetreault. 2016. There’s no comparison: Referenceless evaluation metrics in grammatical error correction. In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 2109–2115, Austin, Texas, November. Association for Computational Linguistics.
- Hwee Tou Ng, Siew Mei Wu, Ted Briscoe, Christian Hadiwinoto, Raymond Hendy Susanto, and Christopher Bryant. 2014. The conll-2014 shared task on grammatical error correction. In *CoNLL Shared Task*, pages 1–14.
- Diane Nicholls. 2003. The cambridge learner corpus: Error coding and analysis for lexicography and elt. In *Proceedings of the Corpus Linguistics 2003 conference*, volume 16, pages 572–581.

- Matt Post, Chris Callison-Burch, and Miles Osborne. 2012. Constructing parallel corpora for six indian languages via crowdsourcing. In *Proceedings of the Seventh Workshop on Statistical Machine Translation*, pages 401–409. Association for Computational Linguistics.
- Marwa Ragheb and Markus Dickinson. 2012. Defining syntax for learner language annotation. In *COLING (Posters)*, pages 965–974.
- Alla Rozovskaya and Dan Roth. 2013. Joint learning and inference for grammatical error correction. *Urbana*, 51:61801.
- Alla Rozovskaya and Dan Roth. 2014. Building a state-of-the-art grammatical error correction system. *Transactions of the Association for Computational Linguistics*, 2:419–434.
- Alla Rozovskaya and Dan Roth. 2016. Grammatical error correction: Machine translation and classifiers. In *Proc. of ACL*, pages 2205–2215.
- Keisuke Sakaguchi, Courtney Napoles, Matt Post, and Joel Tetreault. 2016. Reassessing the goals of grammatical error correction: Fluency instead of grammaticality. *Transactions of the Association for Computational Linguistics*, 4:169–182.
- Elior Sulem, Omri Abend, and Ari Rappoport. 2015. Conceptual annotations preserve structure across translations: A french-english case study. *Proceedings of S2MT 2015*, page 11.
- Elaine Tarone. 1983. On the variability of interlanguage systems. *Applied linguistics*, 4(2):142–164.
- Joel R Tetreault and Martin Chodorow. 2008. Native judgments of non-native usage: Experiments in preposition error detection. In *Proceedings of the Workshop on Human Judgements in Computational Linguistics*, pages 24–32. Association for Computational Linguistics.
- Helen Yannakoudakis, Ted Briscoe, and Ben Medlock. 2011. A new dataset and method for automatically grading esol texts. In *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies-Volume 1*, pages 180–189. Association for Computational Linguistics.
- Omar F Zaidan and Chris Callison-Burch. 2011. Crowdsourcing translation: Professional quality from non-professionals. In *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies-Volume 1*, pages 1220–1229. Association for Computational Linguistics.
- James Zou, Gregory Valiant, Paul Valiant, Konrad Karczewski, Siu On Chan, Kaitlin Samocha, Mokol Lek, Shamil Sunyaev, Mark Daly, Daniel MacArthur, et al. 2015. Quantifying the unobserved protein-coding variants in human populations provides a roadmap for large-scale sequencing projects. *bioRxiv*, page 030841.