

Q7 Difference betⁿ.

HTML

1. HTML is the primary language for designing any Webpage.

2. It works with older browser only.

3. Less fast, flexible, efficient as compared to HTML5.

4. Audio & Video tags are not provided.

5. Drawing different shapes like triangle, rectangle & circle is not possible.

6. HTML use cookies

7. Declaration of Doctype is very long.

HTML5

1. HTML5 is the most up graded version of the HTML.

2. It is supported by all the new browser like Chrome, Safari, etc.

3. More fast, flexible, efficient as compared to HTML.

4. Audio & Video tags are provided.

5. Drawing different shapes like triangle, rectangle, circle is Possible.

6. It supports local storage

7. Declaration of Doctype is very simple.

Q.7 Write a JavaScript to check password & confirm passwords are same or not.

→

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<script type = "text/javascript">
```

```
function chkPass()
```

```
{
```

```
var first = document.frm.pass1.value;
```

```
var second = document.frm.pass2.value;
```

```
if (first == second)
```

```
{
```

```
return true;
```

```
}
```

```
else
```

```
{
```

```
alert("Both passwords should be same");
```

```
return false;
```

```
}
```

```
}
```

```
</script>
```

```
</head>
```

```
<body>
```

```
<form name = "frm" action = "#" on Submit = "return  
chkPass()">
```

```
<font size = 6>
```

```
Enter Password : <input type = "password"
```

```
name = "pass1"/> <br/> <br/>
```


Re-enter Password: <input type="password" name="pass2"/>

<input type="submit">

</form>

</body>

</html>

Output:-

Enter password:

Re-enter Password:

This page says

Both passwords should be
same

Q.7 What is Inheritance in CSS? Explain CSS Animation properties.

- • Inheritance in CSS
- Inheritance in CSS refers to the process where some CSS properties applied to a parent are automatically passed down to its child element.
 - Not all CSS prop. like color, font-family, line height, etc are inherited by default.
 - Inheritance allows us to keep styles consistent throughout a website without having to repeat them in our code.

Syntax :- `property-name: inherit;`
eg :- `font-size: inherit;`

• CSS Animation Properties.

Following lists the all the css animⁿ prop:

Property	Description
i) @keyframe	- specifies the animation code.
ii) animation-name	- specifies the name of keyframe.
iii) animation-duration	- time specification to take a complete one cycle.
iv) animation-timing-function	- specifies speed curve of animation.
v) animation-delay	- specifies a delay for a start (or animation)
vi) animation-iteration-count	- no. of times animation should be played.

Q7 Explain any 5 Semantic tags of HTML5 with eg.

- • Semantic Elements
 - Elements with meaning
 - Helps to structure code & make more readable.
 - Easy to maintain code
 - Describe meaning to developer & browser.
 - Helps search engine browser to crawler to understand str. and contents.

• Tags :- <header>, <nav>, <aside>, <section>, <article>, <div>, <footer>, <main>

```

<header></header> ①
<section> ②
<article> ③
  <figure> ④
    <img>
    <figcaption></figcaption> ⑤
  </figure>
</article>
<section>
<footer></footer>
  
```

Tag

Description.

1. <article> defines an Article.
2. <aside> defines a content aside from the page content.
3. <footer> defines a footer for doc/section.
4. <header> defines a header for doc/section.
5. <main> specifies main content of doc.
6. <nav> defines navigation links.
7. <section> defines sections in a doc.
8. <figure> defines self-contained contents like diagrams, photos, etc.
9. <figcaption> defines caption for <figure>.

→ Code :

```
<!DOCTYPE html>
<html>
<head>
  <meta charset = "UTF-8">
  <title> Simple Page </title>
</head>
<body>
  <header> — ①
    <h1> My site </h1>
  </header>
  <main> — ②
    <section id = "home"> — ③
      <h2> Welcome </h2>
      <article> — ④
        <h3> Post 1 </h3>
        <p> This is a Blogpost. </p>
      </article>
      <aside> — ⑤
        <h3> Sidebar </h3>
        <p> Related info. or ads </p>
      </aside>
    </section>
  </main>
  <footer> — ⑥
    <p> © 2025 my site </p>
  </footer>
</body>
</html>
```


NOTES

<body>

<header>

<h1> </h1>

</header>

<main>

<sectionid = " " >

<h2> </h2>

<article>

<h3> </h3>

<p> </p>

</article>

<aside>

<h3> </h3>

<p> </p>

</aside>

</section>

</main>

<Footer>

<p> \$10py; 10ph myite </p>

</Footer>

</body>

</html>

Q7 Explain `<audio>` & `<video>` elements in HTML5 with eg.

- HTML5 introduced the `<audio>` & `<video>` elements to allow Web developers to embed media content (like sound and video) directly into Web pages without needs of external plugins.

• `<audio>` element:

- The `<audio>` tag is used to embed sound content such as music, podcast or effects in a webpage.

- Attributes:

- i) controls: display, play, pause & volume controls
- ii) autoplay: automatically starts when page loads.
- iii) loop: repeats after ends.
- iv) muted: mutes by default
- v) preload: suggest how browser should load the audio.

- support format - MP3, Ogg, WAV

- ex:

```
<!DOCTYPE html>
<html>
<head>
  <title> Audio Example </title>
</head>
<body>
  <h2> HTML5 Audio Eg. </h2>
  <audio control>
    <source src = " " > </audio>
  </body>
</html>
```


• video element:

The `<video>` tag is used to embed video content in a webpage.

Attributes:

- i) Controls: Video controls like play, pause, fullscreen.
- ii) autoplay: Plays automatically.
- iii) Loop: Loop video playback.
- iv) muted: muted by default.
- v) Poster: specifies an image to be shown, before video plays.

Example:

```
<!DOCTYPE html>
<html>
  <head>
    <title> Video Eg </title>
  </head>
  <body>
    <h2> HTML5 Video Eg </h2>
    <video = " " >
      <source src = " " />
    </video>
  </body>
</html>
```

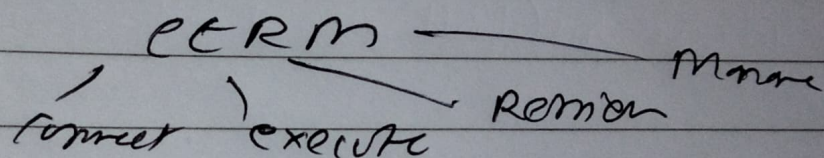

JDBC

- Java datBase connectivity.
↳ Java API connect & execute queries in DB.

Plays a crucial role in JP. by enabling
Java application includes
Web App/In.

with Relational DB like Oracle, MySQL, etc.

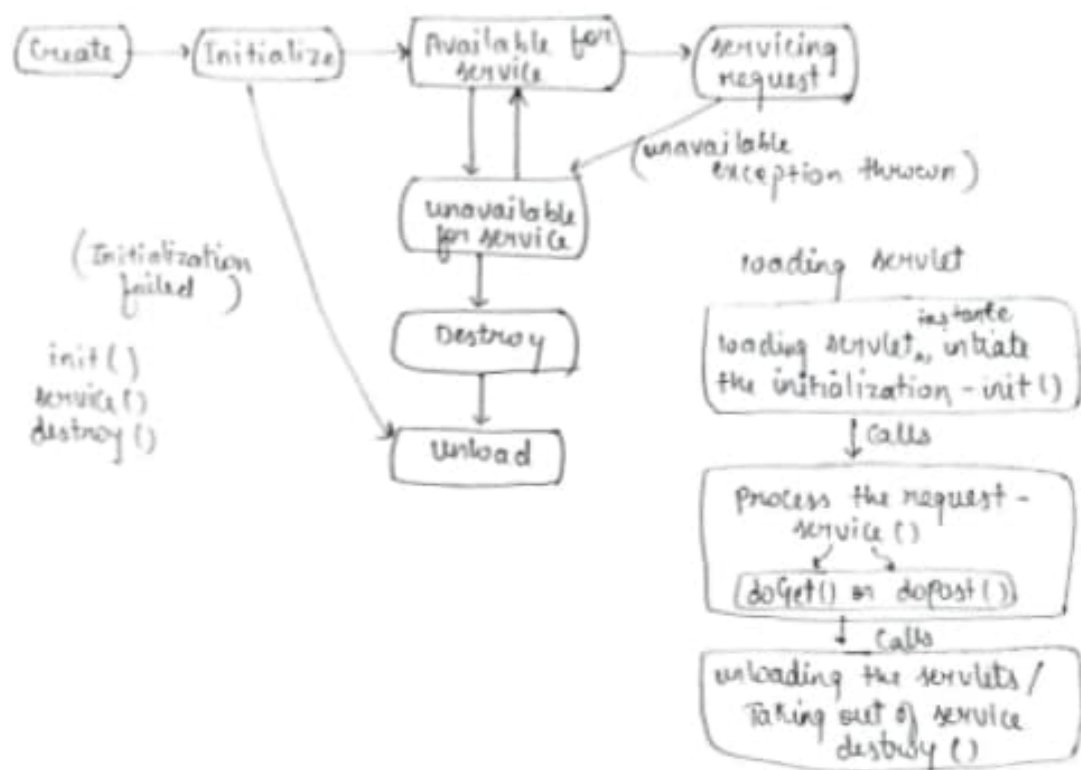
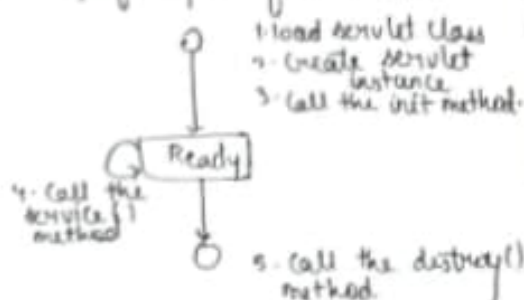
Operations



- animation-name: Specifies the name of the keyframes.
- animation-duration: Duration of the animation (eg 2s, 500ms)
- animation-timing-function: Defines speed curve (eg linear, ease in, ease out)
- animation-delay: Delay before animation.
- animation-iteration-count: Number of times animation

Ans. Explain the servlet life cycle with neat diagram

1. Servlet class is loaded
2. Servlet instance is created
3. init method is invoked
4. Service method is invoked
5. Destroy method is invoked



1. Servlet class is loaded.

The class loader is responsible to load the servlet class. The servlet class is loaded when the first request for the servlet is received by the web container.

2. Servlet instance is created.

The web container creates the instance of a servlet after loading the servlet class. The servlet instance is created only once in the servlet life cycle.

3. init method is invoked.

The web container calls the init method only once after creating the servlet instance. The init method is used to initialize the servlet. It is the life cycle method of the Java 2. Servlet - Servlet interface.