CSS PRACTICAL SOLUTIONS

1. Create JSON object Student with rollno, name and marks. Assign values and display them.

Ans –

```
<!DOCTYPE html>

<html ng-app="studentApp">

<head>

  <title>Student JSON Object</title>

  <script
src="https://ajax.googleapis.com/ajax/libs/angularjs/1.8.2/angular.
min.js"></script>

</head>


<body ng-controller="studentCtrl">


<h2>Student Details</h2>


<p>

  <strong>Roll No:</strong> {{student.rollno}}<br>

  <strong>Name:</strong> {{student.name}}<br>

  <strong>Marks:</strong> {{student.marks}}

</p>


<script>

var app = angular.module("studentApp", []);
```

```
app.controller("studentCtrl", function($scope) {
  // Create JSON Object Student
  $scope.student = {
    rollno: 12,
    name: "Rohit Patil",
    marks: 78
  };
});
</script>

</body>
</html>
```

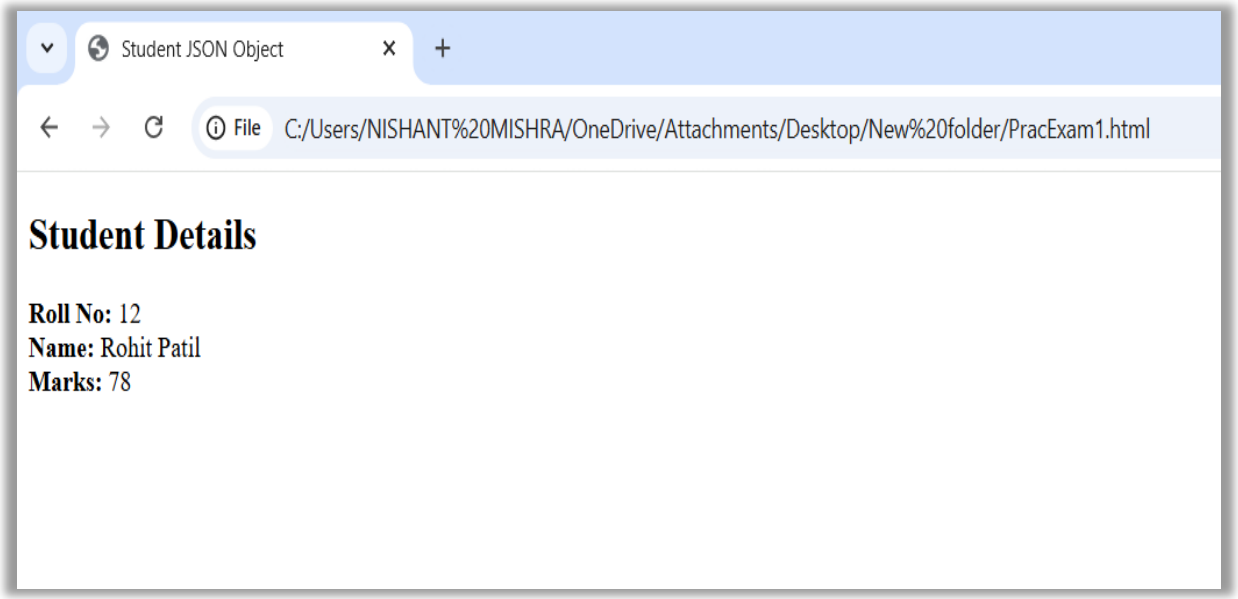

2. Set the first name and last name in separate property and display the full name.

Ans –

```
<!DOCTYPE html>
<html ng-app="nameApp">
<head>
  <title>Full Name Display</title>
<script src="https://ajax.googleapis.com/ajax/libs/angularjs/1.8.2/angular.min.js"></script>
</head>

<body ng-controller="nameCtrl">

<h2>Name Details</h2>

<p>
  <strong>First Name:</strong> {{firstName}}<br>
  <strong>Last Name:</strong> {{lastName}}<br>
  <strong>Full Name:</strong> {{firstName + " " + lastName}}
</p>

<script>
var app = angular.module("nameApp", []);

app.controller("nameCtrl", function($scope) {
  $scope.firstName = "Rohit";
  $scope.lastName = "Patil";
});
</script>

</body>
</html>
```

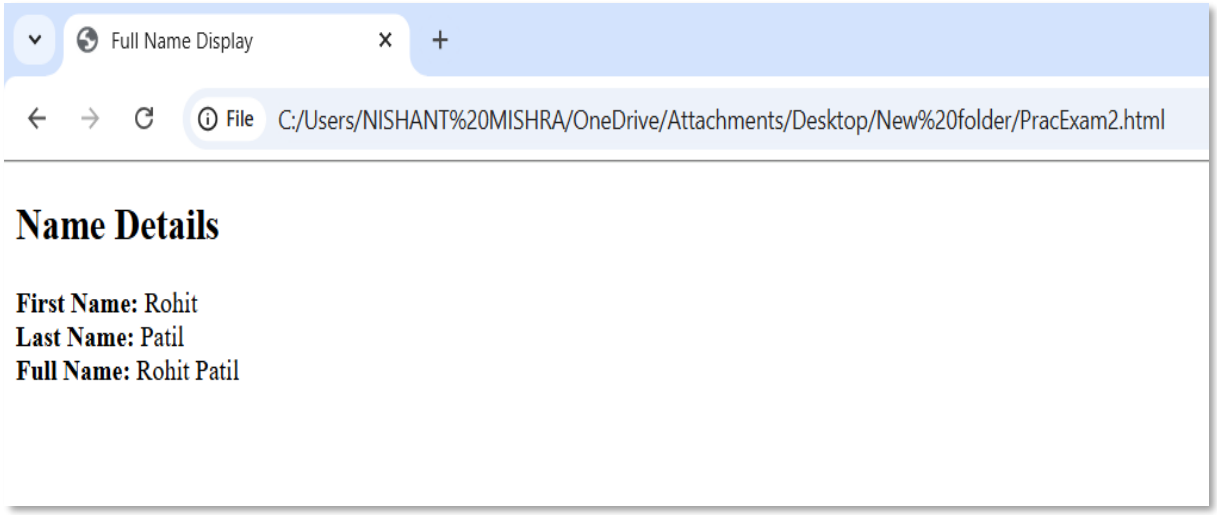

3. Accept the amount from the user and display it in currency format and also display date in MM/DD/YYYY format.

Ans - <!DOCTYPE html>

```
<html ng-app="myApp">
<head>
  <title>Currency and Date Format</title>
  <script
src="https://ajax.googleapis.com/ajax/libs/angularjs/1.8.2/angul
ar.min.js"></script>
</head>

<body ng-controller="myCtrl">

<h2>Amount and Date Display</h2>

<p>
  Enter Amount: <input type="number" ng-
model="amount"><br><br>
</p>
```

```
<p>
  <strong>Amount in Currency Format:</strong> {{amount |
currency:"₹"}}<br>
  <strong>Date (MM/DD/YYYY):</strong> {{today |
date:'MM/dd/yyyy'}}
</p>

<script>
var app = angular.module("myApp", []);

app.controller("myCtrl", function($scope) {
  $scope.amount = 0;
  $scope.today = new Date();
});
</script>

</body>
</html>
```

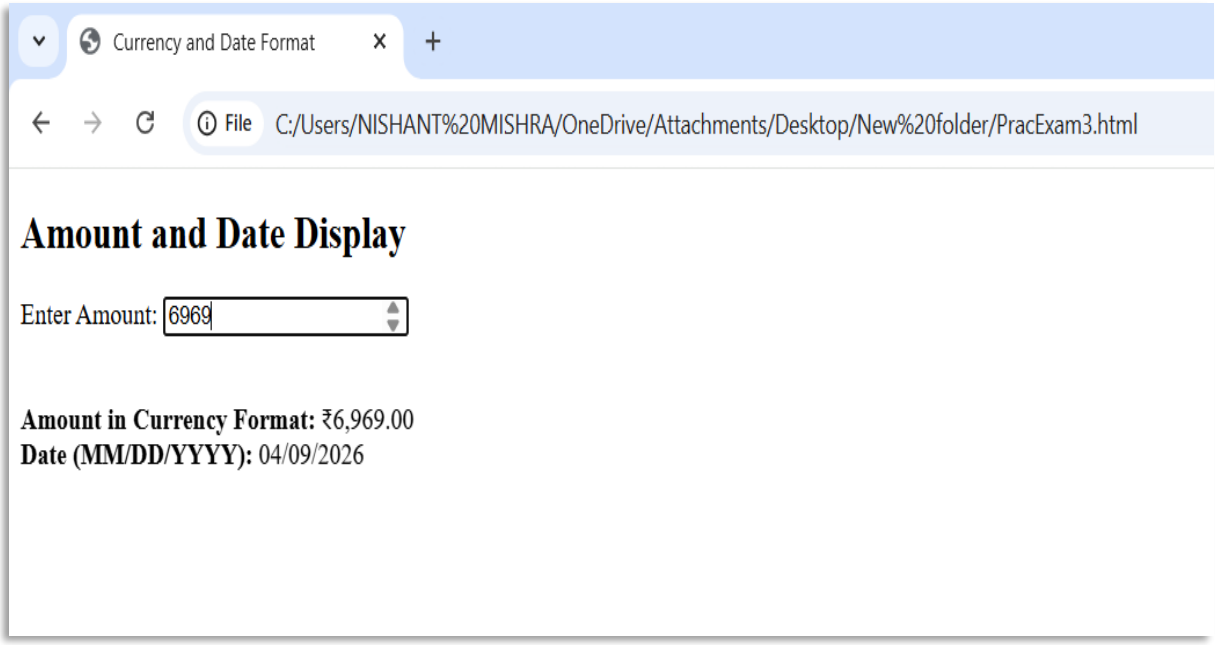

4.Display 10 students data in the table format with different styles for odd and even rows.

Ans

```
<!DOCTYPE html>
<html ng-app="studentApp">

<head>
  <title>Student Table - Odd & Even Row Styling</title>

  <!-- AngularJS Library -->
  <script
src="https://ajax.googleapis.com/ajax/libs/angularjs/1.8.2/angular.min.js"></script>

  <style>
    table {
      border-collapse: collapse;
      width: 70%;
      margin: 20px auto;
      font-family: Arial;
    }

    th,
    td {
      border: 1px solid black;
      padding: 8px;
      text-align: center;
    }

    th {
      background-color: #222;
      color: white;
    }

    .odd-row {
```

```
        background-color: #f9f9f9;
        color: #000;
      }

      .even-row {
        background-color: #d1ecf1;
        color: #000;
      }
    </style>
  </head>

  <body ng-controller="studentCtrl">
    <h2 align="center">Student Information Table</h2>

    <table>
      <tr>
        <th>Sr. No</th>
        <th>Name</th>
        <th>Roll No</th>
        <th>Class</th>
        <th>City</th>
      </tr>

      <tr ng-repeat="student in students" ng-class-odd="'odd-row'" ng-
class-even="'even-row'">
        <td>{{$index + 1}}</td>
        <td>{{student.name}}</td>
        <td>{{student.roll}}</td>
        <td>{{student.class}}</td>
        <td>{{student.city}}</td>
      </tr>
    </table>

    <script>
      var app = angular.module("studentApp", []);
      app.controller("studentCtrl", function ($scope) {
        $scope.students = [
          { name: "Aarav", roll: 101, class: "10th", city: "Mumbai" },
```

```
        { name: "Vivaan", roll: 102, class: "10th", city: "Delhi" },
        { name: "Aditya", roll: 103, class: "10th", city: "Bangalore" },
        { name: "Vihaan", roll: 104, class: "10th", city: "Chennai" },
        { name: "Arjun", roll: 105, class: "10th", city: "Kolkata" },
        { name: "Sai", roll: 106, class: "10th", city: "Hyderabad" },
        { name: "Reyansh", roll: 107, class: "10th", city: "Pune" },
       { name: "Ayaan", roll: 108, class: "10th", city: "Ahmedabad" },
        { name: "Krishna", roll: 109, class: "10th", city: "Jaipur" },
        { name: "Ishaan", roll: 110, class: "10th", city: "Lucknow" }
      ];
    });
  </script>
</body>

</html>
```

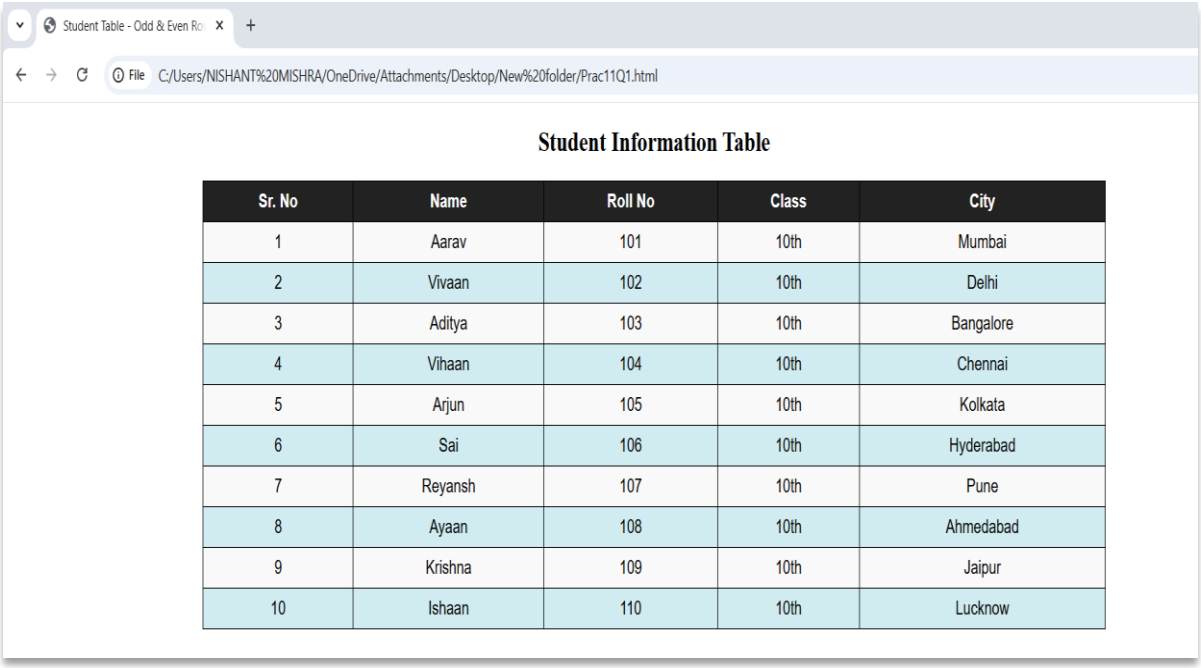

Sr. No	Name	Roll No	Class	City
1	Aarav	101	10th	Mumbai
2	Vivaan	102	10th	Delhi
3	Aditya	103	10th	Bangalore
4	Vihaan	104	10th	Chennai
5	Arjun	105	10th	Kolkata
6	Sai	106	10th	Hyderabad
7	Reyansh	107	10th	Pune
8	Ayaan	108	10th	Ahmedabad
9	Krishna	109	10th	Jaipur
10	Ishaan	110	10th	Lucknow

4. Create a registration form that collects name, email, and password, and clears inputs after submission.

Ans -

```
<!DOCTYPE html>
<html>
<head>
  <title>Registration Form</title>
  <script crossorigin
src="https://unpkg.com/react@18/umd/react.development.js"></script>
  <script crossorigin src="https://unpkg.com/react-dom@18/umd/react-
dom.development.js"></script>
  <script
src="https://unpkg.com/@babel/standalone/babel.min.js"></script>
</head>
<body>
  <div id="root"></div>
  <script type="text/babel">
    function App() {
      const [formData, setFormData] = React.useState({
        name: "",
        email: "",
        password: ""
      });

      const handleChange = (e) => {
        const { name, value } = e.target;
        setFormData({
          ...formData,
          [name]: value
        });
      };

      const handleSubmit = (e) => {
        e.preventDefault();

        alert(
          "Registration Successful!\n\n" +
          "Name: " + formData.name +
          "\nEmail: " + formData.email +
          "\nPassword: " + formData.password
        );

        // Clear inputs after submission
        setFormData({
```

```
      name: "",
      email: "",
      password: ""
    });
  };

  return (
    <div style={{ padding: '20px', maxWidth: '400px' }}>
      <h2>Registration Form</h2>

      <form onSubmit={handleSubmit}>
        <label>Name:</label><br />
        <input
          type="text"
          name="name"
          value={formData.name}
          onChange={handleChange}
          required
        /><br /><br />

        <label>Email:</label><br />
        <input
          type="email"
          name="email"
          value={formData.email}
          onChange={handleChange}
          required
        /><br /><br />

        <label>Password:</label><br />
        <input
          type="password"
          name="password"
          value={formData.password}
          onChange={handleChange}
          required
        /><br /><br />

        <button type="submit">Register</button>
      </form>
    </div>
```

```
        );
      }

      ReactDOM.render(<App />, document.getElementById('root'));
    </script>
</body>
</html>
```

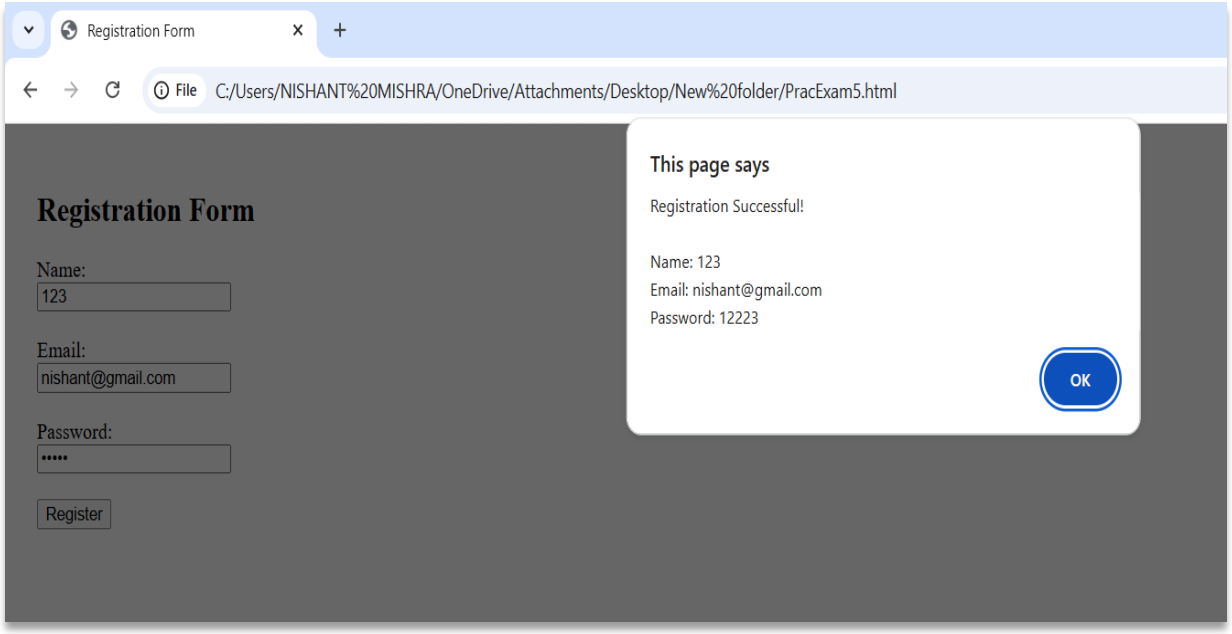

6.Write a React program to change the background color of a div when a button is clicked using the useState hook.

Ans –

```
<!DOCTYPE html>
<html>
<head>
  <title>React Background Color Change</title>
  <script crossorigin
src="https://unpkg.com/react@18/umd/react.development.js"><
/script>
  <script crossorigin src="https://unpkg.com/react-
dom@18/umd/react-dom.development.js"></script>
```

```
  <script
src="https://unpkg.com/@babel/standalone/babel.min.js"></scr
ipt>
</head>
<body>
  <div id="root"></div>

  <script type="text/babel">
    const { useState } = React;

    function App() {
      // State to store background color
      const [color, setColor] = useState("lightblue");

      return (
        <div style={{ textAlign: "center", marginTop: "50px" }}>

          <div
            style={{
              width: "200px",
              height: "200px",
              margin: "auto",
              backgroundColor: color
            }}
          ></div>

          <br />

          <button onClick={() => setColor("lightgreen")}>
            Change Color
          </button>

        </div>
      );
    }
```

```
ReactDOM.createRoot(document.getElementById('root')).render(
<App />);
  </script>
</body>
</html>>
```

7.Write an AngularJS program that uses an external controller file to create and manage a table of students, and apply the orderBy filter to sort the student names.

ANS –

File 1 (PracExam7.html)

```
<!DOCTYPE html>
<html>
<head>
  <title>Student Table with External Controller</title>
```

```
  <!-- AngularJS Library -->
  <script
src="https://ajax.googleapis.com/ajax/libs/angularjs/1.8.2/angular.min
.js"></script>


  <!-- External Controller -->
  <script src="examController.js"></script>


  <style>
    table {
      border-collapse: collapse;
      width: 60%;
      margin: 20px auto;
    }
    th, td {
      border: 1px solid black;
      padding: 8px;
      text-align: center;
    }
    th {
      background-color: #4CAF50;
      color: white;
    }
  </style>
</head>
```

```
<body ng-app="studentApp" ng-controller="StudentController">

<h2 align="center">Student Details (Sorted by Name)</h2>

<table>
  <tr>
    <th>Roll No</th>
    <th>Name</th>
    <th>Marks</th>
  </tr>

  <tr ng-repeat="s in students | orderBy:'name'">
    <td>{{s.rollno}}</td>
    <td>{{s.name}}</td>
    <td>{{s.marks}}</td>
  </tr>
</table>
</body>
</html>
```

File 2(examController.js)

```
var app = angular.module("studentApp", []);
app.controller("StudentController", function($scope) {
  $scope.students = [
```

```
    { name: "Rahul", rollno: 101, marks: 85 },
    { name: "Anita", rollno: 102, marks: 90 },
    { name: "Vikas", rollno: 103, marks: 78 },
    { name: "Neha", rollno: 104, marks: 88 },
    { name: "Amit", rollno: 105, marks: 82 },
    { name: "Priya", rollno: 106, marks: 95 },
    { name: "Kiran", rollno: 107, marks: 80 }
  ];
});
```

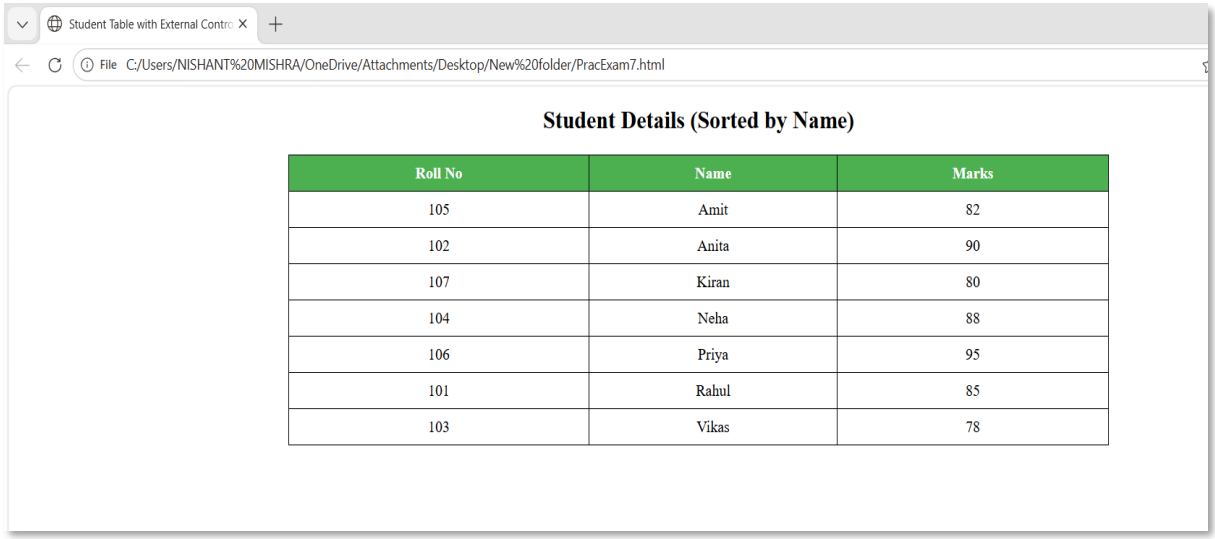

Roll No	Name	Marks
105	Amit	82
102	Anita	90
107	Kiran	80
104	Neha	88
106	Priya	95
101	Rahul	85
103	Vikas	78

8.Write a React program to design a feedback form that accepts user name, email, and feedback message, and displays a thank-you message after submission.

Ans -

```html
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8" />
  <meta name="viewport" content="width=device-width, initial-scale=1.0" />
  <title>Practical 8 - React Feedback Form</title>
  <style>
    body {
      font-family: Arial, sans-serif;
      margin: 20px;
    }
    form {
      width: 340px;
      display: flex;
      flex-direction: column;
      gap: 10px;
    }
    input, textarea, button {
      padding: 8px;
    }
  </style>
</head>
<body>
  <h2>Practical 8: React Feedback Form</h2>
```

```
  <div id="root"></div>


  <script
src="https://unpkg.com/react@18/umd/react.development.js"></scrip
t>
  <script src="https://unpkg.com/react-dom@18/umd/react-
dom.development.js"></script>
  <script
src="https://unpkg.com/@babel/standalone/babel.min.js"></script>


  <script type="text/babel">
    function FeedbackForm() {
      const [formData, setFormData] = React.useState({
        name: "",
        email: "",
        message: ""
      });
      const [submitted, setSubmitted] = React.useState(false);


      function handleChange(event) {
        const { name, value } = event.target;
        setFormData({ ...formData, [name]: value });
      }


      function handleSubmit(event) {
        event.preventDefault();
```

```
  setSubmitted(true);
}

if (submitted) {
  return <h3>Thank you for your feedback, {formData.name}.</h3>;
}

return (
  <form onSubmit={handleSubmit}>
    <input
      type="text"
      name="name"
      placeholder="Enter your name"
      value={formData.name}
      onChange={handleChange}
      required
    />
    <input
      type="email"
      name="email"
      placeholder="Enter your email"
      value={formData.email}
      onChange={handleChange}
      required
    />
```

```
        <textarea
          name="message"
          placeholder="Enter your feedback"
          value={formData.message}
          onChange={handleChange}
          required
        ></textarea>
        <button type="submit">Submit Feedback</button>
      </form>
    );
  }

  const root =
ReactDOM.createRoot(document.getElementById("root"));
  root.render(<FeedbackForm />);
 </script>
</body>
</html>
```

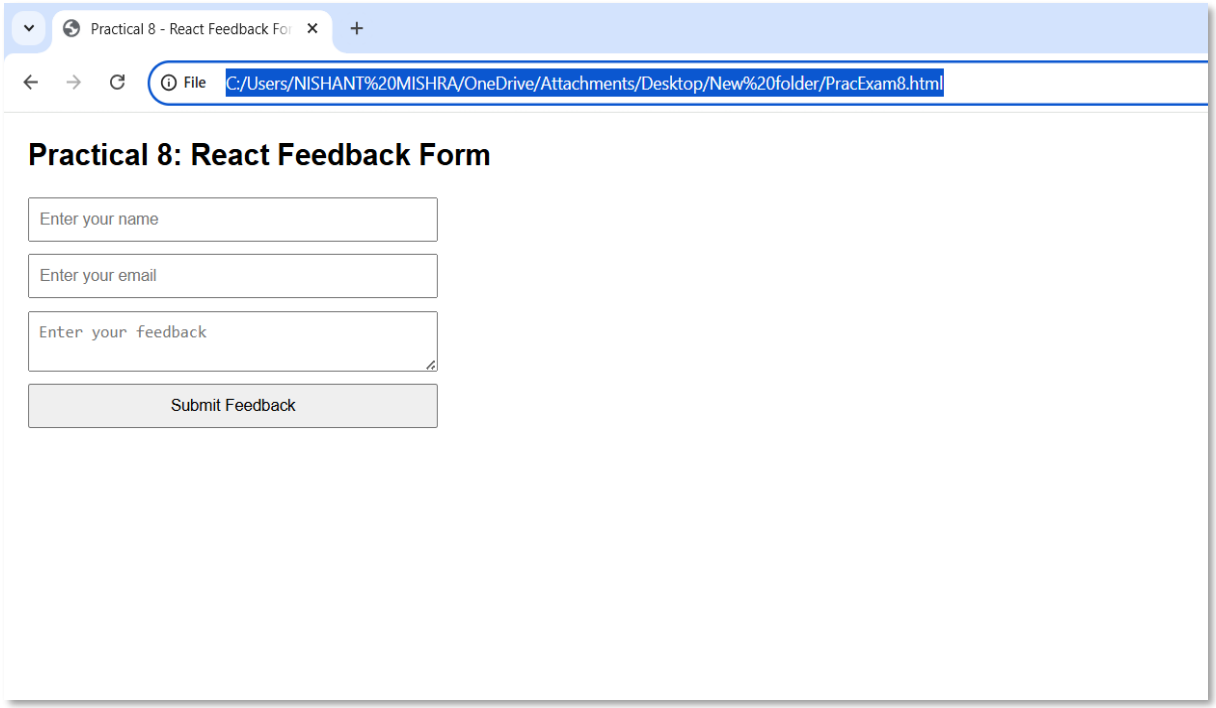

9.Write a React program that demonstrates all three CSS approaches — Inline, Stylesheet, and CSS Modules.

Ans-

```
<!DOCTYPE html>

<html>

<head>

  <title>React CSS Approaches</title>

  <!-- React CDN -->

  <script crossorigin
src="https://unpkg.com/react@18/umd/react.development.js"></scrip
t>
```

```
  <script crossorigin src="https://unpkg.com/react-
dom@18/umd/react-dom.development.js"></script>
  <script
src="https://unpkg.com/@babel/standalone/babel.min.js"></script>


  <!-- Stylesheet (External CSS) -->
  <style>
    .external-box {
      background-color: lightblue;
      padding: 20px;
      margin: 10px;
      border: 2px solid blue;
    }
    .external-text {
      color: darkblue;
    }
  </style>
</head>
<body>
  <div id="root"></div>
  <script type="text/babel">
    function App() {
      // 1. Inline CSS
      const inlineStyle = {
        backgroundColor: "lightcoral",
        padding: "20px",
```

```
  margin: "10px",
  border: "2px solid red"
};

// 3. CSS Module (Simulated)
const styles = {
  box: {
    backgroundColor: "lightgreen",
    padding: "20px",
    margin: "10px",
    border: "2px solid green"
  },
  text: {
    color: "darkgreen"
  }
};

return (
  <div>
    <h1>React CSS Approaches</h1>

    {/* 1. Inline CSS */}
    <div style={inlineStyle}>
      <h2>Inline CSS</h2>
      <p>This uses style object directly in React.</p>
```

```
            </div>

            {/* 2. Stylesheet CSS */}
            <div className="external-box">
              <h2 className="external-text">Stylesheet CSS</h2>
              <p className="external-text">This uses external CSS
classes.</p>
            </div>

            {/* 3. CSS Modules (Simulated) */}
            <div style={styles.box}>
              <h2 style={styles.text}>CSS Modules</h2>
              <p style={styles.text}>CSS Modules are simulated here
using JS objects.</p>
            </div>
          </div>
        );
      }

      // Render
      ReactDOM.render(<App />, document.getElementById("root"));
    </script>
</body>
</html>
```

React CSS Approaches
File
C:/Users/NISHANT%20MISHRA/OneDrive/Attachments/Desktop/New%20folder/PracExam9.html
React CSS Approaches
Inline CSS
This uses style object directly in React.
Stylesheet CSS
This uses external CSS classes.
CSS Modules
CSS Modules are simulated here using JS objects.