


## **BALL VALVE WAFER 1" - 4" CL150**

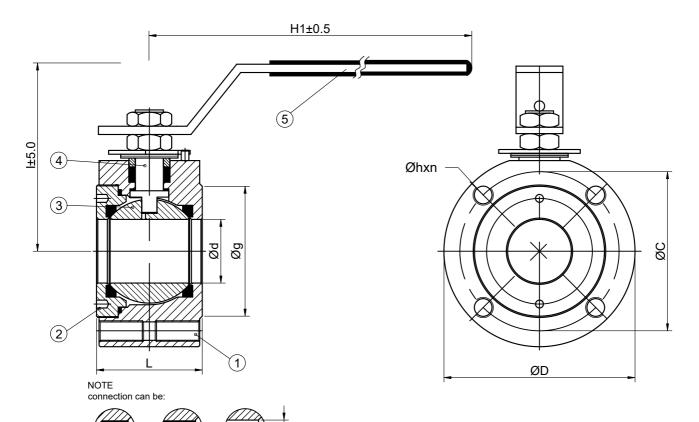

No.	Part	Material						
1	Body	W.Nr. 1.0460 (A105)	W.Nr. 1.4404 (AISI316L)					
2	Bonnet	W.Nr. 1.0460 (A105)	W.Nr. 1.4404 (AISI316L)					
3	Ball (relife hole)	W.Nr. 1.4408 (CF8M)						
4	Stem (anti static)	W.Nr. 1.4401 (AISI 316)						
5	Handle	W.Nr. 1.4301 (AISI 304)						


passing hole

Operating temperature AISI316 type: t<sub>min</sub> =-50°C; t<sub>max</sub> =+180 °C Suitable for environment temperature t≥-50°C

thread

throughout

LUG



DN		CL 150									KC			
mm	inch	d	g	Н	H1	ı	L	D	t	r	С	h	n	KG
25	1"	25	50,8	115	173	114	46	108	16	18	79,4	15,8	4	2,7
50	2"	50	92,1	160	275	153	83	152	18	18	120,6	19	4	8
80	3"	80	127	235	370	187	126	190	24	18	152,4	19	8	20
100	4"	100	157,2	235	370	200	154	229	24	18	190,5	19	8	30

<sup>\*</sup> must be defined by customer