

fp-tools interactive interfaces

A. GUI workflow configuration

fp-tools
Version 0.1.7
Run dir: /tmp/fp-tools-gui-paper

Run directory
Old run dir
/tmp/fp-tools-gui-paper
Apply run dir

Home
☐ Run History
☐ atac-correct
☐ call-footprints
☐ diff-footprints
☐ plot-aggregate
☐ Config

fp-tools GUI

Per-user browser wrapper around the packaged fp-tools commands.

Run directory: /tmp/fp-tools-gui-paper

Direct CLI remains primary. The GUI builds normalized configs, can save or load YAML, and can run single jobs or batch jobs without changing the core tool behavior.

Example YAML configs

Ready-to-load examples are under `examples/gui_configs`.


```
ataccorrect_batch.yml
ataccorrect_single.yml
bindetect_batch_single.yml
bindetect_comparisons_2vs2.yml
bindetect_single.yml
footprintscores_batch.yml
footprintscores_single.yml
plotaggregate_batch.yml
plotaggregate_single.yml
```

Current config summary

```
{
  "run_mode": "single",
  "sample_jobs": 1,
  "comparison_jobs": 0
}
```

version: 1
run_mode: single
run_jobs: null
defaults: {}
samples:
- sample_id: run

B. Differential-footprint HTML report

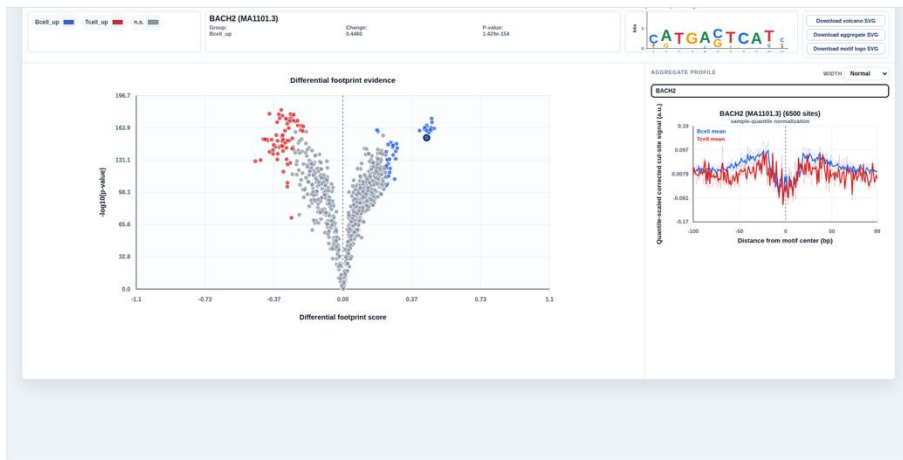

C. Aggregate-batch HTML browser

