

Raymond O. Pedriña

BSIT 32E2

Repository -

[https://github.com/onetwothreedotcom/ELECTIVE\\_H1\\_BSIT\\_32E2\\_PedrinaRaymond](https://github.com/onetwothreedotcom/ELECTIVE_H1_BSIT_32E2_PedrinaRaymond)


GET - <https://localhost:7197/api/resolutions>

The screenshot shows a POSTMAN interface with the following details:

- Method:** GET
- URL:** https://localhost:7197/api/resolutions
- Body:** (8 items)
- Response:** 200 OK (33 ms, 449 B)
- Body Content (Pretty):**

```
1 {
2   "id": 4,
3   "title": "Fry water",
4   "isDone": false,
5   "createdAt": "2026-01-03T21:54:18.0929195+08:00"
}
1 {
2   "id": 2,
3   "title": "Make $10",
4   "isDone": false,
5   "createdAt": "2026-01-03T21:56:45.2063409+08:00"
}
1 {
2   "id": 3,
3   "title": "Sleep for 10 hours daily".
```

## GET - <https://localhost:7197/api/resolutions/4>

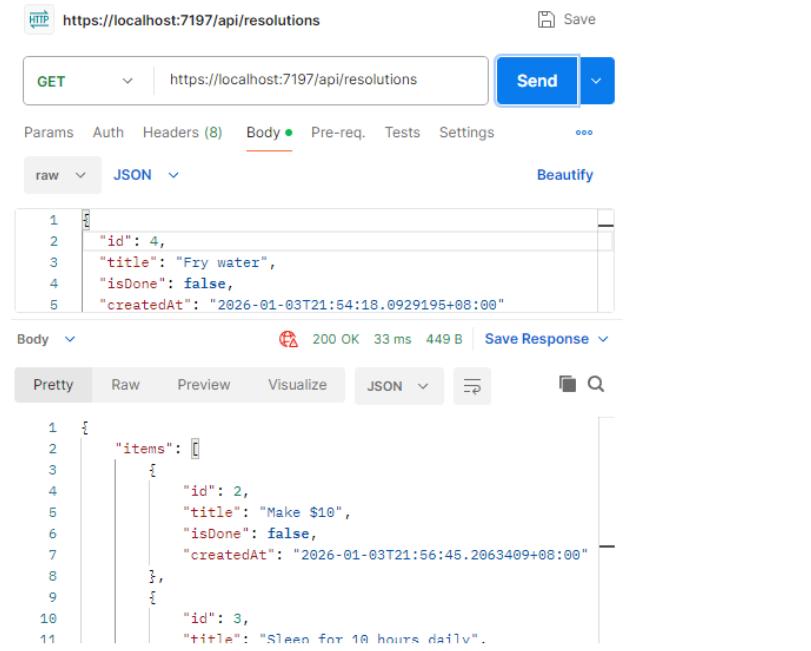

HTTP <https://localhost:7197/api/resolutions> Save

GET <https://localhost:7197/api/resolutions> Send

Params Auth Headers (8) Body ● Pre-req. Tests Settings

raw JSON **Beautify**


```
1 {  
2   "id": 4,  
3   "title": "Fry water",  
4   "isDone": false,  
5   "createdAt": "2026-01-03T21:54:18.0929195+08:00"  
}
```

Body **200 OK** 33 ms 449 B Save Response

Pretty Raw Preview Visualize JSON **Beautify**

```
1 {  
2   "items": [  
3     {  
4       "id": 2,  
5       "title": "Make $10",  
6       "isDone": false,  
7       "createdAt": "2026-01-03T21:56:45.2063409+08:00"  
8     },  
9     {  
10       "id": 3,  
11       "title": "Sleep for 10 hours daily".  
12     }  
13   ]  
14 }
```

## POST - <https://localhost:7197/api/resolutions>

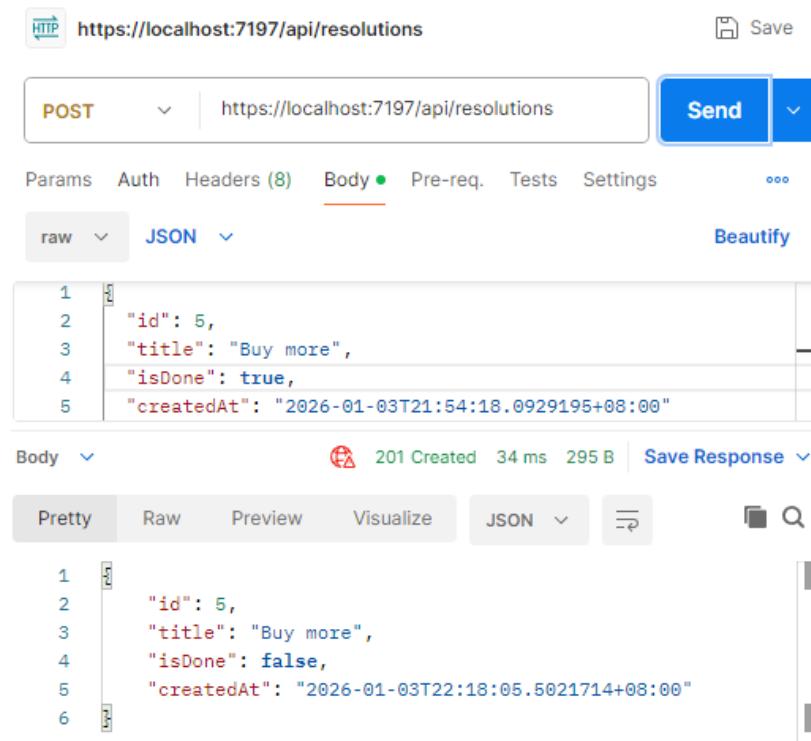

HTTP <https://localhost:7197/api/resolutions> Save

POST <https://localhost:7197/api/resolutions> Send

Params Auth Headers (8) Body ● Pre-req. Tests Settings

raw JSON **Beautify**

```
1 {  
2   "id": 5,  
3   "title": "Buy more",  
4   "isDone": true,  
5   "createdAt": "2026-01-03T21:54:18.0929195+08:00"  
}
```

Body **201 Created** 34 ms 295 B Save Response

Pretty Raw Preview Visualize JSON **Beautify**

```
1 {  
2   "id": 5,  
3   "title": "Buy more",  
4   "isDone": false,  
5   "createdAt": "2026-01-03T22:18:05.5021714+08:00"  
6 }
```

DELETE - <https://localhost:7197/api/resolutions/5>

The screenshot shows the Postman application interface. At the top, there is a header bar with a 'Save' button. Below it, a toolbar has 'DELETE' selected and a URL field containing 'https://localhost:7197/api/resolutions/5'. To the right is a 'Send' button. Underneath the toolbar, tabs for 'Params', 'Auth', 'Headers (8)', 'Body', 'Pre-req.', 'Tests', and 'Settings' are visible, with 'Body' being the active tab. The 'Body' tab is set to 'JSON' view, with a 'Beautify' link nearby. A code editor window displays the following JSON payload:

```
1
2   "id": 5,
3   "title": "Buy more stuff",
4   "isDone": false,
5   "createdAt": "2026-01-03T21:54:18.0929195+08:00"
6
```

Below the code editor, the response section shows a status of 204 No Content, 3 ms duration, and 81 B size. It includes 'Save Response' and 'Pretty', 'Raw', 'Preview', 'Visualize', and 'Text' buttons. The 'Pretty' button is currently selected.