


Blood Effects Pack

Description

Enhance your game with the *BloodEffectsPack*! This versatile asset pack includes blood splashes, decals, and gut 3D meshes, offering both realistic and stylized effects. Customize colors and details to fit your unique style and bring a dynamic edge to your scenes. Perfect for adding depth and impact to your projects!

Scripts (Common)

[*KillEffect.cs*](#)




Kills the game object after a random duration between the minimum and maximum lifetime values.

[*KillEffect_Trail_Projector.cs*](#)


Used to destroy trail projectors within the trail projector group.

[*ToggleRepeat.cs*](#)

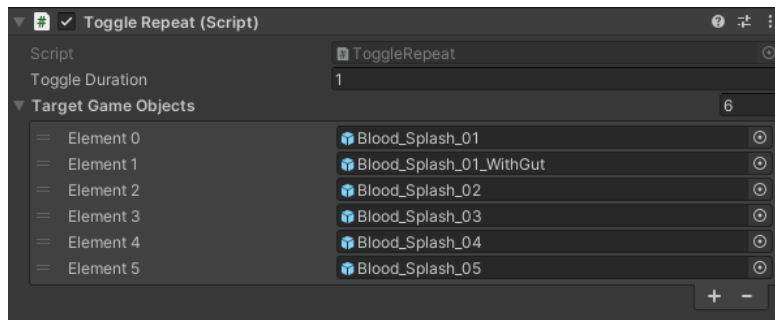


Toggles the active states of target game objects for the duration specified by the ToggleDuration property. Used for demonstration purposes.

[*CircularMovement.cs*](#)



Moves the game object in a circular path. Used for demonstration purposes.

EffectController.cs

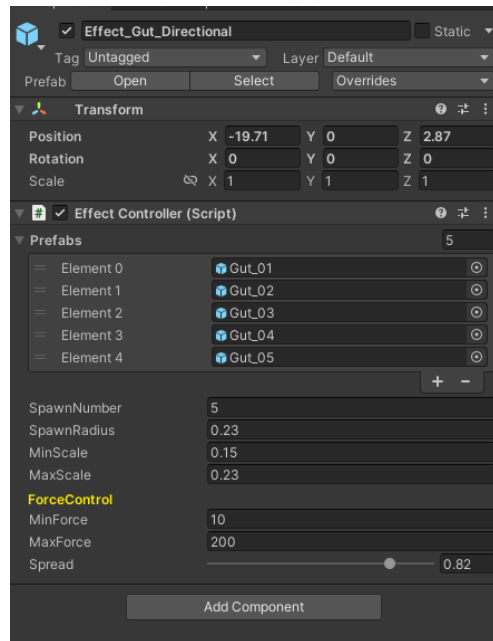


Used for spawning gut meshes and applying forces.

Prefabs:

List of prefabs that will be used for random spawning:

Scripts (Built-In)

BloodModifier.cs

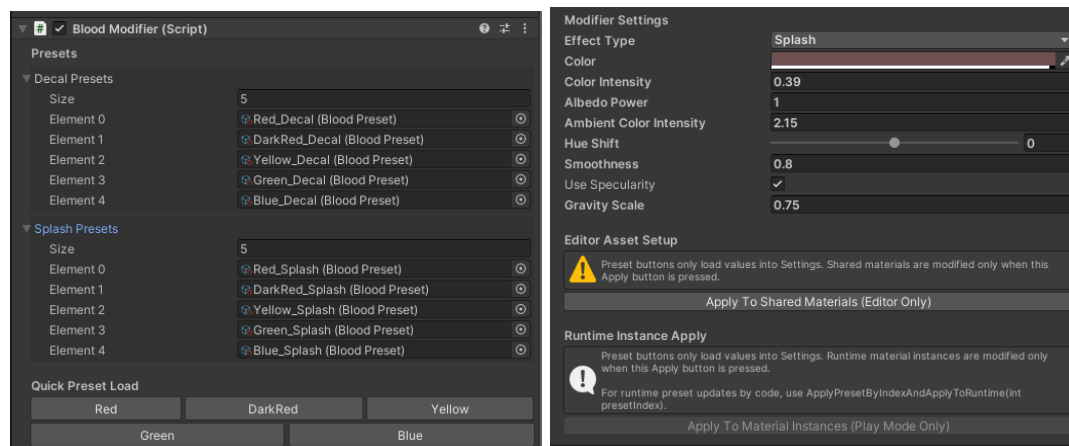

An editor script for detecting shared materials in the hierarchy and applying material preset parameters for different blood color configurations.

DecalPresets:

An array of ScriptableObjects containing material preset parameters for various blood color configurations used in blood decals.

SplashPresets:

An array of ScriptableObjects containing material preset parameters for various blood color configurations used in blood splashes.

EffectType:

Defines whether the game object is a decal or a splash.

PresetButtons:

Loads the material preset when clicking the buttons.

Color:

Color material property value applied when the Apply button is clicked.

ColorIntensity:

ColorIntensity material property value applied when the Apply button is clicked.

AlbedoPower:

AlbedoPower material property value applied when the Apply button is clicked.

AmbientColorIntensity:

AmbientColorIntensity material property value applied when the Apply button is clicked.

HueShift:

HueShift property material value applied when the Apply button is clicked.

UseSpecularity:

UserSpecularity material property value applied when the Apply button is clicked.

GravityScale:

Particle gravity scale value applied when the Apply button is clicked.

ApplyToSharedMaterials(Editor Only):

Applies material property configurations to all detected shared materials in the hierarchy.

ApplyToMaterialInstances(Play Mode Only):


Applies the material property changes only to the **runtime material instance** on the renderer. Only that specific object is affected, and the original material asset remains unchanged.

Changing Presets via Code

To change the color or preset through code, use the following method inside **BloodModifier**:

```
BloodModifier modifier = GetComponent<BloodModifier>();  
modifier.ApplyPresetByIndexAndApplyToRuntime(presetIndex);
```

ProjectorSpawnerSystem.cs

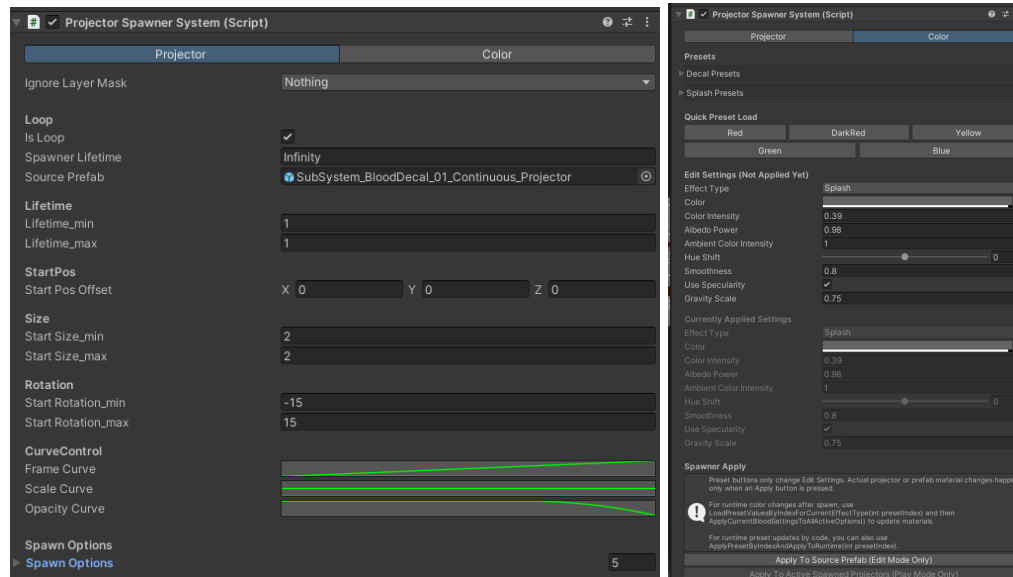

projector spawner and controller script.

IgnoreLayerMask:

Sets the ignore layer mask for the projector.

DestroyAfter:

Destroys the projector after the loop's lifetime has been reached, or after the lifetime is reached if not set to loop.

IsLoop:

Sets the projector to loop.

LoopingLifetime:

The lifetime duration for looping.

SourcePrefab:

The sub-projector spawner prefab.

Lifetime_min:

The minimum lifetime of the projector. Lifetime is chosen randomly between the minimum and maximum values.

Lifetime_max:

The maximum lifetime of the projector. Lifetime is chosen randomly between the minimum and maximum values.

StartPosOffset:

The offset for the start position of the spawned projector.

StartSize_min:

The minimum size of the spawned projector. Size is chosen randomly between the minimum and maximum values.

StartSize_max:

The maximum size of the spawned projector. Size is chosen randomly between the minimum and maximum values.

StartRotation_min:

The minimum starting rotation of the spawned projector. Rotation is chosen randomly between the minimum and maximum values.

StartRotation_max:

The maximum starting rotation of the spawned projector. Rotation is chosen randomly between the minimum and maximum values.

FrameCurve:

A curve that controls the sprite sheet's frame over time. It determines how the frames of the sprite sheet are changed or animated throughout the projector's lifetime.

ScaleCurve:

A curve that defines the scaling behavior of the projector over time. It controls how the projector's size changes throughout its lifetime.

OpacityCurve:

A curve that defines the opacity (visibility) of the projector over time. It controls how the projector fades in or out during its lifetime.

SpawnOptions.Delay_min:

The minimum delay for the sub-projector spawner. Chosen randomly between the minimum and maximum values.


SpawnOptions.Delay_max:

The maximum delay for the sub-projector spawner. Chosen randomly between the minimum and maximum values.

Color Tab

The **Color tab** uses the same system as the **BloodModifier**. Refer to the **BloodModifier** documentation for details.

TrailProjectorSpawnerSystem.cs

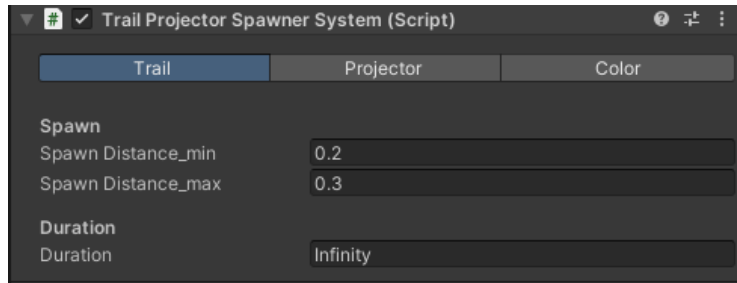

Trail-based projector spawner and controller script. This component spawns projectors along a trail path while the object moves.

Trail Tab

SpawnDistance_min

Minimum distance required before spawning the next projector.

The actual spawn distance is randomly chosen between SpawnDistance_min and SpawnDistance_max.

SpawnDistance_max

Maximum distance required before spawning the next projector.

The actual spawn distance is randomly chosen between SpawnDistance_min and SpawnDistance_max.

Duration

Controls how long the trail spawner remains active and continues spawning projectors.

Projector Tab

The **Projector tab** uses the same settings as **ProjectorSpawnerSystem.cs**.

Refer to the **ProjectorSpawnerSystem** documentation for details.

Color Tab

The **Color tab** uses the same system as **BloodModifier**.

Refer to the **BloodModifier** documentation for details.

Scripts (URP)


[*BloodModifier_URP.cs*](#)

Same as the [*BloodModifier.cs*](#) script in the built-in version.

[*ProjectorPrioritySetter_URP.cs*](#)


Controls the sorting order for the projector. Newer projectors will have higher priority in the sorting order.

[*ProjectorSpriteController_URP*](#)

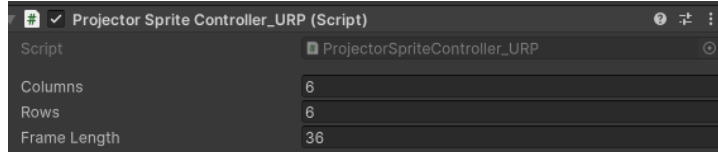

Controls the tiling and offset of the projector to display the sprite sequence correctly.

[*ProjectorSpawnerSystem_URP.cs*](#)

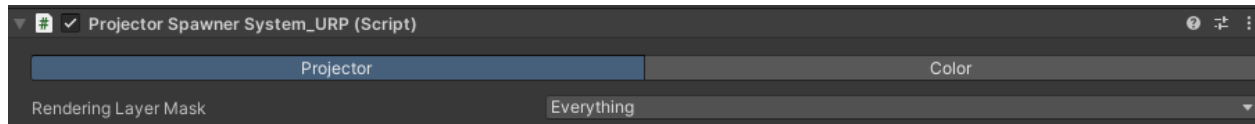


RenderingLayerMask:

Sets the rendering layer mask for the projector.

Others:

Same as the [*ProjectorSpawnerSystem.cs*](#) script in the built-in version.

[*TrailProjectorSpawnerSystem_URP.cs*](#)

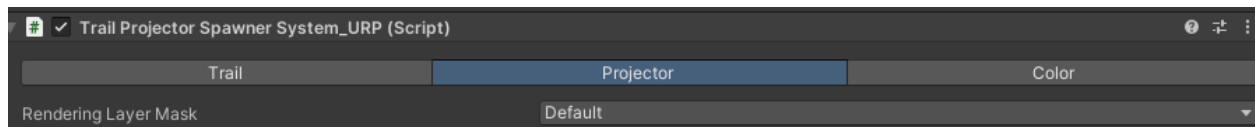

RenderingLayerMask:

Sets the rendering layer mask for the projector.

Same as the [*TrailProjectorSpawnerSystem.cs*](#) script in the built-in version.

Scripts (HDRP)

[*BloodModifier_HDRP.cs*](#)

Same as the [*BloodModifier.cs*](#) script in the built-in version.


[*ProjectorPrioritySetter_HDRP.cs*](#)

Same as the [*ProjectorPrioritySetter_URP.cs*](#) script in the URP version.

[*ProjectorSpriteController_HDRP.cs*](#)

Same as the [*ProjectorSpriteController_URP.cs*](#) script in the URP version.

[*ProjectorSpawner_HDRP.cs*](#)




Decal Layer:

Sets the decal layer for the projector.

Others:

Same as the [*ProjectorSpawner.cs*](#) script in the built-in version.

[*ContinuousProjectorSpawner_HDRP.cs*](#)




Decal Layer:

Sets the decal layer for the projector.

Others:

Same as the [*ContinuousProjectorSpawner.cs*](#) script in the built-in version.

[*TrailProjectorSpawner_HDRP.cs*](#)



Decal Layer:


Sets the decal layer for the projector.

Others:

Same as the [*TrailProjectorSpawner.cs*](#) script in the built-in version.

Shaders(Built-In)

BloodEffectsPack/BuiltIn/BloodFX_PBR

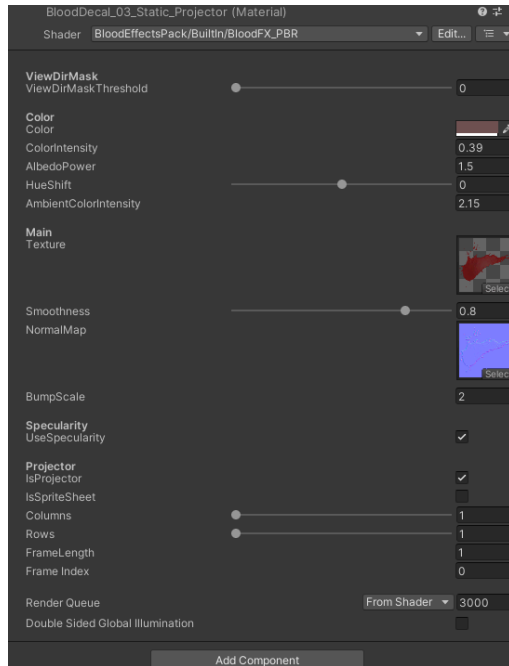

ViewDirMaskThreshold:

Threshold to control masking of faces that are close to perpendicular to the view direction.

Color:

Tint color applied to the main texture.

ColorIntensity:

Adjusts the intensity of the Color parameter.

AlbedoPower:

Applies the power operation to the albedo, defined as $\text{pow}(\text{albedo}, \text{AlbedoPower})$

HueShift:

Adjusts the HueShift.

AmbientColorIntensity:

Adjusts the intensity of the ambient color.

Texture:

Assigns the main texture.

Smoothness:

Controls the smoothness of the surface.

NormalMap:

Assigns a tangent space normal map.

BumpScale:

Adjusts the intensity of the normal map.

IsProjector:

Toggled on when the material is used for the projector.

UseSpecularity:

Toggles the material's specularity.

IsSpriteSheet:

Indicates whether the projector uses a sprite sheet for animation.

Columns:

The number of columns in the sprite sheet.

Rows:

The number of rows in the sprite sheet.

FrameLength:


The duration of each frame in the sprite sheet animation.

FrameIndex:

The current frame index in the sprite sheet.

Shaders(URP)

BloodEffectsPack/URP/BloodFX_PBR

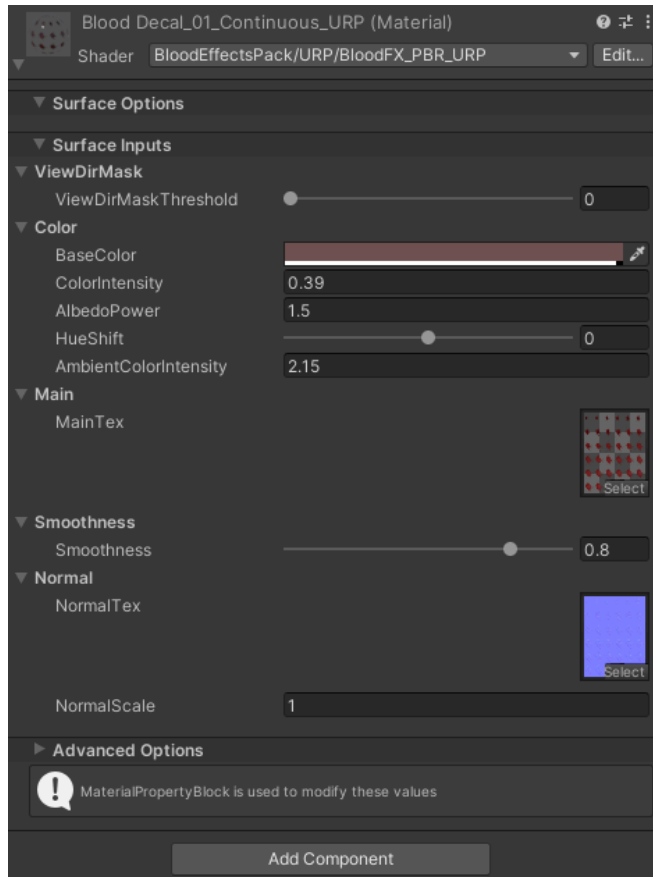

ViewDirMaskThreshold: Threshold to control masking of faces that are close to perpendicular to the view direction.

BaseColor:

Tint color applied to the main texture.

ColorIntensity:

Adjusts the intensity of the Color parameter.

AlbedoPower:

Applies the power operation to the albedo, defined as $pow(albedo, AlbedoPower)$

HueShift:

Adjusts the HueShift.

AmbientColorIntensity:

Adjusts the intensity of the ambient color.

MainTexture:

Assigns the main texture.

Smoothness:

Controls the smoothness of the surface.


NormalTex:

Assigns a tangent space normal map.

NormalScale:

Adjusts the intensity of the normal map.

BloodEffectsPack/URP/BloodFX_PBR_URP

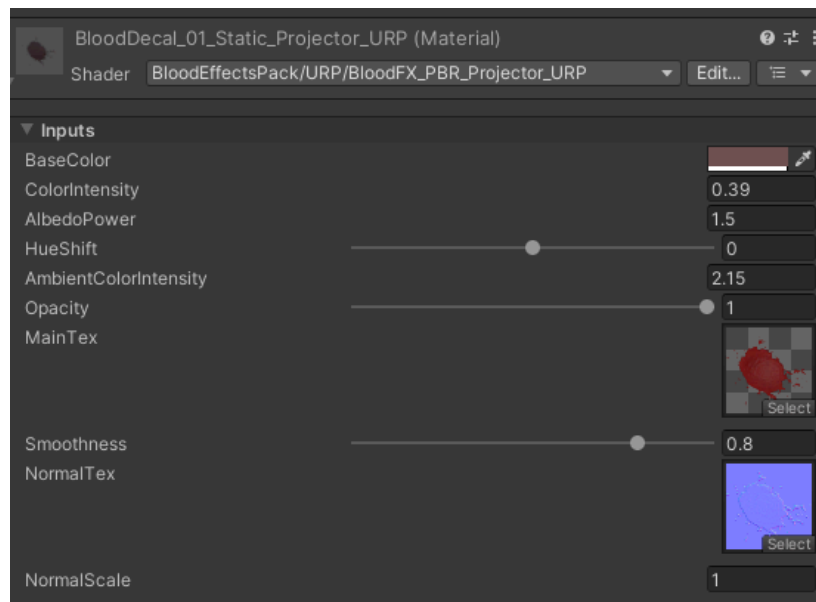

BaseColor:

Tint color applied to the main texture.

ColorIntensity:

Adjusts the intensity of the Color parameter.

AlbedoPower:

Applies the power operation to the albedo, defined as $\text{pow}(\text{albedo}, \text{AlbedoPower})$

HueShift:

Adjusts the HueShift.

AmbientColorIntensity:

Adjusts the intensity of the ambient color.

Opacity:

Controls opacity.

MainTexture:

Assigns the main texture.

Smoothness:

Controls the smoothness of the surface.

NormalTex:


Assigns a tangent space normal map.

NormalScale:

Adjusts the intensity of the normal map.

Shaders(HDRP)

BloodEffectsPack/HDRP/BloodFX_PBR

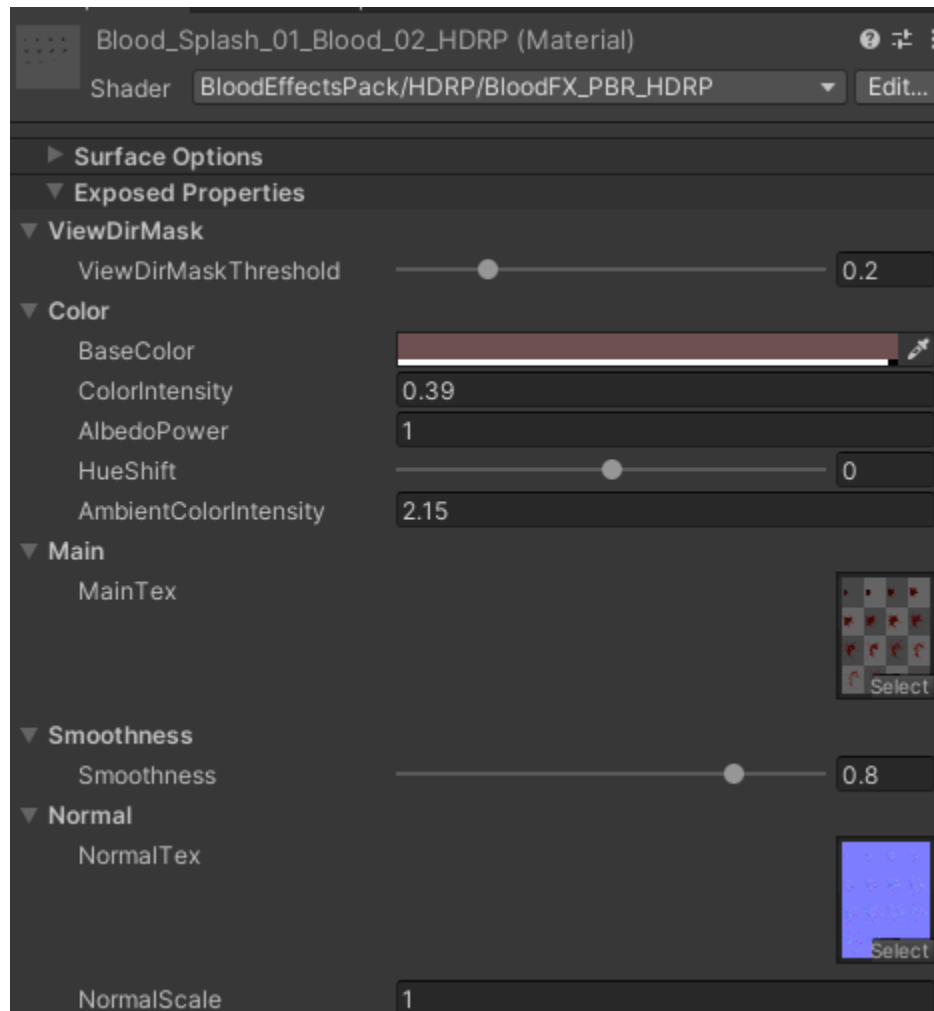

ViewDirMaskThreshold: Threshold to control masking of faces that are close to perpendicular to the view direction.

BaseColor:

Tint color applied to the main texture.

ColorIntensity:

Adjusts the intensity of the Color parameter.

AlbedoPower:

Applies the power operation to the albedo, defined as $\text{pow}(\text{albedo}, \text{AlbedoPower})$

HueShift:

Adjusts the HueShift.

AmbientColorIntensity:

Adjusts the intensity of the ambient color.

MainTexture:

Assigns the main texture.

Smoothness:

Controls the smoothness of the surface.


NormalTex:

Assigns a tangent space normal map.

NormalScale:

Adjusts the intensity of the normal map.

BloodEffectsPack/HDRP/BloodFX_PBR_Projector_HDRP

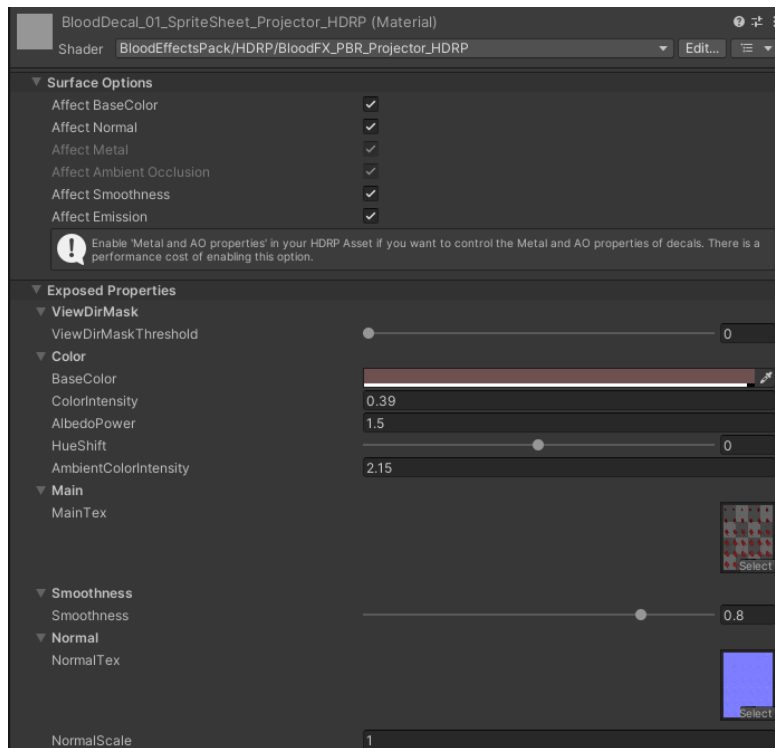

ViewDirMaskThreshold: Threshold to control masking of faces that are close to perpendicular to the view direction.

BaseColor:

Tint color applied to the main texture.

ColorIntensity:

Adjusts the intensity of the Color parameter.

AlbedoPower:

Applies the power operation to the albedo, defined as $pow(albedo, AlbedoPower)$

HueShift:

Adjusts the HueShift.

AmbientColorIntensity:

Adjusts the intensity of the ambient color.

MainTexture:

Assigns the main texture.

Smoothness:

Controls the smoothness of the surface.

NormalTex:

Assigns a tangent space normal map.

NormalScale:

Adjusts the intensity of the normal map.