

# WEB\_PRINCIPE\_BASE


## Question1:

### Create a new repository

A repository contains all project files, including the revision history. Already have a project repository elsewhere? [Import a repository.](#)

Required fields are marked with an asterisk (\*).

Owner \*

 onixir ▾

Repository name \*

/ IPEFA\_WPB\_CANDELAMAI

✓ IPEFA\_WPB\_CANDELAMARTOS\_NINO\_2024 is available.

Great repository names are short and memorable. Need inspiration? How about [legendary-octo-guacamole](#) ?

Description (optional)

☒  **Public**

Anyone on the internet can see this repository. You choose who can commit.

☐  **Private**

You choose who can see and commit to this repository.

Initialize this repository with:

☒ **Add a README file**

This is where you can write a long description for your project. [Learn more about READMEs.](#)

Add .gitignore

.gitignore template: None ▾

Choose which files not to track from a list of templates. [Learn more about ignoring files.](#)

Choose a license

License: None ▾


A license tells others what they can and can't do with your code. [Learn more about licenses.](#)

This will set  **main** as the default branch. Change the default name in your [settings](#).


 You are creating a public repository in your personal account.

Create repository


## Question2 :

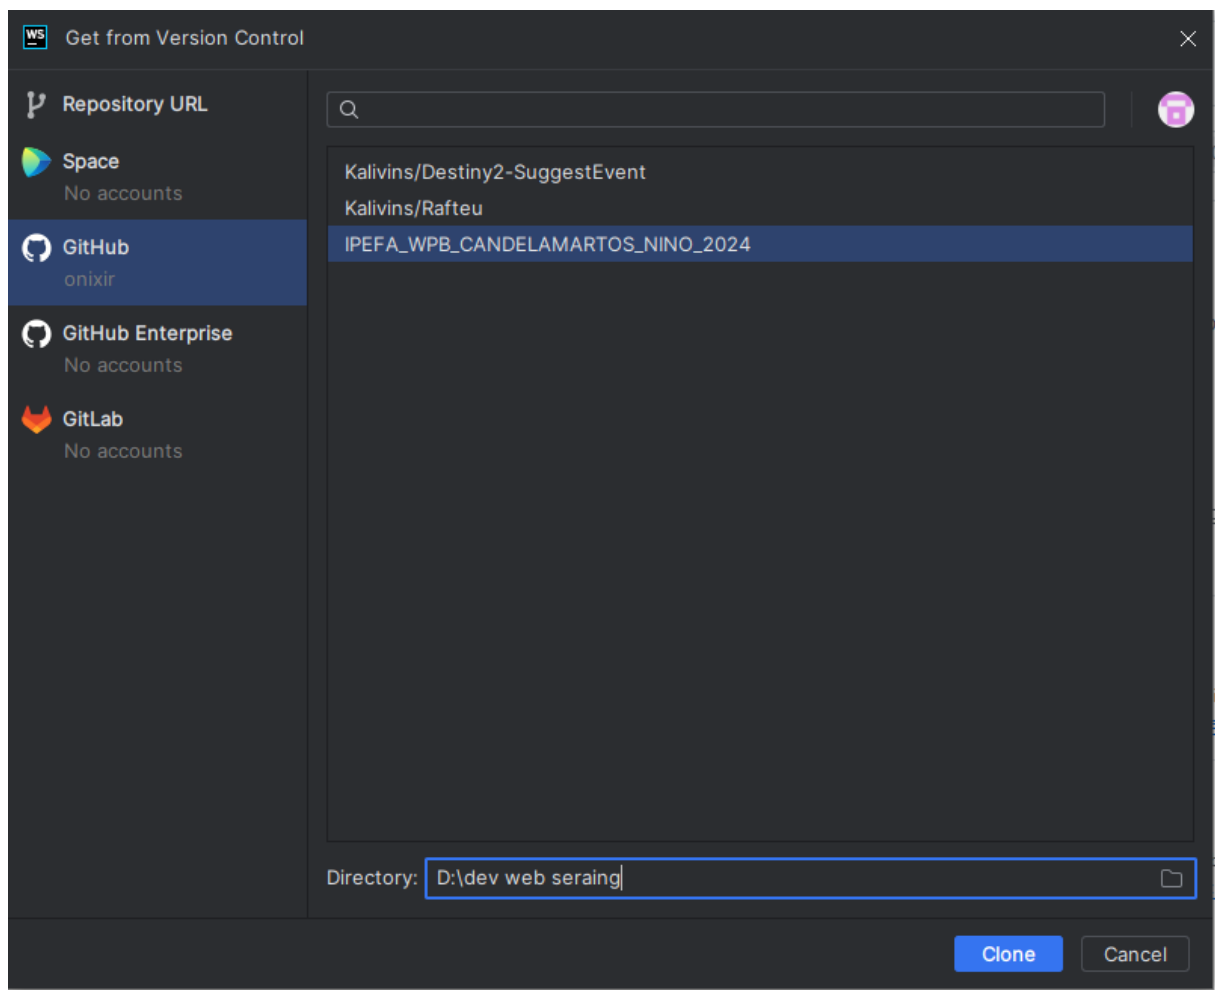


### Question 3 :

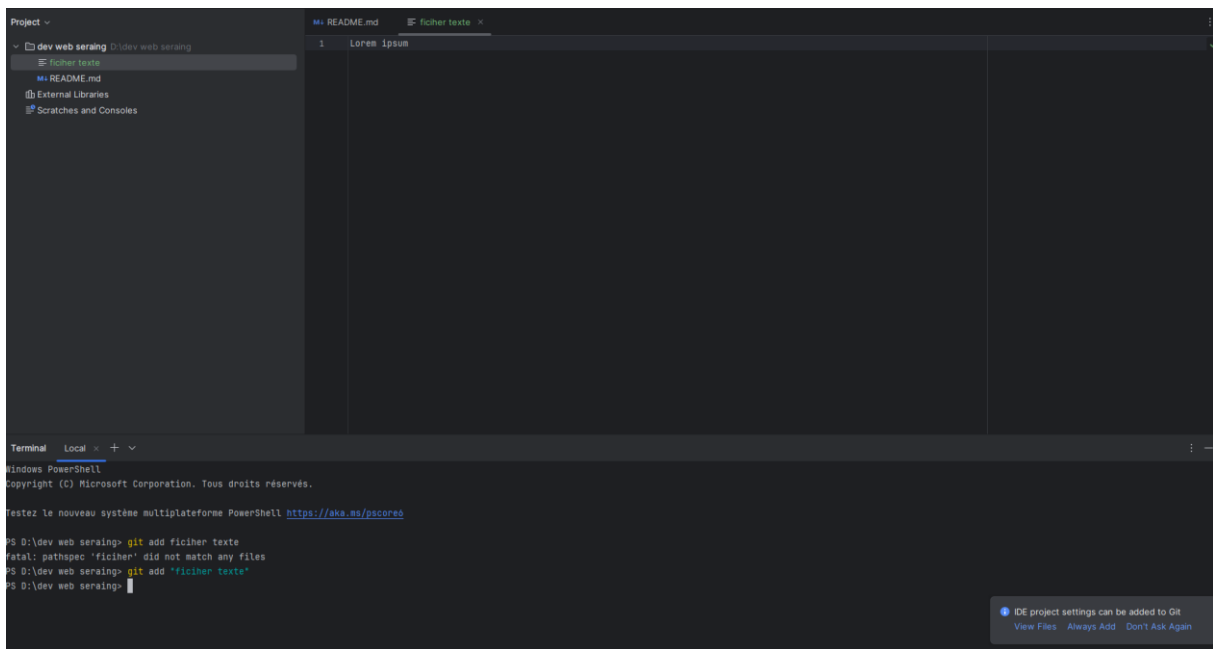


### Question4 :

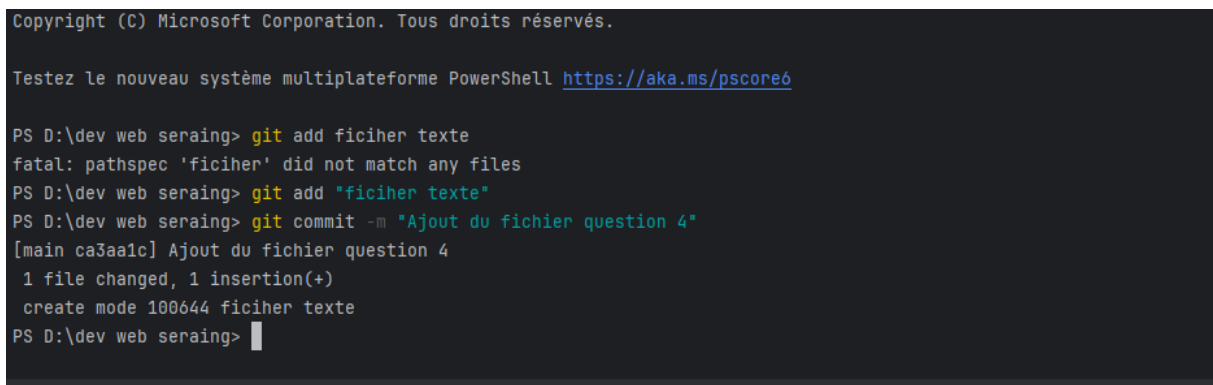


### Question 5 :

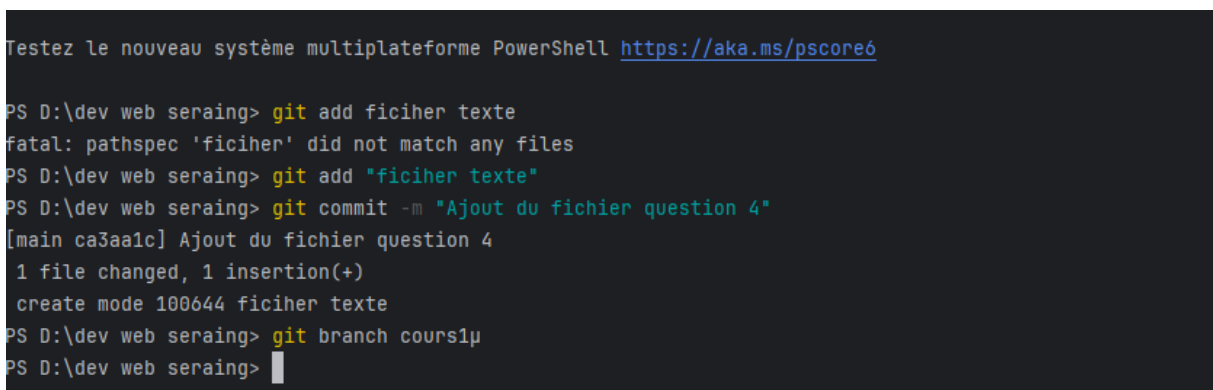


## Question 6 :

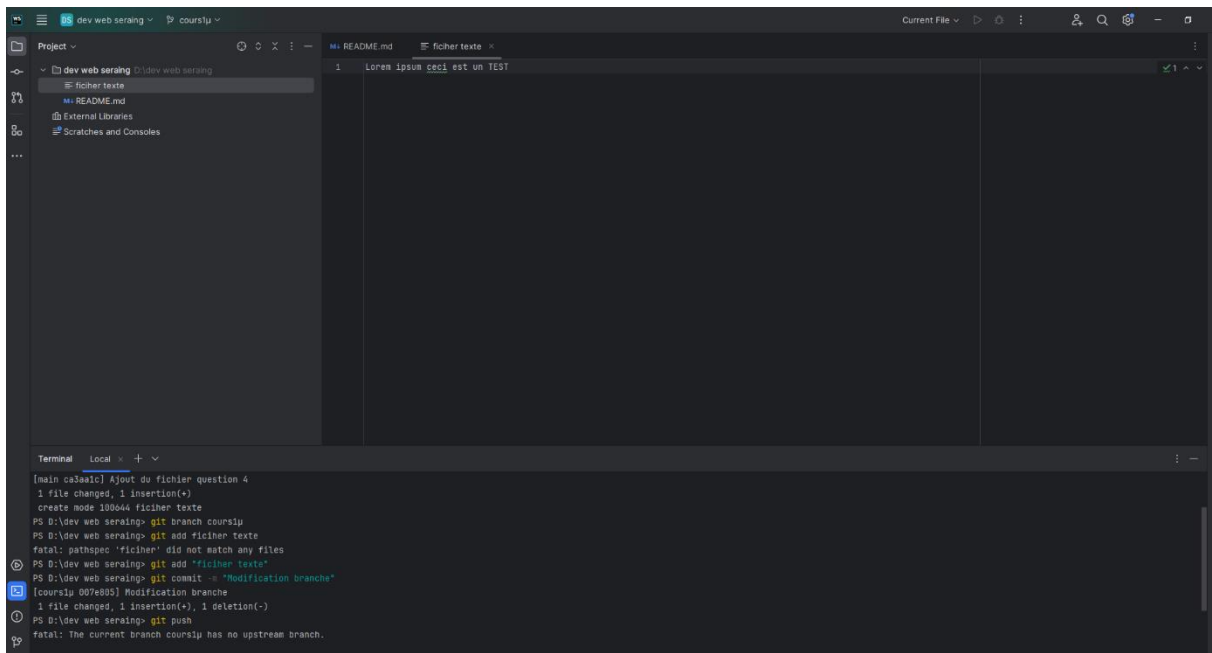

## Question 7 :

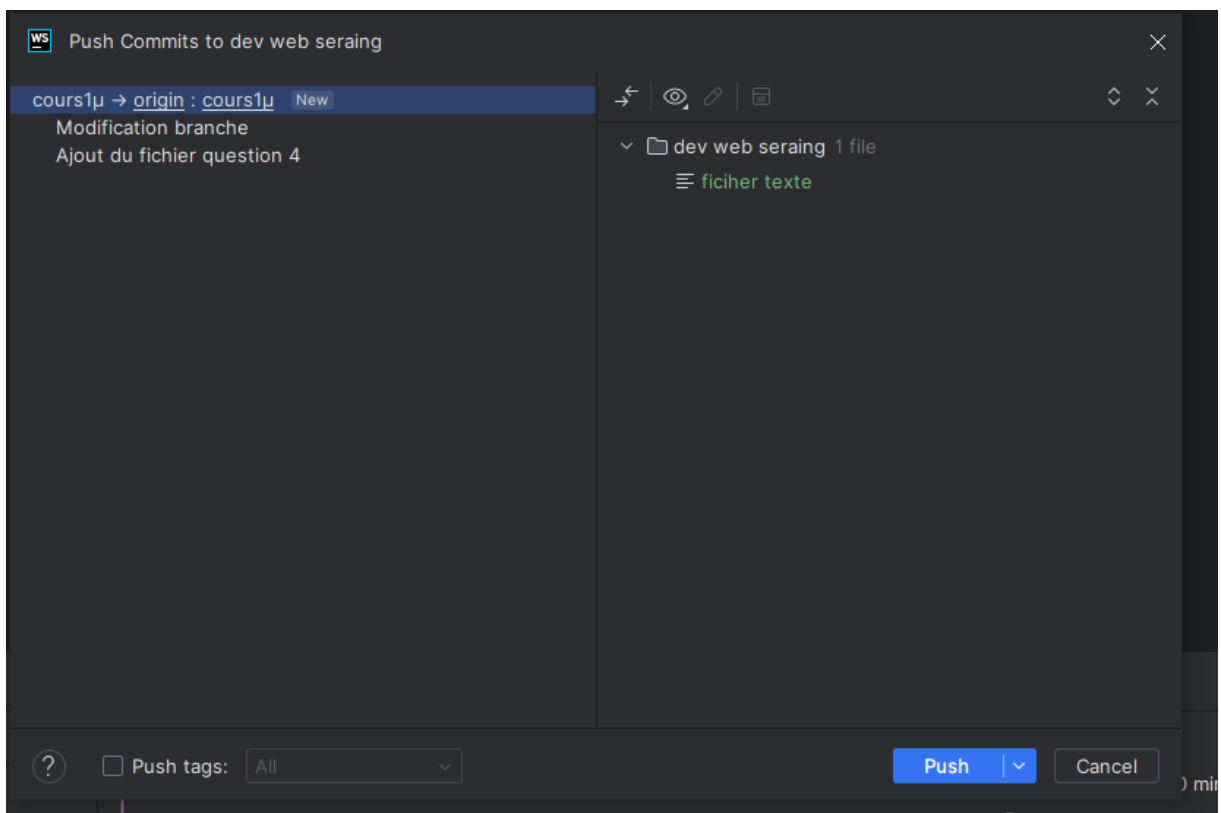


## Question8 :

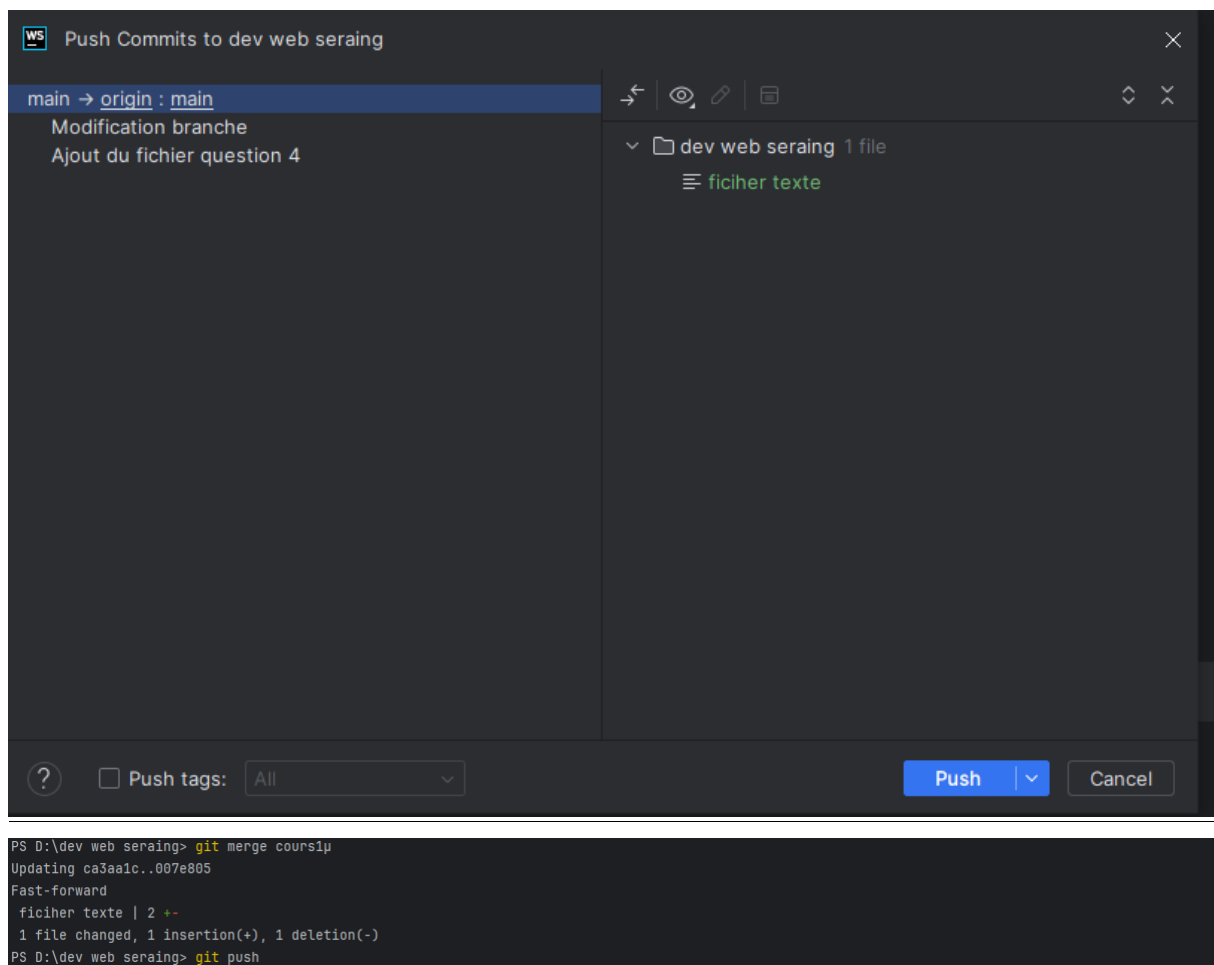


## Question 9 :

Pas de conflit.


## Question 10 :

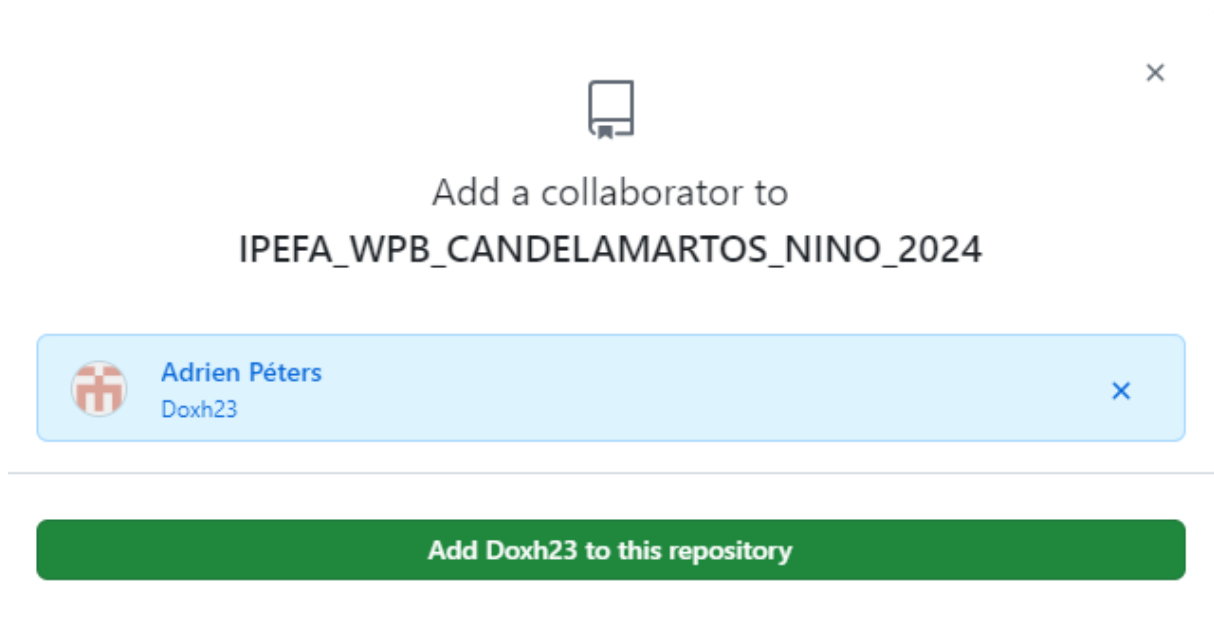

## Question 11 :

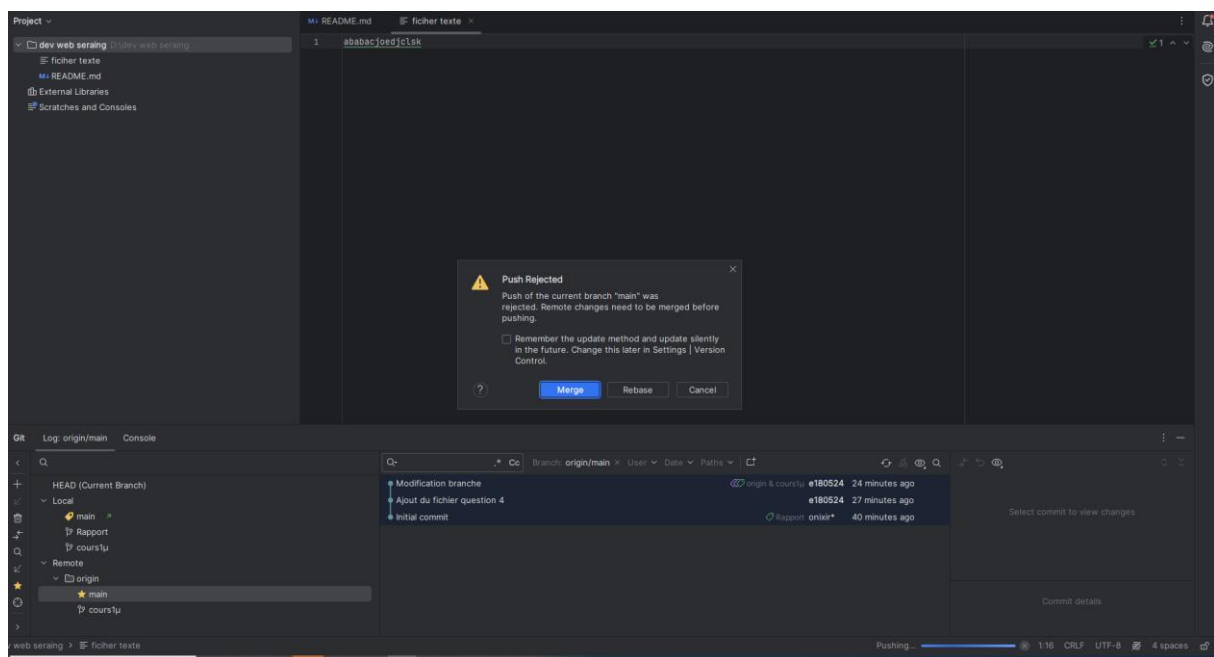

## Question 12 :

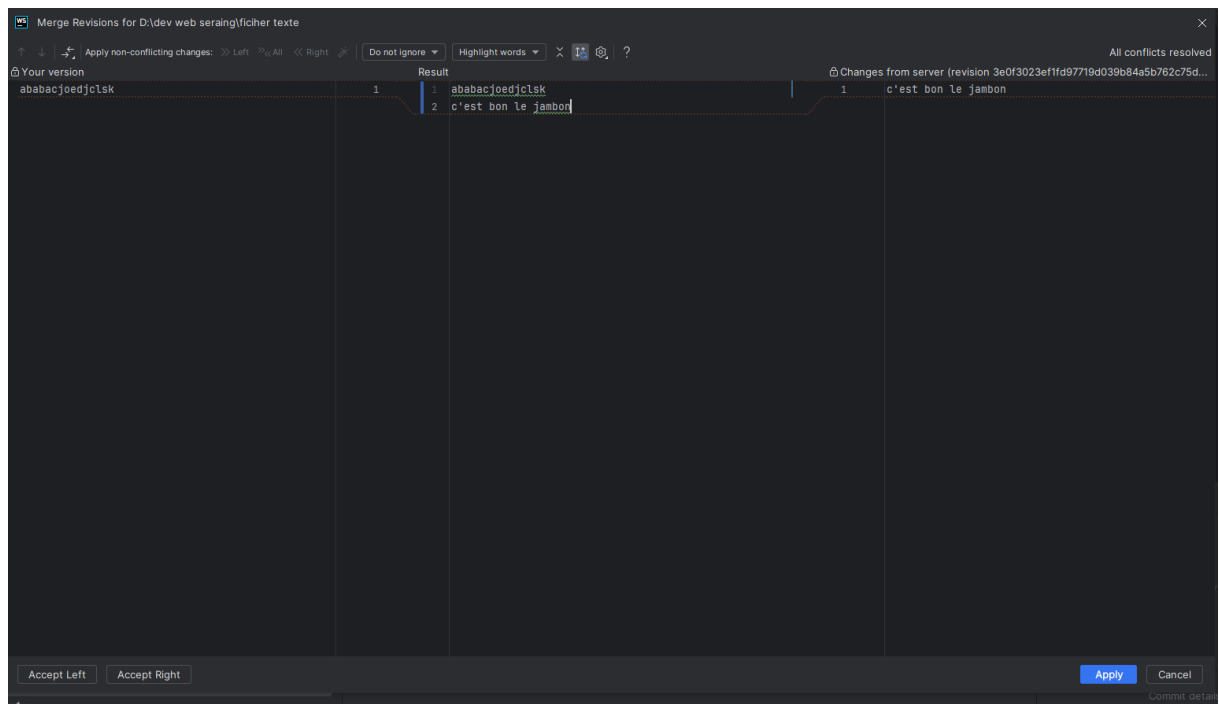

Pour résoudre ce genre de cas le mieux à c est de fusionner manuellement les deux fichiers concernée par le conflits.