


# Example Website



# Game Tic Tac Toe

Board Size:

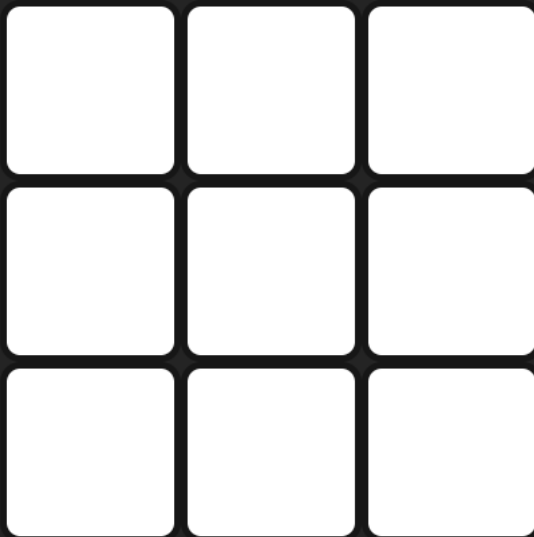


Reset

## Game History


No games history

# Size board change

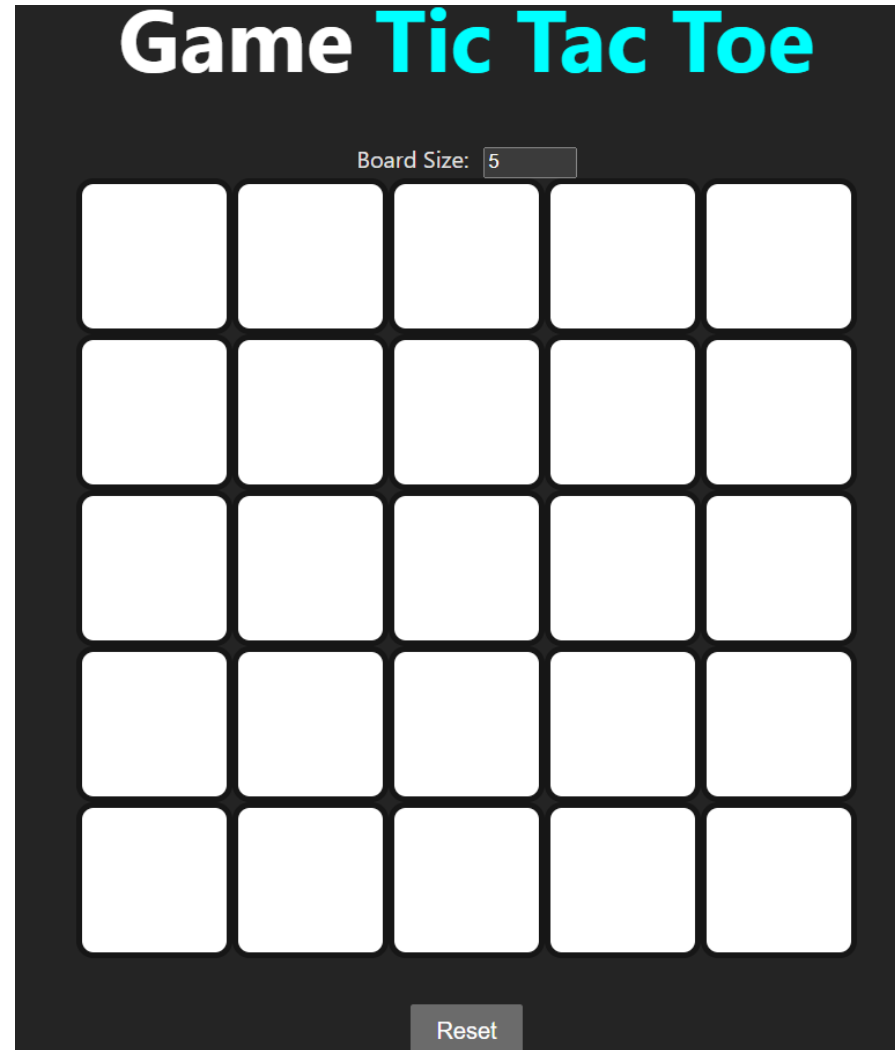

# Game Tic Tac Toe

Board Size:

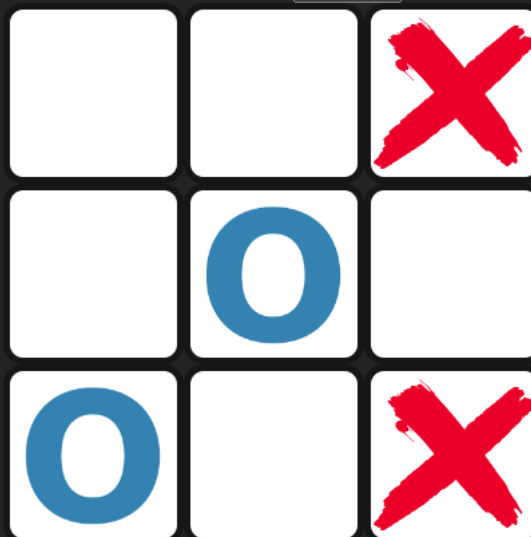

Reset

## Game History

No games history


localhost:5173 บอกว่า

X wins!

ตกลง

# Game Tic Tac Toe

Board Size:

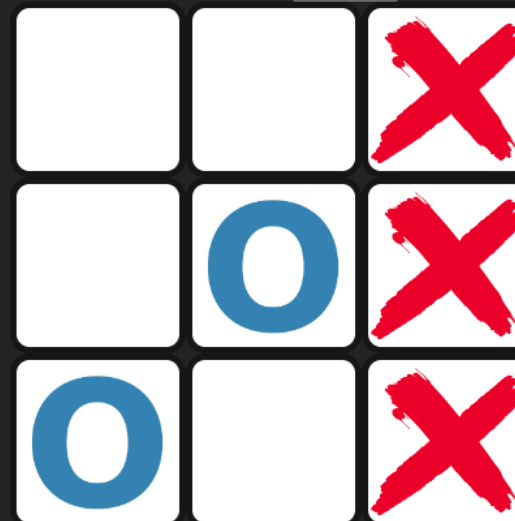

Reset

## Game History

No games history

# History game board

**Game History**

Game 1:

Date: 25/7/2567 20:22:44

Winner: X

Board:

		X
	O	X
O		X

Game 2:

Date: 25/7/2567 20:26:32

Winner: X

Board:

X	X	X	X	X
	O	O	O	O

# MongoDB

The screenshot displays the MongoDB Compass web interface. The left sidebar shows the database structure with 'localhost:27017' selected. Under the 'tictactoe' database, the 'games' collection is highlighted. The main panel shows the 'games' collection with 0 documents. A query is entered in the search bar: `{ field: 'value' }` or [Generate query](#). Below the search bar are buttons for 'ADD DATA', 'EXPORT DATA', 'UPDATE', and 'DELETE'. The document viewer shows a single document with the following structure:

```
{
  "_id": ObjectId('66a251a4d8793fb876dc2bd7'),
  "board": [
    [
      "",
      "",
      "X"
    ],
    [
      "",
      "O",
      "X"
    ],
    [
      "O",
      "",
      "X"
    ]
  ],
  "currentPlayer": "O",
  "winner": "X",
  "date": "2024-07-25T13:22:44.564+00:00",
  "__v": 0
}
```

The bottom status bar shows the MongoDB shell prompt: `>_MONGOSH`.