



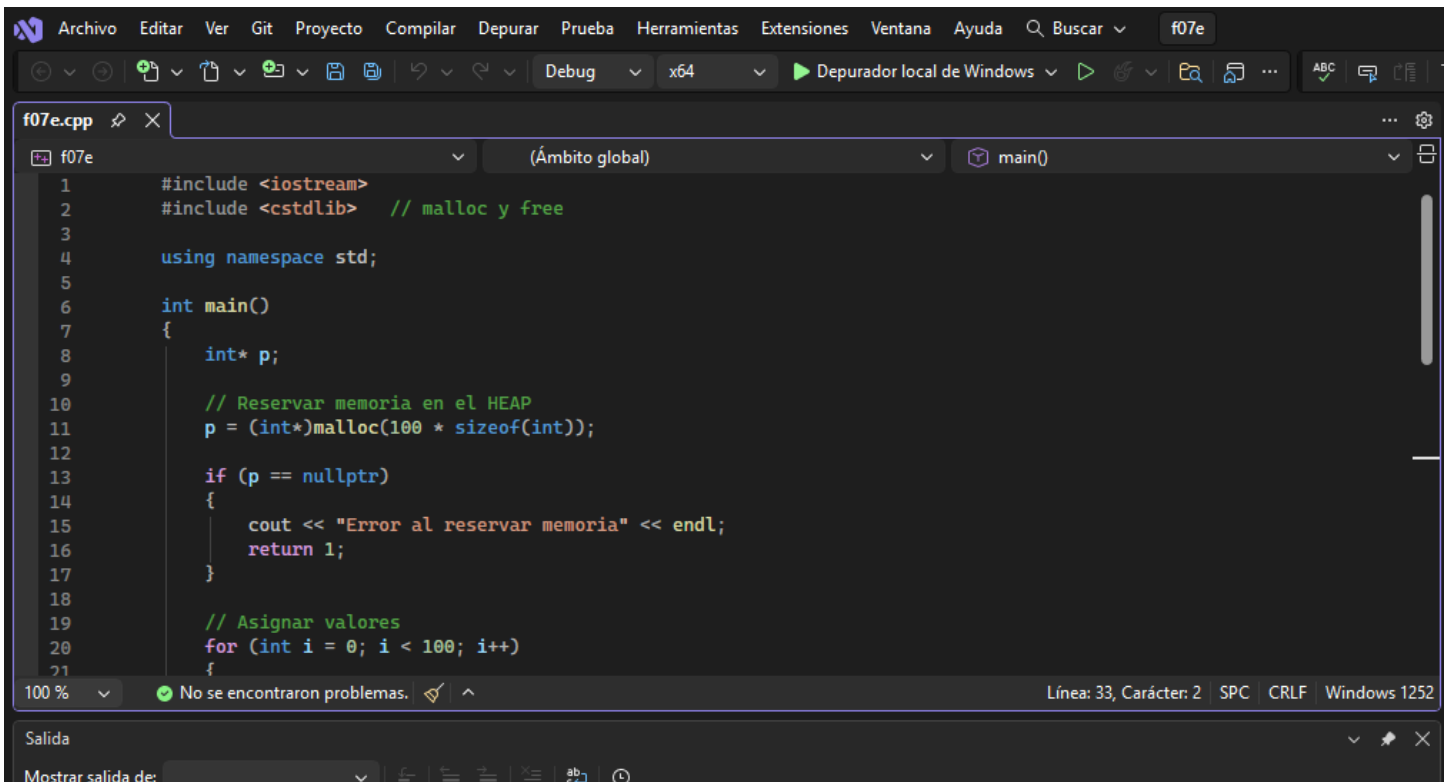

Visual Studio Code editor showing the first part of the C++ code for `f07e.cpp`. The code includes `<iostream>` and `<cstdlib>`, uses the `std` namespace, and defines a `main` function. The function allocates memory using `malloc` and checks if the pointer is `nullptr`. The status bar indicates "No se encontraron problemas." (No problems found).

```
1  #include <iostream>
2  #include <cstdlib> // malloc y free
3
4  using namespace std;
5
6  int main()
7  {
8      int* p;
9
10     // Reservar memoria en el HEAP
11     p = (int*)malloc(100 * sizeof(int));
12
13     if (p == nullptr)
14     {
15         cout << "Error al reservar memoria" << endl;
16         return 1;
17     }
18
19     // Asignar valores
20     for (int i = 0; i < 100; i++)
21     {
```

100 % No se encontraron problemas. Línea: 33, Carácter: 2 SPC CRLF Windows 1252

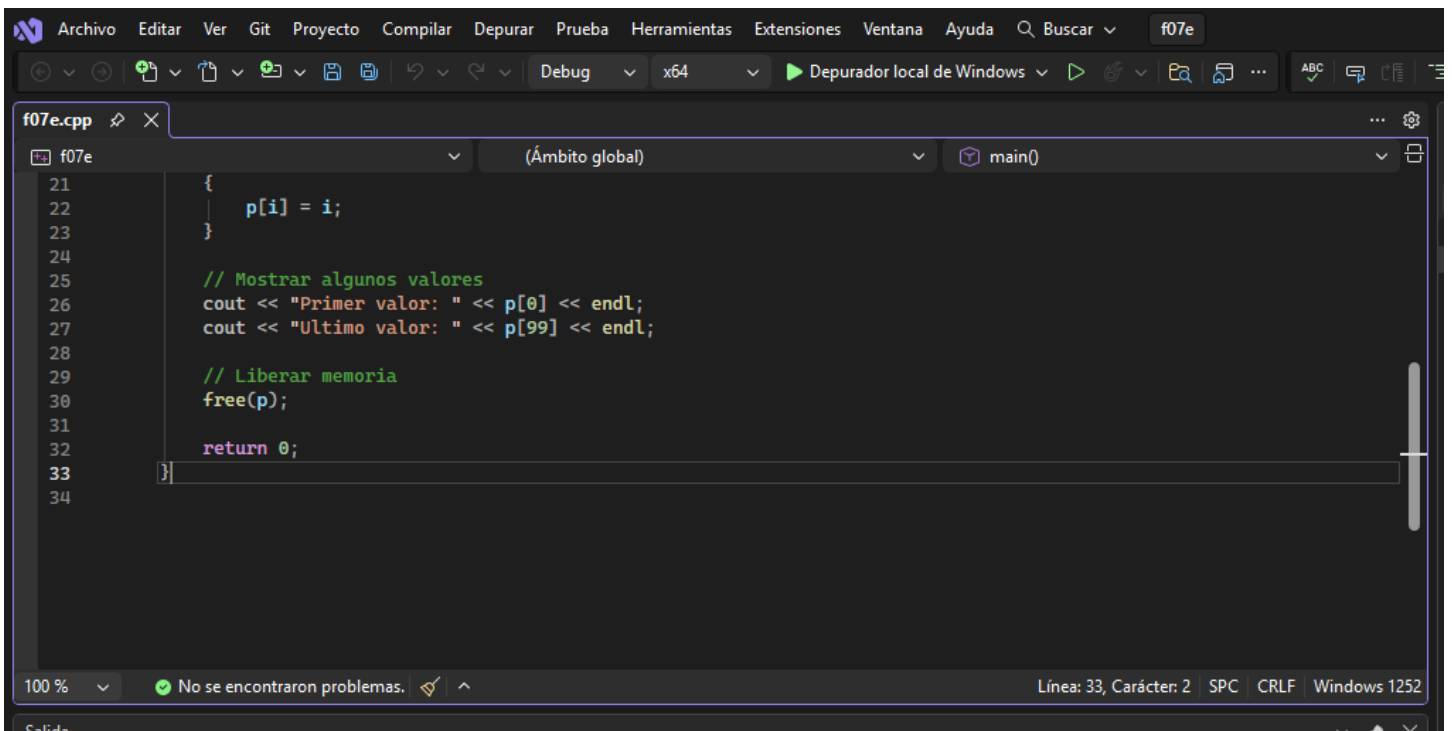

Visual Studio Code editor showing the second part of the C++ code for `f07e.cpp`. The code continues the loop from the previous screenshot, adds output statements, and ends with a `return 0;` statement. The status bar indicates "No se encontraron problemas." (No problems found).

```
21     {
22         p[i] = i;
23     }
24
25     // Mostrar algunos valores
26     cout << "Primer valor: " << p[0] << endl;
27     cout << "Ultimo valor: " << p[99] << endl;
28
29     // Liberar memoria
30     free(p);
31
32     return 0;
33 }
34
```

100 % No se encontraron problemas. Línea: 33, Carácter: 2 SPC CRLF Windows 1252

