

HTML Styles

The HTML **style** attribute is used to add styles to an element, such as color, font, size, and more.

```
<!DOCTYPE html>
<html>
<body>

<p>I am normal</p>
<p style="color:red;">I am red</p>
<p style="color:blue;">I am blue</p>
<p style="font-size:50px;">I am big</p>

</body>
</html>
```

I am normal

I am red

I am blue

I am big

The HTML Style Attribute

Setting the style of an HTML element, can be done with the **style** attribute.

The HTML **style** attribute has the following syntax:

```
<tagname style="property:value;">
```

The **property** is a CSS property. The **value** is a CSS value.

Background Color

The CSS **background-color** property defines the background color for an HTML element.

```
<!DOCTYPE html>
<html>
<body style="background-color:powderblue;">

<h1>This is a heading</h1>
<p>This is a paragraph.</p>

</body>
</html>
```

This is a heading

This is a paragraph.

Example

Set background color for two different elements:

```
<!DOCTYPE html>
<html>
<body>

<h1 style="background-color:powderblue;">This is a
heading</h1>
<p style="background-color:tomato;">This is a paragraph.
</p>

</body>
</html>
```

This is a heading

This is a paragraph.

Text Color

The CSS **color** property defines the text color for an HTML element:

```
<!DOCTYPE html>
<html>
<body>

<h1 style="color:blue;">This is a heading</h1>
<p style="color:red;">This is a paragraph.</p>

</body>
</html>
```

This is a heading

This is a paragraph.

Fonts

The CSS **font-family** property defines the font to be used for an HTML element:

Example

```
<!DOCTYPE html>
<html>
<body>

<h1 style="font-family:verdana;">This is a heading</h1>
<p style="font-family:courier;">This is a paragraph.</p>

</body>
</html>
```

This is a heading

This is a paragraph.

Text Size

The CSS **font-size** property defines the text size for an HTML element:

Example

```
<!DOCTYPE html>
<html>
<body>

<h1 style="font-size:300%;">This is a heading</h1>
<p style="font-size:160%;">This is a paragraph.</p>

</body>
</html>
```

This is a heading

This is a paragraph.

Text Alignment

The CSS **text-align** property defines the horizontal text alignment for an HTML element:

Example

```
<!DOCTYPE html>
<html>
<body>

<h1 style="text-align:center;">Centered Heading</h1>
<p style="text-align:center;">Centered paragraph.</p>

</body>
</html>
```

Centered Heading

Centered paragraph.

HTML Comment Tag

You can add comments to your HTML source by using the following syntax:

```
<!DOCTYPE html>
<html>
<body>

<!-- This is a comment -->
<p>This is a paragraph.</p>
<!-- Comments are not displayed in the browser -->

</body>
</html>
```

This is a paragraph.

Hide Content

Comments can be used to hide content.

This can be helpful if you hide content temporarily:

Example

```
<!DOCTYPE html>
<html>
<body>

<p>This is a paragraph.</p>

<!-- <p>This is another paragraph </p> -->

<p>This is a paragraph too.</p>

</body>
</html>
```

This is a paragraph.

This is a paragraph too.

→You can also hide more than one line. Everything between the **<!--** and the **-->** will be hidden from the display.

Example:

```
<!DOCTYPE html>
<html>
<body>

<p>This is a paragraph.</p>
<!--
<p>Look at this cool image:</p>

-->
<p>This is a paragraph too.</p>

</body>
</html>
```

This is a paragraph.

This is a paragraph too.

Comments are also great for debugging HTML, because you can comment out HTML lines of code, one at a time, to search for errors.

Hide Inline Content

Comments can be used to hide parts in the middle of the HTML code.

```
<!DOCTYPE html>
<html>
<body>

<p>This <!-- great text --> is a paragraph.</p>

</body>
</html>
```

This is a paragraph.

HTML colors are specified with predefined color names, or with RGB, HEX, HSL, RGBA, or HSLA values.

Color Names

In HTML, a color can be specified by using a color name:

```
<!DOCTYPE html>
<html>
<body>

<h1 style="background-color:Tomato;">Tomato</h1>
<h1 style="background-color:Orange;">Orange</h1>
<h1 style="background-color:DodgerBlue;">DodgerBlue</h1>
<h1 style="background-
color:MediumSeaGreen;">MediumSeaGreen</h1>
<h1 style="background-color:Gray;">Gray</h1>
<h1 style="background-color:SlateBlue;">SlateBlue</h1>
<h1 style="background-color:Violet;">Violet</h1>
<h1 style="background-color:LightGray;">LightGray</h1>

</body>
</html>
```

Tomato

Orange

DodgerBlue

MediumSeaGreen

Gray

SlateBlue

Violet

LightGray

Background Color

You can set the background color for HTML elements:

```
<!DOCTYPE html>
<html>
<body>

<h1 style="background-color:DodgerBlue;">Hello World</h1>

<p style="background-color:Tomato;">
Lorem ipsum dolor sit amet, consectetur adipiscing elit,
sed diam nonummy nibh euismod tincidunt ut laoreet dolore
magna aliquam erat volutpat.
Ut wisi enim ad minim veniam, quis nostrud exerci tation
ullamcorper suscipit lobortis nisl ut aliquip ex ea
commodo consequat.
</p>

</body>
</html>
```

Hello World

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed diam nonummy nibh euismod tincidunt ut laoreet dolore magna aliquam erat volutpat. Ut wisi enim ad minim veniam, quis nostrud exerci tation ullamcorper suscipit lobortis nisl ut aliquip ex ea commodo consequat.

Text Color

You can set the color of text:

```
<!DOCTYPE html>
<html>
<body>

<h3 style="color:Tomato;">Hello World</h3>

<p style="color:DodgerBlue;">Lorem ipsum dolor sit amet,
consectetur adipiscing elit, sed diam nonummy nibh
euismod tincidunt ut laoreet dolore magna aliquam erat
volutpat.</p>

<p style="color:MediumSeaGreen;">Ut wisi enim ad minim
veniam, quis nostrud exerci tation ullamcorper suscipit
lobortis nisl ut aliquip ex ea commodo consequat.</p>

</body>
</html>
```

Hello World

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed diam nonummy nibh euismod tincidunt ut laoreet dolore magna aliquam erat volutpat.

Ut wisi enim ad minim veniam, quis nostrud exerci tation ullamcorper suscipit lobortis nisl ut aliquip ex ea commodo consequat.

Border Color

You can set the color of borders:

```
<!DOCTYPE html>
<html>
<body>

<h1 style="border: 2px solid Tomato;">Hello World</h1>

<h1 style="border: 2px solid DodgerBlue;">Hello
World</h1>

<h1 style="border: 2px solid Violet;">Hello World</h1>

</body>
</html>
```

Hello World

Hello World

Hello World

Color Values

In HTML, colors can also be specified using RGB values, HEX values, HSL values, RGBA values, and HSLA values.

The following three <div> elements have their background color set with RGB, HEX, and HSL values:

```
<!DOCTYPE html>
<html>
<body>

<p>Same as color name "Tomato":</p>

<h1 style="background-color:rgb(255, 99, 71);">rgb(255,
99, 71)</h1>
<h1 style="background-color:#ff6347;">#ff6347</h1>
<h1 style="background-color:hsl(9, 100%, 64%);">hsl(9,
100%, 64%)</h1>

<p>Same as color name "Tomato", but 50% transparent:</p>
<h1 style="background-color:rgba(255, 99, 71,
0.5);">rgba(255, 99, 71, 0.5)</h1>
<h1 style="background-color:hsla(9, 100%, 64%,
0.5);">hsla(9, 100%, 64%, 0.5)</h1>

<p>In addition to the predefined color names, colors can
be specified using RGB, HEX, HSL, or even transparent
colors using RGBA or HSLA color values.</p>

</body>
</html>
```

Same as color name "Tomato":

rgb(255, 99, 71)

#ff6347

hsl(9, 100%, 64%)

Same as color name "Tomato", but 50% transparent:

rgba(255, 99, 71, 0.5)

hsla(9, 100%, 64%, 0.5)

In addition to the predefined color names, colors can be specified using RGB, HEX, HSL, or even transparent colors using RGBA or HSLA color values.

What is CSS?

Cascading Style Sheets (CSS) is used to format the layout of a webpage.

With CSS, you can control the color, font, the size of text, the spacing between elements, how elements are positioned and laid out, what background images or background colors are to be used, different displays for different devices and screen sizes, and much more!

Using CSS

CSS can be added to HTML documents in 3 ways:

- **Inline** - by using the **style** attribute inside HTML elements
- **Internal** - by using a **<style>** element in the **<head>** section
- **External** - by using a **<link>** element to link to an external CSS file

The most common way to add CSS, is to keep the styles in external CSS files. However, in this tutorial we will use inline and internal styles, because this is easier to demonstrate, and easier for you to try it yourself.

Inline CSS

An inline CSS is used to apply a unique style to a single HTML element.

An inline CSS uses the `style` attribute of an HTML element.

The following example sets the text color of the `<h1>` element to blue, and the text color of the `<p>` element to red:

```
<!DOCTYPE html>
<html>
<body>

<h1 style="color:blue;">A Blue Heading</h1>

<p style="color:red;">A red paragraph.</p>

</body>
</html>
```

A Blue Heading

A red paragraph.

Internal CSS

An internal CSS is used to define a style for a single HTML page.

An internal CSS is defined in the `<head>` section of an HTML page, within a `<style>` element.

The following example sets the text color of ALL the `<h1>` elements (on that page) to blue, and the text color of ALL the `<p>` elements to red. In addition, the page will be displayed with a "powderblue" background color:

```
<!DOCTYPE html>
<html>
<head>
<style>
body {background-color: powderblue;}
h1   {color: blue;}
p    {color: red;}
</style>
</head>
<body>

<h1>This is a heading</h1>
<p>This is a paragraph.</p>

</body>
</html>
```

This is a heading

This is a paragraph.

External CSS


An external style sheet is used to define the style for many HTML pages.

To use an external style sheet, add a link to it in the `<head>` section of each HTML page:

```
<!DOCTYPE html>
<html>
<head>
  <link rel="stylesheet" href="styles.css">
</head>
<body>

<h1>This is a heading</h1>
<p>This is a paragraph.</p>

</body>
</html>
```

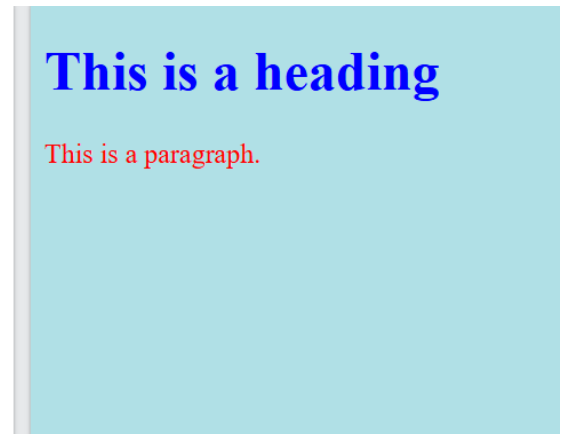

The external style sheet can be written in any text editor. The file must not contain any HTML code, and must be saved with a .css extension.

Here is what the "styles.css" file looks like:

"styles.css":

```
body {
  background-color: powderblue;
}
h1 {
  color: blue;
}
p {
  color: red;
}
```

```
<!DOCTYPE html>
<html>
<head>
<style>
h1 {
  color: blue;
  font-family: verdana;
  font-size: 300%;
}
p {
  color: red;
  font-family: courier;
  font-size: 160%;
}
</style>
</head>
<body>

<h1>This is a heading</h1>
<p>This is a paragraph.</p>

</body>
</html>
```

This is a heading

This is a paragraph.

CSS Border

```
<!DOCTYPE html>
<html>
<head>
<style>
p {
  border: 2px solid powderblue;
}
</style>
</head>
<body>

<h1>This is a heading</h1>

<p>This is a paragraph.</p>
<p>This is a paragraph.</p>
<p>This is a paragraph.</p>

</body>
</html>
```

This is a heading

This is a paragraph.

This is a paragraph.

This is a paragraph.

CSS Padding

The CSS **padding** property defines a padding (space) between the text and the border.

```

<!DOCTYPE html>
<html>
<head>
<style>
p {
  border: 2px solid powderblue;
  padding: 30px;
}
</style>
</head>
<body>

<h1>This is a heading</h1>

<p>This is a paragraph.</p>
<p>This is a paragraph.</p>
<p>This is a paragraph.</p>

</body>
</html>

```

This is a heading

This is a paragraph.

This is a paragraph.

This is a paragraph.

CSS Margin

The CSS **margin** property defines a margin (space) outside the border.

```

<!DOCTYPE html>
<html>
<head>
<style>
p {
  border: 2px solid powderblue;
  margin: 50px;
}
</style>
</head>
<body>

<h1>This is a heading</h1>

<p>This is a paragraph.</p>
<p>This is a paragraph.</p>
<p>This is a paragraph.</p>

</body>
</html>

```

This is a heading

This is a paragraph.

This is a paragraph.

This is a paragraph.

Link to External CSS

External style sheets can be referenced with a full URL or with a path relative to the current web page.

```
<!DOCTYPE html>
<html>
<head>
  <link rel="stylesheet" href="/html/styles.css">
</head>
<body>

<h1>This is a heading</h1>
<p>This is a paragraph.</p>

</body>
</html>
```

This is a heading

This is a paragraph.