

Handwriting Based Text Steganography Using Universal Languages

Dr. Indradip Banerjee
Computer Science & Engineering,
University Institute of Technology,
The University of Burdwan
Burdwan, India.
ibanerjee2001@gmail.com

Kaustav Bandyopadhyay
Computer Science & Engineering,
Seacom Engineering College,
Howrah, India
banerjeekaustav11@gmail.com

Dr. Anand Mohan
Department of Physics
L.N Mithila University
Darbhanga, Bihar, India
anandmohanjrf@gmail.com

Abstract— Hidden transmission securely over the public media is literally known as Steganography. A widespread dimension of work in this area of research has been recognized by different research group on steganography. In this contribution, a quantum based text steganography mechanism has been considered which can work in numeric handwriting of universal Indian regional languages. The methodology of quantum has been integrated before the algorithm of embedding and a function has been incorporate for encryption as well as decryption procedure with this determination to enrich the level of the security. Text steganography unruffled with a function designed by mathematics & quantum attitude based on the use of handwriting characters in various Indian regional languages with mapping truth table of quantum gate have been developed in this contribution.

Keywords— Text Steganography, Numeric Handwriting, Security and Quantum Steganography.

I. INTRODUCTION

Thrashing of information is the ability to prevent or hidden certain aspects from being accessible to others excluding authentic user. It has various sub castigations. Steganography is the term which is most catching sub disciplines in the universe of information hiding [1] which is imitative from a work by Johannes Trithemus (1462-1516) titled it "Steganographia" and the word comes from the language of Greek which literally means "covered writing". Steganography is the ancient art of hidden information through any cover and communication channel or an algorithm which is used for creating a stego without cover etc, so that will not possible to trace as well as suspect by an eavesdropper. Steganography is the concept has been emanates from cryptography in the sense that where cryptography is the concept to keep the content secret by encryption technique, whereas the steganography is the mechanism to secret the message within the channel by hiding procedure [2].

Researchers in this meadow have been used diverse media like text, image, video, protocol, music and sound etc to develop the concept of steganography. Now the beautiful category is text, because this is the difficult kind of category in the terminology of steganography. Lack of redundant information is the challenge in the text steganography and thus this category is gorgeous as well as challenging.

A. Quantum Steganography

Precise diminutive volume of research work has been done in quantum steganography. The idea of hiding secret messages as the error syndromes of a Quantum Error Correcting Code was introduced by Julio Gea-Banacloche [3]. In this development the three-bit repetition code has been used to transmit messages between Alice and Bob using

the concept of shared secret key. Alice put the errors deliberately to create the noise and transmit it to the channel, and then Eve notices the errors which have been applied from sender zone and extract the messages by the receiver. He assumes that a binary-symmetric communication channel has been share in the established model by the help of Alice and Bob. This contribution does not report that the errors would resemble a believable channel or it considers the case of the existence of essential noise. Super-dense coding modification technique developed by Natori [4] gives a mechanism of quantum steganography in a simple behavior. Bennett and Brassard's developed protocol named as Quantum Key Distribution which has been used by Martin to develop a notion of quantum steganography communication based on a variation of Quantum Key Distribution to hide a communication channel [5]. There are three different types quantum steganography protocols have been developed by Curty [6].

B. Quantum gate:

Quantum circuit model of computation in quantum computing, a quantum gate or quantum logic gate is a basic quantum circuit which operates on qubits. Classical logic gates have been used by the conventional digital circuit's and here the qubits are termed as the building blocks of quantum circuits. These are uses the logic gates which are called Quantum logic gates (QLG), the QLG are reversible like other classical logic gates. However, the reversible gates have been used by the classical computing only. Quantum gates fundamentally can be symbolized as like matrices. A gate can be represented as $2^{kh} \times 2^{kh}$ unitary matrix where kh is the qubits. The number of qubits in the input and output of the gate is equal. There are various types of quantum gates are represent the qubits. The well-known quantum gates used by various researchers are Phase shift gates, Hadamard gate, Fredkin gate, Pauli-Z gate, Pauli-Y gate, Pauli-X gate, Controlled gates, Swap gate, Toffoli gate, etc. Here we use Controlled gates to represent the qubits and control the operations.

NOT	<0>	<1>
<0>	0	1
<1>	1	0

Fig. 1. NOT Gate Truth Table

C. Reversible Classical Logic:

Theories of reversibility of computation were introduced in the year 1970. Logical and physical reversibility, these two issues are the main part and both the topics were intimately connected. Logical reversibility technologies are taken the input from the output of that gate function or by

same computation technique. The NAND gate is explicitly irreversible, it has two inputs and one output, while the NOT gate is reversible (it's own inverse). In Physical reversibility issues the NAND gate has been used and that has only one output, in the design of the process it has been observed that one of the inputs of the gate has effectively been erased, whose evidence has been permanently vanished. The modification in the value of entropy that can be associated with the loss of one bit of information is $\ln 2$, which, thermodynamically, corresponds to an energy increase of $kh^{Tm} \ln 2$, where kh denoted as Boltzman's constant and Tm stands for temperature. The heat degenerate at the time of running the process is usually taken to be a sign of physical irreversibility, that the microscopic physical state of the system cannot be restored correctly as it was earlier the course took place. By the support of inputs and outputs it can be understood that the Reversible logic gates are symmetric. The reversible NOT gate, whose truth table is given in Fig. 1. It can also write this in the form of a matrix, or as a graphic. The matrix arrangement gradients the shapes of truth table and the gradients are shown in the form of $\langle 0 \rangle, \langle 1 \rangle$. The matrix fields are written in the form of 1's and 0's such that each vertical line or in horizontal line has exactly a single 1, which has been understood as a one-to-one plotting of the input to the output. A two-bit gate closely related to the NOT gate is the two-bit Controlled-NOT (or C-NOT) gate. Controlled-NOT gate shows in Fig. 2, performs a NOT on the second bit if the first bit is $\langle 1 \rangle$, but otherwise has no effect. The C-NOT gate is well-known as XOR gate, since the exclusive OR operation has been performed by the help of the two input bits and composes the output to the second bit.

C-NOT	$\langle 00 \rangle$	$\langle 01 \rangle$	$\langle 10 \rangle$	$\langle 11 \rangle$
$\langle 00 \rangle$	1	0	0	0
$\langle 01 \rangle$	0	1	0	0
$\langle 10 \rangle$	0	0	0	1
$\langle 11 \rangle$	0	0	1	0

Fig. 2. NOT Gate Truth Table

The Controlled NOT gate (also C-NOT or CNOT) is a quantum gate that is an essential component in the construction of a quantum computer. The proof of operation [7] is given below:

Let $\left\{ |0\rangle = \begin{bmatrix} 1 \\ 0 \end{bmatrix}, |1\rangle = \begin{bmatrix} 0 \\ 1 \end{bmatrix} \right\}$ be the orthonormal basis.

Let $|\psi\rangle = x|0\rangle + y|1\rangle = \begin{bmatrix} x \\ y \end{bmatrix}$ and $|\phi\rangle = y|0\rangle + x|1\rangle = \begin{bmatrix} y \\ x \end{bmatrix}$.

$|\phi\rangle$ be the flip qubit of $|\psi\rangle$.

Recall that $|\alpha\rangle \otimes |\beta\rangle = |\alpha\rangle|\beta\rangle = |\alpha, \beta\rangle$ (1)

i. In case of 0 control qubit

First, it can be prove that: $CNOT |0, \psi\rangle = |0, \psi\rangle$

Before the phase of computation, it has been noted that the specific definition of $CNOT$ assumes an eigen basis of

$$|00\rangle = \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \end{bmatrix}, |01\rangle = \begin{bmatrix} 0 \\ 1 \\ 0 \\ 0 \end{bmatrix}, |10\rangle = \begin{bmatrix} 0 \\ 0 \\ 1 \\ 0 \end{bmatrix}, |11\rangle = \begin{bmatrix} 0 \\ 0 \\ 0 \\ 1 \end{bmatrix}$$

Then, it's not difficult to verify

$$\text{that } |0, \psi\rangle = x|0\rangle|0\rangle + y|0\rangle|1\rangle = \begin{bmatrix} x \\ y \\ 0 \\ 0 \end{bmatrix} \quad (2)$$

$$\text{Then } CNOT |0, \psi\rangle = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ 0 \\ 0 \end{bmatrix} = \begin{bmatrix} x \\ y \\ 0 \\ 0 \end{bmatrix} = |0, \psi\rangle \quad (3)$$

Therefore if the first qubit is 0 then $CNOT$ doesn't change the $|\psi\rangle$ qubit.

ii. In case of 1 control qubit

Now, it shall prove that $CNOT |1, \psi\rangle = |1, \phi\rangle$, which means that the $CNOT$ gate flips the $|\psi\rangle$ qubit.

$$\text{Similarly to the first demonstration, we have } |1, \psi\rangle = \begin{bmatrix} 0 \\ 0 \\ x \\ y \end{bmatrix}.$$

$$\text{Then } CNOT |1, \psi\rangle = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} 0 \\ 0 \\ x \\ y \end{bmatrix} = x \begin{bmatrix} 0 \\ 0 \\ 0 \\ 1 \end{bmatrix} + y \begin{bmatrix} 0 \\ 0 \\ 1 \\ 0 \end{bmatrix} \quad (4)$$

$$\text{As we can see that } |1, 1\rangle = \begin{bmatrix} 0 \\ 0 \\ 0 \\ 1 \end{bmatrix} \text{ and } |1, 0\rangle = \begin{bmatrix} 0 \\ 0 \\ 1 \\ 0 \end{bmatrix}, \text{ using}$$

these on the equation above gives

$$CNOT |1, \psi\rangle = x|1, 1\rangle + y|1, 0\rangle = |1\rangle(x|1\rangle + y|0\rangle) = |1, \phi\rangle \quad (5)$$

Therefore the $CNOT$ gate flips the $|\psi\rangle$ qubit into $|\phi\rangle$ if the control qubit is set to 1. A simple way to observe this is to multiply the $CNOT$ matrix by a column vector, noticing that the operation on the first bit is identity, and a NOT gate on the second bit.

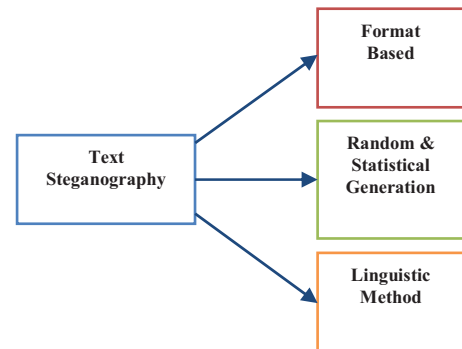


Fig. 3. Types of Steganography

D. Text Steganography

Text is the prehistoric and difficult media used in the literature. Letters and telegrams in the earlier time used to hide the secret messages within their texts i.e. before the electronic era comes. Text steganography mechanism used for hiding any type of information inside the text i.e. character-based messages. There are three basic categories of text steganography have been proposed by different researchers illustrated in Fig. 3. Three categories are termed as format-based, random as well as statistical generation and linguistic technique. [8]

i. Format-based methods [8]: This methods normally adjust existing text by physical formatting for hiding the steganography text.

ii. Random and statistical generation method [8]: This method can avoid the plaintext where as in this method the researchers generate their own cover texts by their algorithm. Character sequences method can hide the information within the character sequences.

iii. Linguistic methods [8]: Text linguistic mechanism has been used to hide the information in this method. A basic text steganography procedure has been furnished in Fig. 4, a secret message can embed to a cover-text through an embedding algorithm and after that form a stego-text. Next step is entitled transmission, transferred the stego-text to the receiver via a communication channel.

In this paper, an approach of Quantum Text Steganography has been projected based on the use of Numeric Handwriting of Indian Regional Language. Various Indian regional languages has been castoff in this study. Here the quantum truth table also mapped to increase the security level and complexity. A new code representation mathematical function has been anticipated here to achieve high level of security. Mathematical function has been used before the embedding operation of the secret message and encoded using passkey. Then, that embeds into cover text by the presented text steganography algorithm. In this method the length of the stego and the cover are identical, so prediction of existence of message is complicated in view of that distinctiveness. This is the

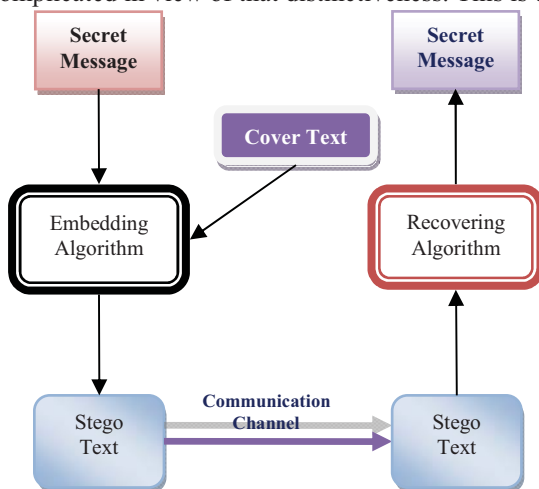


Fig. 4. Mechanism of Text Steganography

Universal language method which can work in different languages and has been developed in this steganography approach.

The proposed development has been designed and implemented by the help of quantum approach has been incorporated in this research and mathematical function has been used to increase the security level.

Organization of the paper is as follows: At first the proposed model has been furnished in Section II. Section III shown some of the algorithms of developed processes. Mathematical Analysis has been designated in section IV. Section V is for the analysis part of the results and the last section deals with the conclusion of the work.

II. THE PROPOSED MODEL

This paper exactly deals with text steganography, uses various Indian regional languages handwritten text as the medium where to hide information. Here the explanation of text steganography remains wide in order to differentiate it from the more specific “linguistic steganography”. Text steganography can involve anything from changing the ASCII character from the specific position of an existing text.

The input messages can be in any digital form. The input message encrypted using mathematical function & passkey and it is treated as a bit stream. Pick two pair of this bit stream of message and transfer to its math function equivalent value with the help of passkey. Then select the handwritten number of any selected Indian Regional Language Text as cover and map it accordingly. Then a matrix formed with the help of message length and map the C-NOT truth table from left most corner in a sequence (vertically or horizontally), after that start embedding one by one if the mapped value showing not ‘1’ value. Subsequently the embedding process continues with the secret message and the cover text in various Regional languages to generate the stego text based on the algorithm. By the help of replacing technique the stego length are being same as cover. The receiver side runs the reverse algorithm and do the reverse operations to get back the information send by the sender zone.

A. Solution Methodology

The proposed system involves two windows i.e. SENDER and RECEIVER. The user will be someone who will have adequate knowledge of steganography systems. The user first select any language from the selected list of handwritten characters and plain text message from a file or enter text in specified area of software, another text to be used as the carrier (cover text) which is in specific selected language and put a Revised key as password. Then with the help of proposed embedding technique the message has been hidden in the handwritten numeric character. At the receiver zone the receiver receives the mapping technology as well as the mapped handwritten numeric characters of specific language which are required to extract the message. Then the mathematical function used for decrypt the information. Fig. 5 displays one of the GUI Exemplification of the mechanism.

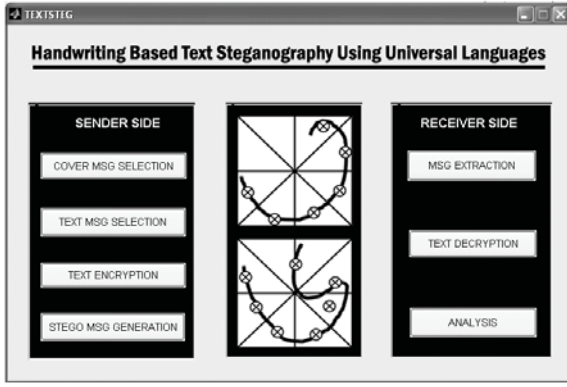


Fig. 5. GUI Representation

III. ALGORITHMS

A. Algorithm for Message Encryption / Decryption

- Select Passkey (Password), message and pick one by one character then convert to its ASCII equivalent.
- Change ASCII code to our generated code from *Mathematical Function* and add Passkey to produce a Function value which is depending on Passkey. Convert to its character equivalent.

B. Algorithm for Message Embedding

- Select the message and encrypt the message with *Mathematical Function*. Then select any specified handwritten numeric character of Indian Regional Language as cover. Check whether the selected text is capable of embedding. If not possible repeat this step otherwise continue.
- Map the quantum C-NOT gate to the matrix MATMSG (N x N) vertically or horizontally & Put the message value by replacing '0' in the matrix MATMSG.
- Check the message sequence and pick first two bit sequence (MSG). Start from the first character of the cover text (TX).
- Start checking & embedding.
- Repeat the above step for the remaining bit sequence of the message and prepare the stego text.

C. Algorithm for Message Extracting

- Select the stego text put in MATMSG (N x N) matrix and map the quantum C-NOT gate to the matrix vertically or horizontally.
- Extract the message value from '0' Th position of C-NOT. Pick values one by one from MATMSG and create MSG.
- Select the stego text TX and extract using universal handwritten character

IV. MATHEMATICAL ANALYSIS

Encryption and Decryption: The entry that lies in the mi^{th} row and the nj^{th} column of a matrix is typically referred to as $(mi, nj)^{th}$ entry of a matrix MA is most commonly written as $MA[mi, nj]$ or $ma_{mi, nj}$. $MA = [ma_{mi, nj}]_{mi=1,2,...,mi \text{ and } nj=1,2,...,nj}$

Row and Column operations are ways to change matrices. In this function three types of Row and three types of column operations have been occurred, which are furnished below –

A. Row Operations

1. Interchange row mi and nj ($R_{mi} \leftrightarrow R_{nj}$)
2. Multiply row mi by s , where $s \neq 0$ ($sR_{mi} \rightarrow R_{mi}$)
3. Add s times row mi to row nj ($sR_{mi} \rightarrow R_{nj}$)

B. Column Operations

1. Interchange column mi and nj ($C_{mi} \leftrightarrow C_{nj}$)
2. Multiply column mi by s , where $s \neq 0$ ($sC_{mi} \rightarrow C_{mi}$)
3. Add s times column mi to column nj ($sC_{mi} \rightarrow C_{nj}$)

Now for SSCE value we perform a column operation on matrix MA . After performing a column operation on $MA[mi, nj]$ it produce MA' . $MA[mi, nj] \rightarrow MA'[mi, nj]$

After that transpose the $MA'[mi, nj]$ matrix and formed $MA'^T [mi, nj]$.

Now it is transformed to an array i.e. place in an orderly arrangement in a linear order.

Then add Passkey (known as password) Pi with $MA'^T [mi, nj]$ transformed matrix and produced $Pi \cdot MA'^T [mi, nj]$.

V. RESULTS ANALYSIS

The authors simulated the proposed system and the results are shown in the Fig. 6, 7 and 8. This method hides two bit per word in the cover text which reflects the high embedding capacity of the system. Although the embedding capacity of the proposed method is depends upon the handwritten characters of universal Languages. In this method the length of the stego and cover are same and unchanged. So due to the said reason the steganalysis part can also handle.

જયપુર, તા. ૯, મે. આઈયીઓલ-પન્ની પદ્મી ગેયસ અને યેનઈ સુપર કિંસ સામેની મેચ શરૂ થતાની સાથે જ વરસાદના વિદન સાથે આઈયીઓલ-પન્ની પદ્મી શવસ્થાન રોયલ્સ અને પેજઈ સુપર કિંગ્સ સામેની મેચ શરૂ થતાની સાથે જ વરસાદના વિદન સાથે ભંડા શતા પામી રત્ની જોરે વરસાદ ભંડા શતા મેચ રજી

Fig. 6. Cover Text in Proposed Text Steganography Technique



Fig. 7. Message in Proposed Text Steganography Technique

જયપુર, તા. ૯, મે. આઈયીઓલ-પન્ની પદ્મી ગેયસ અને યેનઈ સુપર કિંસ સામેની મેચ શરૂ થતાની સાથે જ વરસાદના વિદન સાથે આઈયીઓલ-પન્ની પદ્મી શવસ્થાન રોયલ્સ અને પેજઈ સુપર કિંગ્સ સામેની મેચ શરૂ થતાની સાથે જ

Fig. 8. Stego Text in Proposed Text Steganography Technique

A. Similarity Measure:

Similarity comparison is the most important in this type of research because if the stego and cover are likely to similar then no one can understand the activity. So the Correlation method has been used for measuring similarity between original and transmitting message.

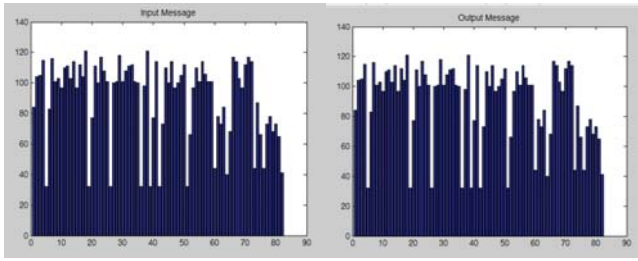


Fig. 9. Graph of Input and Output Message

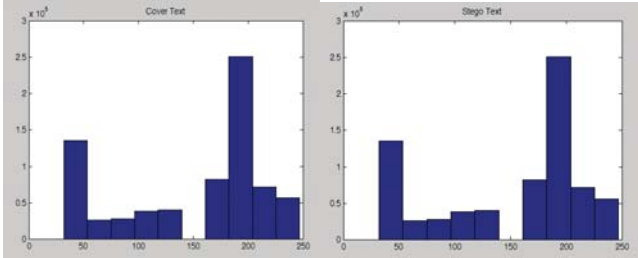


Fig. 10. Graph of Cover Text and Stego Text

TABLE I. CORRELATION VALUES OF COVER AND STEGO TEXT IN DIFFERENT LENGTH OF MESSAGE

MESSAGE LENGTH (In Character)	CORRELATION VALUE
10	0.99976
50	0.998787621
100	0.997577235
200	0.995159513
300	0.992745838
400	0.990336183
500	0.987930524
600	0.985528835
700	0.983131092
800	0.98073727
900	0.978347344
1000	0.975961289

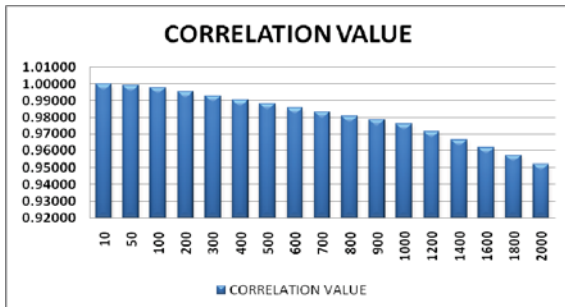


Fig. 11. Representation Correlation values of Cover and Stego

If we have a series of n measurements of X and Y written as cx_i and cy_i where $i = 1, 2, \dots, n$. After that the sample correlation coefficient used in Pearson correlation cr between two variables i.e. X and Y . The sample correlation coefficient is written

$$cr_{cx, cy} = \frac{\sum_{i=1}^n (cx_i - \overline{cx})(cy_i - \overline{cy})}{(n-1)CS_{cx}CS_{cy}} \quad (6)$$

where \overline{cx} and \overline{cy} are the sample means of X and Y , CS_{cx} and CS_{cy} are the sample standard deviations of X and Y . The Correlation score of comparing cover text and stego text is

shown in Table I and the chart in Table II represent the Correlation of different stego of various length of message.

TABLE II. COMPUTATION TIME OF STEGO & MESSAGE GENERATION

Message Length (In Character)	Computation Time (in Second)		Difference (B-A)
	Stego Generate (A)	Message Generate (B)	
10	0.1404009	0.1872012	0.0468003
50	0.6552042	0.6864044	0.0312002
100	1.2168078	1.3572087	0.1404009
200	1.9344124	3.0576196	1.1232072
300	2.7144174	3.3228213	0.6084039
400	3.5724229	4.3836281	0.8112052
500	4.5396291	5.616036	1.0764069
600	5.6940365	7.0512452	1.3572087
700	7.4256476	8.4864544	1.0608068
800	10.4208668	10.8576696	0.4368028
900	9.5784614	10.8888698	1.3104084
1000	9.3288598	11.4192732	2.0904134

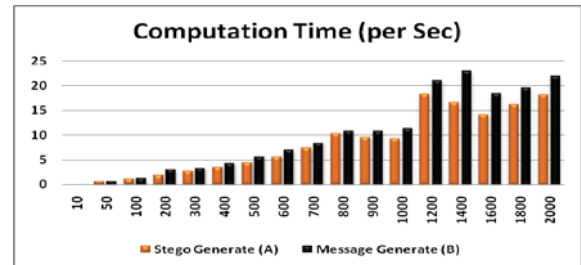


Fig. 12. Representation Computation Time values of Stego & Message

In Fig. 10 it has been observed that the cover and stego graphs both are remain same. The Fig. 9 shows that the Input and Output messages graphs are same; from this view also we can proof our technique. In Table II shows the computation time of Stego and Message generation and graph shows in Fig. 12. To observe the computation time it is proved that the receiver side message generation system is faster than sender side stego generation system.

Comparison of presented steganography appliance with other existing's are arguing in Table III.

TABLE III. COMPARISON WITH OTHER TEXT STEGANOGRAPHY METHODS

Method Name	Text Steganography by Changing Words Spelling. [9]	Text Steganography by Inter-word Spacing and Inter paragraph Spacing Approach. [10]	Text Steganography by Using Letter Points and Extensions [11]	Proposed Text Steganography
Details of the Method:	In this method the author proposed a method for embedding the secret message by placing the US words for hiding the bit 0 and	In this method, the lines or paragraph of the text are vertically shifted to some degree (for example, each line shifts 1/300 inch up or down) or the words of any	In this method the Arabic language is used to embed any secret message by using the pointed letter to hold 1 and	In this method the universal language is used to embed any secret message by making

	UK words for hiding the bit 1.	line are shifted horizontally and information is hidden by creating a unique shape of the text.	un pointed letters to hold 0	some changes in some of the handwritten letters to hold 00,01,10,11. A quantum approach has been used to increase the level of security.
No of Embedding Bits:	single(0 and 1)	single(0 and 1)	single(0 and 1)	double(0 0,01,10,11)
Changes Occurred:	In Word(US for 0,UK for 1)	In Lines, Word or Paragraph.(one space for 0,two space for 1)	In Letter(point ed letter for 0,unpointed letter for 1)	In Letter (changing the letter pattern)
Embedding Capacity :	The embedding capacity of this method is the lowest compared to other 4 methods because it used a whole word to embed bit 0 or bit 1.	Greater than Method 1 but lesser than Method 3,Method 5 because here increasing the white spaces embedding capacity can be increased but this increasing can also be done at some extent. Otherwise it will be easy to trace the changes made in the text.	Greater than Method 1 and Method 2 but lesser than Method 4 and Method 5 because it changes a single letter to embedding a bit 0 or bit 1.	Greater than the previous three method because one change of letter embed two bits simultaneously.
Similarity Measure :	Not Applicable	Not Applicable	Not Applicable	0.99

VI. CONCLUSIONS

The above contribution totally based on text steganography. Here the authors have used the approach by handwritten numeric character of universal Indian Regional Languages. The quantum truth table mapping technique also used to increase the security. This property generates the

stego text with minimum degradation. Here with the help of Mathematical function and user's entered Passkey the author extend the security level in view of cryptography also along with Steganography technique. The lengths of both the cover as well as stego are same and this can established that the method can avoid steganalysis. The result shows that the performance of the technique is satisfactorily. In future the author can be extended this work in biometric security study.

REFERENCES

- [1] Fabien A.P. Petitcolas, Ross J. Anderson, Markus G. Kuhn: Information Hiding—A Survey, Proceedings of the IEEE, Vol. 87, No. 7, July 1999, pp. 1062-1078, ISSN 0018-9219.
- [2] Ross J. Anderson. and Fabien A.P.Petitcolas. On the limits of steganography. IEEE Journal on Selected Areas in Communications (J-SAC), Special Issue on Copyright and Privacy Protection, 16:474–481, 1998.
- [3] J. Gea-Banacloche. Journal of Mathematical Physics, pages 43, 4531, 2002.
- [4] S. Natori. Quantum computation and information. Topics in Applied Physics(Springer, Berlin/Heidelberg), 102:235–240, 2006.
- [5] K. Martin. Lecture Notes in Computer Science, pages 4567, 32, 2008.
- [6] M. Curty and D. J. Santos. 2nd Bielefeld Workshop on Quantum Information and Complexity, 2000.
- [7] Nielsen, Michael A. & Chuang, Isaac L. (2000). Quantum Computation and Quantum Information. Cambridge University Press. ISBN 0-521-63235-8.
- [8] Krista Bennett (2004). "Linguistic Steganography: Survey, Analysis, and Robustness Concerns for Hiding Information in Text". CERIAS TR 2004-13.
- [9] M. Shirali-Shahreza, "Text Steganography by Changing Words Spelling". 10th International Conference on Advanced Communication Technology, 2008. ICACT 2008. (Volume:3). Page(s): 1912 – 1913, ISSN : 1738-9445, Conference Location : Gangwon-Do, Date of Conference: 17-20 Feb. 2008, Publisher: IEEE.
- [10] Lip Yee Por, Kok Onn Chee, Tan Fong Ang and Delina Beh. "An enhanced embedding method using inter-sentence, inter-word, end-of-line and inter-paragraph spacing", International Journal of the Physical Sciences. Vol. 6(36), pp. 8130 - 8142, 30 December, 2011. ISSN 1992 - 1950 ©2011 Academic Journals.
- [11] S. Khan, B. Abhijitha, R. Sankineni, B. Sunil. "Polish text steganography method using letter points and extension", IEEE International Conference on Electrical, Computer and Communication Technologies (ICECCT), 2015. Date of Conference: 5-7 March 2015, Page(s): 1 – 5, Print ISBN: 978-1-4799-6084-2, Conference Location : Coimbatore, Publisher: IEEE.