
FIG. A1 — Three phases

Where design-time declaration becomes runtime enforcement

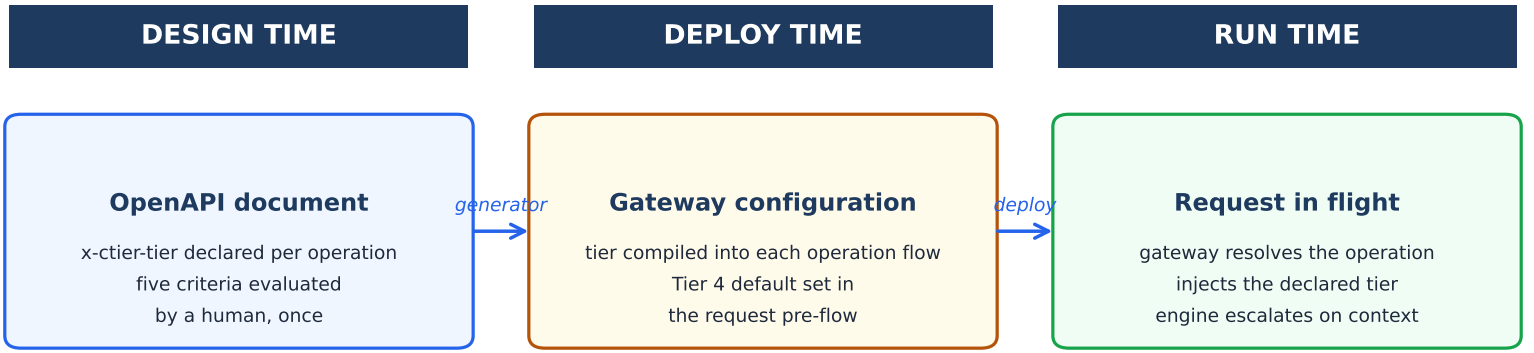

The declared tier is a floor. Runtime adjustment is unidirectional.

Why the assignment is compiled at deploy time

No second router

The gateway already resolves which operation matched. An engine that re-derived it would be a second routing implementation capable of silent disagreement. The possibility is removed rather than reduced.

One artefact

The assignment travels in the generated configuration. C12 is governed-set coverage; binding that assignment to the composition is C13. No separate governance document is loaded at request time.


Fail-closed is structural

An unclassified operation receives no override and inherits Tier 4 — not because a rule enforces it, but because the absence of a policy produces it. The safe default is the default.

Per-gateway difference lives entirely in the generator. The engine receives a resolved tier over one uniform interface and never learns which gateway called it.

FIG. A2 — Apigee policy execution order

How the declared tier is injected, and why unclassified operations fail closed

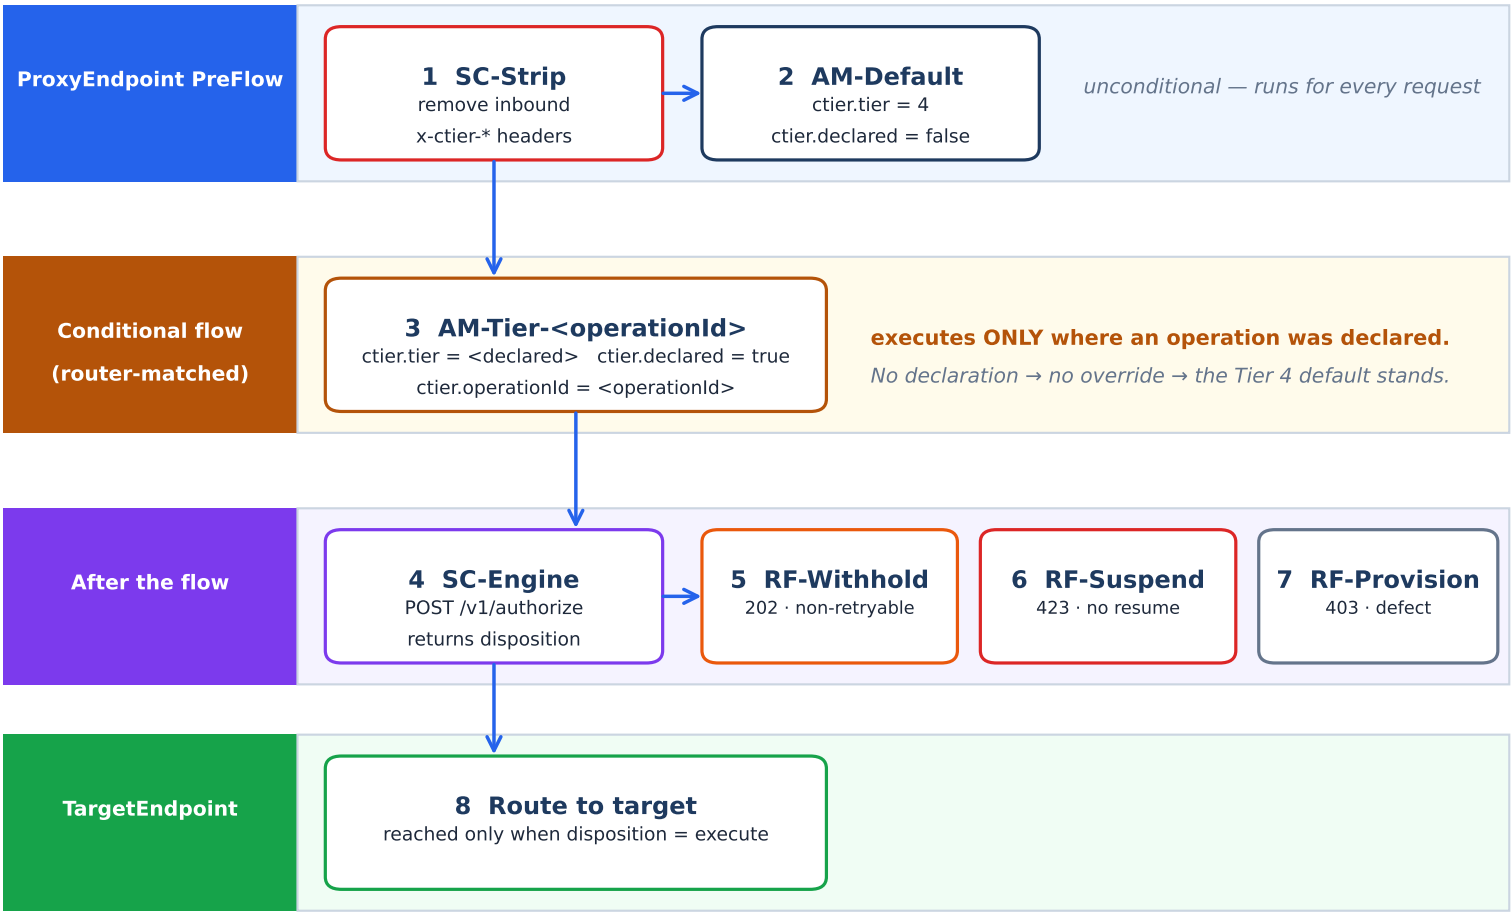

Apigee has no native ext_authz equivalent; ServiceCallout executes in the request path and populates flow variables that subsequent conditional policies branch on. On callout timeout the proxy fails closed.

FIG. A3 — Trust boundary

A tier asserted by the caller is never honoured


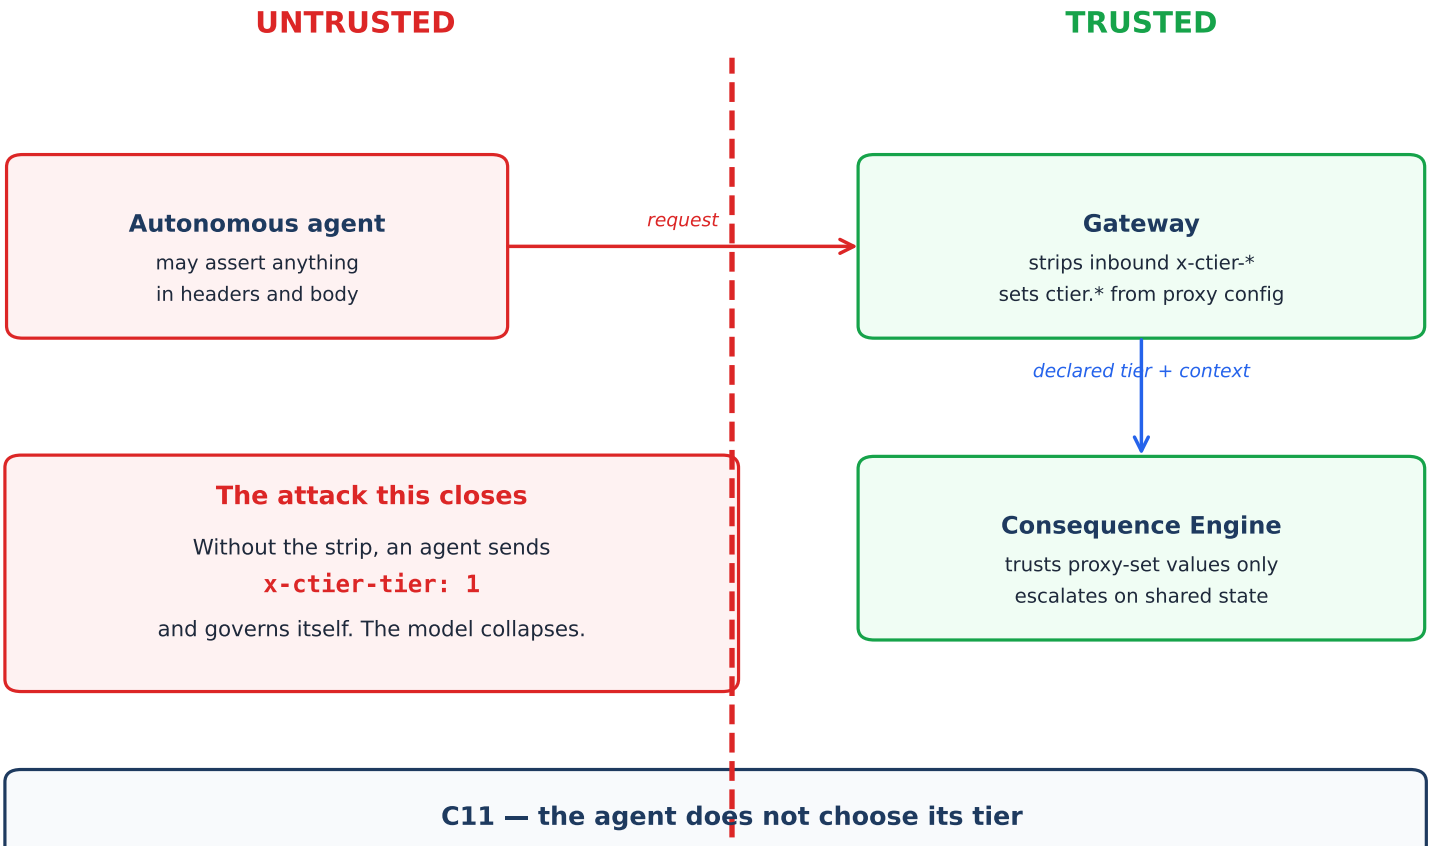


FIG. A4 — Tier 3, out-of-band approval


No component blocks on human input

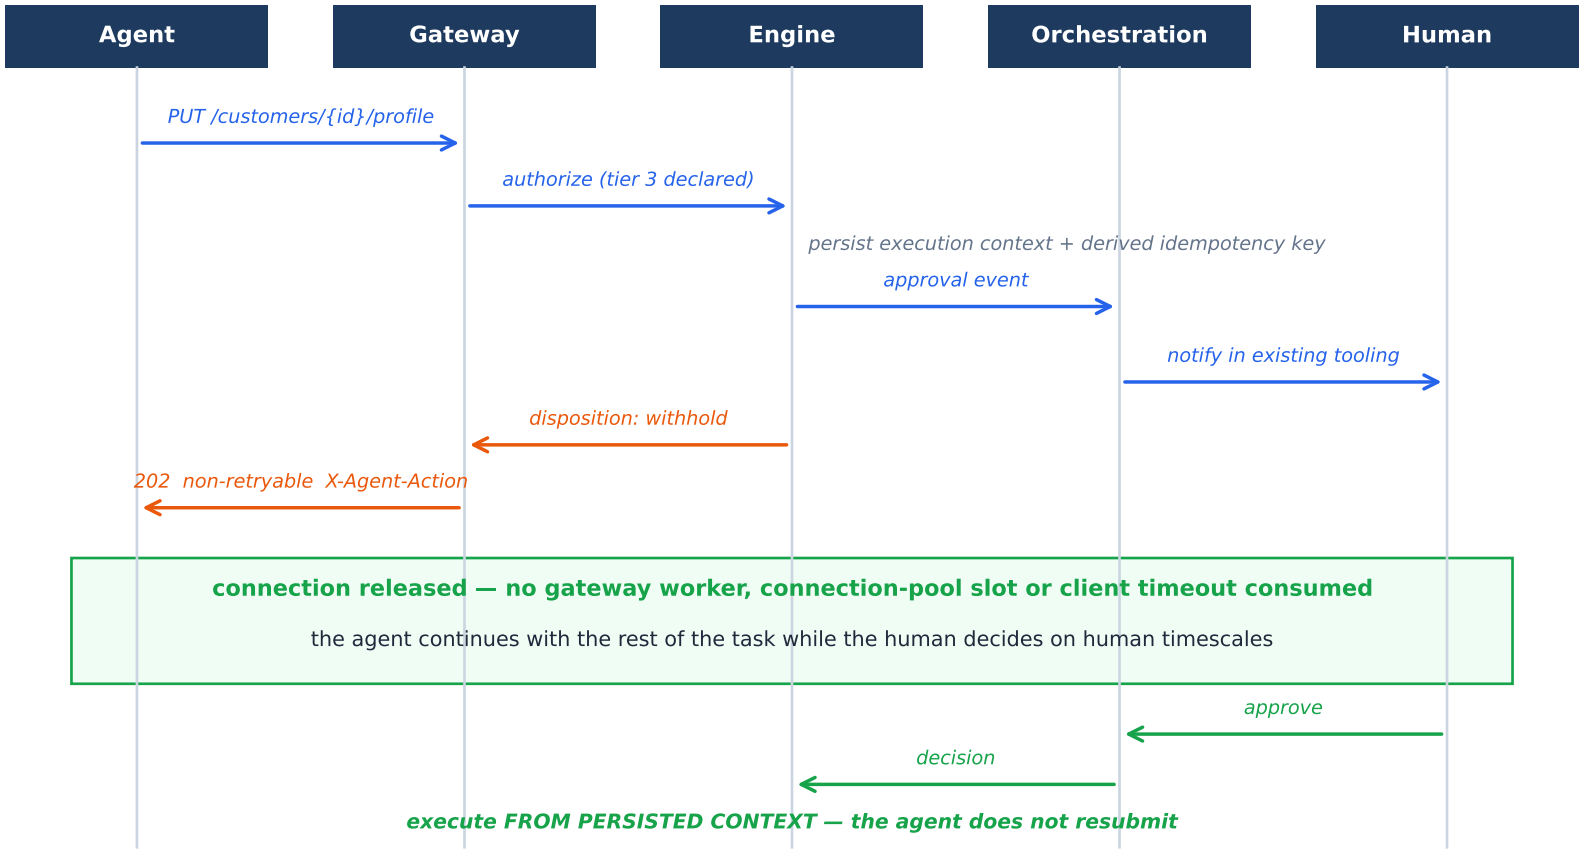

The operation executed is byte-identical to the operation described in the event the reviewer decided upon.
An agent employing a planning model may reach a different formulation between the withholding and the release; resubmission would mean one payload was approved and another executed.

FIG. A5 — Tier 4, no execute under the agent

C9 — the agent is removed from the path; a human performs the action

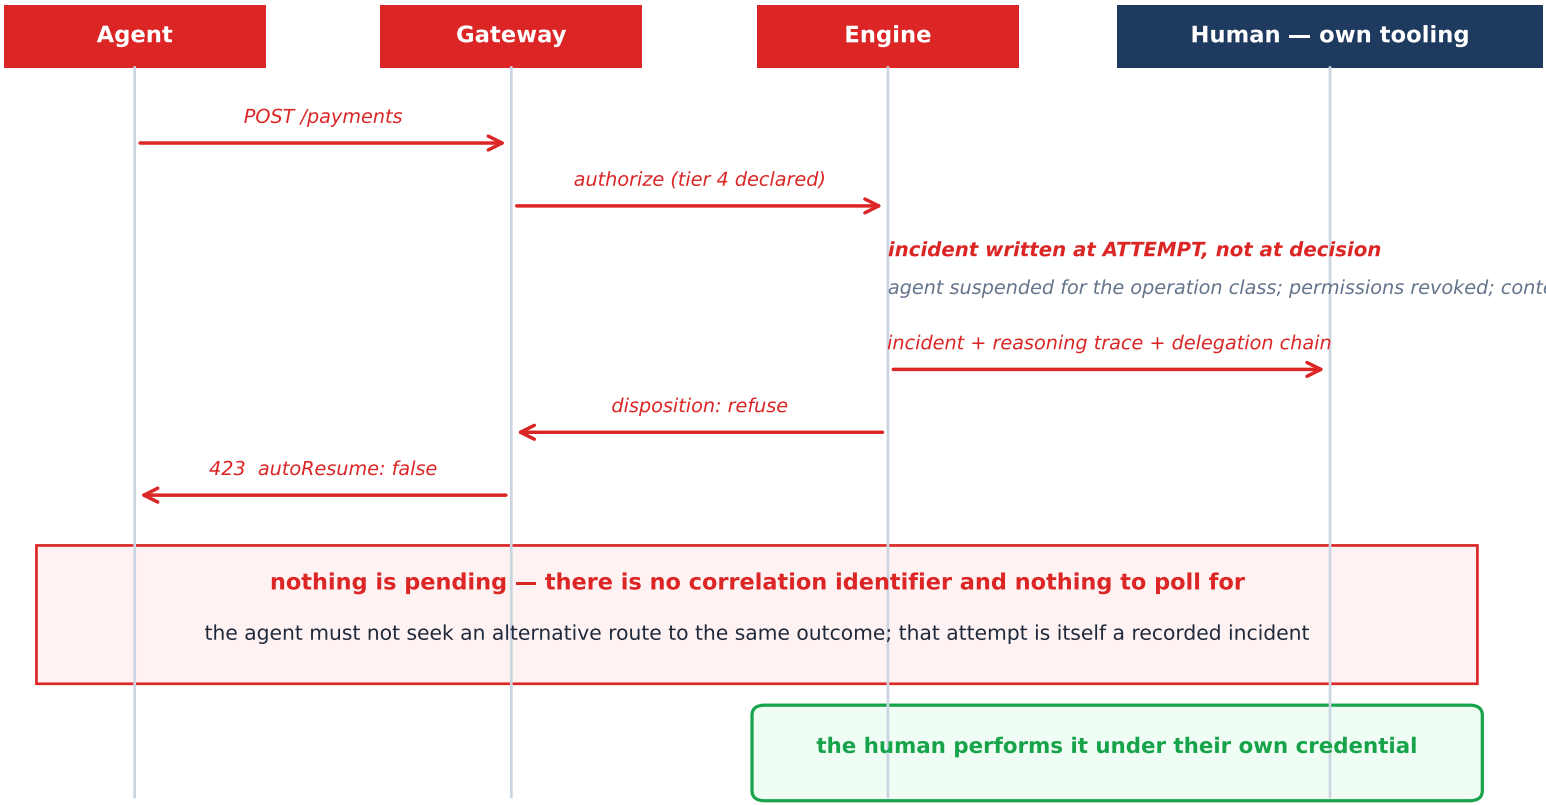


No state transition exists by which a Tier 4 operation enters an executing state under the agent's identity.

An agent repeatedly attempting a Tier 4 operation is a recorded signal even though nothing executed.

FIG. A6 — Deployment topology

The engine is stateless; the generator runs in CI and produces a versioned artifact

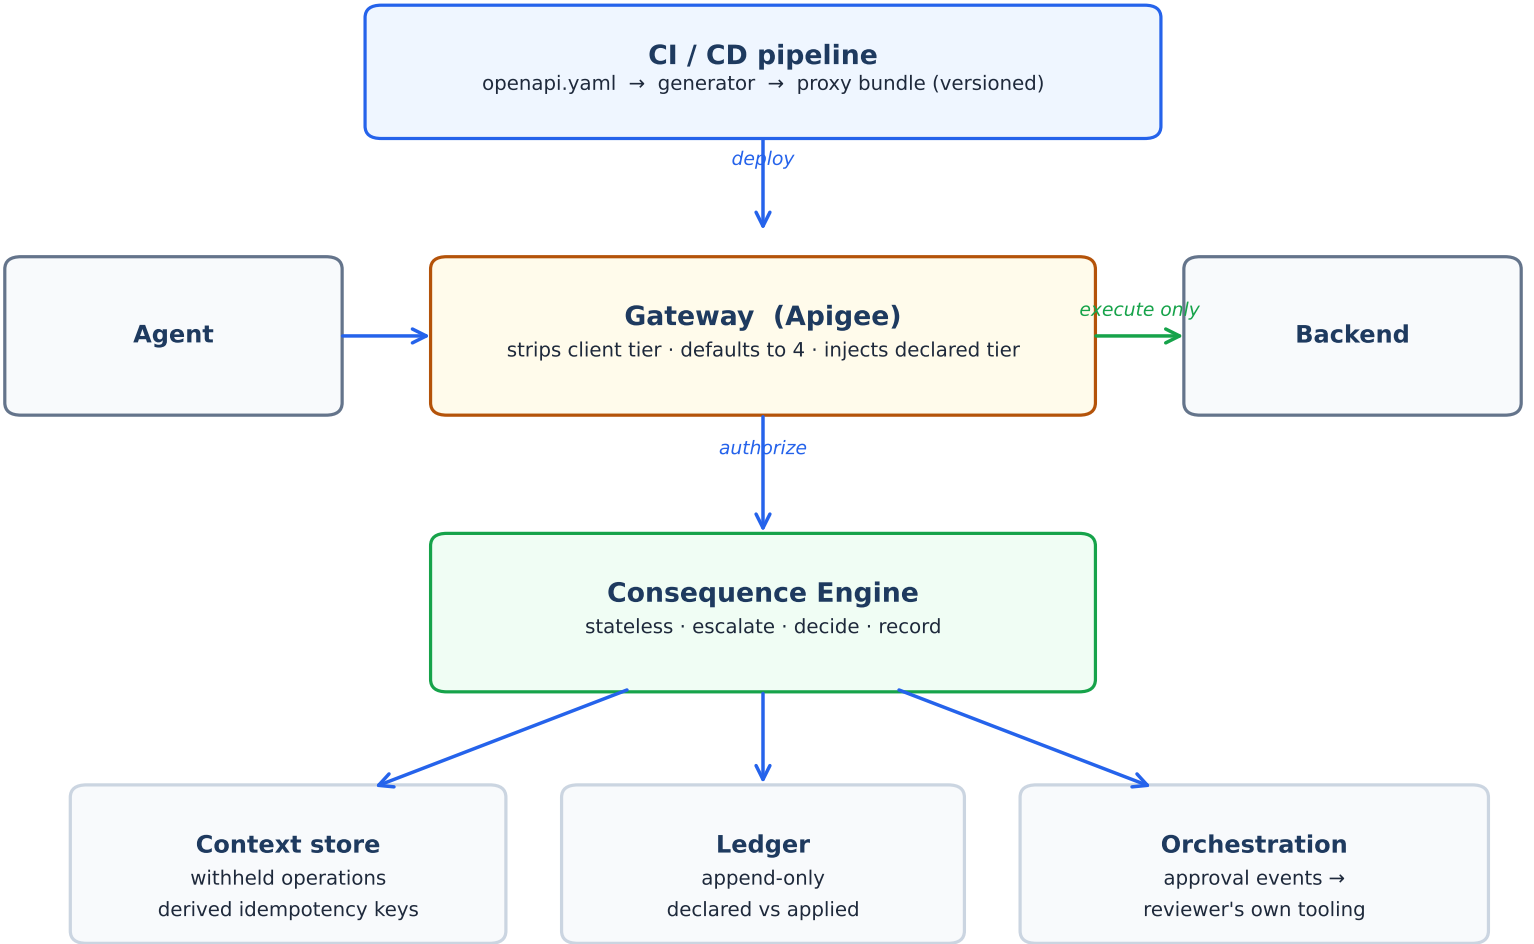

All vendor-specific work is in the generator. Swapping Apigee for Envoy, Kong or APIM changes the generator target only — the engine, the contracts and the conformance requirements are unchanged.