

EIOPA RISK-FREE CURVE APRIL-23 RECALCULATION

The risk-free curve is one of the principal inputs into an economic scenario generator. This notebook recalculates the risk-free curve using the parameters that are claimed to be used. The European Insurance and Occupational Pensions Authority (EIOPA) publishes their own yield curve prediction. To do this they use the Smith & Wilson algorithm.

Summary

The goal of this test is to replicate the EIOPA yield curve. This test will use the methodology that EIOPA claims it is using and the calibration vector that they publish. If the test is passed, the user can be more confident, that EIOPA risk free rate (RFR) curve was generated using the described methodology/calibration and that the process was implemented correctly.

Table of Contents

1. [Note on Smith & Wilson algorithm](#)
2. [Data requirements](#)
3. [Success criteria](#)
4. [External dependencies](#)
5. [Calibration parameters and calibration vector provided by EIOPA](#)
6. [Smith & Wilson calculation functions](#)
7. [Generation of the risk-free curve](#)
8. [Test 1; Comparison test](#)
9. [Test 1; Success criteria](#)
10. [Test 1; Comparison test](#)
11. [Conclusion](#)

Note on Smith & Wilson algorithm

To replicate the calculations, this example uses a modified Smith&Wilson implementation (The original implementation is available on [GitHub](#):

- [Python](#)
- [Matlab](#)
- [JavaScript](#)

Limitations of the implementation

Current implementation only looks at a single currency and with/without Volatility Adjustment (VA). The day count convention assumes that each year has the same number of days.

Data requirements

This script contains the EIOPA risk-free rate publication for April 2023. The publication can be found on the [EIOPA RFR website](#).

The observed maturities `M_Obs` and the calibrated vector `Qb` can be found in the Excel sheet `EIOPA_RFR_20230430_Qb_SW.xlsx`.

The target maturities (`T_Obs`), the additional parameters (`UFR` and `alpha`), and the given curve can be found in the Excel `EIOPA_RFR_20230430_Term_Structures.xlsx`, sheet `RFR_spot_no_VA` if the test looks at the curve without the Volatility Adjustment and the sheet `RFR_spot_with_VA` if the test looks at the curve with the Volatility Adjustment.

[Back to the top](#)

Success criteria

The following success criteria is defined:

- Maximum difference between the calculated curve and the one provided by EIOPA is less than 0.1 bps
- Average difference between the calculated curve and the one provided by EIOPA is less than 0.05 bps

In [664...]

```
test_statistics_max_diff_in_bps = 0.1
test_statistics_average_diff_in_bps = 0.05
```

The success function is called at the end of the test to confirm if the success criteria have been met.

In [665...]

```
def SuccessTest(TestStatistics, threshold_max, threshold_mean):
    out1 = False
    out2 = False
    if max(TestStatistics) < threshold_max:
        print("Test passed")
        out1 = True
    else:
        print("Test failed")

    if np.mean(TestStatistics) < threshold_mean:
        print("Test passed")
        out2 = True
    else:
        print("Test failed")
    return [out1, out2]
```

[Back to the top](#)

External dependencies

This implementation uses three well established Python packages widely used in the financial industry. Pandas (<https://pandas.pydata.org/docs/>), Numpy (<https://numpy.org/doc/>), and Matplotlib (<https://matplotlib.org/stable/index.html>)

In [666...]

```
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import matplotlib.ticker as mtick
%matplotlib notebook
pd.options.display.max_rows = 150
```

Importing data

In [667...]

```
selected_param_file = 'Param_VA.csv'
selected_curves_file = 'Curves_VA.csv'

#selected_param_file = 'Param_no_VA.csv'
#selected_curves_file = 'Curves_no_VA.csv'
```

In [668...]

```
param_raw = pd.read_csv(selected_param_file, sep=',', index_col=0)
```

Parameter input

Parameters sheet

In [669...]

```
param_raw.head()
```

Out[669...]

	Euro_Maturities	Euro_Values	Austria_Maturities	Austria_Values	Belgium_Maturities	Be
Country						
Coupon_freq	1.000000	1.000000	1.000000	1.000000	1.000000	1.000000
LLP	20.000000	20.000000	20.000000	20.000000	20.000000	20.000000
Convergence	40.000000	40.000000	40.000000	40.000000	40.000000	40.000000
UFR	3.450000	3.450000	3.450000	3.450000	3.450000	3.450000
alpha	0.111906	0.111906	0.111906	0.111906	0.111906	0.111906

5 rows × 106 columns

The country selected is:

In [670...]

```
country = "United Kingdom"
```

In [671...]

```
maturities_country_raw = param_raw.loc[:,country+"_Maturities"].iloc[6:]
param_country_raw = param_raw.loc[:,country + "_Values"].iloc[6:]
extra_param = param_raw.loc[:,country + "_Values"].iloc[:6]
```

Extra parameters

Smith-Wilson calibration parameters

In [672...]

```
extra_param
```

Out[672...]

Country	
Coupon_freq	1.000000
LLP	50.000000
Convergence	40.000000
UFR	3.450000
alpha	0.094267
CRA	0.000000

Name: United Kingdom_Values, dtype: float64

In [673...]

```
relevant_positions = pd.notna(maturities_country_raw.values)
```

In [674...]

```
maturities_country = maturities_country_raw.iloc[relevant_positions]
```

Maturity vector

Vector of maturities used in the calibration

In [675...]

```
maturities_country.head(15)
```

Out[675...]

```
Country
1      1.0
2      2.0
3      3.0
4      4.0
5      5.0
6      6.0
7      7.0
8      8.0
9      9.0
10     10.0
11     11.0
12     12.0
13     13.0
14     14.0
15     15.0
Name: United Kingdom_Maturities, dtype: float64
```

In [676...]

```
Qb = param_country_raw.iloc[relevant_positions]
```

Calibration vector

Vector **Qb** provided as input

In [677...]

```
Qb
```

Out[677...]

```
Country
1      -16.271194
2       3.877381
3       2.816187
4      -1.659806
5       0.251827
6       0.328745
7      -0.490860
8       0.040324
9       2.029252
10      -0.798840
11      -0.013811
12      -0.145850
13      -0.007012
14      -0.006793
15      -0.209108
16       0.002562
```

```
17      0.002279
18      0.002138
19      0.002076
20      0.156525
21     -0.004547
22     -0.004119
23     -0.003827
24     -0.003511
25     -0.003212
26     -0.002911
27     -0.002633
28     -0.002281
29     -0.002209
30     -0.389391
31      0.014000
32      0.012967
33      0.012303
34      0.011604
35      0.010971
36      0.010374
37      0.009815
38      0.009289
39      0.008796
40      0.008325
41      0.007900
42      0.007422
43      0.007249
44      0.006033
45      0.008796
46     -0.003222
47      0.040021
48     -0.123021
49      0.484246
50     -0.250031
Name: United Kingdom Values, dtype: float64
```

In [678...]

```
curve_raw = pd.read_csv(selected_curves_file, sep=',', index_col=0)
```

In [679...]

```
curve_country = curve_raw.loc[:, country]
```

[Back to the top](#)

Calibration parameters and calibration vector provided by EIOPA

In [680...]

```
# Maturity of observations:  
M_Obs = np.transpose(np.array(maturities_country.values))  
  
# Ultimate forward rate ufr represents the rate to which the curve will converge  
ufr = extra_param.iloc[3]/100  
  
# Convergence speed parameter alpha controls the speed at which the curve converges to the ultimate forward rate  
alpha = extra_param.iloc[4]  
  
# For which maturities do we want the SW algorithm to calculate the rates. In this case all maturities  
M_Target = np.transpose(np.arange(1,151))  
  
# Qb calibration vector published by EIOPA for the curve calibration:  
Qb = np.transpose(np.array(Qb.values))
```

[Back to the top](#)

Smith & Wilson calculation functions

In this step, the independent version of the Smith&Wilson algorithm is implemented. To do this, two functions are taken from the publicly available repository and modified to accept the product of `Q*b` instead of the calibration vector `b`.

In [681...]

```

def SWExtrapolate(M_Target, M_Obs, Qb, ufr, alpha):
    # SWEXTRAPOLATE Interpolate or/and extrapolate rates for targeted maturities using a
    # out = SWExtrapolate(M_Target, M_Obs, Qb, ufr, alpha) calculates the rates for maturities
    #
    # Arguments:
    #     M_Target = k x 1 ndarray. Each element represents a bond maturity of interest. Ex. M_Target = [1; 2; 3]
    #     M_Obs = n x 1 ndarray. Observed bond maturities used for calibrating the calibration vector.
    #     Qb = n x 1 ndarray. Calibration vector calculated on observed bonds.
    #     ufr = 1 x 1 floating number. Representing the ultimate forward rate.
    #         Ex. ufr = 0.042
    #     alpha = 1 x 1 floating number. Representing the convergence speed parameter of the
    #
    #
    # Returns:
    #     k x 1 ndarray. Represents the targeted rates for a zero-coupon bond. Each rate is
    #
    # For more information see https://www.eiopa.europa.eu/sites/default/files/risk_free_curve.ipynb

def SWHeart(u, v, alpha):
    # SWHEART Calculate the heart of the Wilson function.
    # H = SWHeart(u, v, alpha) calculates the matrix H (Heart of the Wilson function) for maturities specified by vectors u and v. The formula is
    # taken from the EIOPA technical specifications paragraph 132.
    #
    # Arguments:
    #     u = n_1 x 1 vector of maturities. Ex. u = [1; 3]
    #     v = n_2 x 1 vector of maturities. Ex. v = [1; 2; 3; 5]
    #     alpha = 1 x 1 floating number representing the convergence speed parameter of the
    #
    # Returns:
    #     n_1 x n_2 matrix representing the Heart of the Wilson function for selected
    #
    # For more information see https://www.eiopa.europa.eu/sites/default/files/risk_free_curve.ipynb

    u_Mat = np.tile(u, [v.size, 1]).transpose()
    v_Mat = np.tile(v, [u.size, 1])
    return 0.5 * (alpha * (u_Mat + v_Mat) + np.exp(-alpha * (u_Mat + v_Mat)) - alpha)

H = SWHeart(M_Target, M_Obs, alpha) # Heart of the Wilson function from paragraph 132
p = np.exp(-np.log(1+ufr)* M_Target) + np.diag(np.exp(-np.log(1+ufr) * M_Target))
return p ** (-1/ M_Target) -1 # Convert obtained prices to rates and return price

```

[Back to the top](#)

Generation of the risk-free curve

The observed maturities, target maturities, and the model parameters provided by EIOPA are used to generate the target curve.

In [682...]

```

r_Target = SWExtrapolate(M_Target,M_Obs, Qb, ufr, alpha)
r_Target = pd.DataFrame(r_Target,columns=['Recalculated rates'])

```

Yield curve calculated

Yield curve calculated using the calibration vector **Qb**

In [683...]

```
r_Target.head(15)
```

Out[683...]

Recalculated rates

0	0.050095
1	0.046896
2	0.044485
3	0.042800
4	0.041427
5	0.040317
6	0.039453
7	0.038808
8	0.038393
9	0.038190
10	0.038087
11	0.038026
12	0.037979
13	0.037930
14	0.037872

[Back to the top](#)

Test 1; Comparison test

Comparison of the calculated yield curve with the yield curve provided by EIOPA. The test is passed if the success criteria is reached.

The provided yield curve can be found in file *EIOPA_RFR_20230430_Term_Structures.xlsx*, sheet *RFR_spot_no_VA* if the test looks at the curve without the Volatility Adjustment and the sheet *RFR_spot_with_VA* if the test looks at the curve with the Volatility Adjustment.

In [684...]

```
target_curve = np.transpose(np.array(curve_country.values))
```

This implementation looks at two kinds of test statistics. The average deviation and the maximum deviation.

The average deviation is defined as:

$$S_{AVERAGE} = \frac{1}{T} \sum_{t=0}^T |r_{EIOPA}(t) - r_{EST}(t)|$$

The maximum deviation is defined as:

$$S_{MAX} = \max_t |r_{EIOPA}(t) - r_{EST}(t)|$$

Where T is the maximum maturity available.

The average difference test is successful if:

$$S_{AVERAGE} < 0.05bps$$

The maximum difference test is successful if:

$$S_{MAX} < 0.1bps$$

In [685...]

```
target_curve = pd.DataFrame(target_curve, columns=['Given rates'])
```

EIOPA curve provided

Yield curve provided by EIOPA

In [686...]


```
target_curve.head()
```

Out[686...]

	Given rates
0	0.05009
1	0.04690
2	0.04448
3	0.04280
4	0.04143

```
In [687...]:  
x_data_label = range(2023,2023+r_Target.shape[0],1)
```

```
In [688...]:  
fig, ax1 = plt.subplots(1,1)  
ax1.plot(x_data_label, r_Target.values*100, color='tab:blue',label="Calculated")  
ax1.plot(x_data_label, target_curve.values*100, color='tab:orange',label="Provided")  
  
ax1.set_ylabel("yield")  
ax1.set_title('Recalculated & provided yield curve')  
ax1.set_xlabel("time")  
ax1.legend()  
ax1.yaxis.set_major_formatter(mtick.PercentFormatter())  
fig.set_figwidth(6)  
fig.set_figheight(3)  
plt.show()
```

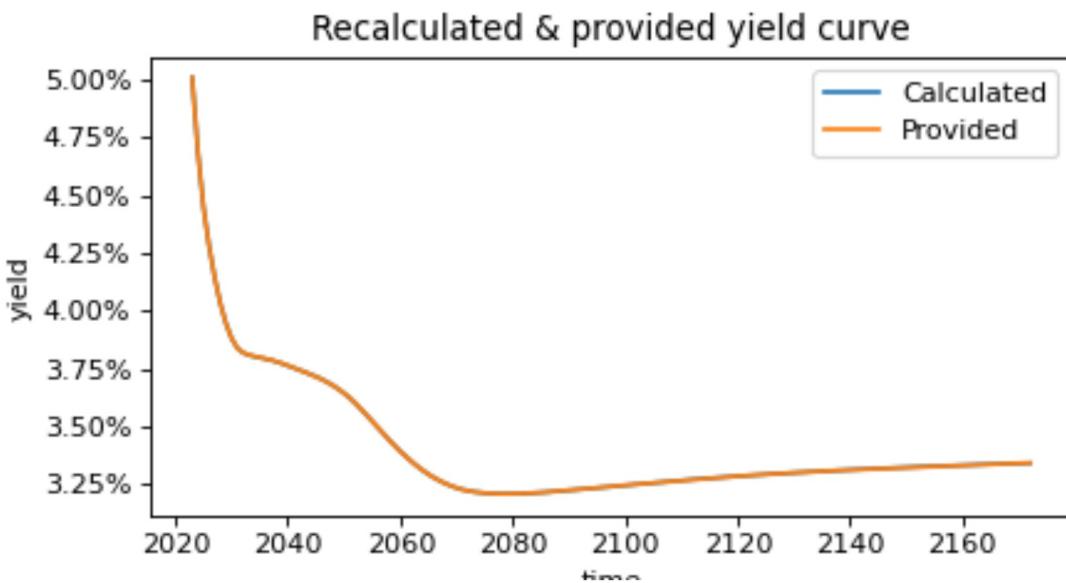

```
In [689...]:  
test_statistics_bdp = pd.DataFrame(abs(r_Target.values-target_curve.values)*10000, co
```

EIOPA curve comparison

Absolute difference in bps

```
In [690...]:  
test_statistics_bdp.head()
```

```
Out[690...]:  
Abs diff in bps
```

0	0.050000
1	0.044441
2	0.046221
3	0.000136

Abs diff in bps

[Back to the top](#)

Test 1; Success criteria

The successful application of the success criteria marks the completion of the test.


In [691...]

```
result1 = SuccessTest(test_statistics_bdp.values, test_statistics_max_diff_in_bps, tolerance)
```

```
Test passed  
Test passed
```

In [692...]

```
x_data_label = range(2023,2023+r_Target.shape[0],1)  
fig, ax1 = plt.subplots(1,1)  
ax1.plot(x_data_label, test_statistics_bdp, label= "Absolute difference")  
ax1.axhline(y = test_statistics_max_diff_in_bps, color = 'r', linestyle = '--',label='Max allowed diff')  
  
ax1.set_xlabel("time")  
ax1.set_ylabel("Difference (in bps)")  
ax1.set_title('Absolute difference in yield curve')  
ax1.legend()  
fig.set_figwidth(6)  
fig.set_figheight(3)  
  
plt.show()
```

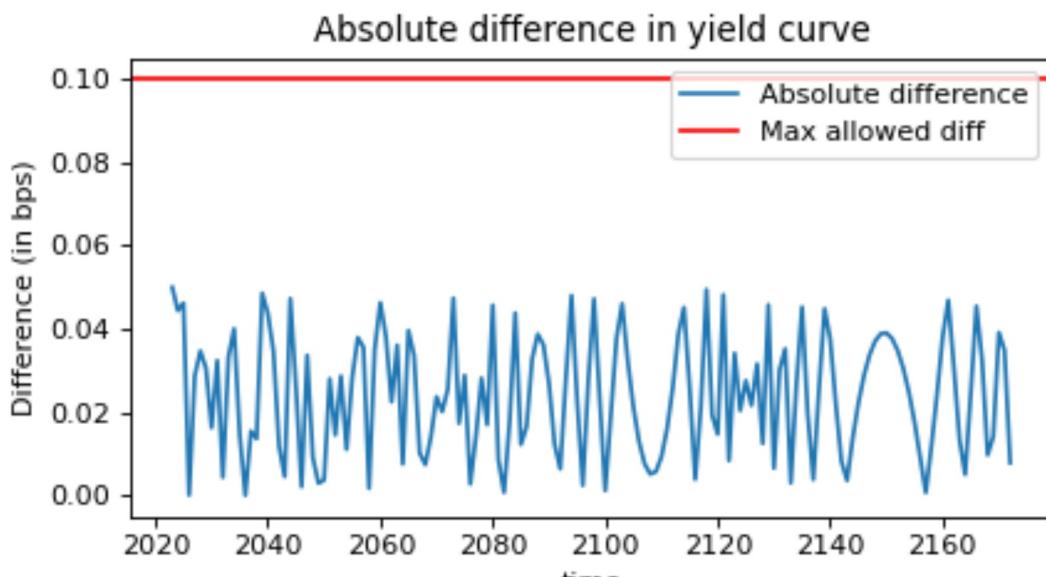

[Back to the top](#)

Conclusion

This test checks the success criteria on the EIOPA curve generated for April 2023. If the tests are passed, it is likely that the curve was generated using the Smith & Wilson algorithm with the calibration vector that was provided in the file *EIOPA_RFR_20230430_Qb_SW.xlsx* and the parameters displayed in the file *EIOPA_RFR_20230430_Term_Structures.xlsx*.

In [693...]

```
pd.DataFrame(data = [result1], columns = ["Mean test", "Max test"], \
              index= ["Provided vs calculated"])
```

Out[693...]

	Mean test	Max test
Provided vs calculated	True	True

Final yield curve

Full yield curve provided by EIOPA in %

In [694...]

```
(curve_country*100).head(150)
```

Out[694...]

Country	
1	5.009
2	4.690
3	4.448
4	4.280
5	4.143
6	4.032
7	3.945
8	3.881
9	3.839
10	3.819
11	3.809
12	3.803
13	3.798
14	3.793
15	3.787
16	3.780
17	3.772
18	3.763
19	3.753
20	3.744
21	3.735
22	3.725
23	3.715
24	3.704
25	3.691
26	3.677
27	3.661
28	3.643

29	3.623
30	3.600
31	3.575
32	3.549
33	3.522
34	3.494
35	3.467
36	3.441
37	3.416
38	3.391
39	3.369
40	3.347
41	3.327
42	3.309
43	3.292
44	3.277
45	3.264
46	3.252
47	3.242
48	3.233
49	3.226
50	3.221
51	3.216
52	3.213
53	3.211
54	3.209
55	3.208
56	3.207
57	3.207
58	3.207
59	3.208
60	3.209
61	3.210
62	3.212
63	3.213
64	3.215
65	3.217
66	3.219
67	3.221
68	3.223
69	3.225
70	3.227
71	3.229
72	3.232
73	3.234
74	3.236
75	3.238
76	3.241
77	3.243
78	3.245
79	3.247
80	3.249
81	3.252
82	3.254
83	3.256
84	3.258
85	3.260
86	3.262
87	3.264

88	3.266
89	3.268
90	3.270
91	3.272
92	3.273
93	3.275
94	3.277
95	3.279
96	3.281
97	3.282
98	3.284
99	3.285
100	3.287
101	3.289
102	3.290
103	3.292
104	3.293
105	3.295
106	3.296
107	3.298
108	3.299
109	3.300
110	3.302
111	3.303
112	3.304
113	3.306
114	3.307
115	3.308
116	3.309
117	3.310
118	3.312
119	3.313
120	3.314
121	3.315
122	3.316
123	3.317
124	3.318
125	3.319
126	3.320
127	3.321
128	3.322
129	3.323
130	3.324
131	3.325
132	3.326
133	3.327
134	3.328
135	3.329
136	3.330
137	3.331
138	3.332
139	3.332
140	3.333
141	3.334
142	3.335
143	3.336
144	3.337
145	3.337
146	3.338

147 3.339
148 3.340
149 3.340
150 3.341