


2D NodeManifold SplitBoundary classification in terms of enum ManifoldType

End points of split boundaries terminating within a model are not manifolds because the Nodes at these points are not duplicated. By contrast, SplitBoundary terminations on the perimeter of a Model have multiplicand nodes.

Note that **since the end points of free-standing SplitBoundaries are not manifolds, they cannot be labelled as such** (can we have a function that returns that label for 2 nodes that are actually the same within an InterFace?

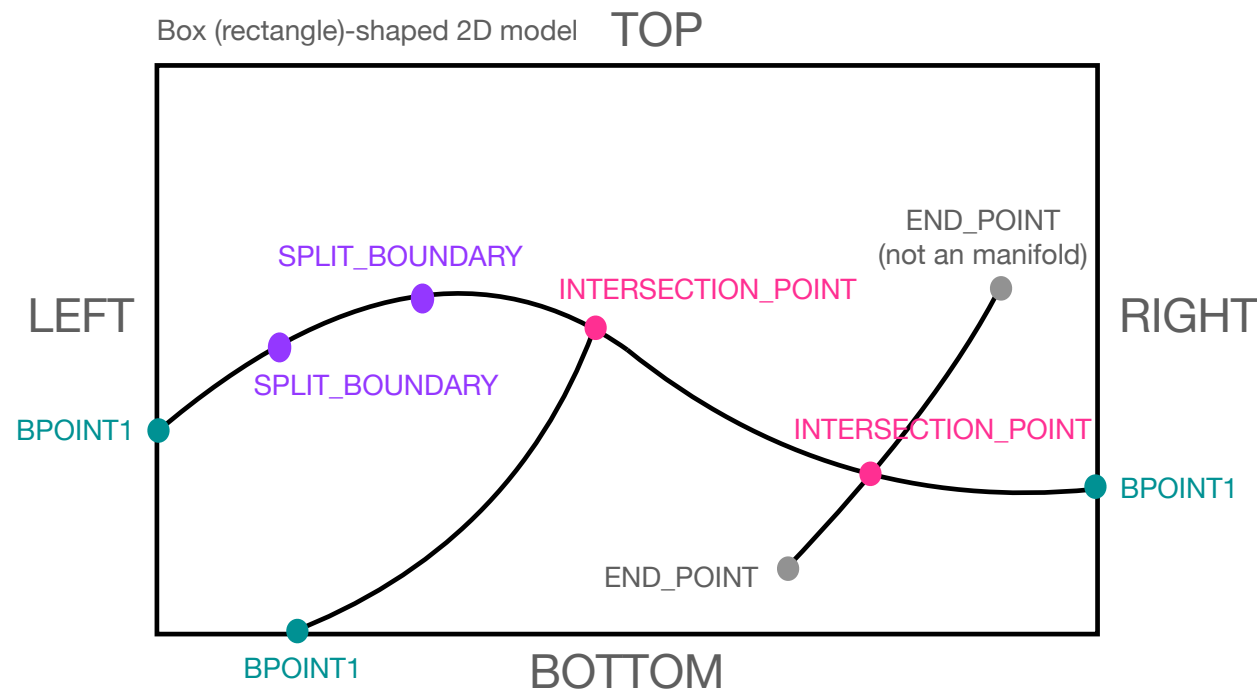

What is missing?

Do we need similar classifiers for normal Node objects to achieve a complete classification?

Using the BOX_BOUNDARY classification scheme, Nodes at the internal boundaries of a mesh are flagged INTERNAL

Figure X. NodeManifold classifiers used to distinguish topologically collocated Nodes within a model.

Since such NodeManifolds are restricted to SplitBoundary end points (2D) / edges (3D), Region or Boundary boundaries are not considered.

3D NodeManifold SplitBoundary classification in terms of enum ManifoldType

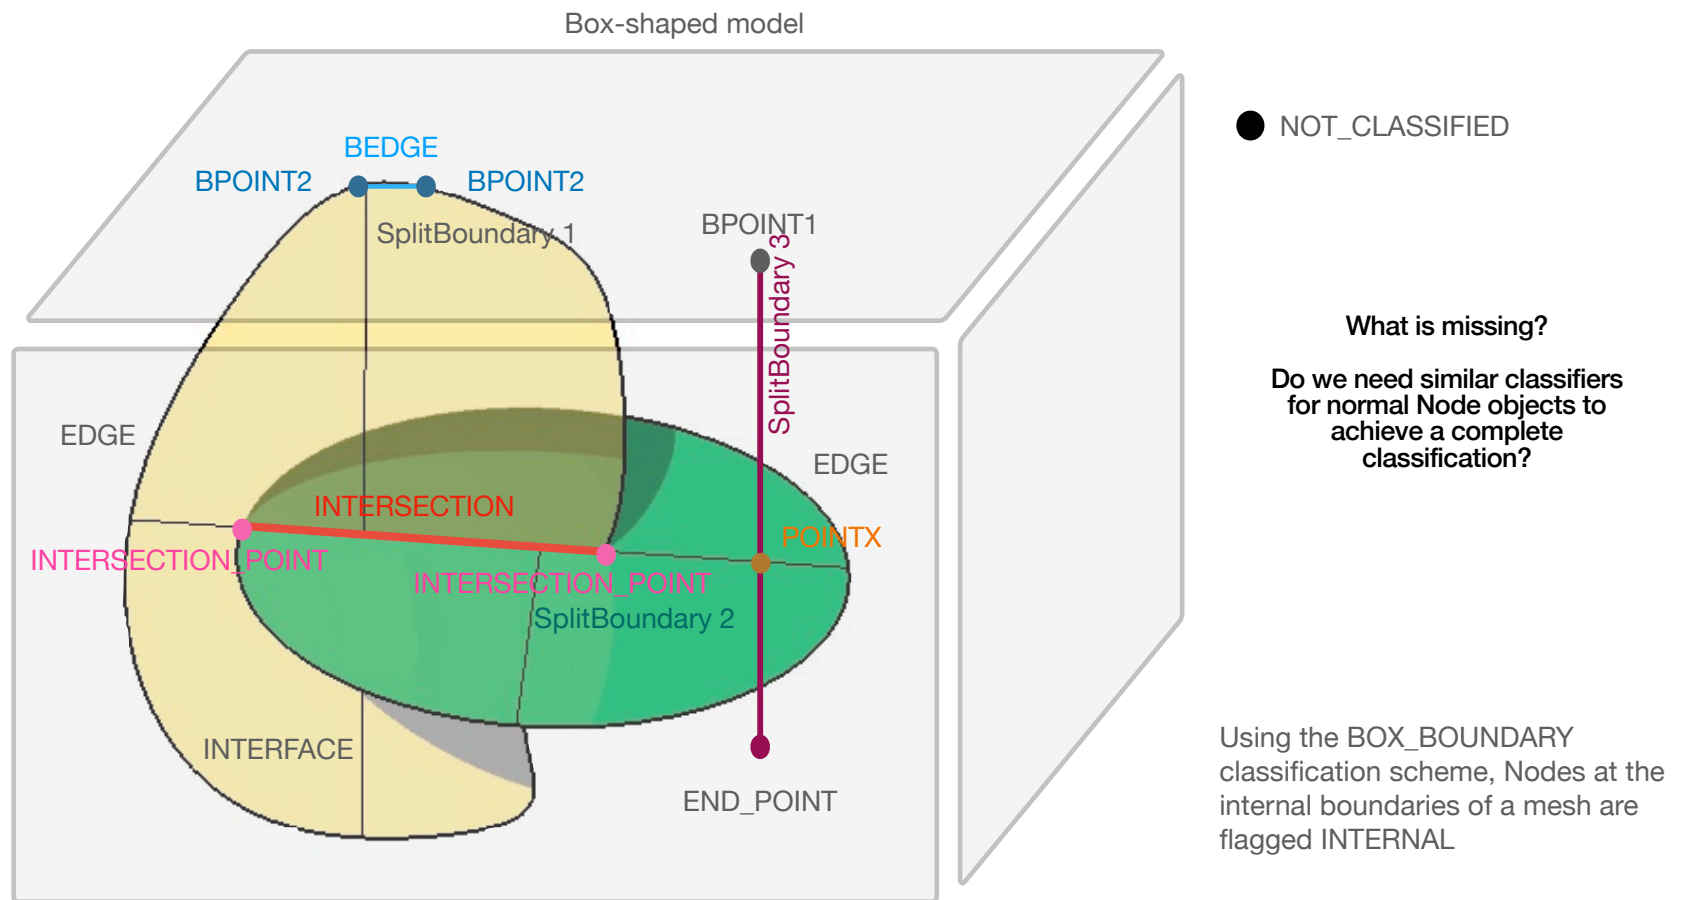


Figure X. NodeManifold classifiers used to distinguish topologically collocated Nodes within a model.

Since NodeManifolds are restricted to SplitBoundaries edges of Boundaries or intersection lines of regions are not considered.