openSUSE Asia Summit 2026
Yogyakarta, October 3 - 4

How To Type Javanese and Kawi Scripts at openSUSE

ꦲꦏ꧀ꦱꦫꦶꦮꦶ ꦕꦼꦫꦩ

Rahman Yusri Aftian

Yogyakarta | 4 October, 2026


718

Language in Indonesia

Source : DjogjaAdventure

9

Script in Unicode

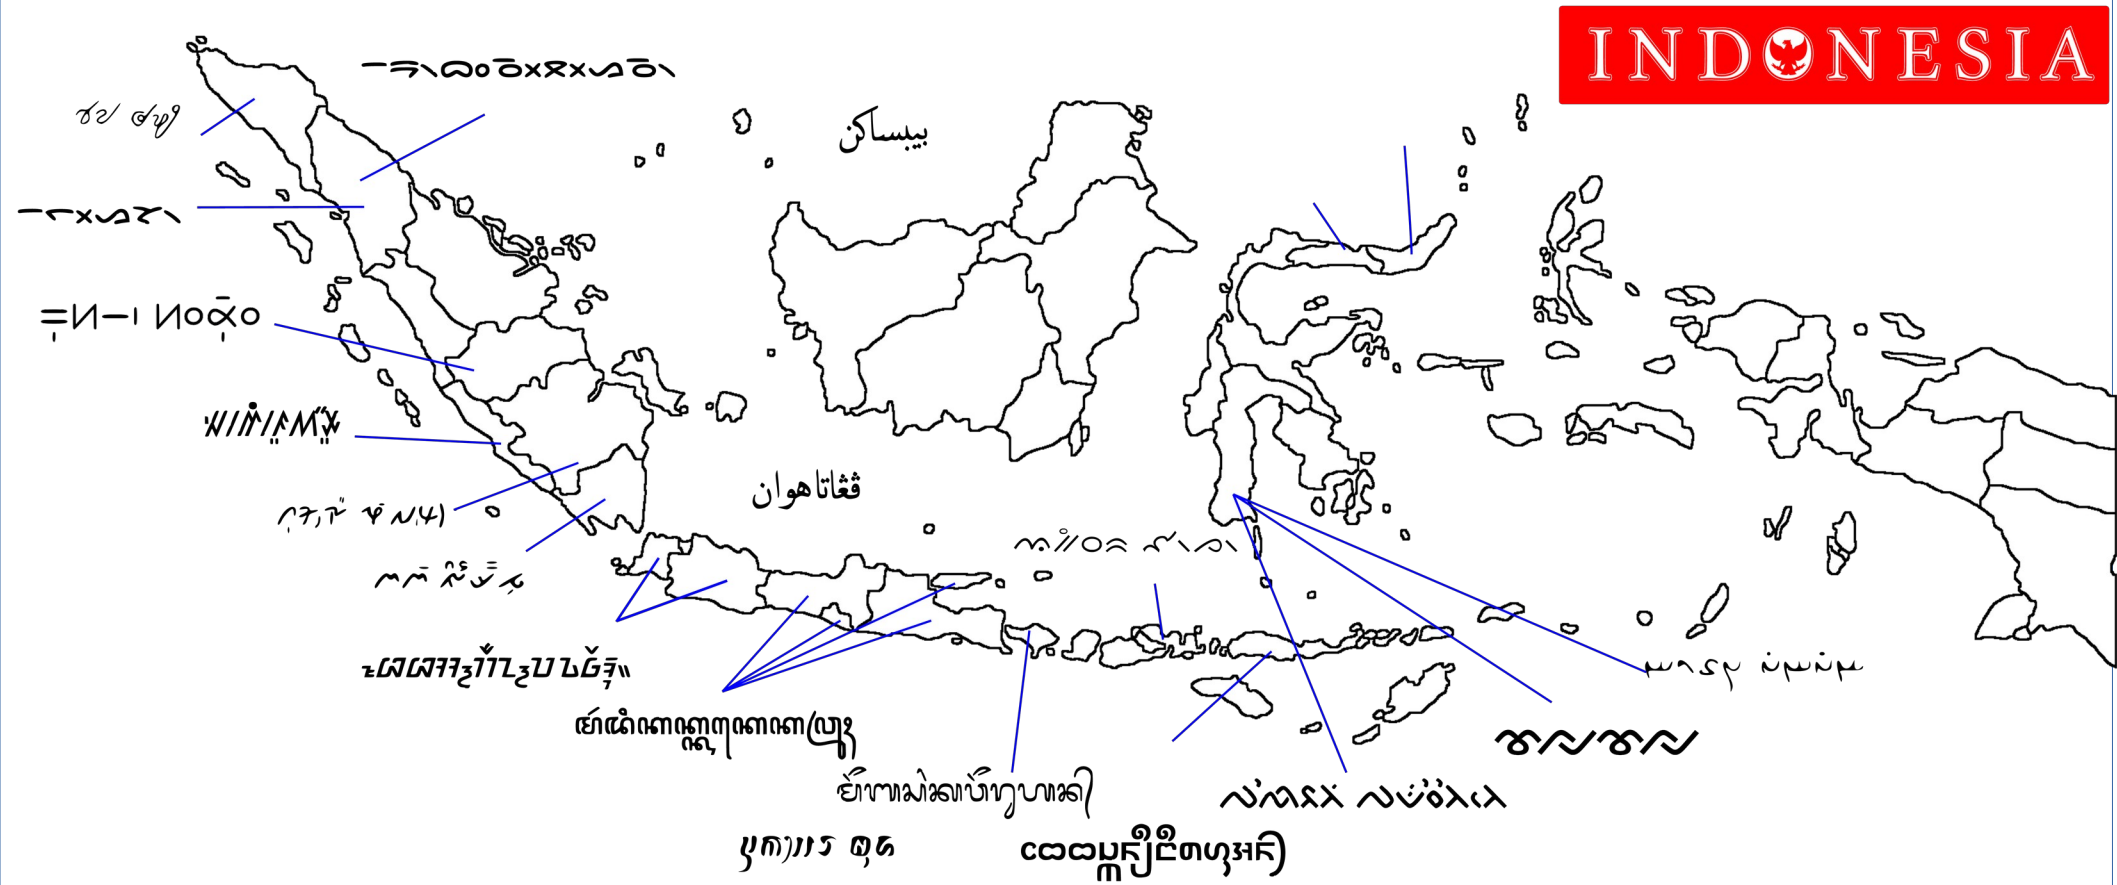

Source : Wikipedia by Benylin

openSUSE Asia Summit 2026
Yogyakarta, October 3 - 4

Javanese Script (Ha Na Ca Ra Ka)

ꦲꦤꦕꦫꦏ



Source : DjogjaAdventure

Javanese[1][2]

Bagan kode resmi Unicode Consortium (PDF)

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
U+A98x	ꦀ	ꦁ	ꦂ	ꦃ	ꦄ	ꦅ	ꦆ	ꦇ	ꦈ	ꦉ	ꦊ	ꦋ	ꦌ	ꦍ	ꦎ	ꦏ
U+A99x	ꦐ	ꦑ	ꦒ	ꦓ	ꦔ	ꦕ	ꦖ	ꦗ	ꦘ	ꦙ	ꦚ	ꦛ	ꦜ	ꦝ	ꦞ	ꦟ
U+A9Ax	ꦠ	ꦡ	ꦢ	ꦣ	ꦤ	ꦥ	ꦦ	ꦧ	ꦨ	ꦩ	ꦪ	ꦫ	ꦬ	ꦭ	ꦮ	ꦯ
U+A9Bx	ꦰ	ꦱ	ꦲ	꦳	ꦴ	ꦵ	ꦶ	ꦷ	ꦸ	ꦹ	ꦺ	ꦻ	ꦼ	ꦽ	ꦾ	ꦿ
U+A9Cx	꧀	꧁	꧂	꧃	꧄	꧅	꧆	꧇	꧈	꧉	꧊	꧋	꧌	꧍		ꧏ
U+A9Dx	꧐	꧑	꧒	꧓	꧔	꧕	꧖	꧗	꧘	꧙					꧚	꧛

Catatan

1. ^ Per Unicode versi 14.0
2. ^ Abu-abu berarti titik kode kosong

openSUSE
Asia Summit 2026
Yogyakarta, October 3 - 4

Javanese[1][2]

Bagan kode resmi Unicode Consortium (PDF)

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
U+A98x	ꦀ	ꦁ	ꦂ	ꦃ	ꦄ	ꦅ	ꦆ	ꦇ	ꦈ	ꦉ	ꦊ	ꦋ	ꦌ	ꦍ	ꦎ	ꦏ
U+A99x	ꦐ	ꦑ	ꦒ	ꦓ	ꦔ	ꦕ	ꦖ	ꦗ	ꦘ	ꦙ	ꦚ	ꦛ	ꦜ	ꦝ	ꦞ	ꦟ
U+A9Ax	ꦠ	ꦡ	ꦢ	ꦣ	ꦤ	ꦥ	ꦦ	ꦧ	ꦨ	ꦩ	ꦪ	ꦫ	ꦬ	ꦭ	ꦮ	ꦯ
U+A9Bx	ꦰ	ꦱ	ꦲ	꦳	ꦴ	ꦵ	ꦶ	ꦷ	ꦸ	ꦹ	ꦺ	ꦻ	ꦼ	ꦽ	ꦾ	ꦿ
U+A9Cx	꧀	꧁	꧂	꧃	꧄	꧅	꧆	꧇	꧈	꧉	꧊	꧋	꧌	꧍		ꧏ
U+A9Dx	꧐	꧑	꧒	꧓	꧔	꧕	꧖	꧗	꧘	꧙					꧚	꧛

Catatan

1. ^ Per Unicode versi 14.0
2. ^ Abu-abu berarti titik kode kosong

openSUSE Asia Summit 2026
Yogyakarta, October 3 - 4

ꦲꦤꦕꦫꦏ


Javanese script (Javanese: ꦲꦤꦕꦫꦏ, romanized: aksara Jawa), also known as hanacaraka, carakan, and dentawyanjana, is one of Indonesia's traditional scripts developed on the island of Java.

Javanese Unicode

The Unicode block for Javanese is U+A980–U+A9DF.


There are 91 code points for Javanese script: 53 letters, 19 punctuation marks, 10 numbers, and 9 vowels


Install font noto-sans-javanese or tuladha-jejeg-fonts

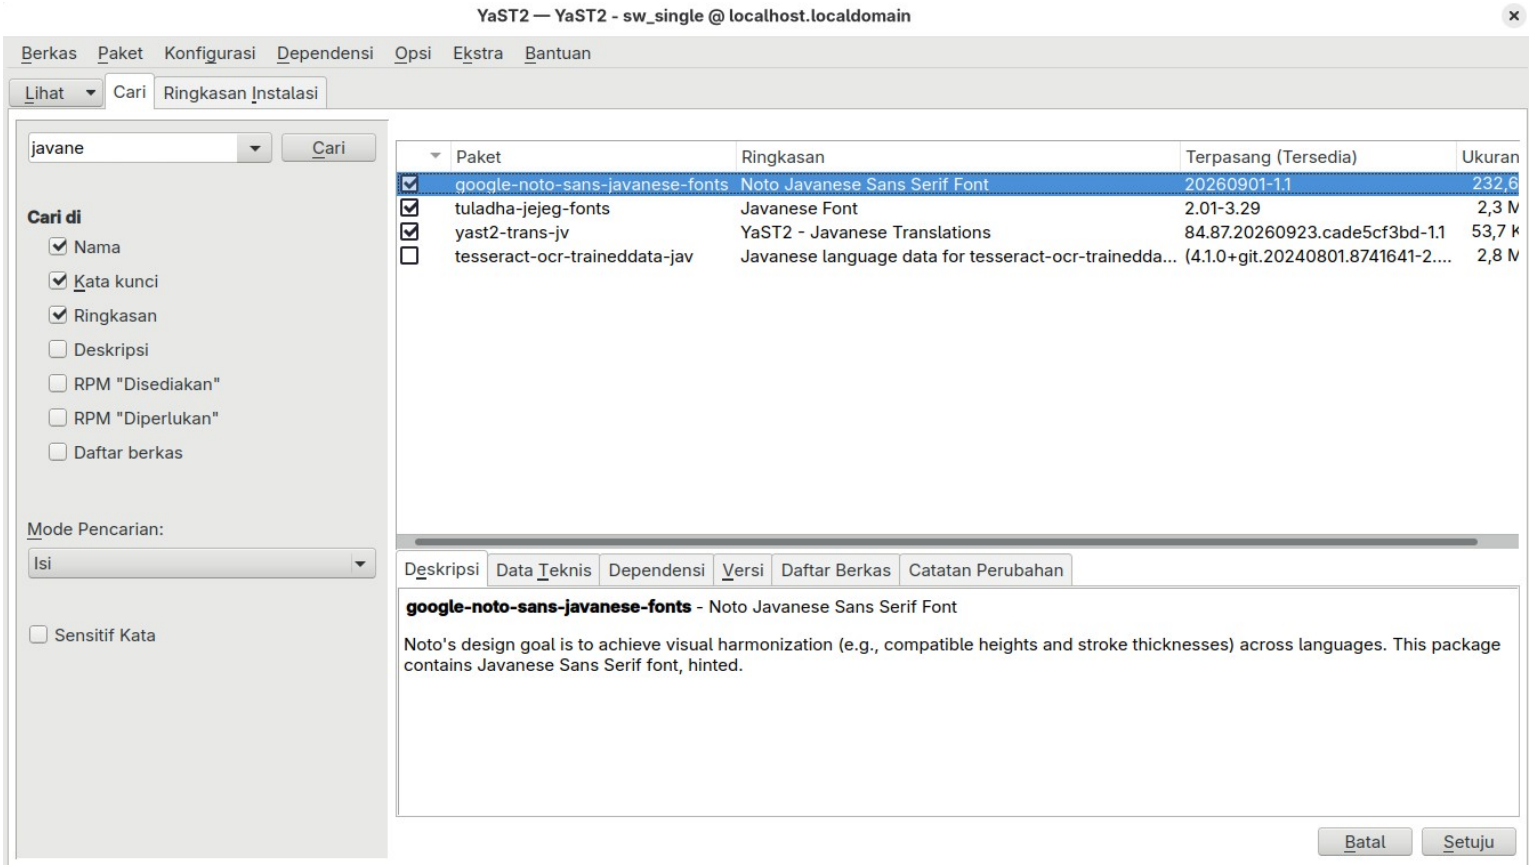


openSUSE Asia Summit 2026
Yogyakarta, October 3 - 4

Setting keyboard Javanese

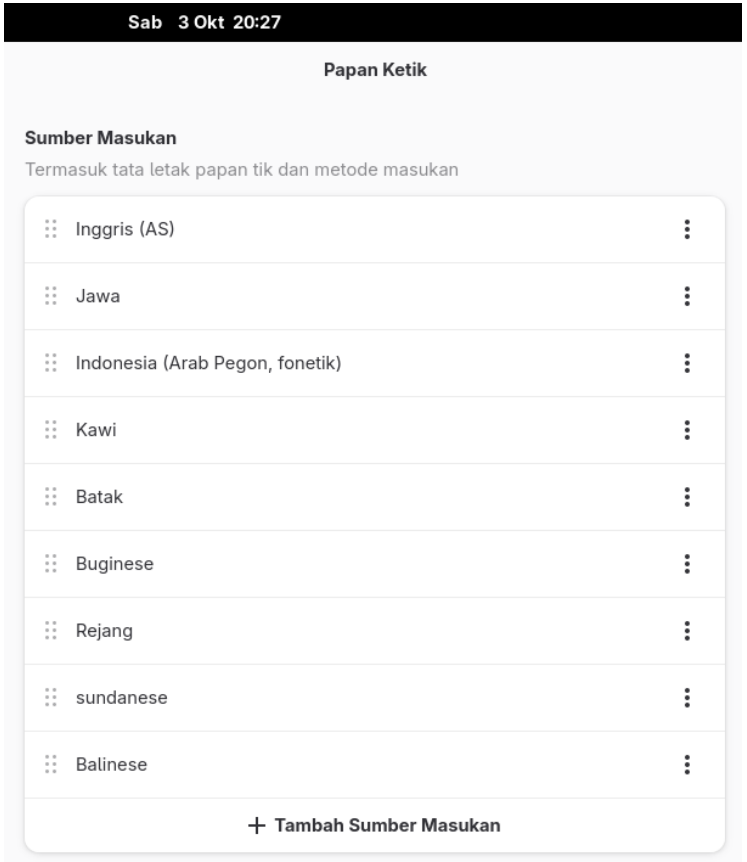

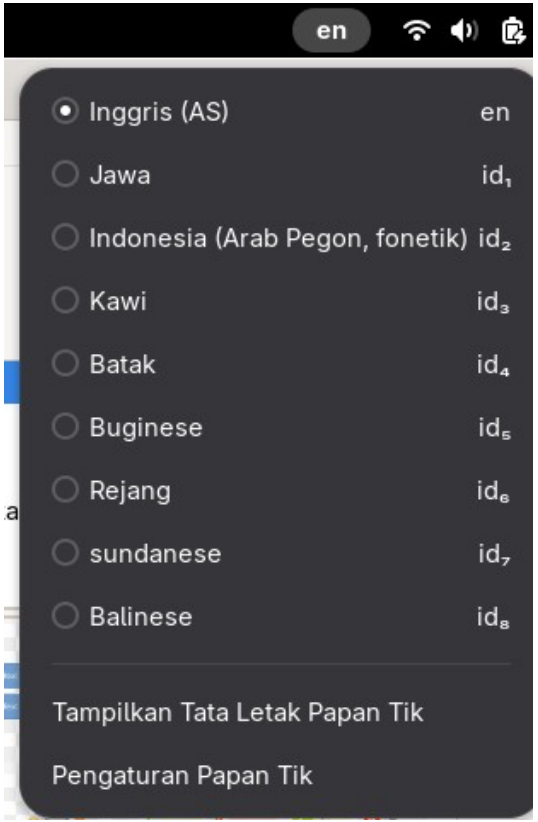

openSUSE Asia Summit 2026
Yogyakarta, October 3 - 4

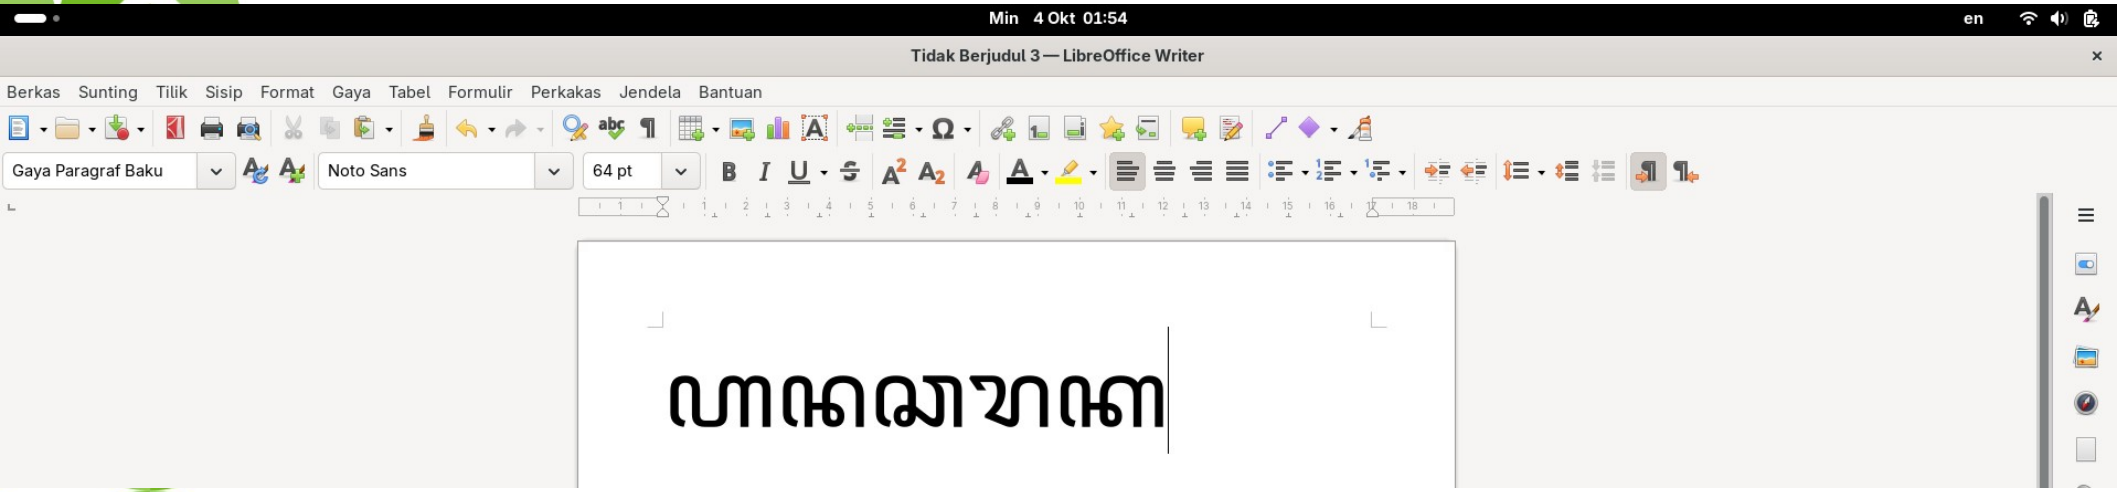

openSUSE Asia Summit 2026
Yogyakarta, October 3 - 4

Kawi Script





Kawi[1][2]

Official Unicode Consortium code chart (PDF)

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
U+11F0x	𑼰	𑼱	𑼲	𑼳	𑼴	𑼵	𑼶	𑼷	𑼸	𑼹	𑼺	𑼻	𑼼	𑼽	𑼾	𑼿
U+11F1x	𑽀		𑽂	𑽃	𑽄	𑽅	𑽆	𑽇	𑽈	𑽉	𑽊	𑽋	𑽌	𑽍	𑽎	𑽏
U+11F2x	𑽐	𑽑	𑽒	𑽓	𑽔	𑽕	𑽖	𑽗	𑽘	𑽙	𑽚	𑽛	𑽜	𑽝	𑽞	𑽟
U+11F3x	𑽠	𑽡	𑽢	𑽣	𑽤	𑽥	𑽦	𑽧	𑽨	𑽩	𑽪				𑽴	𑽵
U+11F4x	𑽶	𑽷	𑽸	𑽹	𑽺	𑽻	𑽼	𑽽	𑽾	𑽿	𑾀	𑾁	𑾂	𑾃	𑾄	𑾅
U+11F5x	𑾆	𑾇	𑾈	𑾉	𑾊	𑾋	𑾌	𑾍	𑾎	𑾏	𑾐					

Notes

1. ^As of Unicode version 18.0
2. ^Grey areas indicate non-assigned code points

Kawi


The Kawi script has the Unicode block range U+11F00 to U+11F5F (Supplementary Multilingual Plane), introduced in Unicode 15.0.

Kawi Unicode

The Unicode block for Javanese is U+A980–U+A9DF. There are 91 code points for Javanese script: 53 letters, 19 punctuation marks, 10 numbers, and 9 vowels

openSUSE Asia Summit 2026
Yogyakarta, October 3 - 4

Install font

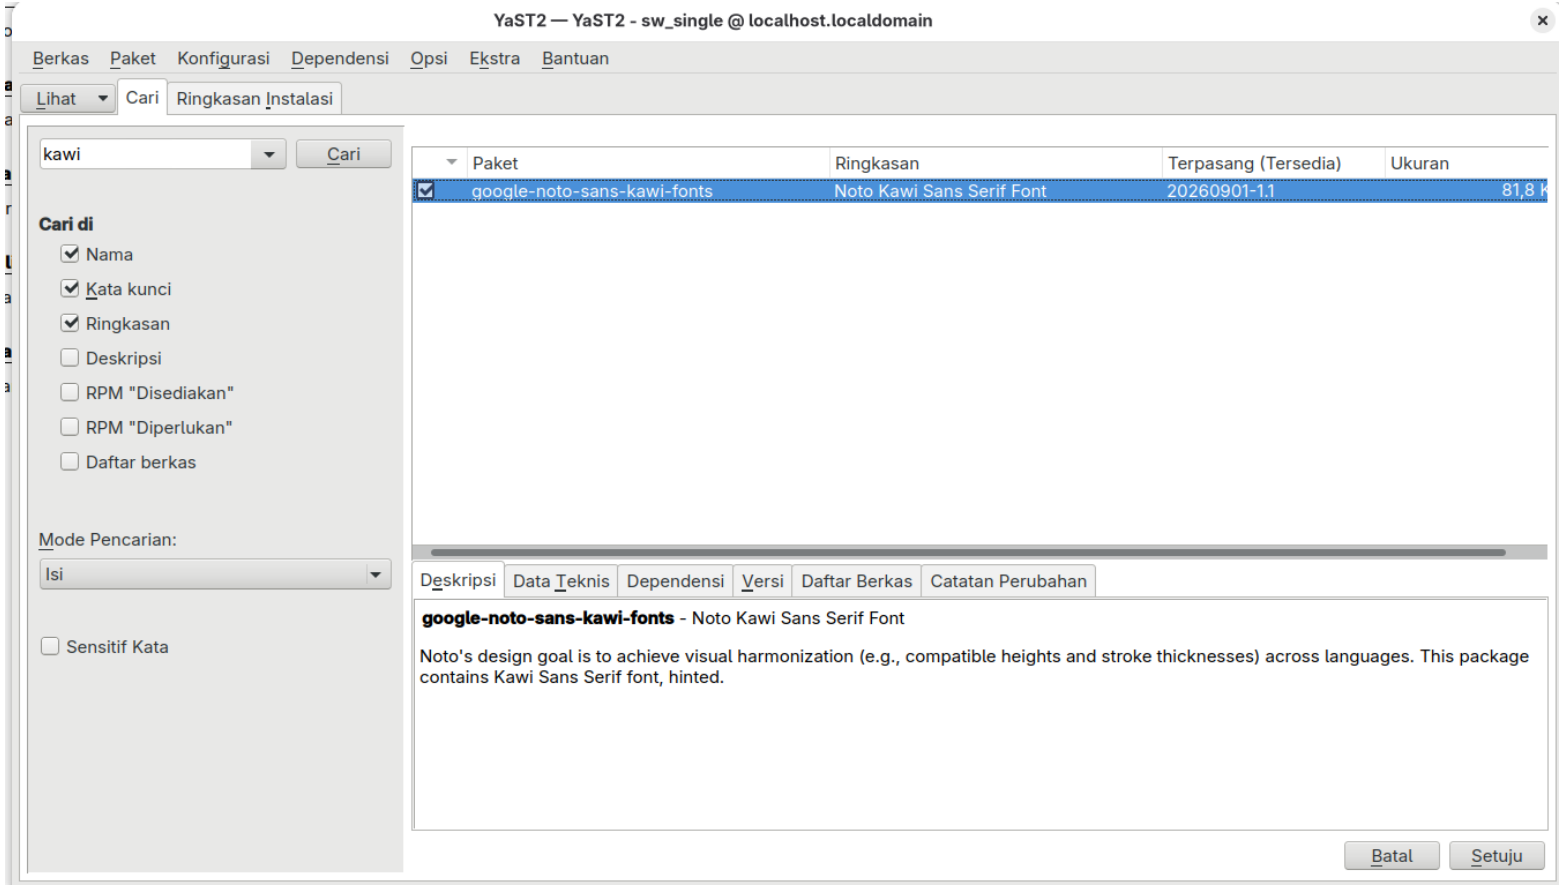

XKeyboard

/usr/share/xkeyboard-config-2/symbol/id

```
default partial alphanumeric_keys
xkb_symbols "kawi" {

    name[Group1]= "Kawi";

    key <AD01> { [ U11F05,  U11F06 ] }; // c / C
    key <AD02> { [ U11F1C,  U11F1C ] }; // w
    key <AD03> { [ U11F3A,  U11F3B ] }; // e
    key <AD04> { [ U11F1A,  U11F02 ] }; // r
    key <AD05> { [ U11F0F,  U11F10 ] }; // t / T (ta / tha)
    key <AD06> { [ U11F19,  U11F09 ] }; // y / Y (ya / nya)
    key <AD07> { [ U11F38,  U11F39 ] }; // u
    key <AD08> { [ U11F36,  U11F37 ] }; // i
    key <AD09> { [ U11F3C,  U11F3D ] }; // o
    key <AD10> { [ U11F14,  U11F15 ] }; // p / P (pa / pha)

    key <AC01> { [ U11F1F,  U11F1E ] }; // s (sa)
    key <AC02> { [ U11F11,  U11F12 ] }; // d / D (da / dha)
    key <AC03> { [ U11F42          ] }; // f (Virama / Pangkon)
    key <AC04> { [ U11F02,  U11F03 ] }; // g / G (ga / gha)
    key <AC05> { [ U11F20,  U11F01 ] }; // h / H (ha / visarga)
    key <AC06> { [ U11F07,  U11F08 ] }; // j / J (ja / jha)
    key <AC07> { [ U11F00,  U11F01 ] }; // k / K (ka / kha)
    key <AC08> { [ U11F1B,  U11F04 ] }; // l / L (la / nga)

    key <AB01> { [ U11F16,  U11F17 ] }; // b / B (ba / bha)
    key <AB02> { [ U11F13,  U11F0E ] }; // n / N (na)
    key <AB03> { [ U11F18,  U11F00 ] }; // m
};
```

/usr/share/xkeyboard-config-2/rules/base.xml
/usr/share/xkeyboard-config-2/rules/evdev.xml


openSUSE Asia Summit 2026
Yogyakarta, October 3 - 4


```
</layout>
<layout>
  <configItem>
    <name>id</name>
    <!-- Keyboard indicator for Indonesian layouts -->
    <shortDescription>id</shortDescription>
    <description>Indonesian (Latin)</description>
    <countryList>
      <iso3166Id>ID</iso3166Id>
    </countryList>
    <languageList>
      <iso639Id>ind</iso639Id>
      <iso639Id>ace</iso639Id>
      <iso639Id>ban</iso639Id>
      <iso639Id>bbc</iso639Id>
      <iso639Id>bew</iso639Id>
      <iso639Id>bjn</iso639Id>
      <iso639Id>btm</iso639Id>
      <iso639Id>bts</iso639Id>
      <iso639Id>bug</iso639Id>
      <iso639Id>gor</iso639Id>
      <iso639Id>jav</iso639Id>
      <iso639Id>jax</iso639Id>
      <iso639Id>mad</iso639Id>
      <iso639Id>mak</iso639Id>
      <iso639Id>min</iso639Id>
      <iso639Id>mui</iso639Id>
      <iso639Id>sas</iso639Id>
      <iso639Id>sun</iso639Id>
      <iso639Id>kaw</iso639Id>
      <iso639Id>rej</iso639Id>
      <iso639Id>batk</iso639Id>
    </languageList>
  </configItem>
```

```
<variantList>
  <variant>
    <configItem>
      <name>melayu-phonetic</name>
      <description>Indonesian (Arab Melayu, phonetic)</description>
    </configItem>
  </variant>
  <variant>
    <configItem>
      <name>melayu-phoneticx</name>
      <description>Indonesian (Arab Melayu, extended phonetic)</description>
    </configItem>
  </variant>
  <variant>
    <configItem>
      <name>pegon-phonetic</name>
      <description>Indonesian (Arab Pegon, phonetic)</description>
    </configItem>
  </variant>
  <variant>
    <configItem>
      <name>javanese</name>
      <description>Javanese</description>
    </configItem>
  </variant>
  <variant>
    <configItem>
      <name>kawi</name>
      <description>Kawi</description>
    </configItem>
   </variant>
   <variant>
    <configItem>
     <name>batak</name>
     <description>Batak</description>
    </configItem>
   </variant>
   <variant>
    <configItem>
     <name>buginese</name>
     <description>Buginese</description>
    </configItem>
   </variant>
   <variant>
    <configItem>
     <name>rejang</name>
     <description>Rejang</description>
    </configItem>
   </variant>
   <variant>
    <configItem>
     <name>sundanese</name>
     <description>Sundanese</description>
    </configItem>
   </variant>
    <variant>
    <configItem>
     <name>balinese</name>
     <description>Balinese</description>
    </configItem>
   </variant>
```


openSUSE Asia Summit 2026
Yogyakarta, October 3 - 4

Setting keyboard Kawi

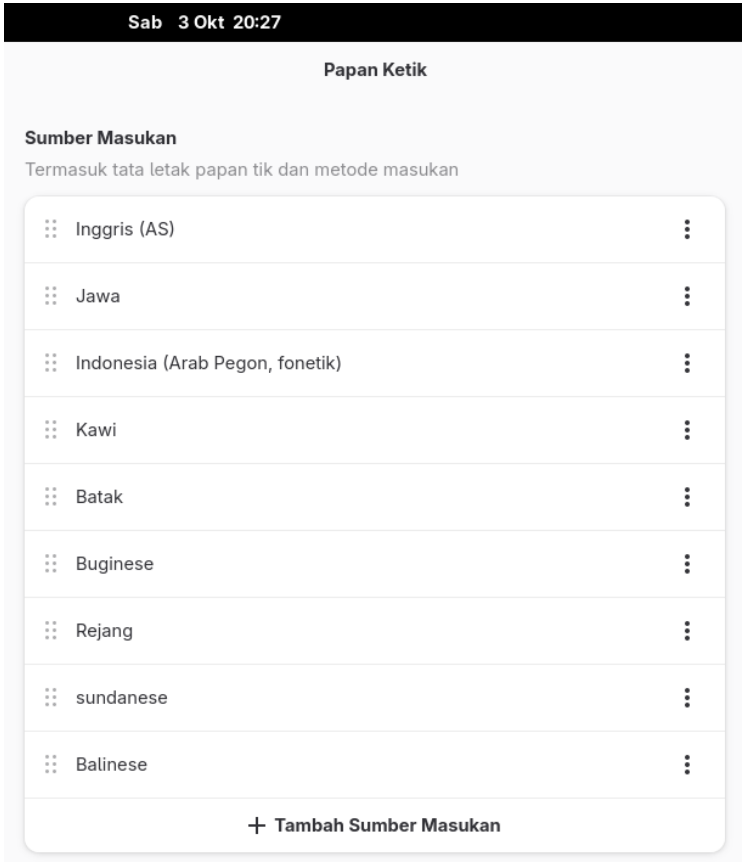

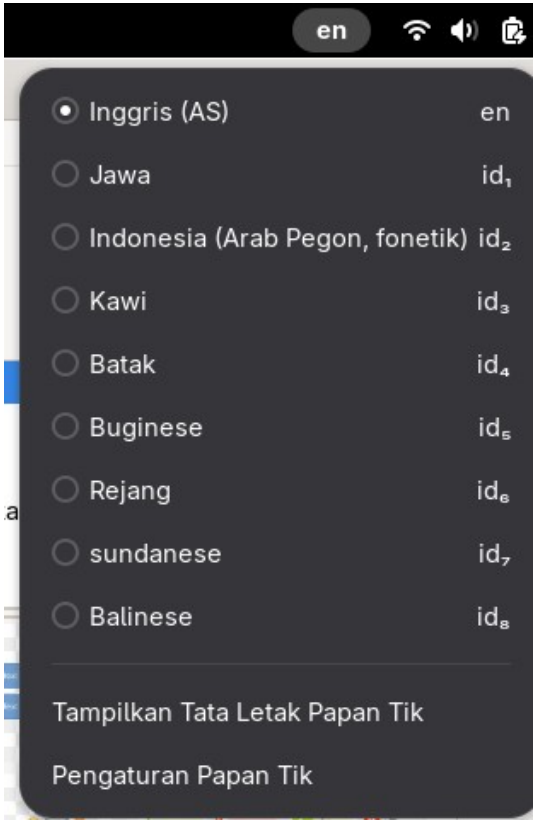


Min 4 Okt 07:26
Tidak Berjudul 3 — LibreOffice Writer
Berkas Sunting Tilik Sisip Format Gaya Tabel Formulir Perkakas Jendela Bantuan
Gaya Paragraf Baku
Noto Sans
94 pt



freedesktop.org

openSUSE Asia Summit 2026
Yogyakarta, October 3 - 4

XKeyboard-Conffig

Thank You

ᏫᎵᏁᏊ ᏓᏣᏘᏍᏓᏕᏲ



openSUSE®
Asia Summit 2026