


Timer boundaries are paired on the same invocation

Four GPUs; 1 MiB per GPU; five independent processes per condition

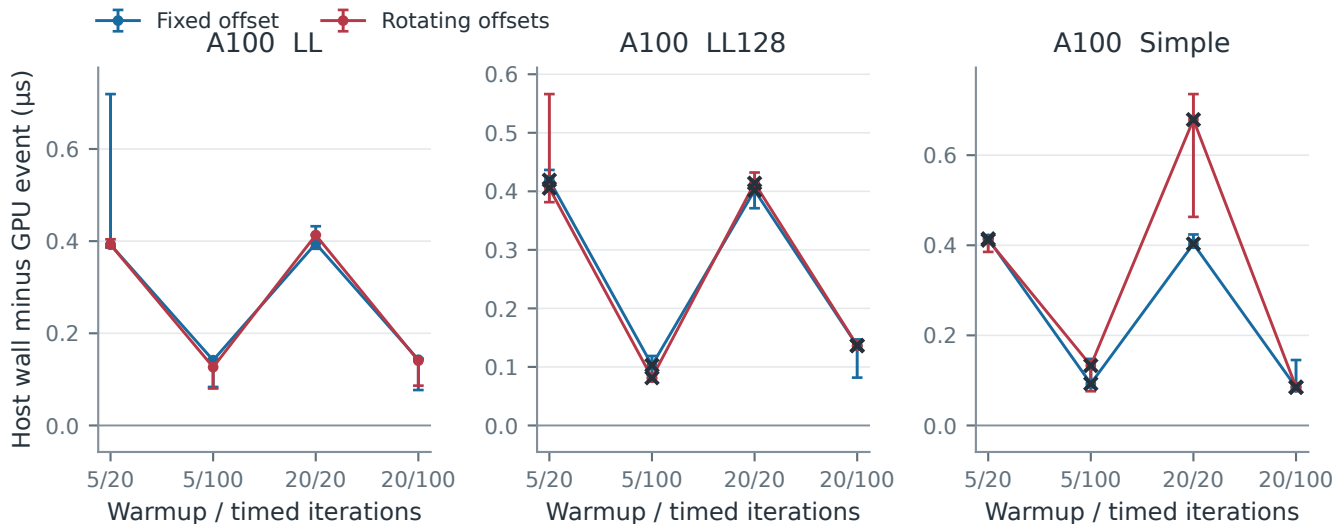

Requested C=24. Crosses mark unrealized channel requests; paired timer differences remain descriptive.

Both timers include their own boundaries around the same launch loop. GPU events may include host issue gaps.

A paired difference is a measurement-boundary effect; it is not an isolated kernel-entry or host-service constant.