

OGC® DOCUMENT: 26-007

External identifier of this OGC® document: <http://www.opengis.net/doc/IS/indoorjson/1.0>



Open
Geospatial
Consortium

OGC INDOORGML 2.0 PART 2B – JSON ENCODING

STANDARD
Implementation

CANDIDATE SWG DRAFT

Version: 0.2.0

Submission Date: 2026-02-28

Approval Date: 2099-01-01

Publication Date: 2099-01-01

Editor: Taehoon Kim, Abdoulaye Diakite, Ki-Joune Li, Zhiyong Wang

Notice for Drafts: This document is not an OGC Standard. This document is distributed for review and comment. This document is subject to change without notice and may not be referred to as an OGC Standard.

Recipients of this document are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

License Agreement

Use of this document is subject to the license agreement at <https://www.ogc.org/license>

Suggested additions, changes and comments on this document are welcome and encouraged. Such suggestions may be submitted using the online change request form on OGC web site: <http://ogc.standardstracker.org/>

Copyright notice

Copyright © 2026 Open Geospatial Consortium

To obtain additional rights of use, visit <https://www.ogc.org/legal>

Note

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. The Open Geospatial Consortium shall not be held responsible for identifying any or all such patent rights.

Recipients of this document are requested to submit, with their comments, notification of any relevant patent claims or other intellectual property rights of which they may be aware that might be infringed by any implementation of the standard set forth in this document, and to provide supporting documentation.

CONTENTS

I. ABSTRACT	vi
II. KEYWORDS	vi
III. PREFACE	vii
IV. SECURITY CONSIDERATIONS	viii
V. SUBMITTING ORGANIZATIONS	ix
VI. SUBMITTERS	ix
1. SCOPE	2
2. CONFORMANCE	4
3. NORMATIVE REFERENCES	6
4. TERMS AND DEFINITIONS	8
5. CONVENTIONS	11
5.1. Identifiers	11
5.2. Use of JSON terminology	11
6. OVERVIEW OF INDOORJSON	13
6.1. Design Principle	13
7. INDOORJSON CORE	17
7.1. IndoorFeatures	18
7.2. ThematicLayer	19
7.3. PrimalSpaceLayer	21
7.4. CellSpace	22
7.5. CellBoundary	24
7.6. DualSpaceLayer	26
7.7. Node	27
7.8. Edge	29
7.9. InterLayerConnection	30
7.10. ExternalReferenceType	32
8. INDOORJSON NAVIGATION EXTENSION	34
8.1. NavigableSpace	34

8.2. GeneralSpace	36
8.3. TransferSpace	37
8.4. NonNavigableSpace	38
8.5. ObjectSpace	39
8.6. NavigableBoundary	40
8.7. NonNavigableBoundary	41
8.8. Route	42
 ANNEX A (NORMATIVE) CONFORMANCE CLASS ABSTRACT TEST SUITE	 45
A.1. Conformance Class Core	45
A.2. Conformance Class Navigation Extension	50
 ANNEX B (NORMATIVE) JSON SCHEMAS	 56
B.1. JSON Schema of a IndoorJSON Core	56
B.2. JSON Schema of a IndoorJSON Navigation	60
 ANNEX C (INFORMATIVE) REVISION HISTORY	 64

LIST OF TABLES

Table 1 – Conceptual Model Mapping	vi
Table 2 – Conformance Class URIs	4

LIST OF FIGURES

Figure 1 – IndoorGML 2.0 core module structure	14
Figure 2 – IndoorGML 2.0 navigation module structure	15

LIST OF NORMATIVE STATEMENTS

REQUIREMENTS CLASS 1	17
REQUIREMENTS CLASS 2	34
REQUIREMENT 1: REQUIREMENT FOR INDOORJSON OBJECT	17
REQUIREMENT 2: REQUIREMENT FOR INDOORJSON CORE	18
REQUIREMENT 3: INDOORFEATURES SCHEMA	19
REQUIREMENT 4: THEMATICLAYER SCHEMA	20

REQUIREMENT 5: PRIMALSPACELAYER SCHEMA	22
REQUIREMENT 6: CELLSPACE SCHEMA	24
REQUIREMENT 7: CELLBOUNDARY SCHEMA	25
REQUIREMENT 8: DUALSPACELAYER SCHEMA	27
REQUIREMENT 9: NODE SCHEMA	28
REQUIREMENT 10: EDGE SCHEMA	30
REQUIREMENT 11: INTERLAYERCONNECTION SCHEMA	31
REQUIREMENT 12: REQUIREMENT FOR INDOORJSON NAVIGATION EXTENSION	34
REQUIREMENT 13: NAVIGABLESPACE SCHEMA	35
REQUIREMENT 14: GENERALSPACE SCHEMA	36
REQUIREMENT 15: TRANSFERSPACE SCHEMA	38
REQUIREMENT 16: NONNAVIGABLESPACE SCHEMA	39
REQUIREMENT 17: OBJECTSPACE SCHEMA	40
REQUIREMENT 18: NAVIGABLEBOUNDARY SCHEMA	41
REQUIREMENT 19: NONNAVIGABLEBOUNDARY SCHEMA	42
REQUIREMENT 20: ROUTE SCHEMA	43
CONFORMANCE CLASS A.1	45
CONFORMANCE CLASS A.2	50



ABSTRACT

The IndoorGML 2.0 Part 2b – JSON Encoding Standard presents the implementation-dependent JavaScript Object Notation (JSON) encoding of the concepts defined by the IndoorGML 2.0 Part 1 – Conceptual Model Standard (OGC 22-045r5). The JSON Encoding is compliant to JSON schema specified by RFC8259. The IndoorGML JSON (IndoorJSON) encoding defines a concrete implementation schema for representing indoor spatial information, including primal space, dual space, thematic layers, interlayer connections, and navigation-related indoor features. This encoding can be used to store and exchange 2D and/or 3D indoor space and indoor navigation network models in the JSON format as data sets or via web services.

This Part 2b of the Standard defines how the concepts developed in Part 1 are realized using JSON schemas. The IndoorJSON Encoding represents a full mapping of the Conceptual Model and is derived fully automatically from the UML model following the UML-to-JSON encoding rules as defined by OGC 24-017r1. The IndoorJSON adopts JSON Schema as its primary schema language and uses geometry objects compatible with OGC Features and Geometries JSON (JSON-FG, OGC 21-045r1), where appropriate. This design choice addresses the limitation that conventional GeoJSON does not provide sufficient support for indoor 3D geometry, especially solid and volumetric geometry. Table 1 maps requirements classes from the IndoorGML 2.0 Conceptual Model into the implementation details documented in this standard.

Table 1 – Conceptual Model Mapping

CONCEPTUAL MODEL	SECTION	JSON SCHEMA
IndoorGML Core	Clause 7	Annex B.1
Navigation Extension	Clause 8	Annex B.2



KEYWORDS

The following are keywords to be used by search engines and document catalogues.

OGCDoc, OGC documents, indoor, navigation, IndoorGML, JSON, GeoJSON, JSON-FG



PREFACE

In order to achieve consensus on the modeling indoor spaces and their neighborhood relationships to support indoor location-based services, a UML Conceptual Model, IndoorGML 2.0 Part 1, was approved as an OGC Standard (OGC 22-045r5) in June, 2025. This model covers geometric and semantic properties of indoor spaces relevant for indoor navigation. This IndoorGML 2.0 Part 2: JSON Encoding (IndoorJSON) Standard defines how those concepts should be realized using JSON format. The IndoorJSON encoding is intended for software developers, data providers, standards implementers, and service providers who need a lightweight, web-friendly, and machine-readable representation of IndoorGML datasets.



SECURITY CONSIDERATIONS

No security considerations have been made for this Standard.

V

SUBMITTING ORGANIZATIONS

The following organizations submitted this Document to the Open Geospatial Consortium (OGC):

- The University of New South Wales
- Pusan National University
- CityGeometrix
- National Institute of Advanced Industrial Science and Technology
- SpatialAlgebra Technology Limited

VI

SUBMITTERS

All questions regarding this submission should be directed to the editor or the submitters:

NAME	AFFILIATION	EMAIL
Taehoon KIM	National Institute of Advanced Industrial Science and Technology	kim.taehoon@aist.go.jp
Abdoulaye Diakite	CityGeometrix Pty Ltd	abdou@citygeometrix.com
Ki-Joune Li	Pusan National University	lik@pnu.edu
Sisi Zlatanova	The University of New South Wales	s.zlatanova@unsw.edu.au
Zhiyong Wang	SpatialAlgebra Technology Limited	zhiyongwang@spatialalgebra.tech



1

SCOPE

The OGC IndoorGML 2.0 Part 2b – JSON Encoding Standard defines a JSON encoding for IndoorGML 2.0 Part 1 – Conceptual Model. The encoding is referred to as IndoorJSON.

The IndoorJSON Standard specifies:

- JSON schema for IndoorGML 2.0 core module;
- JSON schema for IndoorGML 2.0 navigation module;
- the geometry encoding rules based on JSON-FG geometry objects; and
- a statement to which IndoorJSON conformance classes a IndoorGML 2.0 conforms to.

IndoorJSON is an implementation encoding of IndoorGML 2.0 Part 1. Therefore, IndoorJSON instances shall be interpreted according to the semantics defined in the IndoorGML 2.0 conceptual model.



2

CONFORMANCE

CONFORMANCE

This standard defines implementation specification which specifies how the IndoorGML 2.0 Conceptual Model should be implemented using JavaScript Object Notation (JSON). The Standardization Target for this standard is:

- Implementations of the IndoorGML 2.0 Conceptual Model using JSON encodings.

Conformance with this standard shall be checked using all the relevant tests specified in Annex A (normative) of this document. The framework, concepts, and methodology for testing, and the criteria to be achieved to claim conformance are specified in the OGC Compliance Testing Policies and Procedures and the OGC Compliance Testing web site.

In order to conform to this OGC® interface standard, a software implementation shall choose to implement:

- Any one of the conformance levels specified in Annex A (normative).

All requirements-classes and conformance-classes described in this document are owned by the standard(s) identified.

Table 2 — Conformance Class URIs

CONFORMANCE CLASS	URI
IndoorGML Core	http://www.opengis.net/spec/indoorgml-2/2.0/json/conf/core
Navigation Extension	http://www.opengis.net/spec/indoorgml-2/2.0/json/conf/navi



3

NORMATIVE REFERENCES

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

Johannes Echterhoff: OGC 24-017r1, *Best Practice for OGC – UML to JSON Encoding Rules*. Open Geospatial Consortium (2025). <http://www.opengis.net/doc/BP/uml-to-json-encoding/1.0>.

Sisi Zlatanova, Abdoulaye Diakite, Taehoon Kim, Ki-Joune Li: OGC 22-045r5, *OGC IndoorGML 2.0 Part 1 – Conceptual Model*. Open Geospatial Consortium (2025). <http://www.opengis.net/doc/IS/indoorgml/2.0>.

Clemens Portele, Panagiotis (Peter) A. Vretanos: OGC 21-045r1, *OGC Features and Geometries JSON – Part 1: Core*. Open Geospatial Consortium (2026). <http://www.opengis.net/doc/IS/json-fg-1/1.0>.

ISO: ISO 19101-1, *Geographic information – Reference model – Part 1: Fundamentals*. International Organization for Standardization, Geneva <https://www.iso.org/standard/59164.html>.

ISO: ISO 19107, *Geographic information – Spatial schema*. International Organization for Standardization, Geneva <https://www.iso.org/standard/66175.html>.

T. Bray (ed.): IETF RFC 8259, *The JavaScript Object Notation (JSON) Data Interchange Format*. RFC Publisher (2017). <https://www.rfc-editor.org/info/rfc8259>.



4

TERMS AND DEFINITIONS

This document uses the terms defined in OGC Policy Directive 49, which is based on the ISO/IEC Directives, Part 2, Rules for the structure and drafting of International Standards. In particular, the word “shall” (not “must”) is the verb form used to indicate a requirement to be strictly followed to conform to this document and OGC documents do not use the equivalent phrases in the ISO/IEC Directives, Part 2.

This document also uses terms defined in the OGC Standard for Modular specifications (OGC 08-131r3), also known as the ‘ModSpec’. The definitions of terms such as standard, specification, requirement, and conformance test are provided in the ModSpec.

For the purposes of this document, the following additional terms and definitions apply.

4.1. conceptual model

model that defines concepts of a universe of discourse

[SOURCE: ISO 19101-1]

4.2. conceptual schema

formal description of a conceptual model

[SOURCE: ISO 19101-1]

4.3. feature

abstraction of real world phenomena

Note 1 to entry: Features are objects that have an identity that allows for distinguishing features from each other. Features can have spatial and non-spatial properties that describe the features in more detail. Spatial properties are properties that have a geometry from ISO 19107 as data type.

Note 2 to entry: Features are denoted by the stereotype «FeatureType» in the IndoorGML 2.0 Conceptual Model.

[SOURCE: ISO 19101-1]



5

CONVENTIONS

5.1. Identifiers

The normative provisions in this standard are denoted by the URI

<http://www.opengis.net/spec/indoorgml-2/2.0/json>

All requirements and conformance tests that appear in this document are denoted by partial URIs which are relative to this base.

5.2. Use of JSON terminology

The following terms are used as specified in JSON. In particular:

- “member” refers to a name/value pair of an object;
- “key” refers to the name of a member; and
- “value” refers to the value of a member, which may be an object, array, string, number, boolean, or null.

For example, the GeoJSON “geometry” member has the key “geometry” and one of the GeoJSON geometries (or null) as its value.



6

OVERVIEW OF INDOORJSON

IndoorJSON implements the conceptual classes of IndoorGML 2.0 Part 1 as JSON objects. The conceptual model remains normative for semantics, while this document defines the JSON representation.

6.1. Design Principle

IndoorJSON is based on the following encoding principles.

6.1.1. Conceptual model preservation

IndoorJSON Core preserve the IndoorGML 2.0 core conceptual model structure, as shown in the below figure.

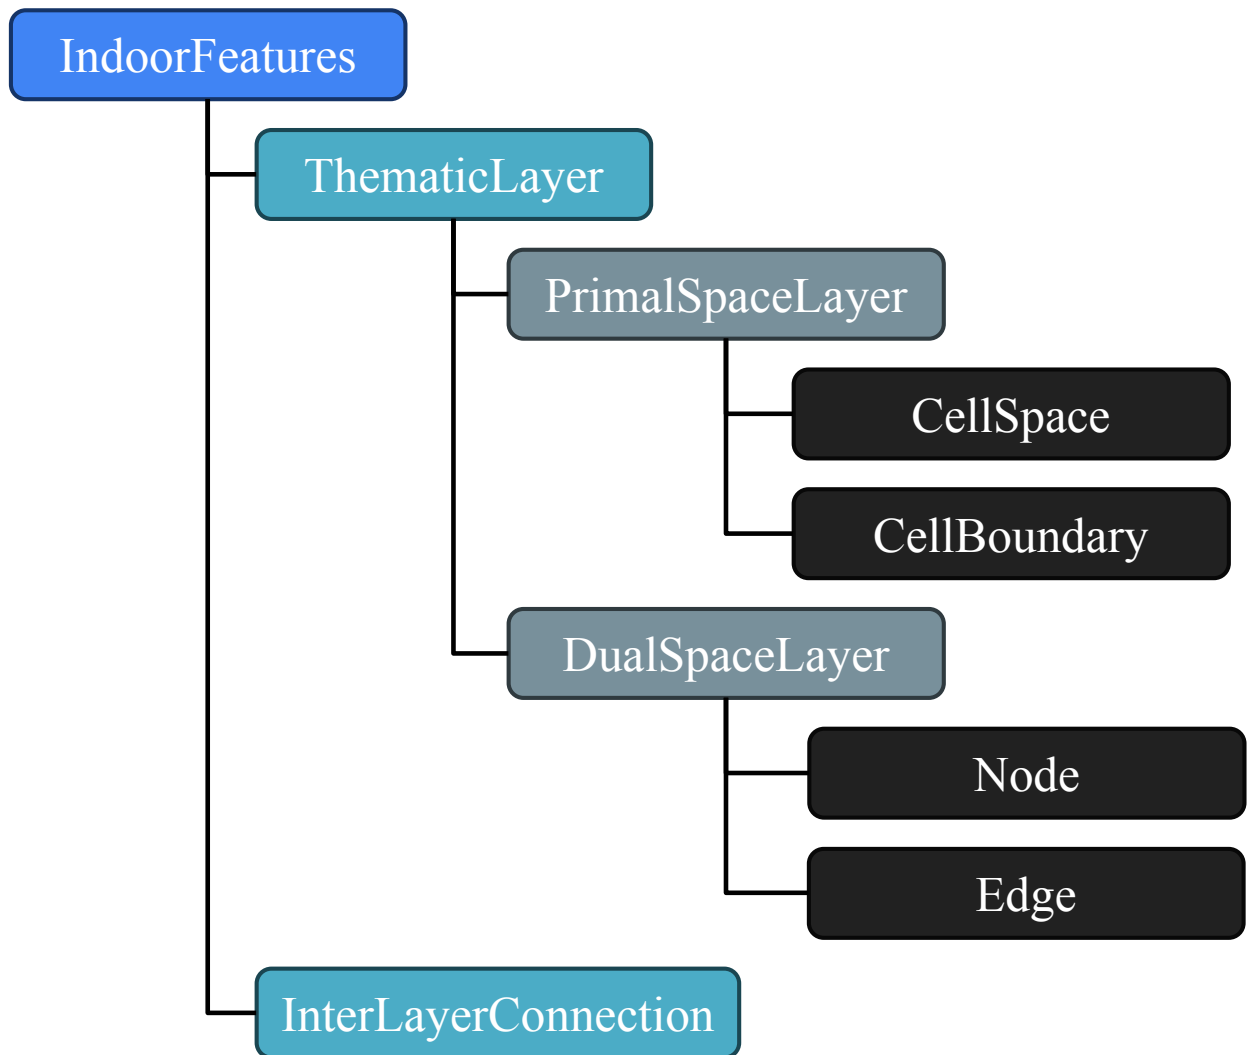


Figure 1 – IndoorGML 2.0 core module structure

The IndoorJSON Core schema follows Figure 1. Each class is defined individually, and depending on their relationships, they can hold other classes as property values or array values. For example, **IndoorFeatures** have `layers` property for **ThematicLayer** and `layerConnections` property for **InterLayerConnection**.

IndoorJSON Navigation preserve the IndoorGML 2.0 navigation conceptual model structure, as shown in the below figure.

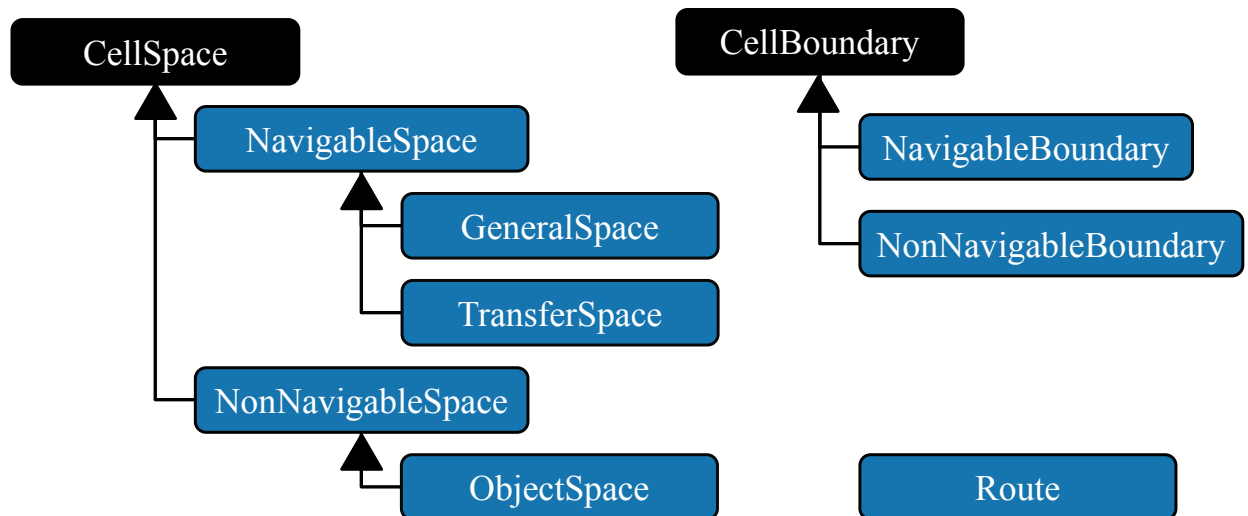


Figure 2 – IndoorGML 2.0 navigation module structure

The IndoorJSON Navigation schema follows Figure 2. In the figure, the arrows represent inheritance. Each class is defined individually. Depending on the inheritance relationship, a child class inherits the properties of its parent class.

6.1.2. JSON-FG-compatible geometry

IndoorJSON use JSON-FG-compatible geometry objects for the geometry representation. This is necessary because indoor spaces require 3D geometry, including solid geometry. The current IndoorJSON core schema references JSON-FG geometry schemas for `geometry2D` and `geometry3D`, including **Polygon** and **Polyhedron** for `CellSpace`.



7

INDOORJSON CORE

REQUIREMENTS CLASS 1

IDENTIFIER	http://www.opengis.net/spec/indoorgml-2/2.0/json/req/core
TARGET TYPE	Implementation Specification
CONFORMANCE CLASS	Conformance class A.1: http://www.opengis.net/spec/indoorgml-2/2.0/conf/core
PREREQUISITES	http://www.opengis.net/spec/indoorgml/2.0/req http://www.opengis.net/spec/json-fg-1/1.0/req/core http://www.opengis.net/spec/json-fg-1/1.0/req/polyhedra
NORMATIVE STATEMENTS	Requirement 1: /req/core/indoorjson Requirement 2: /req/core/element Requirement 3: /req/core/indoorfeature Requirement 4: /req/core/thematiclayer Requirement 5: /req/core/primalspacelayer Requirement 6: /req/core/cellspace Requirement 7: /req/core/cellboundary Requirement 8: /req/core/dualspacelayer Requirement 9: /req/core/node Requirement 10: /req/core/edge Requirement 11: /req/core/interlayerconnection

IndoorJSON object represents one of feature class of IndoorGML 2.0 conceptual model.

The IndoorJSON Object:

- **must** have one member with the name `id`. The value must be a string that serves as a unique identifier for the IndoorJSON object and can be used to represent cross-references between IndoorJSON objects.
- **must** have one member with the name `featuretype`. The value is one of the possibilities in the figure Figure 1 or Figure 2.

REQUIREMENT 1: REQUIREMENT FOR INDOORJSON OBJECT

IDENTIFIER	<code>/req/core/indoorjson</code>
INCLUDED IN	Requirements class 1: http://www.opengis.net/spec/indoorgml-2/2.0/json/req/core

REQUIREMENT 1: REQUIREMENT FOR INDOORJSON OBJECT

A An IndoorJSON object SHALL contain id and featuretype members.

REQUIREMENT 2: REQUIREMENT FOR INDOORJSON CORE

IDENTIFIER /req/core/element

INCLUDED IN Requirements class 1: <http://www.opengis.net/spec/indoorgml-2/2.0/json/req/core>

A IndoorGML Core JSON elements implemented by a conforming instance document SHALL conform to the JSON schema in `indoorjson.core.schema.json`.

7.1. IndoorFeatures

IndoorFeature object is an instance of `IndoorFeature`, the container for the indoor dataset. It aggregates one or more thematic layers and may include interlayer connections.

The **IndoorFeature** object shall contain:

- id
- featureType
- layers for representing **ThematicLayer** object as item
- optionally, layerConnections for **InterLayerConnection** object as item

```
{
  "IndoorFeatures": {
    "$anchor": "IndoorFeatures",
    "type": "object",
    "properties": {
      "id": { "type": "string" },
      "featureType": { "enum": ["IndoorFeatures"] },
      "layers": {
        "type": "array",
        "minItems": 1,
        "items": { "$ref": "#/$defs/ThematicLayer" },
        "uniqueItems": true
      },
      "layerConnections": {
        "type": "array",
        "items": { "$ref": "#/$defs/InterLayerConnection" },
        "uniqueItems": true
      }
    },
    "required": ["id", "featureType", "layers"]
  }
}
```

```
}
}
```

Listing 1 – A JSON schema of the IndoorFeature:

```
{
  "featureType": "IndoorFeatures",
  "layers": [
    {
      "id": "TL-1",
      "featureType": "ThematicLayer",
      "semanticExtension": false,
      "theme": "Physical",
      "primalSpace": {...},
      "dualSpace": {...}
    },
    ...
  ],
  "layerConnections": [
    {
      "id": "ILC-1",
      "featureType": "InterLayerConnection",
      "connectedLayers": ["TL-1", "TL-2"],
      "connectedNodes": ["N1", "N101"],
      "typeOfTopoExpression": "CONTAINS"
    }
  ]
}
```

Listing 2 – An example of the IndoorFeature object:

REQUIREMENT 3: INDOORFEATURES SCHEMA

IDENTIFIER	/req/core/indoorfeature
INCLUDED IN	Requirements class 1: http://www.opengis.net/spec/indoorgml-2/2.0/json/req/core
A	An IndoorFeatures object SHALL contain at least one ThematicLayer object as item of layers value.
B	The featuretype value SHALL be "IndoorFeatures".

7.2. ThematicLayer

ThematicLayer object is an instance of ThematicLayer, which represents one contextual decomposition of indoor space. For example, physical layer, navigation layer, sensor layer, etc.

The **ThematicLayer** object shall contain:

- id

- featureType
- semanticExtension indicates whether there is extension module with additional semantic information associated to the **PrimalSpaceLayer**
- theme determines what type of model representation can be expected in the **PrimalSpaceLayer**
- optionally, primalSpace for **PrimalSpaceLayer** object
- optionally, dualSpace for **DualSpaceLayer** object

The core schema defines semanticExtension and theme members, with theme values including “Virtual”, “Physical”, “Tags”, and “Unknown”, according to the conceptual model.

```
{
  "ThematicLayer": {
    "$anchor": "ThematicLayer",
    "type": "object",
    "properties": {
      "id": { "type": "string" },
      "featureType": { "enum": ["ThematicLayer"] },
      "semanticExtension": { "type": "boolean" },
      "theme": { "enum": ["Virtual", "Physical", "Tags", "Unknown"] },
      "primalSpace": { "$ref": "#/$defs/PrimalSpaceLayer" },
      "dualSpace": { "$ref": "#/$defs/DualSpaceLayer" }
    },
    "required": ["id", "featureType", "semanticExtension", "theme"]
  }
}
```

Listing 3 – A JSON schema of the ThematicLayer:

```
{
  "id": "TL-1",
  "featureType": "ThematicLayer",
  "semanticExtension": false,
  "theme": "Physical",
  "primalSpace": {...},
  "dualSpace": {...}
}
```

Listing 4 – An example of the ThematicLayer object:

REQUIREMENT 4: THEMATICLAYER SCHEMA

IDENTIFIER	/req/core/thematiclayer
INCLUDED IN	Requirements class 1: http://www.opengis.net/spec/indoorqml-2/2.0/json/req/core
A	A ThematicLayer object SHALL declare whether there is an extension module with additional semantic information using the semanticExtension member.
B	A ThematicLayer object SHALL determine what type of model representation can be expected using the theme member.

REQUIREMENT 4: THEMATICLAYER SCHEMA

C	The Theme value SHALL be one of the following: “Virtual”, “Physical”, “Tags”, or “Unknown”
D	The featuretype value SHALL be “ThematicLayer”.

7.3. PrimalSpaceLayer

PrimalSpaceLayer object is an instance of PrimalSpaceLayer, which contains spatial objects representing indoor subdivisions.

The **PrimalSpaceLayer** object shall contain:

- id
- featureType
- cellSpaceMember for representing **CellSpace** object as item
- optionally, cellBoundaryMember for representing **CellBoundary** object as item
- optionally, creationDatetime
- optionally, terminationDatetime

```
{
  "PrimalSpaceLayer": {
    "$anchor": "PrimalSpaceLayer",
    "type": "object",
    "properties": {
      "id": { "type": "string" },
      "featureType": { "enum": ["PrimalSpaceLayer"] },
      "creationDatetime": { "type": "string", "format": "date-time" },
      "terminationDatetime": { "type": "string", "format": "date-time" },
      "cellSpaceMember": {
        "type": "array",
        "minItems": 1,
        "items": { "$ref": "#/$defs/CellSpace" },
        "uniqueItems": true
      },
      "cellBoundaryMember": {
        "type": "array",
        "items": { "$ref": "#/$defs/CellBoundary" },
        "uniqueItems": true
      }
    },
    "required": ["id", "featureType", "cellSpaceMember"]
  }
}
```

Listing 5 — A JSON schema of the PrimalSpaceLayer:

```

{
  "primalSpace": {
    "id": "PS-1",
    "featureType": "PrimalSpaceLayer",
    "creationDatetime": "2025-10-30T13:00:00",
    "cellSpaceMember": [...],
    "cellBoundaryMember": [...]
  }
}

```

Listing 6 – An example of the PrimalSpaceLayer object:

REQUIREMENT 5: PRIMALSPACE LAYER SCHEMA

IDENTIFIER	/req/core/primalspacelayer
INCLUDED IN	Requirements class 1: http://www.opengis.net/spec/indoorgml-2/2.0/json/req/core
A	A PrimalSpaceLayer SHALL contain one or more CellSpace objects.
B	The CellSpace objects belonging to the same PrimalSpaceLayer SHALL not intersect with each other.
C	The CellBoundary objects belonging to the same PrimalSpaceLayer SHALL not intersect with each other.
D	The featureType value SHALL be "PrimalSpaceLayer".

7.4. CellSpace

CellSpace object is an instance of [CellSpace](#), which represents a unit of indoor space. The **CellSpace** may correspond to a room, corridor, stairwell, elevator cabin, platform, zone, virtual partition, or other spatial subdivision.

An **CellSpace** object shall contain:

- id
- featureType
- poi is a flag that specifies whether this **CellSpace** is a point of interest
- optionally, cellSpaceName is the name assigned to the space according to internal convention
- optionally, level
- optionally, duality can be mapped to the id value of the **Node** object

- optionally, cellSpaceGeom
- optionally, boundedBy can have the id value of the linked **CellBoundary** objects
- optionally, externalReference for representing **ExternalReference** object

A **CellSpace** can be linked to a **Node** through the duality member. A **CellSpace** can be linked to a set of **CellBoundaries** through the boundedBy member. For cellSpaceGeom member, it defines cellSpaceGeom.geometry2D using a JSON-FG Polygon geometry and cellSpaceGeom.geometry3D using a JSON-FG Polyhedron geometry. The externalReference member is used for the reference of an object to its corresponding object in an external data set.

```
{
  "CellSpace": {
    "$anchor": "CellSpace",
    "type": "object",
    "properties": {
      "id": { "type": "string" },
      "featureType": { "enum": ["CellSpace",
        "NavigableSpace", "GeneralSpace", "TransferSpace",
        "NonNavigableSpace", "ObjectSpace"] },
      "cellSpaceName": { "type": "string" },
      "level": { "type": "string" },
      "poi": { "type": "boolean" },
      "duality": { "type": "string", "format": "uri-reference" },
      "cellSpaceGeom": {
        "type": "object",
        "properties": {
          "geometry2D": { "$ref": "https://schemas.opengis.net/json-fg/geometry-
            object.json#/$defs/Polygon" },
          "geometry3D": { "$ref": "https://schemas.opengis.net/json-fg/geometry-
            object.json#/$defs/Polyhedron" }
        }
      },
      "boundedBy": {
        "type": "array",
        "items": { "type": "string", "format": "uri-reference" },
        "uniqueItems": true
      },
      "externalReference": { "$ref": "#/$defs/ExternalReferenceType" }
    },
    "required": ["id", "featureType", "poi"]
  }
}
```

Listing 7 — A JSON schema of the CellSpace:

```
{
  "id": "C1",
  "featureType": "CellSpace",
  "duality": "N1",
  "poi": false,
  "level": "1",
  "cellSpaceGeom": {
    "geometry2D": {
      "type": "Polygon",
      "coordinates": [[[0,0], [2,0], [2,2], [0,2], [0,0]]]
    }
  },
  "boundedBy": ["B1"]
}
```


}

Listing 8 — An example of the CellSpace object:

REQUIREMENT 6: CELLSPACE SCHEMA	
IDENTIFIER	/req/core/cellspace
INCLUDED IN	Requirements class 1: http://www.opengis.net/spec/indoorgml-2/2.0/json/req/core
A	A CellSpace object SHALL declare whether it is a point of interest space using the <code>poi</code> member.
B	The <code>duality</code> value SHALL be the same as the <code>id</code> of the linked Node object.
C	The <code>boundedBy</code> value SHALL contain the same <code>id</code> as the linked CellBoundary objects.
D	The geometry of the linked CellBoundary SHALL not exceed the extent of the CellSpace geometry.
E	The <code>featuretype</code> value SHALL be one of “CellSpace”, “NonNavigableSpace”, or “ObjectSpace”.

7.5. CellBoundary

CellBoundary object is an instance of CellBoundary, a boundary of a CellSpace. A boundary may be physical or virtual.

The **CellBoundary** object shall contain:

- `id`
- `featureType`
- `isVirtual` indicate whether a **CellBoundary** corresponds to a virtual surface (true) or a physical one (false)
- optionally, `duality` can be mapped to the `id` value of the **Edge** object
- optionally, `cellBoundaryGeom`
- optionally, `externalReference` for representing **ExternalReference** object

A **CellBoundary** can be linked to a **Edge** through the `duality` member. For `cellBoundaryGeom` member, it defines `cellBoundaryGeom.geometry2D` using a JSON-FG `LineString` geometry and

cellBoundaryGeom.geometry3D using a JSON-FG Polygon geometry. The externalReference member is used for the reference of an object to its corresponding object in an external data set

```
{
  "CellBoundary": {
    "$anchor": "CellBoundary",
    "type": "object",
    "properties": {
      "id": { "type": "string" },
      "featureType": { "enum": ["CellBoundary", "NavigableBoundary",
"NonNavigableBoundary"] },
      "isVirtual": { "type": "boolean" },
      "duality": { "type": "string", "format": "uri-reference" },
      "cellBoundaryGeom": {
        "type": "object",
        "properties": {
          "geometry2D": { "$ref": "https://schemas.opengis.net/json-fg/geometry-
object.json#/$defs/LineString" },
          "geometry3D": { "$ref": "https://schemas.opengis.net/json-fg/geometry-
object.json#/$defs/Polygon" }
        }
      },
      "externalReference": { "$ref": "#/$defs/ExternalReferenceType" }
    },
    "required": ["id", "featureType", "isVirtual"]
  }
}
```

Listing 9 – A JSON schema of the CellBoundary:

```
{
  "id": "B1",
  "featureType": "CellBoundary",
  "isVirtual": false,
  "duality": "E1",
  "cellBoundaryGeom": {
    "geometry2D": {
      "type": "LineString",
      "coordinates": [[2,0],[2,2]]
    }
  }
}
```

Listing 10 – An example of the CellBoundary object:

Requirement 7: CellBoundary Schema	
Identifier	/req/core/cellboundary
Included in	Requirements class 1: http://www.opengis.net/spec/indoorgml-2/2.0/json/req/core
A	A CellBoundary object SHALL specify whether it is virtual using the isVirtual member.
B	The duality value SHALL be the same as the id of the linked Edge object.

REQUIREMENT 7: CELLBOUNDARY SCHEMA

C The featureType value SHALL be one of "CellBoundary", or "NonNavigableBoundary".

7.6. DualSpaceLayer

DualSpaceLayer object is an instance of DualSpaceLayer, represents the graph structure corresponding to the primal space layer. It contains nodes and edges.

The **DualSpaceLayer** object shall contain:

- id
- featureType
- isLogical indicates whether the provided graph is a geometric or a logical
- isDirected specifies whether the provided graph is directed
- nodeMember for representing **Node** object as item
- optionally, edgeMember for representing **Edge** object as item
- optionally, creationDatetime
- optionally, terminationDatetime

```
{
  "DualSpaceLayer": {
    "$anchor": "DualSpaceLayer",
    "type": "object",
    "properties": {
      "id": { "type": "string" },
      "featureType": { "enum": ["DualSpaceLayer"] },
      "creationDatetime": { "type": "string", "format": "date-time" },
      "terminationDatetime": { "type": "string", "format": "date-time" },
      "isLogical": { "type": "boolean" },
      "isDirected": { "type": "boolean" },
      "nodeMember": {
        "type": "array",
        "minItems": 1,
        "items": { "$ref": "#/$defs/Node" },
        "uniqueItems": true
      },
      "edgeMember": {
        "type": "array",
        "items": { "$ref": "#/$defs/Edge" },
        "uniqueItems": true
      }
    },
    "required": ["id", "featureType", "isLogical", "isDirected", "nodeMember"]
  }
}
```

```
}
```

Listing 11 — A JSON schema of the DualSpaceLayer:

```
{
  "dualSpace": {
    "id": "DS-1",
    "featureType": "DualSpaceLayer",
    "creationDatetime": "2025-10-30T13:00:00",
    "isLogical": false,
    "isDirected": false,
    "nodeMember": [...],
    "edgeMember": [...]
  }
}
```

Listing 12 — An example of the DualSpaceLayer object:

REQUIREMENT 8: DUALSPACE LAYER SCHEMA

IDENTIFIER	/req/core/dualspace layer
INCLUDED IN	Requirements class 1: http://www.opengis.net/spec/indoorgml-2/2.0/json/req/core
A	A DualSpaceLayer object SHALL specify whether the provided graph is a geometric or a logical using the <code>isLogical</code> member.
B	When the <code>isLogical</code> value is FALSE, the geometries of its Node instances SHALL be spatially located inside of their corresponding CellSpaces .
C	A DualSpaceLayer object SHALL specify whether the provided graph is directed using the <code>isDirected</code> member.
D	A DualSpaceLayer object SHALL contain one or more Node objects as <code>NodeMember</code> values.
E	The <code>featuretype</code> value SHALL be "DualSpaceLayer".

7.7. Node

Node object is an instance of Node, a state or a graph vertex in the dual space layer.

The **Node** object shall contain:

- `id`
- `featureType`
- duality must be mapped to the `id` member of the **CellSpace** object

- optionally, geometry
- optionally, connects can have the id member of the connected **Edge** object

A **Node** may be linked to a **CellSpace** through the duality member. A **Node** may be connects to a set of **Edges** through the connects member. For geometry member referred JSON-FG Point geometry.

```
{
  "Node": {
    "$anchor": "Node",
    "type": "object",
    "properties": {
      "id": { "type": "string" },
      "featureType": { "enum": ["Node"] },
      "duality": { "type": "string", "format": "uri-reference" },
      "geometry": { "$ref": "https://schemas.opengis.net/json-fg/geometry-object.json#/$defs/Point" },
      "connects": {
        "type": "array",
        "items": { "type": "string", "format": "uri-reference" },
        "uniqueItems": true
      }
    },
    "required": ["id", "featureType", "duality"]
  }
}
```

Listing 13 – A JSON schema of the Node:

```
{
  "id": "N1",
  "featureType": "Node",
  "duality": "C1",
  "geometry": {
    "type": "Point",
    "coordinates": [1,1]
  },
  "connects": ["E1"]
}
```

Listing 14 – An example of the Node object:

REQUIREMENT 9: NODE SCHEMA

IDENTIFIER /req/core/node

INCLUDED IN Requirements class 1: <http://www.opengis.net/spec/indoorgml-2/2.0/json/req/core>

A A **Node** object SHALL contain a duality value by referencing the id member of to correspond **CellSpace**.

B The connects value SHALL contain the same id as the linked **Edge** objects.

C The featuretype value SHALL be "Node".

7.8. Edge

Edge object is an instance of `Edge`, which represents a relationship between two nodes. It may represent adjacency, connectivity, accessibility, or navigability.

The Edge object shall contain:

- `id`
- `featureType`
- `weight` can be used in graph-based applications
- `connects` must have the `id` value of the connected **Nodes** object
- optionally, `duality` can be mapped to the `id` value of the **CellBoundary** object
- optionally, `geometry`

An Edge must reference the connected **Nodes** using the `connects` member. An Edge can be linked to a **CellBoundary** through the `duality` member. For `geometry` member referred JSON-FG `LineString` geometry.

```
{
  "Edge": {
    "$anchor": "Edge",
    "type": "object",
    "properties": {
      "id": { "type": "string" },
      "featureType": { "enum": ["Edge"] },
      "duality": { "type": "string", "format": "uri-reference" },
      "weight": { "type": "number" },
      "geometry": { "$ref": "https://schemas.opengis.net/json-fg/geometry-object.json#/$defs/LineString" },
      "connects": {
        "type": "array",
        "items": { "type": "string", "format": "uri-reference" },
        "minItems": 2,
        "maximum": 2,
        "uniqueItems": true
      }
    },
    "required": ["id", "featureType", "weight", "connects"]
  }
}
```

Listing 15 — A JSON schema of an Edge:

```
{
  "id": "E1",
  "featureType": "Edge",
  "duality": "B1",
  "weight": 1.0,
  "geometry": {
    "type": "LineString",
    "coordinates": [[1,1],[3,1]]
  }
}
```

```

    },
    "connects": [
      "N1",
      "N2"
    ]
  }
}

```

Listing 16 — An example of the Edge object:

REQUIREMENT 10: EDGE SCHEMA

IDENTIFIER	/req/core/edge
INCLUDED IN	Requirements class 1: http://www.opengis.net/spec/indoorgml-2/2.0/json/req/core
A	An Edge object SHALL reference the connected Nodes using the connects member.
B	An Edge object SHALL contain a weight value.
C	The start and end coordinates of the geometry value SHALL match the coordinates of the connected Nodes in the connects member.
D	The featureType value SHALL be "Edge".

7.9. InterLayerConnection

InterLayerConnection object is an instance of InterLayerConnection, represents a relationship between objects in different thematic layers.

The **InterLayerConnection** object shall contain:

- id
- featureType
- connectedLayers must be mapped to the id value of the two **ThematicLayer** objects
- typeOfTopoExpression
- optionally, connectedNodes can be mapped to the id value of the two **Node** objects
- optionally, connectedCells can be mapped to the id value of the two **CellSpace** objects
- optionally, comment

The typeOfTopoExpression member represents the topological relationship between two layers. The typeOfTopoExpression values including "CONTAINS", "OVERLAPS", "EQUALS",

“WITHIN”, “CROSSES”, and “OTHERS”, according to the conceptual model. Those topological values are in the form of verbs for which the subject is the first instance of the connectedLayers member. The values of the connectedLayers, connectedNodes, and connectedCells members shall be ordered and mapped to the same indices.

```
{
  "InterLayerConnection": {
    "$anchor": "InterLayerConnection",
    "type": "object",
    "properties": {
      "id": { "type": "string" },
      "featureType": { "enum": ["InterLayerConnection"] },
      "connectedLayers": {
        "type": "array",
        "items": { "type": "string", "format": "uri-reference" },
        "minItems": 2,
        "maximum": 2,
        "uniqueItems": true
      },
      "connectedNodes": {
        "type": "array",
        "items": { "type": "string", "format": "uri-reference" },
        "minItems": 2,
        "maximum": 2,
        "uniqueItems": true
      },
      "connectedCells": {
        "type": "array",
        "items": { "type": "string", "format": "uri-reference" },
        "minItems": 2,
        "maximum": 2,
        "uniqueItems": true
      },
      "typeOfTopoExpression": {
        "enum": ["CONTAINS", "OVERLAPS", "EQUALS", "WITHIN", "CROSSES", "OTHERS"]
      },
      "comment": { "type": "string" }
    },
    "required": ["id", "featureType", "connectedLayers", "typeOfTopoExpression"]
  }
}
```

Listing 17 – A JSON schema of the InterLayerConnection:

```
{
  "id": "ILC-1",
  "featureType": "InterLayerConnection",
  "connectedLayers": ["TL-1", "TL-2"],
  "connectedNodes": ["N1", "N101"],
  "typeOfTopoExpression": "CONTAINS"
}
```

Listing 18 – An example of the InterLayerConnection object:

REQUIREMENT 11: INTERLAYERCONNECTION SCHEMA

IDENTIFIER	/req/core/interlayerconnection
------------	--------------------------------

REQUIREMENT 11: INTERLAYERCONNECTION SCHEMA

INCLUDED IN	Requirements class 1: http://www.opengis.net/spec/indoorgml-2/2.0/json/req/core
A	The InterLayerConnection object SHALL reference the connected ThematicLayer using the connectedLayers member.
B	The InterLayerConnection object SHALL use the typeOfTopoExpression member to represent the topological the values in connectedLayers (or, if that value is not null, connectedNodes or connectedCells).
C	The typeOfTopoExpression value SHALL be one of the following: "CONTAINS", "OVERLAPS", "EQUALS", "WITHIN", "CROSSES", or "OTHERS"
D	The connectedLayers value SHALL contain the same id as the linked ThematicLayer objects.
E	The connectedNodes value SHALL contain the same id as the linked Node objects.
F	The connectedCells value SHALL contain the same id as the linked CellSpace objects.
G	The values of the connectedLayers, connectedNodes, and connectedCells members SHALL be ordered and mapped to the same indices.
H	The featureType value SHALL be "InterLayerConnection".

7.10. ExternalReferenceType

The externalReferenceType object is used for the reference of an object to its corresponding object in an external data set. This is not a feature class of IndoorGML 2.0.

```
{
  "ExternalReferenceType": {
    "$anchor": "ExternalReferenceType",
    "type": "object",
    "properties": {
      "externalObject": {
        "type": "object",
        "properties": {
          "name": { "type": "string" },
          "uri": { "type": "string", "format": "uri" }
        },
        "required": ["name", "uri"]
      },
      "informationSystem": { "type": "string", "format": "uri" }
    },
    "required": ["externalObject", "informationSystem"]
  }
}
```

Listing 19 – A JSON schema of the ExternalReferenceType:



8

INDOORJSON NAVIGATION EXTENSION

REQUIREMENTS CLASS 2

IDENTIFIER	http://www.opengis.net/spec/indoorgml-2/2.0/json/req/navi
TARGET TYPE	Implementation Specification
CONFORMANCE CLASS	Conformance class A.2: http://www.opengis.net/spec/indoorgml-2/2.0/conf/navi
PREREQUISITES	http://www.opengis.net/spec/indoorgml/2.0/req http://www.opengis.net/spec/json-fg-1/1.0/req/core http://www.opengis.net/spec/json-fg-1/1.0/req/polyhedra
NORMATIVE STATEMENTS	Requirement 12: /req/navi/element Requirement 13: /req/navi/navigablespace Requirement 14: /req/navi/generalspace Requirement 15: /req/navi/transferspace Requirement 16: /req/navi/nonnavigablespace Requirement 17: /req/navi/objectspace Requirement 18: /req/navi/navigableboundary Requirement 19: /req/navi/nonnavigableboundary Requirement 20: /req/navi/route

REQUIREMENT 12: REQUIREMENT FOR INDOORJSON NAVIGATION EXTENSION

IDENTIFIER	/req/navi/element
INCLUDED IN	Requirements class 2: http://www.opengis.net/spec/indoorgml-2/2.0/json/req/navi
A	IndoorGML Navigation Extension JSON elements implemented by a conforming instance document SHALL conform to the JSON schema in <code>indoorjson.navi.schema.json</code> .

8.1. NavigableSpace

NavigableSpace object is an instance of NavigableSpace, which represents a space where the user can move freely. The compartmentalized spaces such as corridor, door, lobby, hallway, big room are represented as **NavigableSpace**.

An **NavigableSpace** object shall contain:

- All members from **CellSpace**
- locomotionType is the allowed transportation mode in indoor space

```
{
  "NavigableSpace": {
    "$anchor": "NavigableSpace",
    "allOf": [
      { "$ref": "indoorjson.core.schema.json#/$defs/CellSpace" },
      {
        "type": "object",
        "properties": {
          "featureType": { "enum": ["NavigableSpace", "GeneralSpace",
"TransferSpace"] },
          "locomotionType": { "enum": ["Flying", "Rolling", "Walking",
"Unspecified"] }
        },
        "required": ["locomotionType"]
      }
    ]
  }
}
```

Listing 20 — A JSON schema of the NavigableSpace:

```
{
  "id": "NS1",
  "featureType": "NavigableSpace",
  "duality": "N1",
  "poi": false,
  "level": "1",
  "cellSpaceGeom": {...},
  "boundedBy": ["B1"],
  "locomotionType": "Walking"
}
```

Listing 21 — An example of the NavigableSpace object:

REQUIREMENT 13: NAVIGABLESPACE SCHEMA

IDENTIFIER	/req/navi/navigablespace
INCLUDED IN	Requirements class 2: http://www.opengis.net/spec/indoorgml-2/2.0/json/req/navi
A	A NavigableSpace object SHALL specify the transportation mode using the locomotionType member.
B	The locomotionType value SHALL be one of the following: “Flying”, “Rolling”, “Walking”, or “Unspecified”
C	The featuretype value SHALL be “NavigableSpace”.

8.2. GeneralSpace

GeneralSpace object is an instance of GeneralSpace, which agents can use for a longer period of time and can serve as starting and target cell in navigation.

An **GeneralSpace** object shall contain:

- All members from **NavigableSpace**
- function specifies details about the function of the cell.

```
{
  "GeneralSpace": {
    "$anchor": "GeneralSpace",
    "allOf": [
      { "$ref": "#/$defs/NavigableSpace" },
      {
        "type": "object",
        "properties": {
          "featureType": { "enum": ["GeneralSpace"] },
          "function": { "enum": ["Administration", "Business, trade", "Education, training", "Recreation", "Laboratory", "Storage", "Security"] },
          "required": ["function"]
        }
      }
    ]
  }
}
```

Listing 22 — A JSON schema of the GeneralSpace:

```
{
  "id": "GS1",
  "featureType": "GeneralSpace",
  "duality": "N1",
  "poi": false,
  "level": "1",
  "cellSpaceGeom": {
    "geometry2D": {
      "type": "Polygon",
      "coordinates": [[[0,0], [2,0], [2,2], [0,2], [0,0]]]
    }
  },
  "boundedBy": ["B1"],
  "locomotionType": "Walking",
  "function": "Administration"
}
```

Listing 23 — An example of the GeneralSpace object:

REQUIREMENT 14: GENERALSPEACE SCHEMA

IDENTIFIER	/req/navi/generalspace
------------	------------------------

REQUIREMENT 14: GENERALSPEACE SCHEMA

INCLUDED IN	Requirements class 2: http://www.opengis.net/spec/indoorgml-2/2.0/json/req/navi
A	A GeneralSpace object SHALL specify the transportation mode using the function member.
B	The function value SHALL be one of the following: "Administration","Business, trade", "Education, training","Recreation","Laboratory","Storage", or "Security"
C	The featureType value SHALL be "GeneralSpace".

8.3. TransferSpace

TransferSpace object is an instance of GeneralSpace, which a space that provides passages between **GeneralSpaces**.

An **TransferSpace** object shall contain:

- All members from **NavigableSpace**
- category specifies opening categories (Door or Window).
- function describes whether the space is an "AnchorSpace" or a "ConnectionSpace".

Note that an AnchorSpace is a space that allows for the connection between the indoor and the outdoor. A ConnectionSpace is a space connecting two indoor or two outdoor spaces.

```
{
  "TransferSpace": {
    "$anchor": "TransferSpace",
    "allOf": [
      {"$ref": "#/$defs/NavigableSpace"},
      {
        "type": "object",
        "properties": {
          "featureType": { "enum": ["TransferSpace"] },
          "category": { "enum": ["Door", "Window"] },
          "function": { "enum": ["AnchorSpace", "ConnectionSpace"] }
        },
        "required": ["category", "function"]
      }
    ]
  }
}
```

Listing 24 — A JSON schema of the TransferSpace:

```
{
  "id": "TS1",
  "featureType": "TransferSpace",
  "poi": false,
```

```

    "cellSpaceGeom": {...},
    "category": "Door",
    "function": "ConnectionSpace"
}

```

Listing 25 — An example of the TransferSpace object:

REQUIREMENT 15: TRANSFERSPACE SCHEMA	
IDENTIFIER	/req/navi/transferspace
INCLUDED IN	Requirements class 2: http://www.opengis.net/spec/indoorgml-2/2.0/json/req/navi
A	A TransferSpace object SHALL contain category and function members.
B	The category value SHALL be one of the following: "Door" or "Window"
C	The function value SHALL be one of the following: "AnchorSpace" for representing connection between the indoor and the outdoor or "ConnectionSpace" for representing connection between two indoor or outdoor spaces.
D	The featureType value SHALL be "TransferSpace".

8.4. NonNavigableSpace

NonNavigableSpace object is an instance of NonNavigableSpace, which **CellSpace** that are occupied by obstacles.

An **ObjectSpace** object shall contain:

- All members from **CellSpace**

```

{
  "NonNavigableSpace": {
    "$anchor": "NonNavigableSpace",
    "allOf": [
      { "$ref": "indoorjson.core.schema.json#/$defs/CellSpace" },
      {
        "type": "object",
        "properties": {
          "featureType": { "enum": ["NonNavigableSpace", "ObjectSpace"] }
        }
      }
    ]
  }
}

```

Listing 26 — A JSON schema of the NonNavigableSpace:

REQUIREMENT 16: NONNAVIGABLESPACE SCHEMA

IDENTIFIER	/req/navi/nonnavigablespace
INCLUDED IN	Requirements class 2: http://www.opengis.net/spec/indoorgml-2/2.0/json/req/navi
A	The featureType value SHALL be one of "NonNavigableSpace" or "ObjectSpace".

8.5. ObjectSpace

ObjectSpace object is an instance of ObjectSpace, when **NonNavigableSpace** contains some objects that makes it non-navigable.

An **ObjectSpace** object shall contain:

- All members from **NonNavigableSpace**
- optionally, containedFeatures describes the number of objects encapsulated within the **ObjectSpace**.
- optionally, description describes any relevant information regarding the objects contained within the space in plain text.

```
{
  "ObjectSpace": {
    "$anchor": "ObjectSpace",
    "allOf": [
      { "$ref": "#/$defs/NonNavigableSpace" },
      {
        "type": "object",
        "properties": {
          "featureType": { "enum": ["ObjectSpace"] },
          "containedFeatures": { "type": "integer" },
          "description": { "type": "string" }
        }
      }
    ]
  }
}
```

Listing 27 — A JSON schema of the ObjectSpace:

```
{
  "id": "OS1",
  "featureType": "ObjectSpace",
  "poi": true,
  "cellSpaceGeom": {...},
  "containedFeatures": 1,
  "description": "vending machine"
}
```



```
}
```

Listing 28 — An example of the ObjectSpace object:

REQUIREMENT 17: OBJECTSPACE SCHEMA

IDENTIFIER	/req/navi/objectspace
INCLUDED IN	Requirements class 2: http://www.opengis.net/spec/indoorgml-2/2.0/json/req/navi
A	The featuretype value SHALL be "ObjectSpace".

8.6. NavigableBoundary

NavigableBoundary object is an instance of NavigableBoundary, which provides further information related to **NavigableSpace**.

An **NavigableBoundary** object shall contain:

- All members from **CellBoundary**
- `navigableBoundaryFunction` describes whether the boundary is an "AnchorBoundary" or a "ConnectionBoundary".
- optionally, `boundaryOrientation` is a flag that specifies whether to use the geometry represented by `cellBoundaryGeom` as-is ('true') or in reverse ('false').

Note that an `AnchorBoundary` is the boundary of `AnchorSpace` that enables the connection between indoor and outdoor spaces. A `ConnectionBoundary` is the boundary of a `ConnectionSpace` that connects two indoor spaces or two outdoor spaces.

```
{
  "NavigableBoundary": {
    "$anchor": "NavigableBoundary",
    "allOf": [
      { "$ref": "indoorjson.core.schema.json#/$defs/CellBoundary" },
      {
        "type": "object",
        "properties": {
          "featureType": { "enum": ["NavigableBoundary"] },
          "boundaryOrientation": { "type": "boolean" },
          "navigableBoundaryFunction": { "enum": ["AnchorBoundary",
"ConnectionBoundary"] }
        },
        "required": ["navigableBoundaryFunction"]
      }
    ]
  }
}
```

```
}
```

Listing 29 — A JSON schema of the NavigableBoundary:

```
{
  "id": "NB1",
  "featureType": "NavigableBoundary",
  "isVirtual": false,
  "duality": "E1",
  "cellBoundaryGeom": {...},
  "boundaryOrientation": true,
  "navigableBoundaryFunction": "ConnectionBoundary"
}
```

Listing 30 — An example of the NavigableBoundary object:

REQUIREMENT 18: NAVIGABLEBOUNDARY SCHEMA

IDENTIFIER	/req/navi/navigableboundary
INCLUDED IN	Requirements class 2: http://www.opengis.net/spec/indoorgml-2/2.0/json/req/navi
A	A NavigableBoundary object SHALL specify the function type using the <code>navigableBoundaryFunction</code> member.
B	The <code>navigableBoundaryFunction</code> value SHALL be one of the following: “Anchor Boundary” or “ConnectionBoundary”
C	The <code>featuretype</code> value SHALL be “NavigableBoundary”.

8.7. NonNavigableBoundary

NonNavigableBoundary object is an instance of `NonNavigableBoundary`, which represent the boundaries between two **NonNavigableSpace** cells or between a **NavigableSpace** and a **NonNavigableSpace** cells.

An **NonNavigableBoundary** object shall contain:

- All members from **CellBoundary**

```
{
  "NavigableBoundary": {
    "$anchor": "NonNavigableBoundary",
    "allOf": [
      { "$ref": "indoorjson.core.schema.json#/$defs/CellBoundary" },
      {
        "type": "object",
        "properties": {
          "featureType": { "enum": [ "NonNavigableBoundary" ] },
        }
      }
    ]
  }
}
```

```

    }
  ]
}
}

```

Listing 31 — A JSON schema of the NonNavigableBoundary:

Requirement 19: NonNavigableBoundary Schema	
IDENTIFIER	/req/navi/nonnavigableboundary
INCLUDED IN	Requirements class 2: http://www.opengis.net/spec/indoorgml-2/2.0/json/req/navi
A	The featureType value SHALL be "NonNavigableBoundary".

8.8. Route

Route object is an instance of `Route`, which represents a subset of network from **DualSpace**, to describe a path for navigation within an indoor space.

An **Route** object shall contain:

- routeNode is ordered sequences of **Node** references to describe the different parts of the route path.
- routeEdge is ordered sequences of **Edge** references to describe the different parts of the route path.
- optionally, creationDate indicates when a specific route was created.

```

{
  "Route": {
    "$anchor": "Route",
    "type": "object",
    "properties": {
      "creationDate": { "type": "string", "format": "date-time" },
      "routeNode": {
        "type": "array",
        "minItems": 2,
        "items": { "$ref": "indoorjson.core.schema.json#/$defs/Node" }
      },
      "routeEdge": {
        "type": "array",
        "minItems": 1,
        "items": { "$ref": "indoorjson.core.schema.json#/$defs/Edge" }
      }
    },
    "required": ["routeNode", "routeEdge"]
  }
}

```

```
}
```

Listing 32 – A JSON schema of the Route:

```
{
  "routeNode": [ "N1", "N2" ],
  "routeEdge": [ "R1" ]
}
```

Listing 33 – An example of the Route object:

Requirement 20: Route Schema	
IDENTIFIER	/req/navi/route
INCLUDED IN	Requirements class 2: http://www.opengis.net/spec/indoorgml-2/2.0/json/req/navi
A	A Route object SHALL contain routeNode and routeEdge members.
B	The routeNode value SHALL contain the same id as the linked Node objects.
C	The routeEdge value SHALL contain the same id as the linked Edge objects.
D	The routeNode and routeEdge SHALL be an ordered list.
E	An Edge object whose connected value contains two consecutive IDs within routeNode SHALL be included in routeEdge value.
F	The connected value of a Edge object corresponding to two consecutive IDs in routeEdge SHALL be contained the ID of the same Node object.



ANNEX A (NORMATIVE) CONFORMANCE CLASS ABSTRACT TEST SUITE



ANNEX A

(NORMATIVE)

CONFORMANCE CLASS ABSTRACT TEST SUITE

A.1. Conformance Class Core

CONFORMANCE CLASS A.1	
IDENTIFIER	<code>http://www.opengis.net/spec/indoorgml-2/2.0/conf/core</code>
REQUIREMENTS CLASS	Requirements class 1: <code>http://www.opengis.net/spec/indoorgml-2/2.0/json/req/core</code>
TARGET TYPE	Implementation Specification
CONFORMANCE TESTS	Abstract test A.1: <code>/conf/core/element</code> Abstract test A.2: <code>/conf/core/indoorjson</code> Abstract test A.3: <code>/conf/core/indoorfeature</code> Abstract test A.4: <code>/conf/core/thematiclayer</code> Abstract test A.5: <code>/conf/core/primalspacelayer</code> Abstract test A.6: <code>/conf/core/cellspace</code> Abstract test A.7: <code>/conf/core/cellboundary</code> Abstract test A.8: <code>/conf/core/dualspacelayer</code> Abstract test A.9: <code>/conf/core/node</code> Abstract test A.10: <code>/conf/core/edge</code> Abstract test A.11: <code>/conf/core/interlayerconnection</code>
ABSTRACT TEST A.1	
IDENTIFIER	<code>/conf/core/element</code>
REQUIREMENT	Requirement 2: <code>/req/core/element</code>

ABSTRACT TEST A.1

TEST PURPOSE Verify that instance documents using the IndoorGML Core JSON elements validate against the JSON schema specified in indoorjson.core.schema.json.

TEST METHOD Validate the instance document against the indoorjson.core.schema.json schema to verify the above requirement. The process may be using an appropriate software tool for validation or be a manual process that checks all definitions from the JSON schema specification.

ABSTRACT TEST A.2

IDENTIFIER /conf/core/indoorjson

REQUIREMENT Requirement 1: /req/core/indoorjson

TEST PURPOSE For each IndoorJSON object verify that if the IndoorJSON object (and inherited objects) is contained id and featuretype members.

TEST METHOD Inspect the instance document to verify the above requirement.

ABSTRACT TEST A.3

IDENTIFIER /conf/core/indoorfeature

REQUIREMENT Requirement 3: /req/core/indoorfeature

TEST PURPOSE For the following members of **IndoorFeatures** object, verify that:

- The **IndoorFeatures** object is contained at least one **ThematicLayer** object as item of layers value.
- The featuretype value is "IndoorFeatures".
- If the layerConnections value is not null, it contains the set of **InterLayerConnection** objects.

TEST METHOD Inspect the instance document to verify the above requirement.

ABSTRACT TEST A.4

IDENTIFIER /conf/core/thematiclayer

REQUIREMENT Requirement 4: /req/core/thematiclayer

TEST PURPOSE For the following members of **ThematicLayer** object, verify that:

ABSTRACT TEST A.4

- The `semanticExtension` value (boolean) is declared based on whether there is an extension module that contains additional semantic information.
- The `theme` value is one of the following: "Virtual", "Physical", "Tags", or "Unknown"
- The `featuretype` value is "ThematicLayer"
- If the `primalSpcae` value is not null, it contains the **PrimalSpaceLayer** object.
- If the `dualSpace` value is not null, it contains the **DualSpace** object.

TEST METHOD Inspect the instance document to verify the above requirement.

ABSTRACT TEST A.5

IDENTIFIER /conf/core/primalspacelayer

REQUIREMENT Requirement 5: /req/core/primalspacelayer

TEST PURPOSE For the following members of **PrimalSpaceLayer** object, verify that:

- The **PrimalSpaceLayer** object is contained at least one **CellSpace** object as item of `cellSpaceMember` value.
- The geometries of each **CellSpace** object contained in `cellSpaceMember` do not intersect with one another.
- The geometries of each **CellBoundary** object contained in `cellBoundaryMember` do not intersect with one another.
- The `featuretype` value is "PrimalSpaceLayer".

TEST METHOD Inspect the instance document to verify the above requirement.

ABSTRACT TEST A.6

IDENTIFIER /conf/core/cellspace

REQUIREMENT Requirement 6: /req/core/cellspace

TEST PURPOSE For the following members of **CellSpace** object, verify that:

- The `poi` value (boolean) is declared based on whether it is a point of interest space.
- If the `duality` value is not null, it contains the `id` value of the **Node** object in the same instance document.
- If the `boundedBy` value is not null, it contains the `id` value of the **CellBoundary** object in the same instance document.
- The geometries of each **CellBoundary** object contained in `boundedBy` value do not exceed the extent of the `cellSpaceGeom` value.

ABSTRACT TEST A.6

- The `featuretype` value is one of the following: "CellSpace", "NonNavigableSpace", or "ObjectSpace".

TEST METHOD Inspect the instance document to verify the above requirement.

ABSTRACT TEST A.7

IDENTIFIER /conf/core/cellboundary

REQUIREMENT Requirement 7: /req/core/cellboundary

For the following members of **CellBoundary** object, verify that:

- The `isVirtual` value (boolean) is declared based on whether it is virtual boundary.
- If the `duality` value is not null, it contains the `id` value of the **Edge** object in the same instance document.
- The `featuretype` value is one of the following: "CellBoundary", or "NonNavigableBoundary".

TEST METHOD Inspect the instance document to verify the above requirement.

ABSTRACT TEST A.8

IDENTIFIER /conf/core/dualspacelayer

REQUIREMENT Requirement 8: /req/core/dualspacelayer

For the following members of **DualSpaceLayer** object, verify that:

- The **DualSpaceLayer** object is contained at least one **Node** object as item of `nodeMember` value.
- The `isLogical` value (boolean) is declared based on whether the provided graph is a geometric or a logical.
- If the `isLogical` value is False, the geometry of each **Node** object contained in `nodeMember` is spatially located within their corresponding **CellSpace**.
- The `isDirected` value (boolean) is declared based on the provided graph is directed.
- If the `edgeMember` value is not null, it contains the **Edge** object.
- The `featuretype` value is "DualSpaceLayer".

TEST METHOD Inspect the instance document to verify the above requirement.

ABSTRACT TEST A.9

IDENTIFIER /conf/core/node

REQUIREMENT Requirement 9: /req/core/node

TEST PURPOSE For the following members of **Node** object, verify that:

- The duality value contains the id value of the **CellSpace** object in the same instance document.
- If the connects value is not null, it contains the id value of the **Edge** object in the same instance document.
- The featuretype value is "Node".

TEST METHOD Inspect the instance document to verify the above requirement.

ABSTRACT TEST A.10

IDENTIFIER /conf/core/edge

REQUIREMENT Requirement 10: /req/core/edge

TEST PURPOSE For the following members of **Edge** object, verify that:

- The connects value contains two id values (start and end) of the **Node** object in the same instance document.
- If the parent **DualSpace** object's isDirected value is True, the connects value interpreted as ordered sequence (start to end).
- If the duality value is not null, it contains the id value of the **CellBoundary** object in the same instance document.
- The start and end coordinates of the **Edge** geometry and geometry of the **Nodes** included in connects is the same.
- The featuretype value is "Edge".

TEST METHOD Inspect the instance document to verify the above requirement.

ABSTRACT TEST A.11

IDENTIFIER /conf/core/interlayerconnection

REQUIREMENT Requirement 11: /req/core/interlayerconnection

TEST PURPOSE For the following members of **InterLayerConnection** object, verify that:

- The connectedLayers value contains two id values of the **ThematicLayer** object in the same instance document.

ABSTRACT TEST A.11

- If the value of `connectedNodes` is not null, it contains the `id` values of **Node** objects in the same instance document, and each **Node** object is contained within a **ThematicLayer** object specified in `connectedLayers`. In this case, the values of `connectedLayers` and `connectedNodes` are matched in order.
- If the value of `connectedCells` is not null, it contains the `id` values of **CellSpace** objects in the same instance document, and each **CellSpace** object is contained within a **ThematicLayer** object specified in `connectedLayers`. In this case, the values of `connectedLayers` and `connectedNodes` are matched in order.
- The `typeOfTopoExpression` value is one of the following: "CONTAINS", "OVERLAPS", "EQUALS", "WITHIN", "CROSSES", or "OTHERS"
- The `featureType` value is "InterLayerConnection".

TEST METHOD Inspect the instance document to verify the above requirement.

A.2. Conformance Class Navigation Extension

CONFORMANCE CLASS A.2

IDENTIFIER	http://www.opengis.net/spec/indoorgml-2/2.0/conf/navi
REQUIREMENTS CLASS	Requirements class 2: http://www.opengis.net/spec/indoorgml-2/2.0/json/req/navi
TARGET TYPE	Implementation Specification
CONFORMANCE TESTS	Abstract test A.12: <code>/conf/navi/element</code> Abstract test A.13: <code>/conf/navi/navigablespace</code> Abstract test A.14: <code>/conf/navi/generalspace</code> Abstract test A.15: <code>/conf/navi/transferspace</code> Abstract test A.16: <code>/conf/navi/nonnavigablespace</code> Abstract test A.17: <code>/conf/navi/objectspace</code> Abstract test A.18: <code>/conf/navi/navigableboundary</code> Abstract test A.19: <code>/conf/navi/nonnavigableboundary</code> Abstract test A.20: <code>/conf/navi/route</code>

ABSTRACT TEST A.12

IDENTIFIER `/conf/navi/element`

REQUIREMENT Requirement 12: `/req/navi/element`

ABSTRACT TEST A.12

TEST PURPOSE	Verify that instance documents using the IndoorGML Core JSON elements validate against the JSON schema specified in indoorjson.navi.schema.json.
TEST METHOD	Validate the instance document against the indoorjson.navi.schema.json schema to verify the above requirement. The process may be using an appropriate software tool for validation or be a manual process that checks all definitions from the JSON schema specification.

ABSTRACT TEST A.13

IDENTIFIER	/conf/navi/navigablespace
REQUIREMENT	Requirement 13: /req/navi/navigablespace
TEST PURPOSE	For the following members of NavigableSpace object, verify that: • Check the validation criteria for "/conf/core/cellspace" based on the inheritance relationship, excluding featuretype. • The locomotionType value is one of the following: "Flying", "Rolling", "Walking", or "Unspecified" • The featuretype value is "NavigableSpace".
TEST METHOD	Inspect the instance document to verify the above requirement.

ABSTRACT TEST A.14

IDENTIFIER	/conf/navi/generalspace
REQUIREMENT	Requirement 14: /req/navi/generalspace
TEST PURPOSE	For the following members of GeneralSpace object, verify that: • Check the validation criteria for "/conf/navi/navigablespace" based on the inheritance relationship, excluding featuretype. • The function value is one of the following: "Administration", "Business, trade", "Education, training", "Recreation", "Laboratory", "Storage", or "Security" • The featuretype value is "GeneralSpace".
TEST METHOD	Inspect the instance document to verify the above requirement.

ABSTRACT TEST A.15

IDENTIFIER	/conf/navi/transferspace
------------	--------------------------

ABSTRACT TEST A.15

REQUIREMENT	Requirement 15: /req/navi/transferspace
TEST PURPOSE	For the following members of TransferSpace object, verify that: • Check the validation criteria for “/conf/navi/navigablespace” based on the inheritance relationship, excluding featuretype. • The category value is one of the following: “Door” or “Window” • The function value is one of the following: “AnchorSpace” or “ConnectionSpace” • The featuretype value is “TransferSpace”.
TEST METHOD	Inspect the instance document to verify the above requirement.

ABSTRACT TEST A.16

IDENTIFIER	/conf/navi/nonnavigablespace
REQUIREMENT	Requirement 16: /req/navi/nonnavigablespace
TEST PURPOSE	For the following members of NonNavigableSpace object, verify that: • Check the validation criteria for “/conf/core/cellspace” based on the inheritance relationship, excluding featuretype. • The featuretype value is one of the following: “NonNavigableSpace” or “ObjectSpace”.
TEST METHOD	Inspect the instance document to verify the above requirement.

ABSTRACT TEST A.17

IDENTIFIER	/conf/navi/objectspace
REQUIREMENT	Requirement 17: /req/navi/objectspace
TEST PURPOSE	For the following members of NonNavigableSpace object, verify that: • Check the validation criteria for “/conf/navi/nonnavigablespace” based on the inheritance relationship, excluding featuretype. • The featuretype value is “ObjectSpace”.
TEST METHOD	Inspect the instance document to verify the above requirement.

ABSTRACT TEST A.18

IDENTIFIER /conf/navi/navigableboundary

REQUIREMENT Requirement 18: /req/navi/navigableboundary

TEST PURPOSE

For the following members of **NavigableSpace** object, verify that:

- Check the validation criteria for “/conf/core/cellboundary” based on the inheritance relationship, excluding featuretype.
- The navigableBoundaryFunction value is one of the following: “AnchorBoundary” or “ConnectionBoundary”
- The featuretype value is “NavigableBoundary”.

TEST METHOD Inspect the instance document to verify the above requirement.

ABSTRACT TEST A.19

IDENTIFIER /conf/navi/nonnavigableboundary

REQUIREMENT Requirement 19: /req/navi/nonnavigableboundary

TEST PURPOSE

For the following members of **NonNavigableSpace** object, verify that:

- Check the validation criteria for “/conf/core/cellboundary” based on the inheritance relationship, excluding featuretype.
- The featuretype value is “NonNavigableBoundary”.

TEST METHOD Inspect the instance document to verify the above requirement.

ABSTRACT TEST A.20

IDENTIFIER /conf/navi/route

REQUIREMENT Requirement 20: /req/navi/route

TEST PURPOSE

For the following members of **Route** object, verify that:

- The routeNode contains the id values of **Node** objects in the same instance document, and each **Node** object is contained within the same **DualSpace** object.
- The routeEdge contains the id values of **Edge** objects in the same instance document, and each **Edge** object is contained within the same **DualSpace** object.
- The **Edge** objects whose connected values contain two consecutive IDs within routeNode are included in the routeEdge value.
- The connected values of **Edge** objects corresponding to two consecutive IDs within routeEdge contain the ID of the same **Node** object.

ABSTRACT TEST A.20

TEST METHOD Inspect the instance document to verify the above requirement.



ANNEX B (NORMATIVE) JSON SCHEMAS

B

ANNEX B

(NORMATIVE)

JSON SCHEMAS

B.1. JSON Schema of a IndoorJSON Core

```
{
  "$schema": "https://json-schema.org/draft/2020-12/schema",
  "$id": "https://www.opengis.net/spec/indoorgml/2.0/json/indoorjson.core.schema.json",
  "title": "IndoorJSON for IndoorGML 2.0 core part",
  "description": "IndoorJSON Core",
  "oneOf": [
    { "$ref": "#/$defs/IndoorFeatures" },
    { "$ref": "#/$defs/ThematicLayer" },
    { "$ref": "#/$defs/InterLayerConnection" },
    { "$ref": "#/$defs/PrimalSpaceLayer" },
    { "$ref": "#/$defs/CellSpace" },
    { "$ref": "#/$defs/CellBoundary" },
    { "$ref": "#/$defs/DualSpaceLayer" },
    { "$ref": "#/$defs/Node" },
    { "$ref": "#/$defs/Edge" }
  ],
  "$defs": {
    "IndoorFeatures": {
      "$anchor": "IndoorFeatures",
      "type": "object",
      "properties": {
        "id": { "type": "string" },
        "featureType": { "enum": ["IndoorFeatures"] },
        "layers": {
          "type": "array",
          "minItems": 1,
          "items": { "$ref": "#/$defs/ThematicLayer" },
          "uniqueItems": true
        },
        "layerConnections": {
          "type": "array",
          "items": { "$ref": "#/$defs/InterLayerConnection" },
          "uniqueItems": true
        }
      },
      "required": ["id", "featureType", "layers"]
    },
    "ThematicLayer": {
      "$anchor": "ThematicLayer",

```

```

    "type": "object",
    "properties": {
      "id": { "type": "string" },
      "featureType": { "enum": ["ThematicLayer"] },
      "semanticExtension": { "type": "boolean" },
      "theme": { "enum": ["Virtual", "Physical", "Tags", "Unknown"] },
      "primalSpace": { "$ref": "#/$defs/PrimalSpaceLayer" },
      "dualSpace": { "$ref": "#/$defs/DualSpaceLayer" }
    },
    "required": ["id", "featureType", "semanticExtension", "theme"]
  },
  "PrimalSpaceLayer": {
    "$anchor": "PrimalSpaceLayer",
    "type": "object",
    "properties": {
      "id": { "type": "string" },
      "featureType": { "enum": ["PrimalSpaceLayer"] },
      "creationDatetime": { "type": "string", "format": "date-time" },
      "terminationDatetime": { "type": "string", "format": "date-time" },
      "cellSpaceMember": {
        "type": "array",
        "minItems": 1,
        "items": { "$ref": "#/$defs/CellSpace" },
        "uniqueItems": true
      },
      "cellBoundaryMember": {
        "type": "array",
        "items": { "$ref": "#/$defs/CellBoundary" },
        "uniqueItems": true
      }
    },
    "required": ["id", "featureType", "cellSpaceMember"]
  },
  "CellSpace": {
    "$anchor": "CellSpace",
    "type": "object",
    "properties": {
      "id": { "type": "string" },
      "featureType": { "enum": ["CellSpace", "NavigableSpace", "GeneralSpace", "TransferSpace", "NonNavigableSpace", "ObjectSpace"] },
      "cellSpaceName": { "type": "string" },
      "level": { "type": "string" },
      "poi": { "type": "boolean" },
      "duality": { "type": "string", "format": "uri-reference" },
      "cellSpaceGeom": {
        "type": "object",
        "properties": {
          "geometry2D": { "$ref": "https://schemas.opengis.net/json-fg/geometry-object.json#/$defs/Polygon" },
          "geometry3D": { "$ref": "https://schemas.opengis.net/json-fg/geometry-object.json#/$defs/Polyhedron" }
        }
      },
      "boundedBy": {
        "type": "array",
        "items": { "type": "string", "format": "uri-reference" },
        "uniqueItems": true
      },
      "externalReference": { "$ref": "#/$defs/ExternalReferenceType" }
    },
    "required": ["id", "featureType", "cellSpaceGeom", "boundedBy", "externalReference"]
  }
}

```

```

    "required": ["id", "featureType", "poi"]
  },
  "CellBoundary": {
    "$anchor": "CellBoundary",
    "type": "object",
    "properties": {
      "id": { "type": "string" },
      "featureType": { "enum": ["CellBoundary", "NavigableBoundary",
"NonNavigableBoundary"] },
      "isVirtual": { "type": "boolean" },
      "duality": { "type": "string", "format": "uri-reference" },
      "cellBoundaryGeom": {
        "type": "object",
        "properties": {
          "geometry2D": { "$ref": "https://schemas.opengis.net/json-fg/
geometry-object.json#/$defs/LineString" },
          "geometry3D": { "$ref": "https://schemas.opengis.net/json-fg/
geometry-object.json#/$defs/Polygon" }
        }
      },
      "externalReference": { "$ref": "#/$defs/ExternalReferenceType" }
    },
    "required": ["id", "featureType", "isVirtual"]
  },
  "DualSpaceLayer": {
    "$anchor": "DualSpaceLayer",
    "type": "object",
    "properties": {
      "id": { "type": "string" },
      "featureType": { "enum": ["DualSpaceLayer"] },
      "creationDatetime": { "type": "string", "format": "date-time" },
      "terminationDatetime": { "type": "string", "format": "date-time" },
      "isLogical": { "type": "boolean" },
      "isDirected": { "type": "boolean" },
      "nodeMember": {
        "type": "array",
        "minItems": 1,
        "items": { "$ref": "#/$defs/Node" },
        "uniqueItems": true
      },
      "edgeMember": {
        "type": "array",
        "items": { "$ref": "#/$defs/Edge" },
        "uniqueItems": true
      }
    },
    "required": ["id", "featureType", "isLogical", "isDirected", "nodeMember"]
  },
  "Node": {
    "$anchor": "Node",
    "type": "object",
    "properties": {
      "id": { "type": "string" },
      "featureType": { "enum": ["Node"] },
      "duality": { "type": "string", "format": "uri-reference" },
      "geometry": { "$ref": "https://schemas.opengis.net/json-fg/geometry-
object.json#/$defs/Point" },
      "connects": {
        "type": "array",
        "items": { "type": "string", "format": "uri-reference" },

```

```

        "uniqueItems": true
    },
    },
    "required": ["id", "featureType", "duality"]
},
"Edge": {
    "$anchor": "Edge",
    "type": "object",
    "properties": {
        "id": { "type": "string" },
        "featureType": { "enum": ["Edge"] },
        "duality": { "type": "string", "format": "uri-reference" },
        "weight": { "type": "number" },
        "geometry": { "$ref": "https://schemas.opengis.net/json-fg/geometry-object.json#/$defs/LineString" },
        "connects": {
            "type": "array",
            "items": { "type": "string", "format": "uri-reference" },
            "minItems": 2,
            "maximum": 2,
            "uniqueItems": true
        }
    },
    "required": ["id", "featureType", "weight", "connects"]
},
"InterLayerConnection": {
    "$anchor": "InterLayerConnection",
    "type": "object",
    "properties": {
        "id": { "type": "string" },
        "featureType": { "enum": ["InterLayerConnection"] },
        "connectedLayers": {
            "type": "array",
            "items": { "type": "string", "format": "uri-reference" },
            "minItems": 2,
            "maximum": 2,
            "uniqueItems": true
        },
        "connectedNodes": {
            "type": "array",
            "items": { "type": "string", "format": "uri-reference" },
            "minItems": 2,
            "maximum": 2,
            "uniqueItems": true
        },
        "connectedCells": {
            "type": "array",
            "items": { "type": "string", "format": "uri-reference" },
            "minItems": 2,
            "maximum": 2,
            "uniqueItems": true
        },
        "typeOfTopoExpression": {
            "enum": ["CONTAINS", "OVERLAPS", "EQUALS", "WITHIN", "CROSSES",
"OTHERS"]
        },
        "comment": { "type": "string" }
    },
    "required": ["id", "featureType", "connectedLayers", "typeOfTopoExpression"]
},

```

```

    "ExternalReferenceType": {
      "$anchor": "ExternalReferenceType",
      "type": "object",
      "properties": {
        "externalObject": {
          "type": "object",
          "properties": {
            "name": { "type": "string" },
            "uri": { "type": "string", "format": "uri" }
          },
          "required": ["name", "uri"]
        },
        "informationSystem": { "type": "string", "format": "uri" }
      },
      "required": ["externalObject", "informationSystem"]
    }
  }
}

```

Listing B.1

B.2. JSON Schema of a IndoorJSON Navigation

```

{
  "$schema": "https://json-schema.org/draft/2020-12/schema",
  "$id": "https://www.opengis.net/spec/indoorgml/2.0/json/indoorjson.navi.schema.json",
  "title": "IndoorJSON for IndoorGML 2.0 navigation part",
  "description": "IndoorJSON Navigation",
  "oneOf": [
    { "$ref": "#/$defs/NavigableSpace" },
    { "$ref": "#/$defs/NonNavigableSpace" },
    { "$ref": "#/$defs/GeneralSpace" },
    { "$ref": "#/$defs/TransferSpace" },
    { "$ref": "#/$defs/ObjectSpace" },
    { "$ref": "#/$defs/NavigableBoundary" },
    { "$ref": "#/$defs/NonNavigableBoundary" },
    { "$ref": "#/$defs/Route" }
  ],
  "$defs": {
    "NavigableSpace": {
      "$anchor": "NavigableSpace",
      "allOf": [
        { "$ref": "indoorjson.core.schema.json#/$defs/CellSpace" },
        {
          "type": "object",
          "properties": {
            "locomotionType": { "enum": ["Flying", "Rolling", "Walking", "Unspecified"] }
          },
          "required": ["locomotionType"]
        }
      ]
    },
    "NonNavigableSpace": {

```

```

    "$anchor": "NonNavigableSpace",
    "allOf": [
      {"$ref": "indoorjson.core.schema.json#/$defs/CellSpace"}
    ]
  },
  "GeneralSpace": {
    "$anchor": "GeneralSpace",
    "allOf": [
      {"$ref": "#/$defs/NavigableSpace"},
      {
        "type": "object",
        "properties": {
          "function": { "enum": ["Administration", "Business, trade",
"Education, training", "Recreation", "Laboratory", "Storage", "Security"]}
        },
        "required": ["function"]
      }
    ]
  },
  "TransferSpace": {
    "$anchor": "TransferSpace",
    "allOf": [
      {"$ref": "#/$defs/NavigableSpace"},
      {
        "type": "object",
        "properties": {
          "category": { "enum": ["Door", "Window"]},
          "function": { "enum": ["AnchorSpace", "ConnectionSpace"]}
        },
        "required": ["category", "function"]
      }
    ]
  },
  "ObjectSpace": {
    "$anchor": "ObjectSpace",
    "allOf": [
      {"$ref": "#/$defs/NonNavigableSpace"},
      {
        "type": "object",
        "properties": {
          "containedFeatures": { "type": "integer"},
          "description": { "type": "string"}
        }
      }
    ]
  },
  "NavigableBoundary": {
    "$anchor": "NavigableBoundary",
    "allOf": [
      {"$ref": "indoorjson.core.schema.json#/$defs/CellBoundary"},
      {
        "type": "object",
        "properties": {
          "boundaryOrientation": { "type": "boolean"},
          "navigableBoundaryFunction": { "enum": ["AnchorBoundary",
"ConnectionBoundary"]}
        },
        "required": ["navigableBoundaryFunction"]
      }
    ]
  }
}

```

```

    ]
  },
  "NonNavigableBoundary": {
    "$anchor": "NonNavigableBoundary",
    "allOf": [
      { "$ref": "indoorjson.core.schema.json#/$defs/CellBoundary" }
    ]
  },
  "Route": {
    "$anchor": "Route",
    "type": "object",
    "properties": {
      "creationDate": { "type": "string", "format": "date-time" },
      "routeNode": {
        "type": "array",
        "minItems": 2,
        "items": { "$ref": "indoorjson.core.schema.json#/$defs/Node" }
      },
      "routeEdge": {
        "type": "array",
        "minItems": 1,
        "items": { "$ref": "indoorjson.core.schema.json#/$defs/Edge" }
      }
    },
    "required": ["routeNode", "routeEdge"]
  }
}
}
}

```

Listing B.2



ANNEX C (INFORMATIVE) REVISION HISTORY



ANNEX C

(INFORMATIVE)

REVISION HISTORY

DATE	RELEASE	EDITOR	PRIMARY CLAUSES MODIFIED	DESCRIPTION
2026-06-03	0.1	Taehoon Kim	all	Initial draft
2026-08-01	0.2	Taehoon Kim	Clause 7, 8, Annex A	Add ATS