

OGC® DOCUMENT: 26-042

External identifier of this OGC® document: <http://www.opengis.net/doc/IS/indoorgml-xml/2.0>



Open
Geospatial
Consortium

OGC INDOORGML 2.0 PART 2A – XML ENCODING

STANDARD
Implementation

CANDIDATE SWG DRAFT

Version: 0.5.0

Submission Date: 2025-08-06

Approval Date: 2099-01-01

Publication Date: 2099-01-01

Editor: Abdoulaye Diakité, Taehoon Kim, Sisi Zlatanova, Ki-Joune Li, Zhiyong Wang

Notice for Drafts: This document is not an OGC Standard. This document is distributed for review and comment. This document is subject to change without notice and may not be referred to as an OGC Standard.

Recipients of this document are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

License Agreement

Use of this document is subject to the license agreement at <https://www.ogc.org/license>

Suggested additions, changes and comments on this document are welcome and encouraged. Such suggestions may be submitted using the online change request form on OGC web site: <http://ogc.standardstracker.org/>

Copyright notice

Copyright © 2026 Open Geospatial Consortium

To obtain additional rights of use, visit <https://www.ogc.org/legal>

Note

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. The Open Geospatial Consortium shall not be held responsible for identifying any or all such patent rights.

Recipients of this document are requested to submit, with their comments, notification of any relevant patent claims or other intellectual property rights of which they may be aware that might be infringed by any implementation of the standard set forth in this document, and to provide supporting documentation.

CONTENTS

I. ABSTRACT	vi
II. KEYWORDS	vi
III. PREFACE	vii
IV. SECURITY CONSIDERATIONS	viii
V. SUBMITTING ORGANIZATIONS	ix
VI. SUBMITTERS	ix
1. SCOPE	2
2. CONFORMANCE	4
3. NORMATIVE REFERENCES	6
4. TERMS AND DEFINITIONS	8
5. CONVENTIONS	11
5.1. Identifiers	11
5.2. Use of XML terminology	11
6. OVERVIEW OF THE XML ENCODING	13
6.1. Design Principle	13
7. INDOORXML CORE	16
7.1. General requirements for encoding standard	16
7.2. IndoorFeatures	17
7.3. ThematicLayer	18
7.4. PrimalSpaceLayer	20
7.5. CellSpace	21
7.6. CellBoundary	23
7.7. DualSpaceLayer	24
7.8. Node	26
7.9. Edge	27
7.10. InterLayerConnection	28
7.11. ExternalReference	30
8. INDOORXML NAVIGATION	33

8.1. General requirements for encoding standards	33
8.2. NavigableSpace	34
8.3. GeneralSpace	35
8.4. TransferSpace	36
8.5. NavigableBoundary	38
8.6. NonNavigableSpace	40
8.7. ObjectSpace	40
8.8. NonNavigableBoundary	42
8.9. Route	42
 ANNEX A (NORMATIVE) CONFORMANCE CLASS ABSTRACT TEST SUITE	46
A.1. Conformance Class Core	46
A.2. Conformance Class Navigation Extension	50
 ANNEX B (NORMATIVE) XML SCHEMA FOR INDOORGML 2	56
B.1. IndoorGML Core Module	56
B.2. IndoorGML Indoor Navigation Module	65
 ANNEX C (INFORMATIVE) EXAMPLE OF CODELIST	74
C.1. GeneralSpace	74
C.2. TransitionSpace	79
C.3. ConnectionSpace	80
C.4. AnchorSpace	80
 ANNEX D (INFORMATIVE) USE-CASES OF INDOORGML 2 – PART2A	83
D.1. Use-Case 1: Conversion from IndoorGML 1.1 to IndoorGML 2	83
D.2. Use-Case 2: Conversion from IFC to IndoorGML 2	83
D.3. Use-Case 3: Mapping of ISO 19164 in IndoorGML 2 – Part 2a	83
D.4. Use-Case 4: Implementation of omlox in IndoorGML 2 – Part 2a	84
D.5. Use-Case 5: Indoor Navigation Service for Visually Impaired Person	84
 BIBLIOGRAPHY	86

LIST OF TABLES

Table 1 – Requirements classes mapping	vi
Table 2 – Conformance classes	4

LIST OF FIGURES

Figure 1 – IndoorGML 2.0 core module structure	13
--	----

LIST OF NORMATIVE STATEMENTS

REQUIREMENTS CLASS 1	16
REQUIREMENTS CLASS 2	33
REQUIREMENT 1: REQUIREMENT FOR GLOBAL XML SCHEMA VALIDATION	16
REQUIREMENT 2: REQUIREMENT FOR INDOORFEATURES XML ELEMENT	18
REQUIREMENT 3: REQUIREMENT FOR THEMATICLAYER XML ELEMENT	19
REQUIREMENT 4: REQUIREMENT FOR PRIMALSPACELAYER XML ELEMENT	21
REQUIREMENT 5: REQUIREMENT FOR CELLSPACE XML ELEMENT	22
REQUIREMENT 6: REQUIREMENT FOR CELLBOUNDARY XML ELEMENT	24
REQUIREMENT 7: REQUIREMENT FOR DUALSPACELAYER XML ELEMENT	25
REQUIREMENT 8: REQUIREMENT FOR NODE XML ELEMENT	27
REQUIREMENT 9: REQUIREMENT FOR EDGE XML ELEMENT	28
REQUIREMENT 10: REQUIREMENT FOR INTERLAYERCONNECTION XML ELEMENT	29
REQUIREMENT 11: REQUIREMENT FOR NAVIGATION MODULE XML SCHEMA VALIDATION	33
REQUIREMENT 12: REQUIREMENT FOR NAVIGABLESPACE XML ELEMENT	35
REQUIREMENT 13: REQUIREMENT FOR GENERALSPACE XML ELEMENT	36
REQUIREMENT 14: REQUIREMENT FOR TRANSFERSPACE XML ELEMENT	38
REQUIREMENT 15: REQUIREMENT FOR NAVIGABLEBOUNDARY XML ELEMENT	39
REQUIREMENT 16: REQUIREMENT FOR NONNAVIGABLESPACE XML ELEMENT	40
REQUIREMENT 17: REQUIREMENT FOR OBJECTSPACE XML ELEMENT	41
REQUIREMENT 18: REQUIREMENT FOR NONNAVIGABLEBOUNDARY XML ELEMENT	42
REQUIREMENT 19: REQUIREMENT FOR ROUTE XML ELEMENT	43
CONFORMANCE CLASS A.1	46
CONFORMANCE CLASS A.2	51



ABSTRACT

The IndoorGML 2.0 Part 2a – XML Encoding Standard presents the implementation-dependent Geography Markup Language (GML) XML schema encoding of the concepts defined by the IndoorGML 2.0 Part 1 – Conceptual Model Standard (OGC 22-045r5). The XML Encoding is compliant with GML version 3.2.1 as specified by OGC 07-036. The XML encoding of IndoorGML 2.0 defines a concrete implementation schema for representing indoor spatial information, including primal space, dual space, thematic layers, interlayer connections, and navigation-related indoor features. This encoding can be used to store and exchange 2D and/or 3D indoor space and indoor navigation network models in XML format as data sets or via web services.

This Part 2a of the Standard defines how the concepts developed in Part 1 are realized using XML Schema definitions. The XML encoding represents a full mapping of the Conceptual Model and is derived from the UML model following the UML-to-GML/XML encoding rules. Table 1 maps requirements classes from the IndoorGML 2.0 Conceptual Model into the implementation details documented in this standard.

Table 1 – Requirements classes mapping

CONCEPTUAL MODEL	SECTION	XML SCHEMA
IndoorGML Core	Clause 7	Annex B.1
Navigation Extension	Clause 8	Annex B.2



KEYWORDS

The following are keywords to be used by search engines and document catalogues.

OGCDoc, OGC documents, indoor, navigation, IndoorGML, GML, XML



PREFACE

In order to achieve consensus on the modeling indoor spaces and their neighborhood relationships to support indoor location-based services, a UML Conceptual Model, IndoorGML 2.0 Part 1, was approved as an OGC Standard (OGC 22-045r5) in June, 2025. This model covers geometric and semantic properties of indoor spaces relevant for indoor navigation. This IndoorGML 2.0 Part 2a: XML Encoding Standard defines how those concepts should be realized using XML schema format. The XML encoding is intended for software developers, data providers, standards implementers, and service providers who need a structured, standard, and machine-readable representation of IndoorGML datasets using XML/GML.



SECURITY CONSIDERATIONS

No security considerations have been made for this Standard.

V

SUBMITTING ORGANIZATIONS

The following organizations submitted this Document to the Open Geospatial Consortium (OGC):

- The University of New South Wales
- Pusan National University
- CityGeometrix
- National Institute of Advanced Industrial Science and Technology
- SpatialAlgebra

VI

SUBMITTERS

All questions regarding this submission should be directed to the editor or the submitters:

NAME	AFFILIATION	EMAIL	OGC MEMBER
Abdoulaye Diakité	CityGeometrix Pty Ltd	abdou@citygeometrix.com	Yes
Taehoon Kim	National Institute of Advanced Industrial Science and Technology	kim.taehoon@aist.go.jp	Yes
Sisi Zlatanova	University of New South Wales	s.zlatanova@unsw.edu.au	Yes
Ki-Joune Li	Pusan National University	lik@pnu.edu	Yes
Zhiyong Wang	SpatialAlgebra Technology Limited	zhiyongwang@spatialalgebra.tech	Yes



1

SCOPE

The OGC® IndoorGML 2.0 Part 2a – XML Encoding Standard defines an XML encoding for IndoorGML 2.0 Part 1 – Conceptual Model. The encoding is implemented as an application schema of the Geography Markup Language version 3.2.1 (GML 3.2.1).

The IndoorGML XML Encoding Standard specifies:

- XML schema for IndoorGML 2.0 core module;
- XML schema for IndoorGML 2.0 navigation module;
- the geometry encoding rules based on GML 3.2.1 geometry objects; and
- a statement to which IndoorGML XML conformance classes an IndoorGML 2.0 instance conforms to.

IndoorGML XML encoding is an implementation encoding of IndoorGML 2.0 Part 1. Therefore, IndoorGML XML instances shall be interpreted according to the semantics defined in the IndoorGML 2.0 conceptual model.



2

CONFORMANCE

CONFORMANCE

This standard defines implementation specification which specifies how the IndoorGML 2.0 Conceptual Model should be implemented using Extensible Markup Language (XML) and GML 3.2.1. The Standardization Target for this standard is:

- Implementations of the IndoorGML 2.0 Conceptual Model using XML encodings.

Conformance with this standard shall be checked using all the relevant tests specified in Annex A (normative) of this document. The framework, concepts, and methodology for testing, and the criteria to be achieved to claim conformance are specified in the OGC Compliance Testing Policies and Procedures and the OGC Compliance Testing web site.

In order to conform to this OGC® interface standard, a software implementation shall choose to implement:

- Any one of the conformance levels specified in Annex A (normative).

All requirements-classes and conformance-classes described in this document are owned by the standard(s) identified.

Table 2 — Conformance classes

CONFORMANCE CLASS	URI
IndoorGML Core	http://www.opengis.net/spec/indoorgml-2/2.0/xml/conf/core
Navigation Extension	http://www.opengis.net/spec/indoorgml-2/2.0/xml/conf/navi



3

NORMATIVE REFERENCES

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

Data elements and interchange formats – Information interchange – Representation of dates and times

Geographic information – Reference model – Part 1: Fundamentals

Geographic Information – Conceptual Schema Language

Geographic information – Conformance and testing

Geographic Information – Spatial Schema

Geographic Information – Rules for Application Schemas

Geographic information – Spatial referencing by coordinates

Geographic Information – Metadata – Part 1: Fundamentals

Geographic Information – Metadata – XML schema implementation

Carl Reed: OGC 04-084, *Topic 0 – Overview*. Open Geospatial Consortium (2005). <https://docs.ogc.org/as/04-084/04-084/pdf>.

Cliff Kottman, Carl Reed: OGC 08-126, *Topic 5 – Features*. Open Geospatial Consortium (2009). <https://docs.ogc.org/as/08-126/08-126/pdf>.

Cliff Kottman: OGC 99-108r2, *Topic 8 – Relationships Between Features*. Open Geospatial Consortium (1999). <https://docs.ogc.org/as/99-108r2/99-108r2/pdf>.

Cliff Kottman: OGC 99-110, *Topic 10 – Feature Collections*. Open Geospatial Consortium (1999). <https://docs.ogc.org/as/99-110/99-110/pdf>.

Clemens Portele: OGC 07-036, *OpenGIS Geography Markup Language (GML) Encoding Standard*. Open Geospatial Consortium (2007). <https://docs.ogc.org/is/07-036/07-036/pdf>.

Sisi Zlatanova, Abdoulaye Diakite, Taehoon Kim, Ki-Joune Li: OGC 22-045r5, *OGC IndoorGML 2.0 Part 1 – Conceptual Model*. Open Geospatial Consortium (2025). <http://www.opengis.net/doc/IS/indoorgml/2.0>.



4

TERMS AND DEFINITIONS

This document uses the terms defined in [OGC Policy Directive 49](#), which is based on the ISO/IEC Directives, Part 2, Rules for the structure and drafting of International Standards. In particular, the word “shall” (not “must”) is the verb form used to indicate a requirement to be strictly followed to conform to this document and OGC documents do not use the equivalent phrases in the ISO/IEC Directives, Part 2.

This document also uses terms defined in the OGC Standard for Modular specifications (OGC 08-131r3), also known as the ‘ModSpec’. The definitions of terms such as standard, specification, requirement, and conformance test are provided in the ModSpec.

For the purposes of this document, the following additional terms and definitions apply.

4.1. conceptual model

model that defines concepts of a universe of discourse

[SOURCE: ISO 19101-1:2014]

4.2. conceptual schema

formal description of a conceptual model

[SOURCE: ISO 19101-1:2014]

4.3. feature

abstraction of real world phenomena

Note 1 to entry: Features are objects that have an identity that allows for distinguishing features from each other. Features can have spatial and non-spatial properties that describe the features in more detail. Spatial properties are properties that have a geometry from ISO 19107:2003 as data type.

Note 2 to entry: Features are denoted by the stereotype «FeatureType» in the IndoorGML 2.0 Conceptual Model.

[SOURCE: ISO 19101-1:2014]



5

CONVENTIONS

5.1. Identifiers

The normative provisions in this standard are denoted by the URI

<http://www.opengis.net/spec/indoorgml-2/2.0/xml>

All requirements and conformance tests that appear in this document are denoted by partial URIs which are relative to this base.

5.2. Use of XML terminology

The following terms and concepts are used as specified in the W3C XML specifications and OGC GML 3.2.1:

- “element” refers to an XML element tag;
- “attribute” refers to a name/value attribute on an XML element;
- “complexType” refers to an XML Schema complex type definition;
- “substitutionGroup” refers to the GML element substitution mechanism allowing specialized elements to substitute base GML feature types; and
- “property element” refers to an XML element that represents an association between features or objects.



6

OVERVIEW OF THE XML ENCODING

The XML encoding of IndoorGML 2.0 implements the conceptual classes of IndoorGML 2.0 Part 1 as GML-compliant XML elements and types. The conceptual model remains normative for semantics, while this document defines the XML schema representation.

6.1. Design Principle

The XML encoding is based on the following encoding principles.

6.1.1. Conceptual model preservation

The XML encoding of the IndoorGML core module preserves the IndoorGML 2.0 core conceptual model structure, as shown in Figure 1.

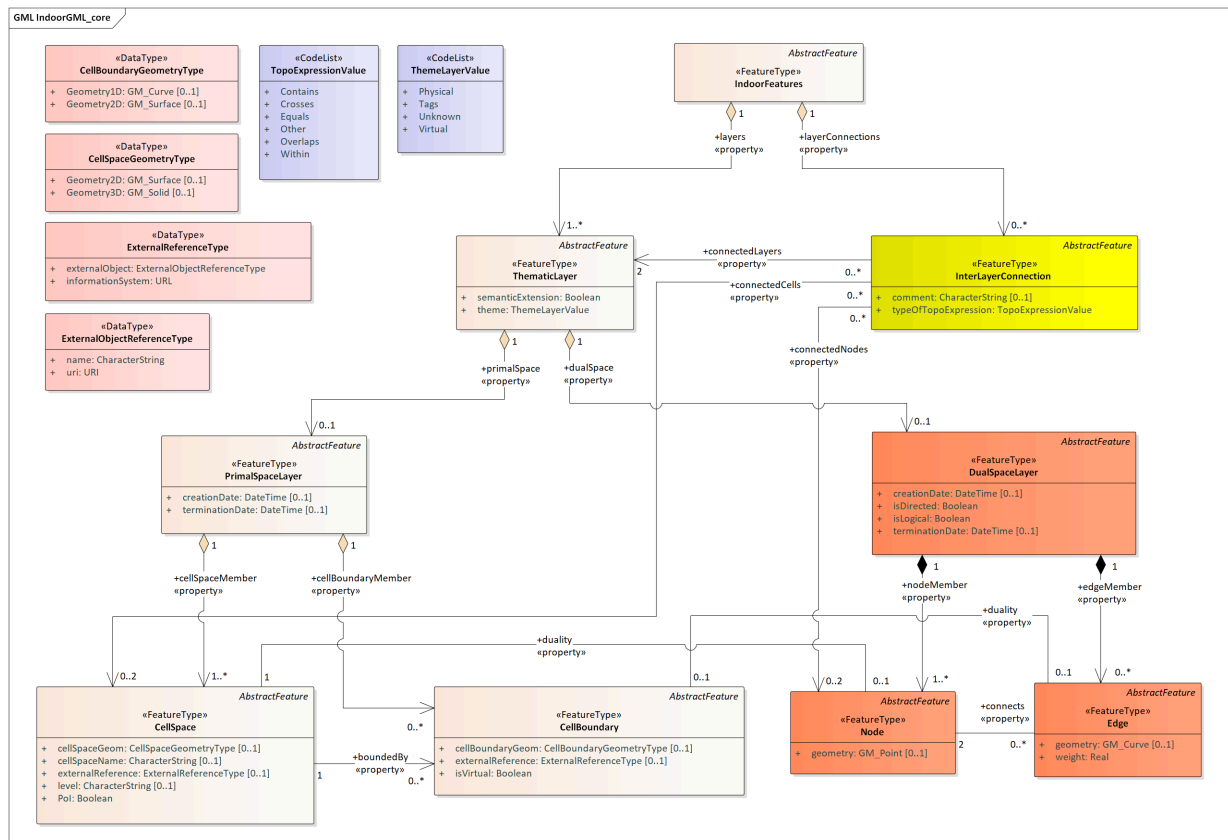


Figure 1 – IndoorGML 2.0 core module structure

Each feature class is mapped to an XML element inheriting from or substituting GML feature elements (e.g. `gml:AbstractFeature`). For example, the `<CellSpace>` element substitutes `gml:AbstractFeature` and extends `gml:AbstractFeatureType` to represent cell spaces.

The XML encoding of the IndoorGML navigation module preserves the IndoorGML 2.0 navigation conceptual model structure, as shown in Figure 2.

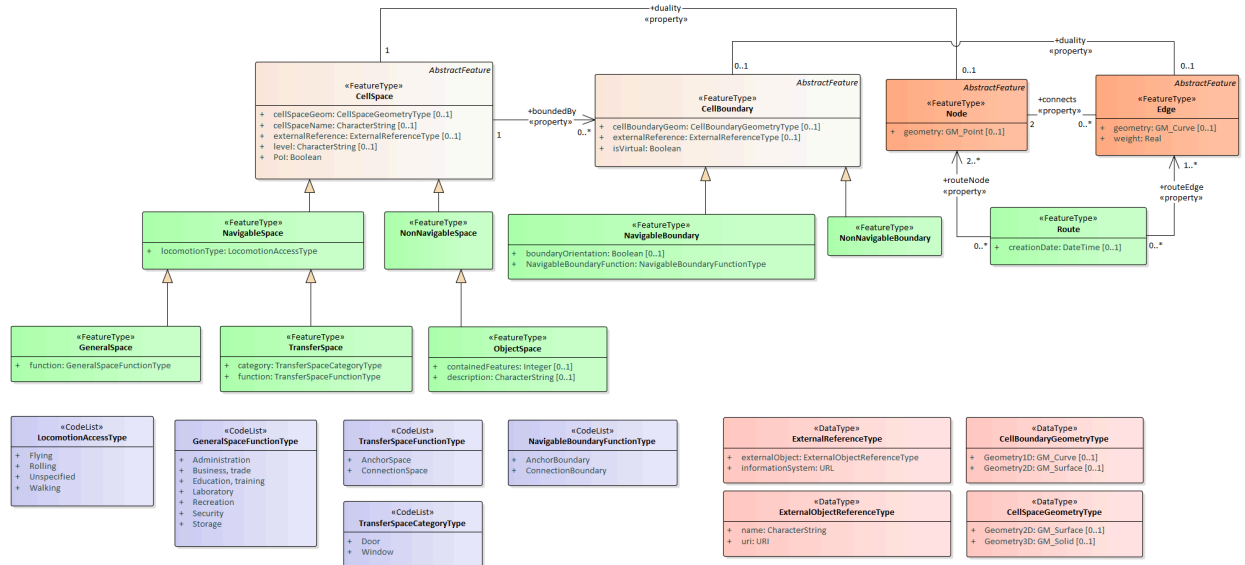


Figure 2 – IndoorGML 2.0 navigation module structure

Navigation feature classes extend core elements using GML inheritance patterns, implementing substitutions where appropriate. For example, `<NavigableSpace>` substitutes `<CellSpace>` and extends its complex type definition.

6.1.2. XML Schema design workflow

The XML encoding schema is derived from the IndoorGML 2.0 UML model and is designed on the basis of OGC GML 3.2.1. XML schema (.xsd) documents are generated from the UML model, establishing elements and complex types for the Core and Navigation modules. Typical patterns include converting associations into GML property types using `xlink:href` references (for example, the duality link from `CellSpace` to `Node`), mapping attributes to native XML schema elements (such as `creationDate` of type `xs:dateTime`), and representing UML code lists as XML simple types restricting `xs:string` with enumeration constraints.

7

INDOORXML CORE

REQUIREMENTS CLASS 1

IDENTIFIER	http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/core
TARGET TYPE	Implementation Specification
CONFORMANCE CLASS	Conformance class A.1: http://www.opengis.net/spec/indoorgml-2/2.0/xml/conf/core
PREREQUISITES	http://www.opengis.net/spec/indoorgml/2.0/req http://www.opengis.net/spec/gml/3.2.1/req
NORMATIVE STATEMENTS	Requirement 1: /req/core/global Requirement 2: /req/core/indoorfeatures Requirement 3: /req/core/thematiclayer Requirement 4: /req/core/primalspacelayer Requirement 5: /req/core/cellspace Requirement 6: /req/core/cellboundary Requirement 7: /req/core/dualspacelayer Requirement 8: /req/core/node Requirement 9: /req/core/edge Requirement 10: /req/core/interlayerconnection

7.1. General requirements for encoding standard

REQUIREMENT 1: REQUIREMENT FOR GLOBAL XML SCHEMA VALIDATION

IDENTIFIER	/req/core/global
INCLUDED IN	Requirements class 1: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/core
A	An instance XML document representing an IndoorGML 2.0 Core dataset SHALL be well-formed XML and validate against the schemas defined in this standard (including IndoorGML_core.xsd and OGC GML 3.2.1).

7.2. IndoorFeatures

The **IndoorFeatures** element is an instance of `IndoorFeatures`, representing the root container feature for an indoor dataset. It aggregates one or more thematic layers and may optionally include interlayer connections.

```
<element name="IndoorFeatures" substitutionGroup="gml:AbstractFeature" type=
"core:IndoorFeaturesType"/>
<complexType name="IndoorFeaturesType">
  <complexContent>
    <extension base="gml:AbstractFeatureType">
      <sequence>
        <element maxOccurs="unbounded" name="layers">
          <complexType>
            <complexContent>
              <extension base="gml:AbstractFeatureMemberType">
                <sequence minOccurs="0">
                  <element ref="core:ThematicLayer"/>
                </sequence>
                <attributeGroup ref="gml:AssociationAttributeGroup"/>
              </extension>
            </complexContent>
          </complexType>
        </element>
        <element maxOccurs="unbounded" minOccurs="0" name="layerConnections">
          <complexType>
            <complexContent>
              <extension base="gml:AbstractFeatureMemberType">
                <sequence minOccurs="0">
                  <element ref="core:InterLayerConnection"/>
                </sequence>
                <attributeGroup ref="gml:AssociationAttributeGroup"/>
              </extension>
            </complexContent>
          </complexType>
        </element>
      </sequence>
    </extension>
  </complexContent>
</complexType>
<complexType name="IndoorFeaturesPropertyType">
  <sequence minOccurs="0">
    <element ref="core:IndoorFeatures"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
```

Listing — XML schema for the IndoorFeatures element

```
<core:IndoorFeatures gml:id="IF_1"
  xmlns:core="http://www.opengis.net/indoorgml/2.0/core"
  xmlns:gml="http://www.opengis.net/gml/3.2"
  xmlns:xlink="http://www.w3.org/1999/xlink">
  <!-- mandatory properties: at least one ThematicLayer -->
  <core:layers>
    <core:ThematicLayer gml:id="TL_Pedestrian">...</core:ThematicLayer>
  </core:layers>
</core:IndoorFeatures>
```

```

    <core:ThematicLayer gml:id="TL_Wheelchair">...</core:ThematicLayer>
  </core:layers>

  <!-- optional properties: InterLayerConnection -->
  <core:layerConnections>
    <core:InterLayerConnection gml:id="ILC_1">...</core:InterLayerConnection>
  </core:layerConnections>
</core:IndoorFeatures>

```

Listing — An example of the IndoorFeatures element

REQUIREMENT 2: REQUIREMENT FOR INDOORFEATURES XML ELEMENT

IDENTIFIER	/req/core/indoorfeatures
INCLUDED IN	Requirements class 1: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/core
A	An IndoorFeatures element SHALL contain at least one layers property containing or referencing a ThematicLayer element.
B	When present, each layerConnections property of an IndoorFeatures element SHALL contain or reference an InterLayerConnection element.
C	An IndoorFeatures element SHALL contain a unique gml:id attribute.

7.3. ThematicLayer

The **ThematicLayer** element is an instance of ThematicLayer, which represents one contextual decomposition of indoor space (e.g. physical layer, navigation layer, sensor layer).

```

<element name="ThematicLayer" substitutionGroup="gml:AbstractFeature" type="core:ThematicLayerType"/>
<complexType name="ThematicLayerType">
  <complexContent>
    <extension base="gml:AbstractFeatureType">
      <sequence>
        <element name="semanticExtension" type="boolean"/>
        <element name="theme" type="core:ThemeLayerValueType"/>
        <element minOccurs="0" name="primalSpace">
          <complexType>
            <complexContent>
              <extension base="gml:AbstractFeatureMemberType">
                <sequence minOccurs="0">
                  <element ref="core:PrimalSpaceLayer"/>
                </sequence>
                <attributeGroup ref="gml:AssociationAttributeGroup"/>
              </extension>
            </complexContent>
          </complexType>
        </element>
        <element minOccurs="0" name="dualSpace">
          <complexType>

```

```

        <complexContent>
          <extension base="gml:AbstractFeatureMemberType">
            <sequence minOccurs="0">
              <element ref="core:DualSpaceLayer"/>
            </sequence>
            <attributeGroup ref="gml:AssociationAttributeGroup"/>
          </extension>
        </complexContent>
      </complexType>
    </element>
  </sequence>
</extension>
</complexContent>
</complexType>
<complexType name="ThematicLayerPropertyType">
  <sequence minOccurs="0">
    <element ref="core:ThematicLayer"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>

```

Listing — XML schema for the ThematicLayer element

```

<core:ThematicLayer gml:id="TL_1">
  <!-- mandatory properties -->
  <core:semanticExtension>true</core:semanticExtension>
  <core:theme>Physical</core:theme>

  <!-- optional properties -->
  <core:primalSpace xlink:href="#PSL_1"/>
  <core:dualSpace xlink:href="#DSL_1"/>
</core:ThematicLayer>

```

Listing — An example of the ThematicLayer element

REQUIREMENT 3: REQUIREMENT FOR THEMATICLAYER XML ELEMENT

IDENTIFIER	/req/core/thematiclayer
INCLUDED IN	Requirements class 1: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/core
A	A ThematicLayer element SHALL declare whether there is an extension module with additional semantic information using the semanticExtension element (true or false).
B	A ThematicLayer element SHALL determine what type of model representation is expected using the theme element.
C	The theme value SHALL be one of the following: "Tags", "Virtual", "Unknown", "Physical", or a user-defined value matching the pattern "other: \w{2,}".
D	When present, the primalSpace property of a ThematicLayer element SHALL contain or reference (via xlink:href) a PrimalSpaceLayer element.
E	When present, the dualSpace property of a ThematicLayer element SHALL contain or reference (via xlink:href) a DualSpaceLayer element.

REQUIREMENT 3: REQUIREMENT FOR THEMATICLAYER XML ELEMENT

F A **ThematicLayer** element SHALL contain a unique `gml:id` attribute.

7.4. PrimalSpaceLayer

The **PrimalSpaceLayer** element is an instance of `PrimalSpaceLayer`, which contains spatial objects representing indoor subdivisions in primal space.

```
<element name="PrimalSpaceLayer" substitutionGroup="gml:AbstractFeature" type="
core:PrimalSpaceLayerType"/>
<complexType name="PrimalSpaceLayerType">
  <complexContent>
    <extension base="gml:AbstractFeatureType">
      <sequence>
        <element minOccurs="0" name="creationDate" type="dateTime"/>
        <element minOccurs="0" name="terminationDate" type="dateTime"/>
        <element maxOccurs="unbounded" name="cellSpaceMember">
          <complexType>
            <complexContent>
              <extension base="gml:AbstractFeatureMemberType">
                <sequence minOccurs="0">
                  <element ref="core:CellSpace"/>
                </sequence>
                <attributeGroup ref="gml:AssociationAttributeGroup"/>
              </extension>
            </complexContent>
          </complexType>
        </element>
        <element maxOccurs="unbounded" minOccurs="0" name="cellBoundaryMember">
          <complexType>
            <complexContent>
              <extension base="gml:AbstractFeatureMemberType">
                <sequence minOccurs="0">
                  <element ref="core:CellBoundary"/>
                </sequence>
                <attributeGroup ref="gml:AssociationAttributeGroup"/>
              </extension>
            </complexContent>
          </complexType>
        </element>
      </sequence>
    </extension>
  </complexContent>
</complexType>
```

Listing — XML schema for the `PrimalSpaceLayer` element

```
<core:PrimalSpaceLayer gml:id="PSL_1">
  <!-- mandatory properties (at least one CellSpace) -->
  <core:cellSpaceMember>
    <core:CellSpace gml:id="CS_1">...</core:CellSpace>
  </core:cellSpaceMember>

  <!-- optional properties -->
```

```

    <core:cellBoundaryMember>
      <core:CellBoundary gml:id="CB_1">...</core:CellBoundary>
    </core:cellBoundaryMember>
    <core:creationDate>2025-08-06T18:39:00Z</core:creationDate>
  </core:PrimalSpaceLayer>

```

Listing — An example of the PrimalSpaceLayer element

REQUIREMENT 4: REQUIREMENT FOR PRIMALSPACE LAYER XML ELEMENT

IDENTIFIER	/req/core/primalspacelayer
INCLUDED IN	Requirements class 1: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/core
A	A PrimalSpaceLayer element SHALL contain at least one cellSpaceMember property containing or referencing a CellSpace element.
B	The CellSpace elements belonging to the same PrimalSpaceLayer SHALL not intersect with each other.
C	The CellBoundary elements belonging to the same PrimalSpaceLayer SHALL not intersect with each other.
D	When present, creationDate and terminationDate SHALL be formatted as valid xs:dateTime strings.
E	A PrimalSpaceLayer element SHALL contain a unique gml:id attribute.

7.5. CellSpace

The **CellSpace** element is an instance of CellSpace, which represents a unit of indoor space such as a room, corridor, stairwell, elevator cabin, or zone.

```

<element name="CellSpace" substitutionGroup="gml:AbstractFeature" type="core:
CellSpaceType"/>
<complexType name="CellSpaceType">
  <complexContent>
    <extension base="gml:AbstractFeatureType">
      <sequence>
        <element minOccurs="0" name="cellSpaceGeom" type="core:
CellSpaceGeometryPropertyType"/>
        <element minOccurs="0" name="externalReference" type="core:
ExternalReferencePropertyType"/>
        <element minOccurs="0" name="level" type="string"/>
        <element name="PoI" type="boolean"/>
        <element minOccurs="0" name="cellSpaceName" type="string"/>
        <element minOccurs="0" name="duality" type="core:NodePropertyType"/>
        <element maxOccurs="unbounded" minOccurs="0" name="boundedBy" type="core:
CellBoundaryPropertyType"/>
      </sequence>
    </extension>
  </complexContent>

```

```

</complexType>
<complexType name="CellSpacePropertyType">
  <sequence minOccurs="0">
    <element ref="core:CellSpace"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
<element name="CellSpaceGeometry" substitutionGroup="gml:AbstractObject" type="
"core:CellSpaceGeometryType"/>
<complexType name="CellSpaceGeometryType">
  <sequence>
    <element minOccurs="0" name="Geometry3D" type="gml:SolidPropertyType"/>
    <element minOccurs="0" name="Geometry2D" type="gml:SurfacePropertyType"/>
  </sequence>
</complexType>
<complexType name="CellSpaceGeometryPropertyType">
  <sequence>
    <element ref="core:CellSpaceGeometry"/>
  </sequence>
</complexType>

```

Listing — XML schema for the CellSpace element

```

<core:CellSpace gml:id="CS_1">
  <!-- mandatory property -->
  <core:PoI>false</core:PoI>

  <!-- optional properties -->
  <core:cellSpaceGeom>
    <core:Geometry3D>
      <gml:Solid gml:id="CSG_CS_1">
        ...
      </gml:Solid>
    </core:Geometry3D>
  </core:cellSpaceGeom>
  <core:duality xlink:href="#ND_1"/>
  <core:level>3rd Floor</core:level>
  <core:cellSpaceName>Locker Room Lv3</core:cellSpaceName>
  <core:boundedBy xlink:href="#CB_1"/>
</core:CellSpace>

```

Listing — An example of the CellSpace element

REQUIREMENT 5: REQUIREMENT FOR CELLSPACE XML ELEMENT

IDENTIFIER	/req/core/cellspace
INCLUDED IN	Requirements class 1: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/core
A	A CellSpace element SHALL declare whether it is a point of interest space using the PoI element (true or false).
B	When present, the duality property of a CellSpace element SHALL reference (via xlink:href) or contain the corresponding Node element in the dual space.
C	When present, each boundedBy property of a CellSpace element SHALL reference (via xlink:href) or contain a corresponding CellBoundary element.

REQUIREMENT 5: REQUIREMENT FOR CELLSPACE XML ELEMENT

D	The geometry of each linked CellBoundary element SHALL not exceed the extent of the CellSpace geometry (cellSpaceGeom).
E	A CellSpace element SHALL contain a unique gml:id attribute.

7.6. CellBoundary

The **CellBoundary** element is an instance of CellBoundary, representing a physical or virtual boundary of a cell space.

```
<element name="CellBoundary" substitutionGroup="gml:AbstractFeature" type="core:
CellBoundaryType"/>
<complexType name="CellBoundaryType">
  <complexContent>
    <extension base="gml:AbstractFeatureType">
      <sequence>
        <element minOccurs="0" name="cellBoundaryGeom" type="core:CellBoundaryGeo
metryPropertyType"/>
        <element minOccurs="0" name="externalReference" type="core:
ExternalReferencePropertyType"/>
        <element name="isVirtual" type="boolean"/>
        <element minOccurs="0" name="duality" type="core:EdgePropertyType"/>
      </sequence>
    </extension>
  </complexContent>
</complexType>
<complexType name="CellBoundaryPropertyType">
  <sequence minOccurs="0">
    <element ref="core:CellBoundary"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
<element name="CellBoundaryGeometry" substitutionGroup="gml:AbstractObject" type=
"core:CellBoundaryGeometryType"/>
<complexType name="CellBoundaryGeometryType">
  <sequence>
    <element minOccurs="0" name="Geometry2D" type="gml:SurfacePropertyType"/>
    <element minOccurs="0" name="Geometry1D" type="gml:CurvePropertyType"/>
  </sequence>
</complexType>
<complexType name="CellBoundaryGeometryPropertyType">
  <sequence>
    <element ref="core:CellBoundaryGeometry"/>
  </sequence>
</complexType>
```

Listing — XML schema for the CellBoundary element

```
<core:CellBoundary gml:id="CB_1">
  <!-- mandatory property -->
  <core:isVirtual>>false</core:isVirtual>
```



```

<!-- optional properties -->
<core:cellBoundaryGeom>
  <core:Geometry2D>
    <gml:Surface gml:id="CBG_CB_1">
      ...
    </gml:Surface>
  </core:Geometry2D>
</core:cellBoundaryGeom>
<core:duality xlink:href="#EDG_1"/>
</core:CellBoundary>

```

Listing — An example of the CellBoundary element

REQUIREMENT 6: REQUIREMENT FOR CELLBOUNDARY XML ELEMENT

IDENTIFIER	/req/core/cellboundary
INCLUDED IN	Requirements class 1: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/core
A	A CellBoundary element SHALL specify whether it represents a virtual boundary (true) or a physical boundary (false) using the isVirtual element.
B	When present, the duality property of a CellBoundary element SHALL reference (via xlink:href) or contain the corresponding Edge element in the dual space.
C	A CellBoundary element SHALL contain a unique gml:id attribute.

7.7. DualSpaceLayer

The **DualSpaceLayer** element is an instance of DualSpaceLayer, representing the graph structure (nodes and edges) corresponding to a primal space layer.

```

<element name="DualSpaceLayer" substitutionGroup="gml:AbstractFeature" type=
"core:DualSpaceLayerType"/>
<complexType name="DualSpaceLayerType">
  <complexContent>
    <extension base="gml:AbstractFeatureType">
      <sequence>
        <element name="isLogical" type="boolean"/>
        <element minOccurs="0" name="creationDate" type="dateTime"/>
        <element minOccurs="0" name="terminationDate" type="dateTime"/>
        <element name="isDirected" type="boolean"/>
        <element maxOccurs="unbounded" minOccurs="0" name="edgeMember">
          <complexType>
            <complexContent>
              <extension base="gml:AbstractFeatureMemberType">
                <sequence minOccurs="0">
                  <element ref="core:Edge"/>
                </sequence>
                <attributeGroup ref="gml:AssociationAttributeGroup"/>
              </extension>
            </complexContent>
          </complexType>
        </element>
      </sequence>
    </extension>
  </complexContent>
</complexType>

```

```

        </complexType>
      </element>
      <element maxOccurs="unbounded" name="nodeMember">
        <complexType>
          <complexContent>
            <extension base="gml:AbstractFeatureMemberType">
              <sequence minOccurs="0">
                <element ref="core:Node"/>
              </sequence>
              <attributeGroup ref="gml:AssociationAttributeGroup"/>
            </extension>
          </complexContent>
        </complexType>
      </element>
    </sequence>
  </extension>
</complexType>
<complexType name="DualSpaceLayerPropertyType">
  <sequence minOccurs="0">
    <element ref="core:DualSpaceLayer"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>

```

Listing — XML schema for the DualSpaceLayer element

```

<core:DualSpaceLayer gml:id="DSL_1">
  <!-- mandatory properties -->
  <core:isLogical>false</core:isLogical>
  <core:isDirected>false</core:isDirected>
  <core:nodeMember>
    <core:Node gml:id="ND_1">...</core:Node>
  </core:nodeMember>

  <!-- optional properties -->
  <core:edgeMember>
    <core:Edge gml:id="EDG_1">...</core:Edge>
  </core:edgeMember>
  <core:creationDate>2025-08-06T18:39:00Z</core:creationDate>
</core:DualSpaceLayer>

```

Listing — An example of the DualSpaceLayer element

REQUIREMENT 7: REQUIREMENT FOR DUALSPACE LAYER XML ELEMENT

IDENTIFIER	/req/core/dualspacelayer
INCLUDED IN	Requirements class 1: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/core
A	A DualSpaceLayer element SHALL specify whether the graph is logical (true) or geometric (false) using the <code>isLogical</code> element.
B	When <code>isLogical</code> is false, the geometries of all Node instances contained in <code>nodeMember</code> SHALL be spatially located inside their corresponding CellSpace geometries.

REQUIREMENT 7: REQUIREMENT FOR DUALSPACE LAYER XML ELEMENT

C	A DualSpaceLayer element SHALL specify whether the graph is directed using the <code>isDirected</code> element (true or false).
D	A DualSpaceLayer element SHALL contain at least one <code>nodeMember</code> property containing or referencing a Node element.
E	A DualSpaceLayer element SHALL contain a unique <code>gml:id</code> attribute.

7.8. Node

The **Node** element is an instance of `Node`, representing a state or graph vertex in the dual space.

```
<element name="Node" substitutionGroup="gml:AbstractFeature" type="core:
NodeType"/>
<complexType name="NodeType">
  <complexContent>
    <extension base="gml:AbstractFeatureType">
      <sequence>
        <element minOccurs="0" name="geometry" type="gml:PointPropertyType"/>
        <element name="duality" type="core:CellSpacePropertyType"/>
        <element maxOccurs="unbounded" minOccurs="0" name="connects" type="core:
EdgePropertyType"/>
      </sequence>
    </extension>
  </complexContent>
</complexType>
<complexType name="NodePropertyType">
  <sequence minOccurs="0">
    <element ref="core:Node"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
```

Listing — XML schema for the Node element

```
<core:Node gml:id="ND_1">
  <!-- mandatory property -->
  <core:duality xlink:href="#CS_1"/>

  <!-- optional properties -->
  <core:geometry>
    <gml:Point gml:id="G_ND_1">
      <gml:pos>445536.499779417 5444906.24858758 -2.02</gml:pos>
    </gml:Point>
  </core:geometry>
  <core:connects xlink:href="#EDG_1"/>
</core:Node>
```

Listing — An example of the Node element

REQUIREMENT 8: REQUIREMENT FOR NODE XML ELEMENT

IDENTIFIER	/req/core/node
INCLUDED IN	Requirements class 1: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/core
A	A Node element SHALL contain a duality property referencing (via <code>xlink:href</code>) or containing the corresponding CellSpace element in the primal space.
B	When present, each connects property of a Node element SHALL reference (via <code>xlink:href</code>) or contain a connected Edge element.
C	A Node element SHALL contain a unique <code>gml:id</code> attribute.

7.9. Edge

The **Edge** element is an instance of `Edge`, which represents an adjacency, connectivity, or navigability relationship between two nodes in dual space.

```
<element name="Edge" substitutionGroup="gml:AbstractFeature" type="core:
EdgeType"/>
<complexType name="EdgeType">
  <complexContent>
    <extension base="gml:AbstractFeatureType">
      <sequence>
        <element minOccurs="0" name="geometry" type="gml:CurvePropertyType"/>
        <element name="weight" type="double"/>
        <element minOccurs="0" name="duality" type="core:
CellBoundaryPropertyType"/>
        <element maxOccurs="2" minOccurs="2" name="connects" type="core:
NodePropertyType"/>
      </sequence>
    </extension>
  </complexContent>
</complexType>
<complexType name="EdgePropertyType">
  <sequence minOccurs="0">
    <element ref="core:Edge"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
```

Listing — XML schema for the Edge element

```
<core:Edge gml:id="EDG_1">
  <!-- mandatory properties -->
  <core:weight>1.0</core:weight>
  <core:connects xlink:href="#ND_1"/>
  <core:connects xlink:href="#ND_2"/>

  <!-- optional properties -->
  <core:geometry>
```

```

    <gml:LineString gml:id="G_EDG_1">
      <gml:pos>445536.499779417 5444906.24858758 -2.02</gml:pos>
      <gml:pos>445537.914644321 5444904.59001251 -2.02</gml:pos>
    </gml:LineString>
  </core:geometry>
  <core:duality xlink:href="#CB_1"/>
</core:Edge>

```

Listing — An example of the Edge element

REQUIREMENT 9: REQUIREMENT FOR EDGE XML ELEMENT

IDENTIFIER	/req/core/edge
INCLUDED IN	Requirements class 1: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/core
A	An Edge element SHALL contain exactly two connects properties referencing (via xlink:href) or containing the connected Node elements.
B	If isDirected is true in the parent DualSpaceLayer , the sequence of connects properties SHALL define the direction of the edge (from the first node to the second node).
C	An Edge element SHALL contain a weight element of type xs:double.
D	When present, the curve in geometry SHALL not self-intersect, and its start and end coordinates SHALL match the coordinates of the connected Node instances referenced by connects.
E	When present, the duality property of an Edge element SHALL reference (via xlink:href) or contain the corresponding CellBoundary element.
F	An Edge element SHALL contain a unique gml:id attribute.

7.10. InterLayerConnection

The **InterLayerConnection** element is an instance of [InterLayerConnection](#), which describes a topological relationship between objects in different thematic layers.

```

<element name="InterLayerConnection" substitutionGroup="gml:AbstractFeature"
type="core:InterLayerConnectionType"/>
<complexType name="InterLayerConnectionType">
  <complexContent>
    <extension base="gml:AbstractFeatureType">
      <sequence>
        <element name="typeOfTopoExpression" type="core:TopoExpressionValueType"/>
      >
        <element minOccurs="0" name="comment" type="string"/>
        <element maxOccurs="2" minOccurs="2" name="connectedLayers" type="core:
ThematicLayerPropertyType"/>
        <element maxOccurs="2" minOccurs="0" name="connectedCells" type="core:
CellSpacePropertyType"/>

```

```

        <element maxOccurs="2" minOccurs="0" name="connectedNodes" type="core:
NodePropertyType"/>
    </sequence>
</extension>
</complexContent>
</complexType>
<complexType name="InterLayerConnectionPropertyType">
    <sequence minOccurs="0">
        <element ref="core:InterLayerConnection"/>
    </sequence>
    <attributeGroup ref="gml:AssociationAttributeGroup"/>
    <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
<simpleType name="TopoExpressionValueType">
    <union memberTypes="core:TopoExpressionValueEnumerationType core:
TopoExpressionValueOtherType"/>
</simpleType>
<simpleType name="TopoExpressionValueEnumerationType">
    <restriction base="string">
        <enumeration value="Contains"/>
        <enumeration value="Overlaps"/>
        <enumeration value="Equals"/>
        <enumeration value="Within"/>
        <enumeration value="Crosses"/>
        <enumeration value="Other"/>
    </restriction>
</simpleType>
<simpleType name="TopoExpressionValueOtherType">
    <restriction base="string">
        <pattern value="other: \w{2,}"/>
    </restriction>
</simpleType>

```

Listing – XML schema for the InterLayerConnection element

```

<core:InterLayerConnection gml:id="ILC_1">
    <!-- mandatory properties -->
    <core:typeOfTopoExpression>Contains</core:typeOfTopoExpression>
    <core:connectedLayers xlink:href="#TL_Pedestrian"/>
    <core:connectedLayers xlink:href="#TL_Wheelchair"/>

    <!-- optional properties -->
    <core:comment>Pedestrian layer contains wheelchair layer subdivision</core:
comment>
    <core:connectedCells xlink:href="#CS_Ped_1"/>
    <core:connectedCells xlink:href="#CS_Wheel_1"/>
</core:InterLayerConnection>

```

Listing – An example of the InterLayerConnection element

REQUIREMENT 10: REQUIREMENT FOR INTERLAYERCONNECTION XML ELEMENT

IDENTIFIER	/req/core/interlayerconnection
INCLUDED IN	Requirements class 1: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/core

REQUIREMENT 10: REQUIREMENT FOR INTERLAYERCONNECTION XML ELEMENT

A	An InterLayerConnection element SHALL contain exactly two connectedLayers properties referencing (via <code>xlink:href</code>) or containing two distinct ThematicLayer elements.
B	An InterLayerConnection element SHALL specify the topological relationship using the typeOfTopoExpression element.
C	The typeOfTopoExpression value SHALL be one of the following: "Contains", "Overlaps", "Equals", "Within", "Crosses", "Other", or a user-defined value matching the pattern "other: \w{2,}".
D	When present, connectedCells SHALL contain exactly two properties referencing (via <code>xlink:href</code>) or containing CellSpace elements belonging to the primal space layers of the first and second connected thematic layers, respectively.
E	When present, connectedNodes SHALL contain exactly two properties referencing (via <code>xlink:href</code>) or containing Node elements belonging to the dual space layers of the first and second connected thematic layers, respectively.
F	The sequence of connectedLayers , connectedCells , and connectedNodes properties SHALL be ordered and correspond pairwise to the same indices.
G	An InterLayerConnection element SHALL contain a unique <code>gml:id</code> attribute.

7.11. ExternalReference

The **ExternalReference** element is used for referencing an object in an external dataset from an IndoorGML feature.

```
<element name="ExternalReference" substitutionGroup="gml:AbstractObject" type=
"core:ExternalReferenceType"/>
<complexType name="ExternalReferenceType">
  <sequence>
    <element name="externalObject" type="core:ExternalObjectReferencePropertyType"
"/>
    <element name="informationSystem" type="gmd:URL_PropertyType"/>
  </sequence>
</complexType>
<element name="ExternalObjectReference" substitutionGroup="gml:AbstractObject"
type="core:ExternalObjectReferenceType"/>
<complexType name="ExternalObjectReferenceType">
  <sequence>
    <element name="name" type="string"/>
    <element name="uri" type="anyURI"/>
  </sequence>
</complexType>
```

Listing — XML schema for the ExternalReference element

```
<core:externalReference>
  <core:ExternalReference>
```

```

    <core:externalObject>
      <core:ExternalObjectReference>
        <core:name>IFC_Space_101</core:name>
        <core:uri>urn:uuid:2b88523c-a9e3-4c92-9442-5f6966f3630f</core:
uri>
      </core:ExternalObjectReference>
    </core:externalObject>
    <core:informationSystem>
      <gmd:URL>https://bim.example.org/project/buildingA.ifc</gmd:URL>
    </core:informationSystem>
  </core:ExternalReference>
</core:externalReference>

```

Listing — An example of the ExternalReference element



8

INDOORXML NAVIGATION

REQUIREMENTS CLASS 2

IDENTIFIER	http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/navi
TARGET TYPE	Implementation Specification
CONFORMANCE CLASS	Conformance class A.2: http://www.opengis.net/spec/indoorgml-2/2.0/xml/conf/navi
PREREQUISITES	http://www.opengis.net/spec/indoorgml/2.0/req Requirements class 1: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/core
NORMATIVE STATEMENTS	Requirement 11: /req/navi/global Requirement 12: /req/navi/navigablespace Requirement 13: /req/navi/generalspace Requirement 14: /req/navi/transferspace Requirement 15: /req/navi/navigableboundary Requirement 16: /req/navi/nonnavigablespace Requirement 17: /req/navi/objectspace Requirement 18: /req/navi/nonnavigableboundary Requirement 19: /req/navi/route

8.1. General requirements for encoding standards

REQUIREMENT 11: REQUIREMENT FOR NAVIGATION MODULE XML SCHEMA VALIDATION

IDENTIFIER	/req/navi/global
INCLUDED IN	Requirements class 2: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/navi
A	An instance XML document representing an IndoorGML 2.0 Navigation module dataset SHALL be well-formed XML and validate against the schemas defined in this standard (including IndoorGML_navi.xsd, IndoorGML_core.xsd, and OGC GML 3.2.1).

8.2. NavigableSpace

The **NavigableSpace** element is an instance of `NavigableSpace`, representing a space where an agent or user can move freely (e.g. corridor, door, lobby, hallway, room).

```
<element name="NavigableSpace" substitutionGroup="core:CellSpace" type="navi:
NavigableSpaceType"/>
<complexType name="NavigableSpaceType">
  <complexContent>
    <extension base="core:CellSpaceType">
      <sequence>
        <element name="locomotionType" type="navi:LocomotionAccessType"/>
      </sequence>
    </extension>
  </complexContent>
</complexType>
<complexType name="NavigableSpacePropertyType">
  <sequence minOccurs="0">
    <element ref="navi:NavigableSpace"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
<simpleType name="LocomotionAccessType">
  <union memberTypes="navi:LocomotionAccessEnumerationType navi:
LocomotionAccessOtherType"/>
</simpleType>
<simpleType name="LocomotionAccessEnumerationType">
  <restriction base="string">
    <enumeration value="Walking"/>
    <enumeration value="Flying"/>
    <enumeration value="Rolling"/>
    <enumeration value="Unspecified"/>
  </restriction>
</simpleType>
<simpleType name="LocomotionAccessOtherType">
  <restriction base="string">
    <pattern value="other: \w{2,}"/>
  </restriction>
</simpleType>
```

Listing — XML schema for the NavigableSpace element

```
<navi:NavigableSpace gml:id="NS_1">
  <!-- inherited mandatory property from CellSpace -->
  <core:PoI>false</core:PoI>

  <!-- mandatory property -->
  <navi:locomotionType>Walking</navi:locomotionType>
</navi:NavigableSpace>
```

Listing — An example of the NavigableSpace element

REQUIREMENT 12: REQUIREMENT FOR NAVIGABLESPACE XML ELEMENT

IDENTIFIER	/req/navi/navigablespace
INCLUDED IN	Requirements class 2: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/navi
A	A NavigableSpace element SHALL conform to all schema and semantic requirements of CellSpace .
B	A NavigableSpace element SHALL specify the allowed locomotion mode using the locomotionType element.
C	The locomotionType value SHALL be one of the following: "Walking", "Flying", "Rolling", "Unspecified", or a user-defined value matching the pattern "other:\w{2,}".
D	A NavigableSpace element SHALL contain a unique gml:id attribute.

8.3. GeneralSpace

The **GeneralSpace** element is an instance of GeneralSpace, representing a navigable space that agents can occupy for extended periods and which can serve as starting or destination points in navigation.

```
<element name="GeneralSpace" substitutionGroup="navi:NavigableSpace" type="navi:GeneralSpaceType"/>
<complexType name="GeneralSpaceType">
  <complexContent>
    <extension base="navi:NavigableSpaceType">
      <sequence>
        <element name="function" type="navi:GeneralSpaceFunctionType"/>
      </sequence>
    </extension>
  </complexContent>
</complexType>
<complexType name="GeneralSpacePropertyType">
  <sequence minOccurs="0">
    <element ref="navi:GeneralSpace"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
<simpleType name="GeneralSpaceFunctionType">
  <union memberTypes="navi:GeneralSpaceFunctionEnumerationType navi:GeneralSpaceFunctionOtherType"/>
</simpleType>
<simpleType name="GeneralSpaceFunctionEnumerationType">
  <restriction base="string">
    <enumeration value="Administration"/>
    <enumeration value="Business, trade"/>
    <enumeration value="Education, training"/>
    <enumeration value="Recreation"/>
  </restriction>
</simpleType>
```

```

        <enumeration value="Laboratory"/>
        <enumeration value="Storage"/>
        <enumeration value="Security"/>
    </restriction>
</simpleType>
<simpleType name="GeneralSpaceFunctionOtherType">
    <restriction base="string">
        <pattern value="other: \w{2,}"/>
    </restriction>
</simpleType>

```

Listing — XML schema for the GeneralSpace element

```

<navi:GeneralSpace gml:id="GS_1">
    <!-- inherited mandatory properties -->
    <core:PoI>false</core:PoI>
    <navi:locomotionType>Walking</navi:locomotionType>

    <!-- mandatory property -->
    <navi:function>Storage</navi:function>
</navi:GeneralSpace>

```

Listing — An example of the GeneralSpace element

REQUIREMENT 13: REQUIREMENT FOR GENERALSPEACE XML ELEMENT

IDENTIFIER	/req/navi/generalspace
INCLUDED IN	Requirements class 2: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/navi
A	A GeneralSpace element SHALL conform to all schema and semantic requirements of NavigableSpace .
B	A GeneralSpace element SHALL specify the functional purpose of the space using the function element.
C	The function value SHALL be one of the following: "Administration", "Business, trade", "Education, training", "Recreation", "Laboratory", "Storage", "Security", or a user-defined value matching the pattern "other: \w{2,}".
D	A GeneralSpace element SHALL contain a unique gml:id attribute.

8.4. TransferSpace

The **TransferSpace** element is an instance of TransferSpace, representing a navigable space that provides passage between general spaces (e.g. doors, windows, gates).

```

<element name="TransferSpace" substitutionGroup="navi:NavigableSpace" type="navi:TransferSpaceType"/>
<complexType name="TransferSpaceType">
    <complexContent>
        <extension base="navi:NavigableSpaceType">

```

```

        <sequence>
            <element name="function" type="navi:TransferSpaceFunctionType"/>
            <element name="type" type="navi:TransferSpaceTypeType"/>
        </sequence>
    </extension>
</complexContent>
</complexType>
<complexType name="TransferSpacePropertyType">
    <sequence minOccurs="0">
        <element ref="navi:TransferSpace"/>
    </sequence>
    <attributeGroup ref="gml:AssociationAttributeGroup"/>
    <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
<simpleType name="TransferSpaceFunctionType">
    <union memberTypes="navi:TransferSpaceFunctionEnumerationType navi:TransferSpaceFunctionOtherType"/>
</simpleType>
<simpleType name="TransferSpaceFunctionEnumerationType">
    <restriction base="string">
        <enumeration value="ConnectionSpace"/>
        <enumeration value="AnchorSpace"/>
    </restriction>
</simpleType>
<simpleType name="TransferSpaceFunctionOtherType">
    <restriction base="string">
        <pattern value="other: \w{2,}"/>
    </restriction>
</simpleType>
<simpleType name="TransferSpaceTypeType">
    <union memberTypes="navi:TransferSpaceTypeEnumerationType navi:TransferSpaceTypeOtherType"/>
</simpleType>
<simpleType name="TransferSpaceTypeEnumerationType">
    <restriction base="string">
        <enumeration value="Door"/>
        <enumeration value="Window"/>
    </restriction>
</simpleType>
<simpleType name="TransferSpaceTypeOtherType">
    <restriction base="string">
        <pattern value="other: \w{2,}"/>
    </restriction>
</simpleType>

```

Listing — XML schema for the TransferSpace element

```

<navi:TransferSpace gml:id="TS_1">
    <!-- inherited mandatory properties -->
    <core:PoI>false</core:PoI>
    <navi:locomotionType>Walking</navi:locomotionType>

    <!-- mandatory properties -->
    <navi:function>ConnectionSpace</navi:function>
    <navi:type>Door</navi:type>
</navi:TransferSpace>

```

Listing — An example of the TransferSpace element

REQUIREMENT 14: REQUIREMENT FOR TRANSFERSPACE XML ELEMENT

IDENTIFIER	/req/navi/transferspace
INCLUDED IN	Requirements class 2: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/navi
A	A TransferSpace element SHALL conform to all schema and semantic requirements of NavigableSpace .
B	A TransferSpace element SHALL specify its passage function using the function element and its opening category using the type element.
C	The function value SHALL be one of the following: "ConnectionSpace" (connecting two indoor or two outdoor spaces), "AnchorSpace" (enabling connection between indoor and outdoor spaces), or a user-defined value matching the pattern "other: \w{2,}".
D	The type value SHALL be one of the following: "Door", "Window", or a user-defined value matching the pattern "other: \w{2,}".
E	A TransferSpace element SHALL contain a unique gml:id attribute.

8.5. NavigableBoundary

The **NavigableBoundary** element is an instance of NavigableBoundary, representing a boundary of a navigable space that provides transition or connection information.

```

<element name="NavigableBoundary" substitutionGroup="core:CellBoundary" type=
"navi:NavigableBoundaryType"/>
<complexType name="NavigableBoundaryType">
  <complexContent>
    <extension base="core:CellBoundaryType">
      <sequence>
        <element name="NavigableBoundaryFunction" type="navi:
NavigableBoundaryFunctionType"/>
        <element minOccurs="0" name="boundaryOrientation" type="boolean"/>
      </sequence>
    </extension>
  </complexContent>
</complexType>
<complexType name="NavigableBoundaryPropertyType">
  <sequence minOccurs="0">
    <element ref="navi:NavigableBoundary"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
<simpleType name="NavigableBoundaryFunctionType">
  <union memberTypes="navi:NavigableBoundaryFunctionEnumerationType navi:Navigabl
eBoundaryFunctionOtherType"/>
</simpleType>
<simpleType name="NavigableBoundaryFunctionEnumerationType">
  <restriction base="string">
    <enumeration value="AncorBoundary"/>
  </restriction>
</simpleType>

```

```

    <enumeration value="ConnectionBoundary"/>
  </restriction>
</simpleType>
<simpleType name="NavigableBoundaryFunctionOtherType">
  <restriction base="string">
    <pattern value="other: \w{2,}"/>
  </restriction>
</simpleType>

```

Listing — XML schema for the NavigableBoundary element

```

<navi:NavigableBoundary gml:id="NB_1">
  <!-- inherited mandatory property from CellBoundary -->
  <core:isVirtual>false</core:isVirtual>

  <!-- mandatory property -->
  <navi:NavigableBoundaryFunction>ConnectionBoundary</navi:
  NavigableBoundaryFunction>

  <!-- optional property -->
  <navi:boundaryOrientation>true</navi:boundaryOrientation>
</navi:NavigableBoundary>

```

Listing — An example of the NavigableBoundary element

REQUIREMENT 15: REQUIREMENT FOR NAVIGABLEBOUNDARY XML ELEMENT

IDENTIFIER	/req/navi/navigableboundary
INCLUDED IN	Requirements class 2: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/navi
A	A NavigableBoundary element SHALL conform to all schema and semantic requirements of CellBoundary .
B	A NavigableBoundary element SHALL specify its boundary function using the NavigableBoundaryFunction element.
C	The NavigableBoundaryFunction value SHALL be one of the following: "ConnectionBoundary" (boundary connecting two indoor or two outdoor spaces), "AnchorBoundary" (boundary enabling transition between indoor and outdoor spaces), or a user-defined value matching the pattern "other: \w{2,}".
D	When present, boundaryOrientation SHALL specify whether the boundary geometry is used with standard orientation (true) or reversed orientation (false).
E	A NavigableBoundary element SHALL contain a unique gml:id attribute.

8.6. NonNavigableSpace

The **NonNavigableSpace** element is an instance of NonNavigableSpace, representing an indoor space subdivision occupied by obstacles or restricted from agent traversal.

```
<element name="NonNavigableSpace" substitutionGroup="core:CellSpace" type="navi:NonNavigableSpaceType"/>
<complexType name="NonNavigableSpaceType">
  <complexContent>
    <extension base="core:CellSpaceType">
      <sequence/>
    </extension>
  </complexContent>
</complexType>
<complexType name="NonNavigableSpacePropertyType">
  <sequence minOccurs="0">
    <element ref="navi:NonNavigableSpace"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
```

Listing — XML schema for the NonNavigableSpace element

```
<navi:NonNavigableSpace gml:id="NNS_1">
  <!-- inherited mandatory property from CellSpace -->
  <core:PoI>false</core:PoI>
</navi:NonNavigableSpace>
```

Listing — An example of the NonNavigableSpace element

Requirement 16: Requirement for NonNavigableSpace XML Element	
Identifier	/req/navi/nonnavigablespace
Included in	Requirements class 2: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/navi
A	A NonNavigableSpace element SHALL conform to all schema and semantic requirements of CellSpace .
B	A NonNavigableSpace element SHALL contain a unique gml : id attribute.

8.7. ObjectSpace

The **ObjectSpace** element is an instance of ObjectSpace, representing a specialized non-navigable space that encapsulates physical objects or furniture within an indoor environment.

```

<element name="ObjectSpace" substitutionGroup="navi:NonNavigableSpace" type=
"navi:ObjectSpaceType"/>
<complexType name="ObjectSpaceType">
  <complexContent>
    <extension base="navi:NonNavigableSpaceType">
      <sequence>
        <element minOccurs="0" name="description" type="string"/>
        <element minOccurs="0" name="containedFeatures" type="integer"/>
      </sequence>
    </extension>
  </complexContent>
</complexType>
<complexType name="ObjectSpacePropertyType">
  <sequence minOccurs="0">
    <element ref="navi:ObjectSpace"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>

```

Listing — XML schema for the ObjectSpace element

```

<navi:ObjectSpace gml:id="OS_1">
  <!-- inherited mandatory property from CellSpace -->
  <core:PoI>false</core:PoI>

  <!-- optional properties -->
  <navi:containedFeatures>3</navi:containedFeatures>
  <navi:description>Living room furniture and columns</navi:description>
</navi:ObjectSpace>

```

Listing — An example of the ObjectSpace element

REQUIREMENT 17: REQUIREMENT FOR OBJECTSPACE XML ELEMENT	
IDENTIFIER	/req/navi/objectspace
INCLUDED IN	Requirements class 2: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/navi
A	An ObjectSpace element SHALL conform to all schema and semantic requirements of NonNavigableSpace .
B	An ObjectSpace element SHALL NOT overlap with any other CellSpace or its specialized classes within the same PrimalSpaceLayer .
C	When present, containedFeatures SHALL be a non-negative integer representing the count of contained objects.
D	When present, description SHALL provide descriptive text regarding the contained objects.
E	An ObjectSpace element SHALL contain a unique gml:id attribute.

8.8. NonNavigableBoundary

The **NonNavigableBoundary** element is an instance of `NonNavigableBoundary`, representing the boundary between two non-navigable spaces or between a navigable space and a non-navigable space.

```
<element name="NonNavigableBoundary" substitutionGroup="core:CellBoundary" type="
navi:NonNavigableBoundaryType"/>
<complexType name="NonNavigableBoundaryType">
  <complexContent>
    <extension base="core:CellBoundaryType">
      <sequence/>
    </extension>
  </complexContent>
</complexType>
<complexType name="NonNavigableBoundaryPropertyType">
  <sequence minOccurs="0">
    <element ref="navi:NonNavigableBoundary"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
```

Listing — XML schema for the NonNavigableBoundary element

```
<navi:NonNavigableBoundary gml:id="NNB_1">
  <!-- inherited mandatory property from CellBoundary -->
  <core:isVirtual>false</core:isVirtual>
</navi:NonNavigableBoundary>
```

Listing — An example of the NonNavigableBoundary element

Requirement 18: Requirement for NonNavigableBoundary XML Element	
Identifier	/req/navi/nonnavigableboundary
Included in	Requirements class 2: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/navi
A	A NonNavigableBoundary element SHALL conform to all schema and semantic requirements of CellBoundary .
B	A NonNavigableBoundary element SHALL contain a unique <code>gml:id</code> attribute.

8.9. Route

The **Route** element is an instance of `Route`, representing a designated navigation path through an indoor space composed of an ordered sequence of nodes and connecting edges in dual space.

```

<element name="Route" substitutionGroup="gml:AbstractFeature" type="navi:
RouteType"/>
<complexType name="RouteType">
  <complexContent>
    <extension base="gml:AbstractFeatureType">
      <sequence>
        <element minOccurs="0" name="creationDate" type="dateTime"/>
        <element maxOccurs="unbounded" minOccurs="2" name="routeNode" type="core:
NodePropertyType"/>
        <element maxOccurs="unbounded" name="routeEdge" type="core:
EdgePropertyType"/>
      </sequence>
    </extension>
  </complexContent>
</complexType>
<complexType name="RoutePropertyType">
  <sequence minOccurs="0">
    <element ref="navi:Route"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>

```

Listing — XML schema for the Route element

```

<navi:Route gml:id="RT_1">
  <!-- mandatory properties (at least 2 nodes and 1 edge) -->
  <navi:routeNode xlink:href="#ND_1"/>
  <navi:routeNode xlink:href="#ND_2"/>
  <navi:routeEdge xlink:href="#EDG_1"/>

  <!-- optional property -->
  <navi:creationDate>2025-10-20T16:44:00Z</navi:creationDate>
</navi:Route>

```

Listing — An example of the Route element

REQUIREMENT 19: REQUIREMENT FOR ROUTE XML ELEMENT

IDENTIFIER	/req/navi/route
INCLUDED IN	Requirements class 2: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/navi
A	A Route element SHALL contain at least two routeNode properties and at least one routeEdge property.
B	Each routeNode property SHALL reference (via xlink:href) or contain a Node element.
C	Each routeEdge property SHALL reference (via xlink:href) or contain an Edge element.
D	The sequences of routeNode and routeEdge properties SHALL represent an ordered contiguous path in the dual space graph.
E	Each consecutive pair of routeNode elements in the sequence SHALL be connected by the corresponding routeEdge element in routeEdge.

REQUIREMENT 19: REQUIREMENT FOR ROUTE XML ELEMENT

F	Consecutive <code>routeEdge</code> elements in the sequence SHALL share a common <code>routeNode</code> element.
G	When present, <code>creationDate</code> SHALL be formatted as a valid <code>xs:dateTime</code> string.
H	A Route element SHALL contain a unique <code>gml:id</code> attribute.



ANNEX A (NORMATIVE) CONFORMANCE CLASS ABSTRACT TEST SUITE

A

ANNEX A (NORMATIVE) CONFORMANCE CLASS ABSTRACT TEST SUITE

A.1. Conformance Class Core

CONFORMANCE CLASS A.1

IDENTIFIER	http://www.opengis.net/spec/indoorgml-2/2.0/xml/conf/core
REQUIREMENTS CLASS	Requirements class 1: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/core
TARGET TYPE	Implementation Specification
CONFORMANCE TESTS	Abstract test A.1: /conf/core/global Abstract test A.2: /conf/core/indoorfeatures Abstract test A.3: /conf/core/thematiclayer Abstract test A.4: /conf/core/primalspacelayer Abstract test A.5: /conf/core/cellspace Abstract test A.6: /conf/core/cellboundary Abstract test A.7: /conf/core/dualspacelayer Abstract test A.8: /conf/core/node Abstract test A.9: /conf/core/edge Abstract test A.10: /conf/core/interlayerconnection

ABSTRACT TEST A.1

IDENTIFIER	/conf/core/global
REQUIREMENT	Requirement 1: /req/core/global
TEST PURPOSE	Verify that instance XML documents validate against the IndoorGML 2.0 Core XML schema (IndoorGML_core.xsd) and OGC GML 3.2.1 schemas.

ABSTRACT TEST A.1

TEST METHOD Validate the XML instance document against IndoorGML_core.xsd and supporting GML 3.2.1 schemas using an XML Schema validator or appropriate validation software.

ABSTRACT TEST A.2

IDENTIFIER /conf/core/indoorfeatures

REQUIREMENT Requirement 2: /req/core/indoorfeatures

TEST PURPOSE Verify that an **IndoorFeatures** element contains at least one layers property referencing or containing a **ThematicLayer** element, that optional layerConnections properties contain or reference **InterLayerConnection** elements, and that a unique gml:id is present.

TEST METHOD Inspect the instance document to verify that the layers property has at least one valid **ThematicLayer** instance, that layerConnections contain valid **InterLayerConnection** instances, and that gml:id is unique.

ABSTRACT TEST A.3

IDENTIFIER /conf/core/thematiclayer

REQUIREMENT Requirement 3: /req/core/thematiclayer

TEST PURPOSE Verify that for each **ThematicLayer** element:

- semanticExtension is a valid boolean value (true or false).
- theme contains a valid value ("Tags", "Virtual", "Unknown", "Physical", or "other:\w{2,}").
- If present, primalSpace references or contains a valid **PrimalSpaceLayer** element.
- If present, dualSpace references or contains a valid **DualSpaceLayer** element.
- A unique gml:id attribute is present.

TEST METHOD Inspect the instance document to verify the above properties.

ABSTRACT TEST A.4

IDENTIFIER /conf/core/primalspacelayer

REQUIREMENT Requirement 4: /req/core/primalspacelayer

TEST PURPOSE Verify that for each **PrimalSpaceLayer** element:

ABSTRACT TEST A.4

- At least one **cellSpaceMember** property containing or referencing a **CellSpace** element is present.
- The geometries of all **CellSpace** members belonging to the same **PrimalSpaceLayer** do not intersect each other.
- The geometries of all **CellBoundary** members belonging to the same **PrimalSpaceLayer** do not intersect each other.
- If present, **creationDate** and **terminationDate** are valid `xs:dateTime` strings.
- A unique `gml:id` attribute is present.

TEST METHOD Inspect the instance document and perform spatial intersection analysis on member geometries to verify non-overlapping constraints.

ABSTRACT TEST A.5

IDENTIFIER /conf/core/cellspace

REQUIREMENT Requirement 5: /req/core/cellspace

TEST PURPOSE Verify that for each **CellSpace** element:

- **PoI** is a valid boolean value (true or false).
- If present, **duality** references or contains a corresponding **Node** element in dual space.
- If present, each **boundedBy** references or contains a corresponding **CellBoundary** element.
- The geometry of each bounding **CellBoundary** does not exceed the geometric extent of the **CellSpace**.
- A unique `gml:id` attribute is present.

TEST METHOD Inspect the instance document and verify geometric boundary containment against the cell space geometry.

ABSTRACT TEST A.6

IDENTIFIER /conf/core/cellboundary

REQUIREMENT Requirement 6: /req/core/cellboundary

TEST PURPOSE Verify that for each **CellBoundary** element:

- **isVirtual** is a valid boolean value (true or false).
- If present, **duality** references or contains a corresponding **Edge** element in dual space.
- A unique `gml:id` attribute is present.

ABSTRACT TEST A.6

TEST METHOD Inspect the instance document to verify the above properties.

ABSTRACT TEST A.7

IDENTIFIER /conf/core/dualspacelayer

REQUIREMENT Requirement 7: /req/core/dualspacelayer

TEST PURPOSE Verify that for each **DualSpaceLayer** element:

- isLogical and isDirected are valid boolean values (true or false).
- When isLogical is false, the geometry of each **Node** in nodeMember is spatially located inside the geometry of its corresponding **CellSpace**.
- At least one nodeMember property containing or referencing a **Node** element is present.
- If present, edgeMember properties contain or reference **Edge** elements.
- A unique gml:id attribute is present.

TEST METHOD Inspect the instance document and perform point-in-polygon / point-in-solid geometric tests when isLogical is false.

ABSTRACT TEST A.8

IDENTIFIER /conf/core/node

REQUIREMENT Requirement 8: /req/core/node

TEST PURPOSE Verify that for each **Node** element:

- duality references or contains the corresponding **CellSpace** element in the primal space.
- If present, each connects property references or contains a connected **Edge** element.
- A unique gml:id attribute is present.

TEST METHOD Inspect the instance document to verify cross-references between nodes, edges, and cell spaces.

ABSTRACT TEST A.9

IDENTIFIER /conf/core/edge

REQUIREMENT Requirement 9: /req/core/edge

ABSTRACT TEST A.9

	Verify that for each Edge element: - Exactly two connects properties referencing or containing connected Node elements are present. - If the parent DualSpaceLayer has <code>isDirected = true</code>, the order of connects is interpreted as directional (start to end node).
TEST PURPOSE	- A valid weight value of type <code>xs:double</code> is present. - If geometry is present, the curve does not self-intersect, and its start and end coordinates match the positions of the connected Node instances. - If present, duality references or contains the corresponding CellBoundary element. - A unique <code>gml:id</code> attribute is present.
TEST METHOD	Inspect the instance document and verify geometric coordinate alignment with connected node positions.

ABSTRACT TEST A.10

IDENTIFIER	<code>/conf/core/interlayerconnection</code>
REQUIREMENT	Requirement 10: <code>/req/core/interlayerconnection</code>
TEST PURPOSE	Verify that for each InterLayerConnection element: - Exactly two connectedLayers properties referencing distinct ThematicLayer elements are present. <code>typeOfTopoExpression</code> is one of the valid enumeration or pattern values ("Contains", "Overlaps", "Equals", "Within", "Crosses", "Other", or "other: \w{2,}"). - If present, <code>connectedCells</code> contains exactly two references to CellSpace elements belonging respectively to the first and second connected thematic layers. - If present, <code>connectedNodes</code> contains exactly two references to Node elements belonging respectively to the first and second connected thematic layers. - The order of <code>connectedLayers</code>, <code>connectedCells</code>, and <code>connectedNodes</code> corresponds pairwise to the same indices. - A unique <code>gml:id</code> attribute is present.
TEST METHOD	Inspect the instance document to verify layer and object cross-references and topological expression values.

A.2. Conformance Class Navigation Extension

CONFORMANCE CLASS A.2

IDENTIFIER	http://www.opengis.net/spec/indoorgml-2/2.0/xml/conf/navi
REQUIREMENTS CLASS	Requirements class 2: http://www.opengis.net/spec/indoorgml-2/2.0/xml/req/navi
TARGET TYPE	Implementation Specification
CONFORMANCE TESTS	Abstract test A.11: /conf/navi/global Abstract test A.12: /conf/navi/navigablespace Abstract test A.13: /conf/navi/generalspace Abstract test A.14: /conf/navi/transferspace Abstract test A.15: /conf/navi/navigableboundary Abstract test A.16: /conf/navi/nonnavigablespace Abstract test A.17: /conf/navi/objectspace Abstract test A.18: /conf/navi/nonnavigableboundary Abstract test A.19: /conf/navi/route

ABSTRACT TEST A.11

IDENTIFIER	/conf/navi/global
REQUIREMENT	Requirement 11: /req/navi/global
TEST PURPOSE	Verify that instance XML documents using the Navigation module validate against IndoorGML_navi.xsd, IndoorGML_core.xsd, and OGC GML 3.2.1 schemas.
TEST METHOD	Validate the XML instance document against the schemas using an XML Schema validator or appropriate validation software.

ABSTRACT TEST A.12

IDENTIFIER	/conf/navi/navigablespace
REQUIREMENT	Requirement 12: /req/navi/navigablespace
TEST PURPOSE	Verify that for each NavigableSpace element: • All validation criteria for /conf/core/cellspace are satisfied. • locomotionType contains a valid value ("Walking", "Flying", "Rolling", "Unspecified", or "other: \w{2,}"). • A unique gml:id attribute is present.
TEST METHOD	Inspect the instance document to verify locomotionType and inherited CellSpace properties.

ABSTRACT TEST A.13

IDENTIFIER /conf/navi/generalspace

REQUIREMENT Requirement 13: /req/navi/generalspace

TEST PURPOSE

Verify that for each **GeneralSpace** element:

- All validation criteria for /conf/navi/navigablespace are satisfied.
- function contains a valid value ("Administration", "Business, trade", "Education, training", "Recreation", "Laboratory", "Storage", "Security", or "other: \w{2,}").
- A unique gml:id attribute is present.

TEST METHOD Inspect the instance document to verify function type and inherited properties.

ABSTRACT TEST A.14

IDENTIFIER /conf/navi/transferspace

REQUIREMENT Requirement 14: /req/navi/transferspace

TEST PURPOSE

Verify that for each **TransferSpace** element:

- All validation criteria for /conf/navi/navigablespace are satisfied.
- function contains a valid value ("ConnectionSpace", "AnchorSpace", or "other: \w{2,}").
- type contains a valid value ("Door", "Window", or "other: \w{2,}").
- A unique gml:id attribute is present.

TEST METHOD Inspect the instance document to verify function, opening type, and inherited properties.

ABSTRACT TEST A.15

IDENTIFIER /conf/navi/navigableboundary

REQUIREMENT Requirement 15: /req/navi/navigableboundary

TEST PURPOSE

Verify that for each **NavigableBoundary** element:

- All validation criteria for /conf/core/cellboundary are satisfied.
- NavigableBoundaryFunction contains a valid value ("ConnectionBoundary", "AncorBoundary" / "AnchorBoundary", or "other: \w{2,}").
- If present, boundaryOrientation is a valid boolean value (true or false).

ABSTRACT TEST A.15

- A unique `gml:id` attribute is present.

TEST METHOD Inspect the instance document to verify boundary function and orientation.

ABSTRACT TEST A.16

IDENTIFIER /conf/navi/nonnavigablespace

REQUIREMENT Requirement 16: /req/navi/nonnavigablespace

TEST PURPOSE Verify that for each **NonNavigableSpace** element:

- All validation criteria for /conf/core/cellspace are satisfied.
- A unique `gml:id` attribute is present.

TEST METHOD Inspect the instance document to verify conformity with CellSpace requirements.

ABSTRACT TEST A.17

IDENTIFIER /conf/navi/objectspace

REQUIREMENT Requirement 17: /req/navi/objectspace

TEST PURPOSE Verify that for each **ObjectSpace** element:

- All validation criteria for /conf/navi/nonnavigablespace are satisfied.
- The geometry does not overlap with any other **CellSpace** or its specialized classes in the same **PrimalSpaceLayer**.
- If present, `containedFeatures` is a valid non-negative integer.
- If present, `description` is a valid string.
- A unique `gml:id` attribute is present.

TEST METHOD Inspect the instance document and verify non-overlapping geometric relationships in the primal space.

ABSTRACT TEST A.18

IDENTIFIER /conf/navi/nonnavigableboundary

REQUIREMENT Requirement 18: /req/navi/nonnavigableboundary

TEST PURPOSE Verify that for each **NonNavigableBoundary** element:

ABSTRACT TEST A.18

- All validation criteria for `/conf/core/cellboundary` are satisfied.
- A unique `gml:id` attribute is present.

TEST METHOD Inspect the instance document to verify conformity with `CellBoundary` requirements.

ABSTRACT TEST A.19

IDENTIFIER `/conf/navi/route`

REQUIREMENT Requirement 19: `/req/navi/route`

TEST PURPOSE

Verify that for each **Route** element:

- At least two `routeNode` properties and at least one `routeEdge` property are present.
- Each `routeNode` references or contains a **Node** element within the same dual space.
- Each `routeEdge` references or contains an **Edge** element within the same dual space.
- `routeNode` and `routeEdge` sequences represent an ordered contiguous path where each consecutive pair of nodes is connected by the corresponding edge, and consecutive edges share a common node.
- If present, `creationDate` is a valid `xs:dateTime` string.
- A unique `gml:id` attribute is present.

TEST METHOD Inspect the instance document and perform graph continuity validation along the route path.



ANNEX B (NORMATIVE) XML SCHEMA FOR INDOORGML 2

B

ANNEX B

(NORMATIVE)

XML SCHEMA FOR INDOORGML 2

In addition to this document, this standard includes some normative XML Schema Documents. These XML Schema Documents are included in this document. These XML Schema Documents are also posted online at the URL <http://schemas.opengis.net/indoorgml/2.0>. In the event of a discrepancy between this document and online versions of the XML Schema Document files (posted at schemas.opengis.net), the online schema files SHALL be considered authoritative.

B.1. IndoorGML Core Module

```
<?xml version="1.0" encoding="UTF-8"?><schema xmlns="http://www.w3.org/2001/
XMLSchema" xmlns:IndoorGML="http://www.opengis.net/indoorgml/2.0/navi" xmlns:gmd=
"http://www.isotc211.org/2005/gmd" xmlns:gml="http://www.opengis.net/gml/3.2"
elementFormDefault="qualified" targetNamespace="http://www.opengis.net/indoorgml/
2.0/core" version="2.0">
  <annotation>
    <appinfo>
      <gmlProfileSchema xmlns="http://www.opengis.net/gml/3.2">IndoorGML</
gmlProfileSchema>
    </appinfo>
  </annotation>
  <import namespace="http://www.isotc211.org/2005/gmd" schemaLocation="http://
schemas.opengis.net/iso/19139/20070417/gmd/gmd.xsd"/>
  <import namespace="http://www.opengis.net/gml/3.2" schemaLocation="http://
schemas.opengis.net/gml/3.2.1/gml.xsd"/>
  <import namespace="http://www.opengis.net/indoorgml/2.0/navi"/>
  <!--XML Schema document created by ShapeChange - http://shapechange.net/-->
  <element name="AbstractFeature" substitutionGroup="gml:AbstractFeature" type=
"IndoorGML:AbstractFeatureType"/>
  <complexType name="AbstractFeatureType">
    <complexContent>
      <extension base="gml:AbstractFeatureType">
        <sequence/>
      </extension>
    </complexContent>
  </complexType>
  <complexType name="AbstractFeaturePropertyType">
    <sequence minOccurs="0">
      <element ref="IndoorGML:AbstractFeature"/>
    </sequence>
    <attributeGroup ref="gml:AssociationAttributeGroup"/>
    <attributeGroup ref="gml:OwnershipAttributeGroup"/>
  </complexType>
  <element name="CellBoundary" substitutionGroup="gml:AbstractFeature" type=
"IndoorGML:CellBoundaryType"/>
```

```

<complexType name="CellBoundaryType">
  <complexContent>
    <extension base="gml:AbstractFeatureType">
      <sequence>
        <element minOccurs="0" name="cellBoundaryGeom" type="IndoorGML:CellBoundaryGeometryPropertyType"/>
        <element minOccurs="0" name="externalReference" type="IndoorGML:ExternalReferencePropertyType"/>
        <element name="isVirtual" type="boolean"/>
        <element minOccurs="0" name="duality" type="IndoorGML:EdgePropertyType">
          <annotation>
            <documentation>Corresponding cell boundary in the primal space</documentation>
          <appinfo>
            <reversePropertyName xmlns="http://www.opengis.net/gml/3.2">IndoorGML:duality</reversePropertyName>
          </appinfo>
        </annotation>
      </element>
    </sequence>
  </extension>
</complexContent>
</complexType>
<complexType name="CellBoundaryPropertyType">
  <sequence minOccurs="0">
    <element ref="IndoorGML:CellBoundary"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
<element name="CellBoundaryGeometry" substitutionGroup="gml:AbstractObject" type="IndoorGML:CellBoundaryGeometryType"/>
<complexType name="CellBoundaryGeometryType">
  <sequence>
    <element minOccurs="0" name="Geometry2D" type="gml:SurfacePropertyType"/>
    <element minOccurs="0" name="Geometry1D" type="gml:CurvePropertyType"/>
  </sequence>
</complexType>
<complexType name="CellBoundaryGeometryPropertyType">
  <sequence>
    <element ref="IndoorGML:CellBoundaryGeometry"/>
  </sequence>
</complexType>
<element name="CellSpace" substitutionGroup="gml:AbstractFeature" type="IndoorGML:CellSpaceType"/>
<complexType name="CellSpaceType">
  <complexContent>
    <extension base="gml:AbstractFeatureType">
      <sequence>
        <element minOccurs="0" name="cellSpaceGeom" type="IndoorGML:CellSpaceGeometryPropertyType"/>
        <element minOccurs="0" name="externalReference" type="IndoorGML:ExternalReferencePropertyType"/>
        <element minOccurs="0" name="level" type="string"/>
        <element name="PoI" type="boolean"/>
        <element minOccurs="0" name="cellSpaceName" type="string"/>
        <element minOccurs="0" name="duality" type="IndoorGML:NodePropertyType">
          <annotation>
            <documentation>Corresponding cell space in the primal space</documentation>
          <appinfo>

```

```

        <reversePropertyName xmlns="http://www.opengis.net/gml/3.2">
IndoorGML:duality</reversePropertyName>
        </appinfo>
        </annotation>
        </element>
        <element maxOccurs="unbounded" minOccurs="0" name="boundedBy" type=
"IndoorGML:CellBoundaryPropertyType">
        <annotation>
        <documentation>Cell boundaries that are bounding a cell space</
documentation>
        </annotation>
        </element>
        </sequence>
        </extension>
        </complexContent>
        </complexType>
        <complexType name="CellSpacePropertyType">
        <sequence minOccurs="0">
        <element ref="IndoorGML:CellSpace"/>
        </sequence>
        <attributeGroup ref="gml:AssociationAttributeGroup"/>
        <attributeGroup ref="gml:OwnershipAttributeGroup"/>
        </complexType>
        <element name="CellSpaceGeometry" substitutionGroup="gml:AbstractObject" type=
"IndoorGML:CellSpaceGeometryType"/>
        <complexType name="CellSpaceGeometryType">
        <sequence>
        <element minOccurs="0" name="Geometry3D" type="gml:SolidPropertyType"/>
        <element minOccurs="0" name="Geometry2D" type="gml:SurfacePropertyType"/>
        </sequence>
        </complexType>
        <complexType name="CellSpaceGeometryPropertyType">
        <sequence>
        <element ref="IndoorGML:CellSpaceGeometry"/>
        </sequence>
        </complexType>
        <element name="DualSpaceLayer" substitutionGroup="gml:AbstractFeature" type=
"IndoorGML:DualSpaceLayerType"/>
        <complexType name="DualSpaceLayerType">
        <complexContent>
        <extension base="gml:AbstractFeatureType">
        <sequence>
        <element name="isLogical" type="boolean"/>
        <element minOccurs="0" name="creationDate" type="dateTime"/>
        <element minOccurs="0" name="terminationDate" type="dateTime"/>
        <element name="isDirected" type="boolean"/>
        <element maxOccurs="unbounded" minOccurs="0" name="edgeMember">
        <annotation>
        <documentation>Edges of a dual space</documentation>
        </annotation>
        <complexType>
        <complexContent>
        <extension base="gml:AbstractFeatureMemberType">
        <sequence minOccurs="0">
        <element ref="IndoorGML:Edge"/>
        </sequence>
        <attributeGroup ref="gml:AssociationAttributeGroup"/>
        </extension>
        </complexContent>
        </complexType>
        </element>
        <element maxOccurs="unbounded" name="nodeMember">
        <annotation>

```

```

        <documentation>Nodes of a dual space</documentation>
      </annotation>
      <complexType>
        <complexContent>
          <extension base="gml:AbstractFeatureMemberType">
            <sequence minOccurs="0">
              <element ref="IndoorGML:Node"/>
            </sequence>
            <attributeGroup ref="gml:AssociationAttributeGroup"/>
          </extension>
        </complexContent>
      </complexType>
    </element>
  </sequence>
</extension>
</complexContent>
</complexType>
<complexType name="DualSpaceLayerPropertyType">
  <sequence minOccurs="0">
    <element ref="IndoorGML:DualSpaceLayer"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
<element name="Edge" substitutionGroup="gml:AbstractFeature" type="IndoorGML:
EdgeType"/>
<complexType name="EdgeType">
  <complexContent>
    <extension base="gml:AbstractFeatureType">
      <sequence>
        <element minOccurs="0" name="geometry" type="gml:CurvePropertyType"/>
        <element name="weight" type="double"/>
        <element minOccurs="0" name="duality" type="IndoorGML:
CellBoundaryPropertyType">
          <annotation>
            <documentation>Corresponding edge in the dual space</documentation>
            <appinfo>
              <reversePropertyName xmlns="http://www.opengis.net/gml/3.2">
IndoorGML:duality</reversePropertyName>
            </appinfo>
          </annotation>
        </element>
        <element maxOccurs="2" minOccurs="2" name="connects" type="IndoorGML:
NodePropertyType">
          <annotation>
            <documentation>The two nodes connected by an edge</documentation>
            <appinfo>
              <reversePropertyName xmlns="http://www.opengis.net/gml/3.2">
IndoorGML:connects</reversePropertyName>
            </appinfo>
          </annotation>
        </element>
      </sequence>
    </extension>
  </complexContent>
</complexType>
<complexType name="EdgePropertyType">
  <sequence minOccurs="0">
    <element ref="IndoorGML:Edge"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>

```

```

<element name="ExternalObjectReference" substitutionGroup="gml:AbstractObject"
type="IndoorGML:ExternalObjectReferenceType"/>
<complexType name="ExternalObjectReferenceType">
  <sequence>
    <element name="name" type="string"/>
    <element name="uri" type="anyURI"/>
  </sequence>
</complexType>
<complexType name="ExternalObjectReferencePropertyType">
  <sequence>
    <element ref="IndoorGML:ExternalObjectReference"/>
  </sequence>
</complexType>
<element name="ExternalReference" substitutionGroup="gml:AbstractObject" type=
"IndoorGML:ExternalReferenceType"/>
<complexType name="ExternalReferenceType">
  <sequence>
    <element name="externalObject" type="IndoorGML:ExternalObjectReferencePrope
rtyType"/>
    <element name="informationSystem" type="gmd:URL_PropertyType"/>
  </sequence>
</complexType>
<complexType name="ExternalReferencePropertyType">
  <sequence>
    <element ref="IndoorGML:ExternalReference"/>
  </sequence>
</complexType>
<element name="IndoorFeatures" substitutionGroup="gml:AbstractFeature" type=
"IndoorGML:IndoorFeaturesType"/>
<complexType name="IndoorFeaturesType">
  <complexContent>
    <extension base="gml:AbstractFeatureType">
      <sequence>
        <element maxOccurs="unbounded" name="layers">
          <complexType>
            <complexContent>
              <extension base="gml:AbstractFeatureMemberType">
                <sequence minOccurs="0">
                  <element ref="IndoorGML:ThematicLayer"/>
                </sequence>
                <attributeGroup ref="gml:AssociationAttributeGroup"/>
              </extension>
            </complexContent>
          </complexType>
        </element>
        <element maxOccurs="unbounded" minOccurs="0" name="layerConnections">
          <complexType>
            <complexContent>
              <extension base="gml:AbstractFeatureMemberType">
                <sequence minOccurs="0">
                  <element ref="IndoorGML:InterLayerConnection"/>
                </sequence>
                <attributeGroup ref="gml:AssociationAttributeGroup"/>
              </extension>
            </complexContent>
          </complexType>
        </element>
      </sequence>
    </extension>
  </complexContent>
</complexType>
<complexType name="IndoorFeaturesPropertyType">
  <sequence minOccurs="0">

```

```

        <element ref="IndoorGML:IndoorFeatures"/>
    </sequence>
    <attributeGroup ref="gml:AssociationAttributeGroup"/>
    <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
<element name="InterLayerConnection" substitutionGroup="gml:AbstractFeature"
type="IndoorGML:InterLayerConnectionType">
    <annotation>
        <documentation>Describes the connection between two thematic layers.</
documentation>
    </annotation>
</element>
<complexType name="InterLayerConnectionType">
    <complexContent>
        <extension base="gml:AbstractFeatureType">
            <sequence>
                <element name="typeOfTopoExpression" type="IndoorGML:
TopoExpressionValueType">
                    <annotation>
                        <documentation>Describes the topological relationship between two
layers (e.g. overlaps, contains, etc.).</documentation>
                    </annotation>
                </element>
                <element minOccurs="0" name="comment" type="string"/>
                <element maxOccurs="2" minOccurs="2" name="connectedLayers" type=
"IndoorGML:ThematicLayerPropertyType"/>
                <element maxOccurs="2" minOccurs="0" name="connectedCells" type=
"IndoorGML:CellSpacePropertyType">
                    <annotation>
                        <documentation>Indicates the interconnected primal spaces</
documentation>
                    </annotation>
                </element>
                <element maxOccurs="2" minOccurs="0" name="connectedNodes" type=
"IndoorGML:NodePropertyType">
                    <annotation>
                        <documentation>Indicates the interconnected dual spaces</
documentation>
                    </annotation>
                </element>
            </sequence>
        </extension>
    </complexContent>
</complexType>
<complexType name="InterLayerConnectionPropertyType">
    <sequence minOccurs="0">
        <element ref="IndoorGML:InterLayerConnection"/>
    </sequence>
    <attributeGroup ref="gml:AssociationAttributeGroup"/>
    <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
<element name="Node" substitutionGroup="gml:AbstractFeature" type="IndoorGML:
NodeType"/>
<complexType name="NodeType">
    <complexContent>
        <extension base="gml:AbstractFeatureType">
            <sequence>
                <element minOccurs="0" name="geometry" type="gml:PointPropertyType"/>
                <element name="duality" type="IndoorGML:CellSpacePropertyType">
                    <annotation>
                        <documentation>Corresponding node in the dual space</documentation>
                    <appinfo>

```

```

        <reversePropertyName xmlns="http://www.opengis.net/gml/3.2">
IndoorGML:duality</reversePropertyName>
        </appinfo>
        </annotation>
        </element>
        <element maxOccurs="unbounded" minOccurs="0" name="connects" type=
"IndoorGML:EdgePropertyType">
        <annotation>
        <documentation>Edges connected to the node</documentation>
        <appinfo>
        <reversePropertyName xmlns="http://www.opengis.net/gml/3.2">
IndoorGML:connects</reversePropertyName>
        </appinfo>
        </annotation>
        </element>
        </sequence>
        </extension>
        </complexContent>
        </complexType>
        <complexType name="NodePropertyType">
        <sequence minOccurs="0">
        <element ref="IndoorGML:Node"/>
        </sequence>
        <attributeGroup ref="gml:AssociationAttributeGroup"/>
        <attributeGroup ref="gml:OwnershipAttributeGroup"/>
        </complexType>
        <element name="PrimalSpaceLayer" substitutionGroup="gml:AbstractFeature" type=
"IndoorGML:PrimalSpaceLayerType"/>
        <complexType name="PrimalSpaceLayerType">
        <complexContent>
        <extension base="gml:AbstractFeatureType">
        <sequence>
        <element minOccurs="0" name="creationDate" type="dateTime"/>
        <element minOccurs="0" name="terminationDate" type="dateTime"/>
        <element maxOccurs="unbounded" name="cellSpaceMember">
        <annotation>
        <documentation>Cell spaces of a primal space</documentation>
        </annotation>
        <complexType>
        <complexContent>
        <extension base="gml:AbstractFeatureMemberType">
        <sequence minOccurs="0">
        <element ref="IndoorGML:CellSpace"/>
        </sequence>
        <attributeGroup ref="gml:AssociationAttributeGroup"/>
        </extension>
        </complexContent>
        </complexType>
        </element>
        <element maxOccurs="unbounded" minOccurs="0" name="cellBoundaryMember">
        <annotation>
        <documentation>Cell boundaries of a primal space</documentation>
        </annotation>
        <complexType>
        <complexContent>
        <extension base="gml:AbstractFeatureMemberType">
        <sequence minOccurs="0">
        <element ref="IndoorGML:CellBoundary"/>
        </sequence>
        <attributeGroup ref="gml:AssociationAttributeGroup"/>
        </extension>
        </complexContent>
        </complexType>

```



```

        </element>
      </sequence>
    </extension>
  </complexContent>
</complexType>
<complexType name="PrimalSpaceLayerPropertyType">
  <sequence minOccurs="0">
    <element ref="IndoorGML:PrimalSpaceLayer"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
<element name="ThematicLayer" substitutionGroup="gml:AbstractFeature" type="
IndoorGML:ThematicLayerType">
  <annotation>
    <documentation>A layer of specific theme aggregating a primal and/or a
dual space of a given environment.</documentation>
  </annotation>
</element>
<complexType name="ThematicLayerType">
  <complexContent>
    <extension base="gml:AbstractFeatureType">
      <sequence>
        <element name="semanticExtension" type="boolean">
          <annotation>
            <documentation>Indicates whether semantic information is
associated (true) or not (false) to the primal space of the thematic layer.</
documentation>
          </annotation>
        </element>
        <element name="theme" type="IndoorGML:ThemeLayerValueType">
          <annotation>
            <documentation>Determines the theme of the layer (e.g topographic,
logical, etc.).</documentation>
          </annotation>
        </element>
        <element minOccurs="0" name="primalSpace">
          <annotation>
            <documentation>Relates the primal spaces to the thematicLayer</
documentation>
          </annotation>
        </element>
        <complexType>
          <complexContent>
            <extension base="gml:AbstractFeatureMemberType">
              <sequence minOccurs="0">
                <element ref="IndoorGML:PrimalSpaceLayer"/>
              </sequence>
              <attributeGroup ref="gml:AssociationAttributeGroup"/>
            </extension>
          </complexContent>
        </complexType>
        </element>
        <element minOccurs="0" name="dualSpace">
          <annotation>
            <documentation>Relates the dual spaces to the thematicLayer.</
documentation>
          </annotation>
        </element>
        <complexType>
          <complexContent>
            <extension base="gml:AbstractFeatureMemberType">
              <sequence minOccurs="0">
                <element ref="IndoorGML:DualSpaceLayer"/>
              </sequence>
            </extension>
          </complexContent>
        </complexType>
      </sequence>
    </extension>
  </complexContent>
</complexType>

```



```

        <attributeGroup ref="gml:AssociationAttributeGroup"/>
      </extension>
    </complexContent>
  </complexType>
</element>
</sequence>
</extension>
</complexContent>
</complexType>
<complexType name="ThematicLayerPropertyType">
  <sequence minOccurs="0">
    <element ref="IndoorGML:ThematicLayer"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
<simpleType name="ThemeLayerValueType">
  <union memberTypes="IndoorGML:ThemeLayerValueEnumerationType IndoorGML:
ThemeLayerValueOtherType"/>
</simpleType>
<simpleType name="ThemeLayerValueEnumerationType">
  <restriction base="string">
    <enumeration value="Tags"/>
    <enumeration value="Virtual"/>
    <enumeration value="Unknown"/>
    <enumeration value="Physical"/>
  </restriction>
</simpleType>
<simpleType name="ThemeLayerValueOtherType">
  <restriction base="string">
    <pattern value="other: \w{2,}"/>
  </restriction>
</simpleType>
<simpleType name="TopoExpressionValueType">
  <union memberTypes="IndoorGML:TopoExpressionValueEnumerationType IndoorGML:
TopoExpressionValueOtherType"/>
</simpleType>
<simpleType name="TopoExpressionValueEnumerationType">
  <restriction base="string">
    <enumeration value="Contains"/>
    <enumeration value="Overlaps"/>
    <enumeration value="Equals"/>
    <enumeration value="Within"/>
    <enumeration value="Crosses"/>
    <enumeration value="Other"/>
  </restriction>
</simpleType>
<simpleType name="TopoExpressionValueOtherType">
  <restriction base="string">
    <pattern value="other: \w{2,}"/>
  </restriction>
</simpleType>
</schema>

```

Listing B.1

B.2. IndoorGML Indoor Navigation Module

```
<?xml version="1.0" encoding="UTF-8"?><schema xmlns="http://www.w3.org/2001/
XMLSchema" xmlns:IndoorGML="http://www.opengis.net/indoorgml/2.0/core" xmlns:gmd=
"http://www.isotc211.org/2005/gmd" xmlns:gml="http://www.opengis.net/gml/3.2"
elementFormDefault="qualified" targetNamespace="http://www.opengis.net/indoorgml/
2.0/navi" version="2.0">
  <annotation>
    <appinfo>
      <gmlProfileSchema xmlns="http://www.opengis.net/gml/3.2">IndoorGML</
gmlProfileSchema>
    </appinfo>
  </annotation>
  <import namespace="http://www.isotc211.org/2005/gmd" schemaLocation="http://
schemas.opengis.net/iso/19139/20070417/gmd/gmd.xsd"/>
  <import namespace="http://www.opengis.net/gml/3.2" schemaLocation="http://
schemas.opengis.net/gml/3.2.1/gml.xsd"/>
  <import namespace="http://www.opengis.net/indoorgml/2.0/core"/>
  <!--XML Schema document created by ShapeChange - http://shapechange.net/-->
  <element name="AbstractFreature" substitutionGroup="gml:AbstractFeature" type=
"IndoorGML:AbstractFreatureType"/>
  <complexType name="AbstractFreatureType">
    <complexContent>
      <extension base="gml:AbstractFeatureType">
        <sequence/>
      </extension>
    </complexContent>
  </complexType>
  <complexType name="AbstractFreaturePropertyType">
    <sequence minOccurs="0">
      <element ref="IndoorGML:AbstractFreature"/>
    </sequence>
    <attributeGroup ref="gml:AssociationAttributeGroup"/>
    <attributeGroup ref="gml:OwnershipAttributeGroup"/>
  </complexType>
  <element name="CellBoundary" substitutionGroup="gml:AbstractFeature" type=
"IndoorGML:CellBoundaryType"/>
  <complexType name="CellBoundaryType">
    <complexContent>
      <extension base="gml:AbstractFeatureType">
        <sequence>
          <element minOccurs="0" name="cellBoundaryGeom" type="IndoorGML:CellBoun
daryGeometryPropertyType"/>
          <element minOccurs="0" name="externalReference" type="IndoorGML:
ExternalReferencePropertyType"/>
          <element name="isVirtual" type="boolean"/>
          <element minOccurs="0" name="duality" type="IndoorGML:
EdgePropertyType">
            <annotation>
              <appinfo>
                <reversePropertyName xmlns="http://www.opengis.net/gml/3.2">
IndoorGML:duality</reversePropertyName>
              </appinfo>
            </annotation>
          </element>
        </sequence>
      </extension>
    </complexContent>
  </complexType>
```

```

<complexType name="CellBoundaryPropertyType">
  <sequence minOccurs="0">
    <element ref="IndoorGML:CellBoundary"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
<element name="CellBoundaryGeometry" substitutionGroup="gml:AbstractObject"
type="IndoorGML:CellBoundaryGeometryType"/>
<complexType name="CellBoundaryGeometryType">
  <sequence>
    <element minOccurs="0" name="Geometry2D" type="gml:SurfacePropertyType"/>
    <element minOccurs="0" name="Geometry1D" type="gml:CurvePropertyType"/>
  </sequence>
</complexType>
<complexType name="CellBoundaryGeometryPropertyType">
  <sequence>
    <element ref="IndoorGML:CellBoundaryGeometry"/>
  </sequence>
</complexType>
<element name="CellSpace" substitutionGroup="IndoorGML:AbstractFeature" type=
"IndoorGML:CellSpaceType"/>
<complexType name="CellSpaceType">
  <complexContent>
    <extension base="IndoorGML:AbstractFeatureType">
      <sequence>
        <element minOccurs="0" name="cellSpaceGeom" type="IndoorGML:
CellSpaceGeometryPropertyType"/>
        <element minOccurs="0" name="externalReference" type="IndoorGML:
ExternalReferencePropertyType"/>
        <element minOccurs="0" name="level" type="string"/>
        <element name="PoI" type="boolean"/>
        <element minOccurs="0" name="name" type="string"/>
        <element minOccurs="0" name="duality" type="IndoorGML:
NodePropertyType">
          <annotation>
            <appinfo>
              <reversePropertyName xmlns="http://www.opengis.net/gml/3.2">
IndoorGML:duality</reversePropertyName>
            </appinfo>
          </annotation>
        </element>
        <element maxOccurs="unbounded" minOccurs="0" name="boundedBy" type=
"IndoorGML:CellBoundaryPropertyType">
          <annotation>
            <documentation>Cell boundaries that are bounding a cell space</
documentation>
          </annotation>
        </element>
      </sequence>
    </extension>
  </complexContent>
</complexType>
<complexType name="CellSpacePropertyType">
  <sequence minOccurs="0">
    <element ref="IndoorGML:CellSpace"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
<element name="CellSpaceGeometry" substitutionGroup="gml:AbstractObject" type=
"IndoorGML:CellSpaceGeometryType"/>
<complexType name="CellSpaceGeometryType">

```

```

    <sequence>
      <element minOccurs="0" name="Geometry3D" type="gml:SolidPropertyType"/>
      <element minOccurs="0" name="Geometry2D" type="gml:SurfacePropertyType"/>
    </sequence>
  </complexType>
  <complexType name="CellSpaceGeometryPropertyType">
    <sequence>
      <element ref="IndoorGML:CellSpaceGeometry"/>
    </sequence>
  </complexType>
  <element name="Edge" substitutionGroup="gml:AbstractFeature" type="IndoorGML:
EdgeType"/>
  <complexType name="EdgeType">
    <complexContent>
      <extension base="gml:AbstractFeatureType">
        <sequence>
          <element minOccurs="0" name="geometry" type="gml:CurvePropertyType"/>
          <element name="weight" type="double"/>
          <element maxOccurs="2" minOccurs="2" name="connects" type="IndoorGML:
NodePropertyType">
            <annotation>
              <documentation>The two nodes connected by an edge</documentation>
              <appinfo>
                <reversePropertyName xmlns="http://www.opengis.net/gml/3.2">
IndoorGML:connects</reversePropertyName>
              </appinfo>
            </annotation>
          </element>
          <element minOccurs="0" name="duality" type="IndoorGML:
CellBoundaryPropertyType">
            <annotation>
              <appinfo>
                <reversePropertyName xmlns="http://www.opengis.net/gml/3.2">
IndoorGML:duality</reversePropertyName>
              </appinfo>
            </annotation>
          </element>
        </sequence>
      </extension>
    </complexContent>
  </complexType>
  <complexType name="EdgePropertyType">
    <sequence minOccurs="0">
      <element ref="IndoorGML:Edge"/>
    </sequence>
    <attributeGroup ref="gml:AssociationAttributeGroup"/>
    <attributeGroup ref="gml:OwnershipAttributeGroup"/>
  </complexType>
  <element name="ExternalObjectReference" substitutionGroup="gml:AbstractObject"
type="IndoorGML:ExternalObjectReferenceType"/>
  <complexType name="ExternalObjectReferenceType">
    <sequence>
      <element name="uri" type="anyURI"/>
      <element name="name" type="string"/>
    </sequence>
  </complexType>
  <complexType name="ExternalObjectReferencePropertyType">
    <sequence>
      <element ref="IndoorGML:ExternalObjectReference"/>
    </sequence>
  </complexType>
  <element name="ExternalReference" substitutionGroup="gml:AbstractObject" type=
"IndoorGML:ExternalReferenceType"/>

```

```

<complexType name="ExternalReferenceType">
  <sequence>
    <element name="externalObject">
      <complexType>
        <complexContent>
          <extension base="gml:AbstractMemberType">
            <sequence minOccurs="0">
              <element ref="IndoorGML:ExternalObjectReferenceType"/>
            </sequence>
            <attributeGroup ref="gml:AssociationAttributeGroup"/>
          </extension>
        </complexContent>
      </complexType>
    </element>
    <element name="informationSystem" type="gmd:URL_PropertyType"/>
  </sequence>
</complexType>
<complexType name="ExternalReferencePropertyType">
  <sequence>
    <element ref="IndoorGML:ExternalReference"/>
  </sequence>
</complexType>
<element name="GeneralSpace" substitutionGroup="IndoorGML:NavigableSpace" type=
"IndoorGML:GeneralSpaceType"/>
<complexType name="GeneralSpaceType">
  <complexContent>
    <extension base="IndoorGML:NavigableSpaceType">
      <sequence>
        <element name="function" type="IndoorGML:GeneralSpaceFunctionType"/>
      </sequence>
    </extension>
  </complexContent>
</complexType>
<complexType name="GeneralSpacePropertyType">
  <sequence minOccurs="0">
    <element ref="IndoorGML:GeneralSpace"/>
  </sequence>
  <attributeGroup ref="gml:AssociationAttributeGroup"/>
  <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
<simpleType name="GeneralSpaceFunctionType">
  <union memberTypes="IndoorGML:GeneralSpaceFunctionEnumerationType IndoorGML:
GeneralSpaceFunctionOtherType"/>
</simpleType>
<simpleType name="GeneralSpaceFunctionEnumerationType">
  <restriction base="string">
    <enumeration value="Administration"/>
    <enumeration value="Business, trade"/>
    <enumeration value="Education, training"/>
    <enumeration value="Recreation"/>
    <enumeration value="Laboratory"/>
    <enumeration value="Storage"/>
    <enumeration value="Security"/>
  </restriction>
</simpleType>
<simpleType name="GeneralSpaceFunctionOtherType">
  <restriction base="string">
    <pattern value="other: \w{2,}"/>
  </restriction>
</simpleType>
<simpleType name="LocomotionAccessType">

```

```

    <union memberTypes="IndoorGML:LocomotionAccessEnumerationType IndoorGML:
LocomotionAccessOtherType"/>
  </simpleType>
  <simpleType name="LocomotionAccessEnumerationType">
    <restriction base="string">
      <enumeration value="Walking"/>
      <enumeration value="Flying"/>
      <enumeration value="Rolling"/>
      <enumeration value="Unspecified"/>
    </restriction>
  </simpleType>
  <simpleType name="LocomotionAccessOtherType">
    <restriction base="string">
      <pattern value="other: \w{2,}"/>
    </restriction>
  </simpleType>
  <element name="NavigableBoundary" substitutionGroup="IndoorGML:CellBoundary"
type="IndoorGML:NavigableBoundaryType"/>
  <complexType name="NavigableBoundaryType">
    <complexContent>
      <extension base="IndoorGML:CellBoundaryType">
        <sequence>
          <element name="NavigableBoundaryFunction" type="IndoorGML:NavigableBoun
daryFunctionType"/>
          <element minOccurs="0" name="boundaryOrientation" type="boolean"/>
        </sequence>
      </extension>
    </complexContent>
  </complexType>
  <complexType name="NavigableBoundaryPropertyType">
    <sequence minOccurs="0">
      <element ref="IndoorGML:NavigableBoundary"/>
    </sequence>
    <attributeGroup ref="gml:AssociationAttributeGroup"/>
    <attributeGroup ref="gml:OwnershipAttributeGroup"/>
  </complexType>
  <simpleType name="NavigableBoundaryFunctionType">
    <union memberTypes="IndoorGML:NavigableBoundaryFunctionEnumerationType
IndoorGML:NavigableBoundaryFunctionOtherType"/>
  </simpleType>
  <simpleType name="NavigableBoundaryFunctionEnumerationType">
    <restriction base="string">
      <enumeration value="AnchorBoundary"/>
      <enumeration value="ConnectionBoundary"/>
    </restriction>
  </simpleType>
  <simpleType name="NavigableBoundaryFunctionOtherType">
    <restriction base="string">
      <pattern value="other: \w{2,}"/>
    </restriction>
  </simpleType>
  <element name="NavigableSpace" substitutionGroup="IndoorGML:CellSpace" type=
"IndoorGML:NavigableSpaceType"/>
  <complexType name="NavigableSpaceType">
    <complexContent>
      <extension base="IndoorGML:CellSpaceType">
        <sequence>
          <element name="locomotionType" type="IndoorGML:LocomotionAccessType"/>
        </sequence>
      </extension>
    </complexContent>
  </complexType>
  <complexType name="NavigableSpacePropertyType">

```

```

    <sequence minOccurs="0">
      <element ref="IndoorGML:NavigableSpace"/>
    </sequence>
    <attributeGroup ref="gml:AssociationAttributeGroup"/>
    <attributeGroup ref="gml:OwnershipAttributeGroup"/>
  </complexType>
  <element name="Node" substitutionGroup="gml:AbstractFeature" type="IndoorGML:
NodePropertyType"/>
  <complexType name="NodePropertyType">
    <complexContent>
      <extension base="gml:AbstractFeatureType">
        <sequence>
          <element minOccurs="0" name="geometry" type="gml:PointPropertyType"/>
          <element maxOccurs="unbounded" minOccurs="0" name="connects" type=
"IndoorGML:EdgePropertyType">
            <annotation>
              <documentation>Edges connected to the node</documentation>
              <appinfo>
                <reversePropertyName xmlns="http://www.opengis.net/gml/3.2">
IndoorGML:connects</reversePropertyName>
              </appinfo>
            </annotation>
          </element>
          <element name="duality" type="IndoorGML:CellSpacePropertyType">
            <annotation>
              <appinfo>
                <reversePropertyName xmlns="http://www.opengis.net/gml/3.2">
IndoorGML:duality</reversePropertyName>
              </appinfo>
            </annotation>
          </element>
        </sequence>
      </extension>
    </complexContent>
  </complexType>
  <complexType name="NodePropertyType">
    <sequence minOccurs="0">
      <element ref="IndoorGML:Node"/>
    </sequence>
    <attributeGroup ref="gml:AssociationAttributeGroup"/>
    <attributeGroup ref="gml:OwnershipAttributeGroup"/>
  </complexType>
  <element name="NonNavigableBoundary" substitutionGroup="IndoorGML:CellBoundary"
type="IndoorGML:NonNavigableBoundaryType"/>
  <complexType name="NonNavigableBoundaryType">
    <complexContent>
      <extension base="IndoorGML:CellBoundaryType">
        <sequence/>
      </extension>
    </complexContent>
  </complexType>
  <complexType name="NonNavigableBoundaryPropertyType">
    <sequence minOccurs="0">
      <element ref="IndoorGML:NonNavigableBoundary"/>
    </sequence>
    <attributeGroup ref="gml:AssociationAttributeGroup"/>
    <attributeGroup ref="gml:OwnershipAttributeGroup"/>
  </complexType>
  <element name="NonNavigableSpace" substitutionGroup="IndoorGML:CellSpace" type=
"IndoorGML:NonNavigableSpaceType"/>
  <complexType name="NonNavigableSpaceType">
    <complexContent>
      <extension base="IndoorGML:CellSpaceType">

```



```

        </sequence>
    </extension>
</complexContent>
</complexType>
<complexType name="NonNavigableSpacePropertyType">
    <sequence minOccurs="0">
        <element ref="IndoorGML:NonNavigableSpace"/>
    </sequence>
    <attributeGroup ref="gml:AssociationAttributeGroup"/>
    <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
<element name="ObjectSpace" substitutionGroup="IndoorGML:NonNavigableSpace"
type="IndoorGML:ObjectSpaceType"/>
<complexType name="ObjectSpaceType">
    <complexContent>
        <extension base="IndoorGML:NonNavigableSpaceType">
            <sequence>
                <element minOccurs="0" name="description" type="string"/>
                <element minOccurs="0" name="containedFeatures" type="integer"/>
            </sequence>
        </extension>
    </complexContent>
</complexType>
<complexType name="ObjectSpacePropertyType">
    <sequence minOccurs="0">
        <element ref="IndoorGML:ObjectSpace"/>
    </sequence>
    <attributeGroup ref="gml:AssociationAttributeGroup"/>
    <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
<element name="Route" substitutionGroup="gml:AbstractFeature" type="IndoorGML:
RouteType"/>
<complexType name="RouteType">
    <complexContent>
        <extension base="gml:AbstractFeatureType">
            <sequence>
                <element minOccurs="0" name="creationDate" type="dateTime"/>
                <element maxOccurs="unbounded" minOccurs="2" name="routeNode" type=
"IndoorGML:NodePropertyType"/>
                <element maxOccurs="unbounded" name="routeEdge" type="IndoorGML:
EdgePropertyType"/>
            </sequence>
        </extension>
    </complexContent>
</complexType>
<complexType name="RoutePropertyType">
    <sequence minOccurs="0">
        <element ref="IndoorGML:Route"/>
    </sequence>
    <attributeGroup ref="gml:AssociationAttributeGroup"/>
    <attributeGroup ref="gml:OwnershipAttributeGroup"/>
</complexType>
<element name="TransferSpace" substitutionGroup="IndoorGML:NavigableSpace"
type="IndoorGML:TransferSpaceType"/>
<complexType name="TransferSpaceType">
    <complexContent>
        <extension base="IndoorGML:NavigableSpaceType">
            <sequence>
                <element name="function" type="IndoorGML:
TransferSpaceFunctionTypeType"/>
                <element name="type" type="IndoorGML:TransferSpaceTypeType"/>
            </sequence>
        </extension>
    </complexContent>
</complexType>

```



```

    </complexContent>
  </complexType>
  <complexType name="TransferSpacePropertyType">
    <sequence minOccurs="0">
      <element ref="IndoorGML:TransferSpace"/>
    </sequence>
    <attributeGroup ref="gml:AssociationAttributeGroup"/>
    <attributeGroup ref="gml:OwnershipAttributeGroup"/>
  </complexType>
  <simpleType name="TransferSpaceFunctionType">
    <union memberTypes="IndoorGML:TransferSpaceFunctionEnumerationType IndoorGML:
TransferSpaceFunctionOtherType"/>
  </simpleType>
  <simpleType name="TransferSpaceFunctionEnumerationType">
    <restriction base="string">
      <enumeration value="ConnectionSpace"/>
      <enumeration value="AnchorSpace"/>
    </restriction>
  </simpleType>
  <simpleType name="TransferSpaceFunctionOtherType">
    <restriction base="string">
      <pattern value="other: \w{2,}"/>
    </restriction>
  </simpleType>
  <simpleType name="TransferSpaceTypeType">
    <union memberTypes="IndoorGML:TransferSpaceTypeEnumerationType IndoorGML:
TransferSpaceTypeOtherType"/>
  </simpleType>
  <simpleType name="TransferSpaceTypeEnumerationType">
    <restriction base="string">
      <enumeration value="Door"/>
      <enumeration value="Window"/>
    </restriction>
  </simpleType>
  <simpleType name="TransferSpaceTypeOtherType">
    <restriction base="string">
      <pattern value="other: \w{2,}"/>
    </restriction>
  </simpleType>
</schema>

```

Listing B.2



ANNEX C (INFORMATIVE) EXAMPLE OF CODELIST



ANNEX C

(INFORMATIVE)

EXAMPLE OF CODELIST

For mapping indoor space features to IndoorNavigation module classes, space features have to be classified by functions and usages of space. Each space class has attributes for functions, usages, and classes of space. Because misspellings or different names for the same notion brings the problems in data interoperability, in order to overcome the typo errors, an example of CodeList is provided in this annex to specify the attribute values including space class types, space function types and space usage types. The CodeLists are defined from OmniClass (Table 13 and Table 14) created and used by the North American architectural, engineering and construction (AEC) industry.

C.1. GeneralSpace

C.1.1. GeneralSpaceClassType

Code list derived from OmniClass Table 13 and CityGML:

- 1000 — Administration
- 1010 — Business, trade
- 1020 — Education, training
- 1030 — Recreation
- 1040 — Art, performance
- 1050 — Healthcare
- 1060 — Laboratory
- 1070 — Service
- 1080 — Production
- 1090 — Storage
- 1100 — Security

- 1110 – Accommodation, Waste management

C.1.2. GeneralSpaceFunctionType

Code list derived from OmniClass Table 13:

- 1000 – Elevator Machine Room
- 1010 – Fire Command Center
- 1020 – Men's Restroom
- 1030 – Unisex Restroom
- 1040 – Refrigerant Machinery Room
- 1050 – Incinerator Room
- 1060 – Gas Room
- 1070 – Liquid Use, Dispensing and Mixing Room
- 1080 – Electrical Room
- 1090 – Telecommunications Room
- 1100 – Hazardous Waste Storage
- 1110 – Building Manager Office
- 1120 – Guard Stations
- 1130 – Women's Restroom
- 1140 – Furnace Room
- 1150 – Fuel Room
- 1160 – Liquid Storage Room
- 1170 – Hydrogen Cutoff Room
- 1180 – Switch Room
- 1190 – Classrooms
- 1200 – Assembly Hall
- 1210 – Physics Teaching Laboratory
- 1220 – Open Class Laboratory
- 1230 – Laboratory Service Space

- 1240 – Computer Lab
- 1250 – Training Support Space
- 1260 – Study Room
- 1270 – Evidence Room
- 1280 – Witness Stand
- 1290 – Robing Area
- 1300 – Council Chambers
- 1310 – Armory
- 1320 – General Performance Spaces
- 1330 – Orchestra Pit
- 1340 – Performance Hall
- 1350 – Audience Space
- 1360 – Audience Seating Space
- 1370 – Projection Booth
- 1380 – Stage Wings
- 1390 – Art Gallery
- 1400 – Sculpture Garden
- 1410 – Recording Studio
- 1420 – Photo Lab
- 1430 – Library
- 1440 – Mediation Chapel
- 1450 – Reflection Space
- 1460 – Chapel
- 1470 – Shrine
- 1480 – Confessional Space
- 1490 – Tabernacle
- 1500 – Choir Loft
- 1510 – Marriage Sanctuary

- 1520 – Mental Health Quiet Room
- 1530 – Bone Densitometry Room
- 1540 – CT Simulator Room
- 1550 – Head Radiographic Room
- 1560 – Mobile Imaging System Alcove
- 1570 – MRI System Component Room
- 1580 – PET/CT Simulator Room
- 1590 – Radiographic Room
- 1600 – Stereotactic Mammography Room
- 1610 – Ultrasound/Optical Coherence Tomography Room
- 1620 – Angiographic Control Room
- 1630 – Angiographic Procedure Control Area
- 1640 – Silver Collection Area
- 1650 – Computer Image Processing Area
- 1660 – CT Control Area
- 1670 – Image Quality Control Room
- 1680 – X-Ray, Plane Film Storage Space
- 1690 – MRI Control Room
- 1700 – MRI Viewing Room
- 1710 – Radiographic Control Room
- 1720 – Tele-Radiology/Tele-Medicine Room
- 1730 – Radiation Diagnostic and Therapy Spaces
- 1740 – Health Physics Laboratory
- 1750 – Linear Accelerator Entrance Maze, Healthcare
- 1760 – Radioactive Waste Storage Room, Healthcare
- 1770 – Nuclear Medicine Scanning Room
- 1780 – Patient Dose/Thyroid Uptake Room
- 1790 – Radiopharmacy

- 1800 – Radiation Therapy, Mold Fabrication Shop
- 1810 – Heart and Lung Diagnostic and Treatment Spaces
- 1820 – Cardiac Catheter Instrument Room
- 1830 – Cardiac Catheter Control Room
- 1840 – Cardiac Electrophysiology Room
- 1850 – Echocardiograph Room
- 1860 – Extended Pulmonary Function Testing Laboratory
- 1870 – Pacemaker ICD Interrogation Room
- 1880 – Procedure Viewing Area
- 1890 – Pulmonary Function Treadmill Room
- 1900 – Respiratory Therapy Clean-up Room
- 1910 – General Diagnostic Procedure and Treatment Spaces
- 1920 – Endoscopy/Gastroenterology Spaces
- 1930 – Clinical Laboratory Spaces
- 1940 – Pharmacy Spaces
- 1950 – Rehabilitation Spaces
- 1960 – Medical Research and Development Spaces
- 1970 – Chemistry Laboratories
- 1980 – Physical Sciences Laboratories
- 1990 – Earth and Environmental Sciences Laboratories
- 2000 – Psychology Laboratories
- 2010 – Dry Laboratories
- 2020 – Wet Laboratories
- 2030 – Biosciences Laboratories
- 2040 – Astronomy Laboratories
- 2050 – Forensics Laboratories
- 2060 – Bench Laboratories
- ... (Refer to the full standard implementation schema for other classifications)

C.1.3. GeneralSpaceUsageType

Code list identically specified as GeneralSpaceFunctionType.

C.2. TransitionSpace

C.2.1. TransitionSpaceClassType

- 1000 – Horizontal Transition
- 1010 – Vertical Transition

C.2.2. TransitionSpaceFunctionType

- 1000 – Corridor
- 1010 – Breezeway
- 1020 – Box Lobby
- 1030 – Elevator Lobby
- 1040 – Landing
- 1050 – Aisle
- 1060 – Ramp
- 1070 – Concourse
- 1080 – Moving walkway
- 1090 – Entry Lobby
- 1100 – Jet way
- 1110 – Elevator Shaft
- 1120 – Stair
- 1130 – Chute

C.2.3. TransitionSpaceUsageType

Code list identically specified as TransitionSpaceFunctionType.

C.3. ConnectionSpace

C.3.1. ConnectionSpaceClassType

- 1000 – Door
- 1010 – Vestibule
- 1020 – Sally port

C.3.2. ConnectionSpaceFunctionType

- 1000 – Door
- 1010 – Vestibule
- 1060 – Sally port

C.3.3. ConnectionSpaceUsageType

Code list identically specified as ConnectionSpaceFunctionType.

C.4. AnchorSpace

C.4.1. AnchorSpaceClassType

- 1000 – Vestibule
- 1020 – Gate

C.4.2. AnchorSpaceFunctionType

- 1000 – Entry Vestibule
- 1010 – Exterior door
- 1020 – Gate
- 1030 – Emergency door

C.4.3. AnchorSpaceUsageType

Code list identically specified as AnchorSpaceFunctionType.



ANNEX D (INFORMATIVE) USE-CASES OF INDOORGML 2 – PART2A

D

ANNEX D (INFORMATIVE) USE-CASES OF INDOORGML 2 – PART2A

D.1. Use-Case 1: Conversion from IndoorGML 1.1 to IndoorGML 2

- Contributor: Ki-Joune Li

D.2. Use-Case 2: Conversion from IFC to IndoorGML 2

- Contributor: Abdoulaye Diakité

D.3. Use-Case 3: Mapping of ISO 19164 in IndoorGML 2 – Part 2a

- Contributors: Ki-Joune Li & Abdoulaye Diakité

D.4. Use-Case 4: Implementation of omlox in IndoorGML 2 – Part 2a

D.5. Use-Case 5: Indoor Navigation Service for Visually Impaired Person



BIBLIOGRAPHY





BIBLIOGRAPHY

- [1] Policy SWG: OGC 08-131r3, *The Specification Model – Standard for Modular specifications*. Open Geospatial Consortium (2009). <https://docs.ogc.org/pol/08-131r3/08-131r3/pdf>.
- [2] Geographic information – Spatial Schema
- [3] OGC: CityGML, OGC 08-007r1 2008
- [4] OGC: OGC City Geography Markup Language (CityGML) Encoding Standard version 2.0, OGC 12-019, 2012
- [5] OGC: OGC KML version 2.2, OGC 07-147r2, 2008
- [6] Lefebvre, S., Hornus S.: Automatic cell-and-portal decomposition, Technical Report 4898, INRIA, 2003
- [7] Anagnostopoulus, C., Testsos, V., Kikiras, P., Hadjiefthymiades, S. P.: OntoNav: A Semantic Indoor Navigation System, First International Workshop on Managing Context Information in Mobile and Pervasive Environments, Vol. 165, Ayia Napa, Cyprus, 2003
- [8] Kulyukin, V., Gharpure, C., Nicholson, J.: RoboCart: Toward Robot-Assisted Navigation of Grocery Stores by the Visually Impaired, Proceedings of the International Conference on Intelligent Robots and Systems, IROS 2005, IEEE/RSJ
- [9] Booch, G., Rumbaugh, J., and Jacobson, I.: Unified Modeling Language User Guide, Addison-Wesley, 1997
- [10] Liao, L., Fox, D., Hightower, J., Kautz, H., Schulz, D.: Voronoi Tracking: Location Estimation Using Sparse and Noisy Sensor Data, Proc. of the International Conference on Intelligent Robots and Systems, IROS 2003, IEEE/RSJ
- [11] Princeton University, 2010
- [12] Adachi, Y., Forester, J., Hyvarinen, J., Karstila, K., Liebich, T., Wix, J.: Industry Foundation Classes IFC2x Edition 3, International Alliance for Interoperability, 2003
- [13] buildingSmart: Industry Foundation Classes Release 2x3 version 2
- [14] Munkres, J. R.: Elements of Algebraic Topology, Addison-Wesley, Menlo Park, CA, 1984
- [15] Egenhofer, M., Herring, J.: Categorizing Binary Topological Relations between Regions, Lines and Points in Geographical Databases, NCGIA Technical Report, 1990

- [16] Lee, Y.C.: Geographic information systems for urban applications: Problems and solutions, *Environment and Planning B: Planning and Design*, Vol. 17:463-473, 1990.
- [17] Lee, J.: 3D GIS for Geo-coding Human Activity in Micro-scale Urban Environments, M.J. Egenhofer, C. Freksa, and H.J. Miller (Eds.): *GIScience 2004*, Springer, Berlin, Germany
- [18] Lee, J.: A Spatial Access Oriented Implementation of a Topological Data Model for 3D Urban Entities, *GeoInformatica* 8(3), 235-262, 2004.
- [19] Kolbe, T.H., Gröger, G. & Plümer, L.: CityGML – Interoperable Access to 3D City Models, P. van Oosterom, S. Zlatanova & E.M. Fendel (eds), *Geo-information for Disaster Management; Proc. of the 1st International Symposium on Geo-information for Disaster Management*, Delft, The Netherlands, March 21–23, 2005. Springer.
- [20] Kolodziej, K. W., Hjelm, J.: *Local Positioning Systems – LBS Applications and Services*, Taylor & Francis Group, London, UK, 2006
- [21] LaValle, S. M.: *Planning Algorithms*, Cambridge University Press, USA, 2006
- [22] Lorenz, B., Ohlbach, H. J., Stoffel, E.-P., Rosner, M.: NL Navigation Commands from Indoor WLAN fingerprinting position data, Technical Report of REVERSE-Project, Munich, Germany, September 2006
- [23] Gold, C. M. and Ledoux, H.: Simultaneous Storage of Primal and Dual Three-Dimensional Subdivisions, *Computers, Environment and Urban Systems – Topology and Spatial Databases*, Vol. 31, Issue 4, 2007, Elsevier
- [24] Lorenz, B., Ohlbach, H. J., Stoffel, E.-P., Rosner, M.: Towards a Semantic Spatial Model for Pedestrian Indoor Navigation, *Lecture Notes in Computer Science – Advances in Conceptual Modeling – Foundations and Applications*, Volume 4802/2007, Springer, Berlin, Germany
- [25] Morris, Sidney A.: *Topology without Tears*, University of Ballarat, Australia, 2007
- [26] Becker, T., Nagel, C., and Kolbe, T. H.: A Multilayered Space-Event Model for Navigation in Indoor Spaces, *Lecture Notes in Geoinformation and Cartography – 3D Geo-Information Science*, 2008.
- [27] Lee, J., Zlatanova, S.: A 3D data model and topological analyses for emergency response in urban areas. *Geospatial Information Technology for Emergency Response – Zlatanova & Li (eds)*, Taylor & Francis Group, London, UK, 2008
- [28] Lee, J.: Indoor Spatial Data Model, *Proc. ISA Workshop*, Seoul, Korea, Aug. 2008
- [29] Fritsch, R. and Piccinini, R. A.: *Cellular Structures in Topology*, Cambridge University Press, Cambridge, England, 2008
- [30] Becker, T., Nagel, C., and Kolbe, T. H.: Supporting Contexts for Indoor Navigation using a Multilayered Space Model, *Tenth International Conference on Mobile Data Management*, Taipei, Taiwan, 2009

- [31] Nagel, C., Becker B., Kaden, R., Li, K-J., Lee, J., and Kolbe, T. H.: Requirements and Space-Event Modeling for Indoor Navigation, OGC 10-191r1, 2010