



# JOINT OGC AND ISO CODE SPRINT 2022 SUMMARY ENGINEERING REPORT

---

## ENGINEERING REPORT

DRAFT

**Submission Date:** 2022-09-30

**Approval Date:** 2029-06-12

**Publication Date:** 2029-06-12

**Editor:** Gobe Hobona, Joana Simoes

**Notice:** This document is not an OGC Standard. This document is an OGC Public Engineering Report created as a deliverable in an OGC Interoperability Initiative and is *not an official position* of the OGC membership. It is distributed for review and comment. It is subject to change without notice and may not be referred to as an OGC Standard.

Further, any OGC Engineering Report should not be referenced as required or mandatory technology in procurements. However, the discussions in this document could very well lead to the definition of an OGC Standard.

## License Agreement

Permission is hereby granted by the Open Geospatial Consortium, ("Licensor"), free of charge and subject to the terms set forth below, to any person obtaining a copy of this Intellectual Property and any associated documentation, to deal in the Intellectual Property without restriction (except as set forth below), including without limitation the rights to implement, use, copy, modify, merge, publish, distribute, and/or sublicense copies of the Intellectual Property, and to permit persons to whom the Intellectual Property is furnished to do so, provided that all copyright notices on the intellectual property are retained intact and that each person to whom the Intellectual Property is furnished agrees to the terms of this Agreement.

If you modify the Intellectual Property, all copies of the modified Intellectual Property must include, in addition to the above copyright notice, a notice that the Intellectual Property includes modifications that have not been approved or adopted by LICENSOR.

THIS LICENSE IS A COPYRIGHT LICENSE ONLY, AND DOES NOT CONVEY ANY RIGHTS UNDER ANY PATENTS THAT MAY BE IN FORCE ANYWHERE IN THE WORLD. THE INTELLECTUAL PROPERTY IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE DO NOT WARRANT THAT THE FUNCTIONS CONTAINED IN THE INTELLECTUAL PROPERTY WILL MEET YOUR REQUIREMENTS OR THAT THE OPERATION OF THE INTELLECTUAL PROPERTY WILL BE UNINTERRUPTED OR ERROR FREE. ANY USE OF THE INTELLECTUAL PROPERTY SHALL BE MADE ENTIRELY AT THE USER'S OWN RISK. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR ANY CONTRIBUTOR OF INTELLECTUAL PROPERTY RIGHTS TO THE INTELLECTUAL PROPERTY BE LIABLE FOR ANY CLAIM, OR ANY DIRECT, SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM ANY ALLEGED INFRINGEMENT OR ANY LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR UNDER ANY OTHER LEGAL THEORY, ARISING OUT OF OR IN CONNECTION WITH THE IMPLEMENTATION, USE, COMMERCIALIZATION OR PERFORMANCE OF THIS INTELLECTUAL PROPERTY.

This license is effective until terminated. You may terminate it at any time by destroying the Intellectual Property together with all copies in any form. The license will also terminate if you fail to comply with any term or condition of this Agreement. Except as provided in the following sentence, no such termination of this license shall require the termination of any third party end-user sublicense to the Intellectual Property which is in force as of the date of notice of such termination. In addition, should the Intellectual Property, or the operation of the Intellectual Property, infringe, or in LICENSOR's sole opinion be likely to infringe, any patent, copyright, trademark or other right of a third party, you agree that LICENSOR, in its sole discretion, may terminate this license without any compensation or liability to you, your licensees or any other party. You agree upon termination of any kind to destroy or cause to be destroyed the Intellectual Property together with all copies in any form, whether held by you or by any third party.

Except as contained in this notice, the name of LICENSOR or of any other holder of a copyright in all or part of the Intellectual Property shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Intellectual Property without prior written authorization of LICENSOR or such copyright holder. LICENSOR is and shall at all times be the sole entity that may authorize you or any third party to use certification marks, trademarks or other special designations to indicate compliance with any LICENSOR standards or specifications. This Agreement is governed by the laws of the Commonwealth of Massachusetts. The application to this Agreement of the United Nations Convention on Contracts for the International Sale of Goods is hereby expressly excluded. In the event any provision of this Agreement shall be deemed unenforceable, void or invalid, such provision shall be modified so as to make it valid and enforceable, and as so modified the entire Agreement shall remain in full force and effect. No decision, action or inaction by LICENSOR shall be construed to be a waiver of any rights or remedies available to it.

None of the Intellectual Property or underlying information or technology may be downloaded or otherwise exported or reexported in violation of U.S. export laws and regulations. In addition, you are responsible for complying with any local laws in your jurisdiction which may impact your right to import, export or use the Intellectual Property, and you represent that you have complied with any regulations or registration procedures required by applicable law to make this license enforceable.

## Copyright notice

Copyright © 2022 Open Geospatial Consortium  
To obtain additional rights of use, visit <http://www.ogc.org/legal/>

## Note

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. The Open Geospatial Consortium shall not be held responsible for identifying any or all such patent rights.

Recipients of this document are requested to submit, with their comments, notification of any relevant patent claims or other intellectual property rights of which they may be aware that might be infringed by any implementation of the standard set forth in this document, and to provide supporting documentation.

# CONTENTS

---

I.	EXECUTIVE SUMMARY .....	v
II.	KEYWORDS .....	vi
III.	SECURITY CONSIDERATIONS .....	vii
IV.	SUBMITTERS .....	vii
V.	ABSTRACT .....	viii
1.	SCOPE .....	2
2.	NORMATIVE REFERENCES .....	4
3.	TERMS, DEFINITIONS AND ABBREVIATED TERMS .....	6
	3.6. Abbreviated terms .....	7
4.	HIGH-LEVEL ARCHITECTURE .....	9
	4.1. Approved and Draft Standards .....	9
	4.2. Open Source Software Projects .....	12
	4.3. Proprietary products .....	14
	4.4. Other solutions .....	15
5.	RESULTS .....	18
	5.1. gleo .....	18
	5.2. MariaDB CubeWerx CubeSERV .....	19
	5.3. Idproxy .....	19
	5.4. GeoNetwork .....	20
	5.5. Geonovum OGC API Testclient .....	21
	5.6. GeM+ .....	22
	5.7. pygeoapi .....	23
	5.8. pycsw .....	24
	5.9. OWSLib .....	26
	5.10. Geopython stack .....	27
	5.11. ISO 19115 activity by OpenWork .....	28
	5.12. 3DGI CityJSON and JSON-FG Viewer .....	31
	5.13. Secure and Asynchronous Catalogue .....	32
	5.14. University of Manchester Natural Language Processing for Spatial Analysis .....	33
	5.15. STAC Browser .....	34

6. DISCUSSION .....	37
6.1. Harmonization between STAC and OGC API Records .....	37
6.2. Harvesting .....	38
6.3. ISO 19115 metadata and OGC API Records .....	39
6.4. JSON-FG .....	40
7. CONCLUSIONS .....	42
7.1. Future Work .....	42
ANNEX A (INFORMATIVE) REVISION HISTORY .....	44
BIBLIOGRAPHY .....	46

## LIST OF FIGURES

---

Figure 1 – High Level Overview of the Sprint Architecture .....	9
Figure 2 – Screenshot of the GLeo demo .....	18
Figure 3 – Screenshot of the CubeWerx CubeSERV demo .....	19
Figure 4 – Screenshot of the CubeWerx CubeSERV demo .....	20
Figure 5 – Screenshot of the OGC API testclient .....	21
Figure 6 .....	22
Figure 7 .....	23
Figure 8 – Screenshot of the pygeoapi transactions demo .....	24
Figure 9 – Screenshot of the pycsw transactions demo .....	25
Figure 10 – Screenshot of the instance of pycsw .....	26
Figure 11 – Screenshot of the OWSLib transactions demo .....	27
Figure 12 – Screenshot of metadata lifecycle management mentor stream using pygeometra, OWSLib, pygeoapi/pycsw, and QGIS .....	28
Figure 13 – Screenshot of the 3DGI CityJSON and JSON-FG Viewer .....	31
Figure 14 – Screenshot of the Natural Language Processing for Spatial Analysis toolkit prototype by the University of Manchester .....	34
Figure 15 – Screenshot of the STAC Browser accessing an implementation of OGC API – Features .....	35
Figure 16 – Screenshot of the STAC Browser accessing an implementation of OGC API – Records .....	35

# EXECUTIVE SUMMARY

Over the past two decades, standards such as ISO 19115:2003 and the OGC Catalogue Services for the Web (CSW) have been integrated into several Spatial Data Infrastructure (SDI) initiatives at national and international levels. These standards leveraged the Extensible Markup Language (XML) which, at the time, was the primary encoding for data exchange across much of Information Technology. In recent times, however, the increasing use of JavaScript Object Notation (JSON) and the uptake of Web Application Programming Interface (API) has meant that modernization of metadata and catalogues approaches is necessary.

In November 2021, the Open Geospatial Consortium (OGC) and the International Organization for Standardization (ISO) held their first joint code sprint. The success of that first joint code sprint provided the foundation for a second joint code sprint. This Engineering Report (ER) summarizes the main achievements of the second joint code sprint, conducted between September 14th and 16th, 2022. The second joint code sprint, named the 2022 Joint OGC and ISO Code Sprint – The Metadata Code Sprint, served to accelerate the support of open geospatial standards that relate to geospatial metadata and catalogues. The code sprint was sponsored by Ordnance Survey (OS) at the Gold-level and Geonovum at the Silver-level. The code sprint was held as a hybrid event, with the face-to-face element hosted at the Geovation Hub in London, United Kingdom.

The code sprint focused on the following group of specifications:

- OGC API – Records candidate Standard [1]
- ISO 19115 metadata Standards (i.e., ISO 19115-1, ISO 19115-2, ISO 19115-3)
- OGC Features and Geometries JSON (JSON-FG) candidate Standard [2]
- Spatio-Temporal Asset Catalog (STAC), which leverages the OGC API – Features Standard [3]

The OGC is an international consortium of more than 500 businesses, government agencies, research organizations, and universities driven to make geospatial (location) information and services FAIR – Findable, Accessible, Interoperable, and Reusable. The consortium consists of Standards Working Groups (SWGs) that have responsibility for designing a candidate standard prior to approval as an OGC Standard and for making revisions to an existing OGC Standard. The sprint objectives for the SWGs were to:

- Develop prototype implementations of OGC Standards, including implementations of draft OGC Application Programming Interface (API) Standards
- Test the prototype implementations
- Provide feedback to the Editor about what worked and what did not
- Provide feedback about the specification document

Technical Committee 211 (TC 211) of ISO is responsible for the development and publication of standards that relate to geographic information. As with other ISO committees, TC 211 consists of member nations, as well as liaison partner organizations. TC 211 and OGC have a liaison partnership that enables the organizations to participate in each other's activities and also to collaborate on standards development initiatives. The sprint objectives for ISO/TC 211 were to:

- Support the development of ISO Standards
- Fix open issues
- Develop new features
- Encourage the implementation of ISO Standards

This engineering report makes the following recommendations for future innovation work items:

- Initiatives to facilitate implementation of JSON-FG (e.g. three-dimensional (3D) data, cadastral data, etc.)
- Initiatives to facilitate implementation of catalogues
- Prototyping of tools for creating metadata (e.g. the automated STAC metadata crawler demonstrated during the sprint)

The engineering report also makes the following recommendations for things that the Standards Working Groups should consider:

- Outreach for promoting JSON-FG
- Code Sprint for designing profiles of JSON-FG for different communities of interest
- Documentation of the different roles of catalogues and API, as well as guidance on when to use them
- Code Sprint on versioning, possibly involving both OGC API – Records and OGC API – Features
- Exploring how to move GeoDCAT forward within OGC

## II

## KEYWORDS

---

The following are keywords to be used by search engines and document catalogues.

hackathon, metadata, code sprint, API, catalogue, record

III

## SECURITY CONSIDERATIONS

---

No security considerations have been made for this document.

IV

## SUBMITTERS

---

All questions regarding this document should be directed to the editor or the contributors:

NAME	ORGANIZATION	ROLE
Gobe Hobona	Open Geospatial Consortium	Editor
Joana Simoes	Open Geospatial Consortium	Editor
Panagiotis Vretanos	CubeWerx Inc.	Contributor
Núria Julià Selvas	UAB-CREAF	Contributor
Joan Maso	UAB-CREAF	Contributor
Moozhan Shakeri	University of Manchester	Contributor
Clemens Portele	interactive instruments GmbH	Contributor
Matthias Mohr	WWU Münster	Contributor
Jeroen Ticheler	GeoCat	Contributor
Tom Kralidis	Meteorological Service of Canada	Contributor
Byron Cochrane	OpenWork Ltd	Contributor
Andreas Matheus	Secure Dimensions	Contributor
Thijs Brentjens	Geonovum	Contributor

## ABSTRACT

---

The subject of this Engineering Report (ER) is a code sprint that was held from the 14th to the 16th of September 2022 to advance open standards that relate to geospatial metadata and catalogues. The code sprint was hosted by the Open Geospatial Consortium (OGC) and the International Organization for Standardization (ISO). The code sprint was sponsored by Ordnance Survey (OS) and Geonovum, and held as a hybrid event with the face-to-face element hosted at the Geovation Hub in London, United Kingdom.

1

# SCOPE

---

## SCOPE

---

This Engineering Report (ER) summarizes the main achievements of the 2022 Joint OGC and ISO Code Sprint. The code sprint was organized to provide a collaborative environment that enables software developers, users, and architects to work together on open standards that relate to geospatial metadata and catalogues.

A Code Sprint is a collaborative and inclusive event driven by innovative and rapid programming with minimal process and organization constraints to support the development of new applications and open standards. Code Sprints experiment with emerging ideas in the context of geospatial standards, help improve interoperability of existing standards by experimenting with new extensions or profiles, and are used for building proofs of concept to support standards development activities and enhancement of software products.

2

# NORMATIVE REFERENCES

---

## NORMATIVE REFERENCES

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

Open API Initiative: OpenAPI Specification 3.0.3, <https://github.com/OAI/OpenAPI-Specification/blob/master/versions/3.0.3.md>

Berners-Lee, T., Fielding, R., Masinter, L: IETF RFC 3896, Uniform Resource Identifier (URI): Generic Syntax, <https://tools.ietf.org/rfc/rfc3896.txt>

ISO: ISO 19115-1, *Geographic information – Metadata – Part 1: Fundamentals*. International Organization for Standardization, Geneva <https://www.iso.org/standard/53798.html>.

ISO: ISO 19115-2, *Geographic information – Metadata – Part 2: Extensions for acquisition and processing*. International Organization for Standardization, Geneva <https://www.iso.org/standard/67039.html>.

ISO: ISO/TS 19115-3, *Geographic information – Metadata – Part 3: XML schema implementation for fundamental concepts*. International Organization for Standardization, Geneva <https://www.iso.org/standard/32579.html>.

3

# TERMS, DEFINITIONS AND ABBREVIATED TERMS

---

# TERMS, DEFINITIONS AND ABBREVIATED TERMS

---

This document uses the terms defined in [OGC Policy Directive 49](#), which is based on the ISO/IEC Directives, Part 2, Rules for the structure and drafting of International Standards. In particular, the word "shall" (not "must") is the verb form used to indicate a requirement to be strictly followed to conform to this document and OGC documents do not use the equivalent phrases in the ISO/IEC Directives, Part 2.

This document also uses terms defined in the OGC Standard for Modular specifications ([OGC 08-131r3](#)), also known as the 'ModSpec'. The definitions of terms such as standard, specification, requirement, and conformance test are provided in the ModSpec.

For the purposes of this document, the following additional terms and definitions apply.

## 3.1. API

---

An Application Programming Interface (API) is a standard set of documented and supported functions and procedures that expose the capabilities or data of an operating system, application, or service to other applications [adapted from ISO/IEC TR 13066-2:2016].

## 3.2. coordinate reference system

---

A coordinate system that is related to the real world by a datum term name [source: ISO 19111]

## 3.3. OpenAPI Document

---

A document (or set of documents) that defines or describes an API. An OpenAPI definition uses and conforms to the OpenAPI Specification (<https://www.openapis.org>)

## 3.4. Metadata

---

information about a resource [source: ISO 19115-1:2014, Amendment 2]

## 3.5. Web API

---

API using an architectural style that is founded on the technologies of the Web [source: OGC API – Features – Part 1: Core]

## 3.6. Abbreviated terms

---

API	Application Programming Interface
CRS	Coordinate Reference System
GIS	Geographic Information System
OGC	Open Geospatial Consortium
OWS	OGC Web Services
REST	Representational State Transfer


4

# HIGH-LEVEL ARCHITECTURE

---

# HIGH-LEVEL ARCHITECTURE

As illustrated in Figure 1, the sprint architecture was designed with the view of enabling client applications to connect to different servers that implement open geospatial standards that relate to metadata and catalogues. Implementations of JSON-FG, ISO 19115, STAC, and OGC API – Records were deployed in participants' own infrastructure in order to build a solution with the architecture shown below in Figure 1.

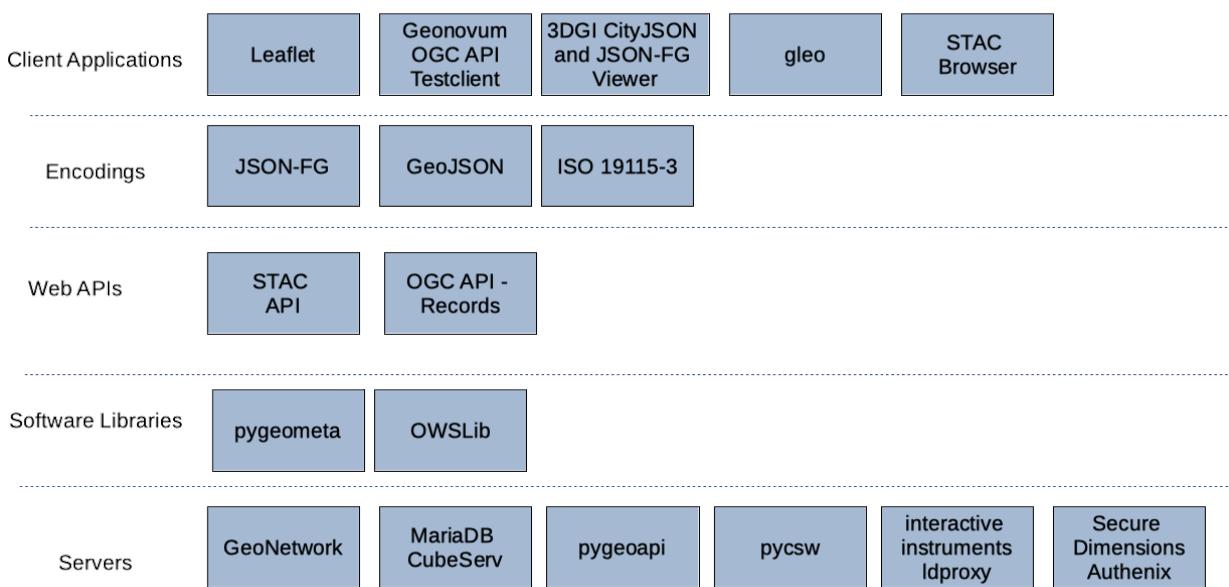

**Figure 1 – High Level Overview of the Sprint Architecture**

The rest of this section describes the software deployed and standards implemented during the code sprint.

## 4.1. Approved and Draft Standards

This section describes the approved and draft standards implemented during the code sprint.

### 4.1.1. OGC API – Records

The [OGC API – Records](#) candidate standard provides discovery and access to catalogues of metadata records about resources such as features, coverages, tiles / maps, models, assets, services or widgets. The candidate standard enables the discovery of geospatial resources by standardizing the way collections of descriptive information about the resources (metadata) are exposed. The candidate standard also enables the discovery and sharing of related resources that may be referenced from geospatial resources or their metadata by standardizing the way all

kinds of records are exposed and managed. OGC API – Records can be considered the future successor to the widely implemented Catalogue Services for the Web (CSW) standard.

The candidate standard specifies the information content of a record. A record contains summary descriptive information about a resource that a provider wishes to make discoverable. Records are organized into collections. A record represents resource characteristics that can be presented for evaluation and further processing by both humans and software. Examples of resources include: a data collection, a service, a process, a style, a code list, an Earth observation asset, a machine learning model, a code list and so on.

### 4.1.2. JSON-FG

JSON-FG (Features and Geometry JSON) extends GeoJSON to support a limited set of additional capabilities that are out-of-scope for GeoJSON, but that are important for a variety of use cases involving feature data.

This candidate standard extends GeoJSON in the following minimal ways:

- The ability to use Coordinate Reference Systems (CRSs) other than WGS 84
- The ability to use non-Euclidean metrics, in particular ellipsoidal metrics
- Support for solids and prisms as geometry types
- The ability to encode temporal characteristics of a feature
- The ability to declare the type and the schema of a feature

Where it is possible to represent information as GeoJSON, the candidate standard allows for the information to be represented as such. Additional information is supported through the use of additional members which are represented using keys that should not conflict with those specified by GeoJSON. This means that JSON-FG enabled clients will be able to parse and understand the additional members.

### 4.1.3. ISO 19115

ISO 19115 Standards define the schema required for describing geographic information and services by means of metadata. Metadata is information about a resource such as a dataset, web service, or API. This multi-part International Standard is applicable to the cataloguing of datasets, clearinghouse activities, geographic datasets, dataset series, individual geographic features, and feature properties.

The individual parts of ISO 19115 that each serve as an approved standard include:

- ISO 19115-1:2014 defines the schema required for describing geographic information and services by means of metadata.

- ISO 19115-2:2019 extends ISO 19115-1:2014 by defining the schema required for an enhanced description of the acquisition and processing of geographic information, including imagery.
- ISO/TS 19115-3:2016 defines an integrated XML implementation of ISO 19115-1, ISO 19115-2, and concepts from ISO/TS 19139.

#### 4.1.4. STAC

The SpatioTemporal Asset Catalog (STAC) is a specification that offers a language for describing geospatial information, so it can be worked with, indexed, and discovered. The STAC API offers an interface that implements OGC API – Features. Although STAC has been developed outside of the OGC, in the long term it is envisaged that the [STAC API](#) specification will be developed into an OGC Community Standard that implements OGC API building blocks that are relevant for the STAC use cases.

The goals for the STAC part of the code sprint were:

- Alignment with OGC API – Records – Content Model and/or Extensions
- Alignment with other standards, for example GeoDCAT and/or JSON-LD
- Collection Search
- JSON-FG vs. STAC projection extension
- Push towards STAC API 1.0.0 release?
- Advance the STAC ecosystem (e.g. PySTAC, QGIS plugin, ...)
- Look through the issue trackers, e.g. [ecosystem](#), [stac-utils](#), and [stactools-packages](#)

STAC is a multi-part specification that includes the following constituent parts:

- [STAC Item](#) is a representation of a single spatio-temporal asset, encoded as a GeoJSON feature with datetime and links properties.
- [STAC Catalog](#) is a JSON-encoded representation of links that provides a structure for organizing and browsing STAC Items.
- [STAC Collection](#) extends the STAC Catalog to offer additional information such as the extents, keywords, license, providers, and other elements that describe STAC Items grouped within the Collection.
- [STAC API](#) provides a RESTful interface that conforms to the OGC API – Features standard, described in an OpenAPI definition document, and supports search of STAC Items.

Each of the above-listed parts can be used on its own, however the parts have been designed to offer optimal capabilities when used together. An in-depth description of the relationship between the STAC API and Static STAC catalogs is provided in a blog post by Chris Holmes [4].

## 4.2. Open Source Software Projects

---

This section describes open source software products that were deployed during the code sprint.

### 4.2.1. OSGeo GeoNetwork

[GeoNetwork](#) is a catalog application for managing spatially referenced resources. It provides metadata editing and search functions as well as an interactive web map viewer.

GeoNetwork is used for (meta)-data management by governments, local communities and private sector. It is also used to discover geospatial (and other) (open) data supporting multiple metadata standards and multiple catalog interfaces.

OGC standards have been core to the GeoNetwork project and the community is now working on the implementation of the OGC API – Records specification.

### 4.2.2. Idproxy

[Idproxy](#) is an implementation of the OGC API family of standards, inspired by the W3C/OGC Spatial Data on the Web Best Practices. Idproxy is developed by interactive instruments GmbH, written in Java (Source Code) and is typically deployed using docker (DockerHub). The software originally started in 2015 as a Web API for feature data based on WFS 2.0 capabilities. In addition to the JSON/XML encodings, an emphasis is placed on an intuitive HTML representation.

The current version supports WFS 2.0 instances as well as PostgreSQL/PostGIS databases as backends. It implements all conformance classes and recommendations of “OGC API – Features – Part 1: Core” and “OGC API – Features- Part 2: Coordinate Reference Systems By Reference”, as well as the draft extensions (that is Part 3 and Part 4). Idproxy also has draft implementations for additional resource types (Tiles, Styles).

### 4.2.3. gleo

The [gleo](#) library is an open-source JavaScript library for WebGL-powered geographic maps. The library supports the display of geographical maps and is intended to cover the same use cases as other libraries such as Leaflet, OpenLayers.

#### **4.2.4. OSGeo pygeoapi**

[pygeoapi](#) is a Python server implementation of the OGC API suite of standards. The project emerged as part of the next generation OGC API efforts in 2018 and provides the capability for organizations to deploy a RESTful OGC API endpoint using OpenAPI, GeoJSON, and HTML. pygeoapi is open source and released under an MIT license. pygeoapi is an official OSGeo Project as well as an OGC Reference Implementation.

pygeoapi supports numerous OGC API Standards. The [official documentation](#) provides an overview of all supported standards.

#### **4.2.5. OSGeo pycsw**

[pycsw](#) is an OGC API – Records and OGC CSW server implementation written in Python. Started in 2010 (more formally announced in 2011), pycsw allows for the publishing and discovery of geospatial metadata via numerous APIs (CSW 2/CSW 3, OpenSearch, OAI-PMH, SRU), providing a standards-based metadata and catalogue component of spatial data infrastructures. pycsw is Open Source, released under an MIT license, and runs on all major platforms (Windows, Linux, Mac OS X). pycsw is an official OSGeo Project as well as an OGC Reference Implementation.

pycsw supports numerous metadata content and API standards, including OGC API – Records – Part 1.0: Core and its associated specifications. The [official documentation](#) provides an overview of all supported standards.

#### **4.2.6. OSGeo pygeometa**

[pygeometa](#) provides a lightweight and Pythonic approach for users to easily create geospatial metadata in standards-based formats using simple configuration files (affectionately called metadata control files (MCF)). The software has minimal dependencies (install is less than 50 kB), and provides a flexible extension mechanism leveraging the Jinja2 templating system. Leveraging the simple but powerful YAML format, pygeometa can generate metadata in numerous standards. Users can also create their own custom metadata formats which can be plugged into pygeometa for custom metadata format output. pygeometa is open source and released under an MIT license.

For developers, pygeometa provides a Pythonic API that allows developers to tightly couple metadata generation within their systems and integrate nicely into metadata production pipelines.

The project supports various metadata formats out of the box including ISO 19115, the WMO Core Metadata Profile, and the WIGOS Metadata Standard. The project also supports the OGC API – Records core record model as well as STAC (Item).

#### 4.2.7. OSGeo OWSLib

[OWSLib](#) is a Python client for OGC Web Services and their related content models. The project is an OSGeo Community project and is released under a BSD 3-Clause License.

OWSLib supports numerous OGC standards, including increasing support for the OGC API suite of standards. The [official documentation](#) provides an overview of all supported standards.

### 4.3. Proprietary products

---

This section describes proprietary software products that were deployed during the code sprint.

#### 4.3.1. MariaDB CubeWerx CubeServ

The [CubeWerx server \("cubeserv"\)](#) is implemented in C and currently implements the following OGC specifications:

- All conformance classes and recommendations of the OGC API – Features – Part 1: Core Standard.
- Multiple conformance classes and recommendations of the OGC API – Records – Part 1: Core candidate Standard.
- Multiple conformance classes and recommendations of the OGC API – Coverages – Part 1: Core candidate Standard.
- Multiple conformance classes and recommendations of the OGC API – Processes – Part 1: Core Standard.
- Multiple versions of the Web Map Service (WMS), Web Processing Service (WPS), Web Map Tile Service (WMTS) and Web Feature Service (WFS) Standards.
- A number of other “un-adopted” OGC Web Service draft specifications including the Testbed-12 Web Integration Service, OWS-7 Engineering Report – GeoSynchronization Service, and the Web Object Service prototype.

The cubeserv executable supports a wide variety of back ends including Oracle, MariaDB, SHAPE files, etc. It also supports a wide array of service-dependent output formats (e.g. GML, GeoJSON, Mapbox Vector Tiles, MapMP, etc.) and coordinate reference systems.

### 4.3.2. Geonovum OGC API Testclient

The Geonovum OGC API Testclient is a basic client to showcase the interaction with implementations of OGC API – Features and OGC API – Records. It is built with [LeafletJS](#) and [jQuery](#), for simplicity.

### 4.3.3. 3DGI CityJSON and JSON-FG Viewer

Participants from 3DGI and Geonovum worked on an extension of a CityJSON viewer to enable support for JSON-FG. CityJSON is an OGC Community Standard for a JSON-based encoding for a well-documented subset of the OGC CityGML data model (version 2.0.0). CityJSON defines how to store digital 3D models of cities and landscapes.

## 4.4. Other solutions

---

This section describes other solutions that were deployed for the code sprint.

### 4.4.1. Secure and Asynchronous Catalogue

There are many factors that influence the response time of a server when it receives a request from a client application. Socket timeouts can occur while the client application waits for a response from the server. To avoid losing the response for requests that require a processing time that is longer than socket timeout, the communication to the client application may continue ‘asynchronously’. That means that the service to client application communication does not take part on the original sockets; it happens somehow else.

The proposed solution from the OGC Testbed-18 Secure & Asynchronous Catalogue team was to leverage the HTTP *Prefer* header (as defined in IETF [RFC 7240](#)) that enables the client application to indicate to the server about the response preferences. For example, a *Prefer* header with the value “*respond-async, wait=10*” indicates that the client application is able (willing) to wait 10 seconds for a response and that an asynchronous response is preferred. To control a generic carry-on for OGC APIs via asynchronous follow-up communication, the Testbed 18 team recommended definition of OGC specific *Prefer* header parameters. One example is to define the parameter *subscription* which links to an existing subscription that defines a particular way of carrying-on. For example, the following *Prefer* header extends the previous example indicating the service to use a particular subscription identified via the URI: “*Prefer: respond-async, wait=10, subscription=https://ogc.demo.secure-dimensions.de/sms/subscriptions/4711*”. In case the service honors the indicated client application preference, the HTTP response must contain the HTTP Header *Preference-Applied* including the parameter that was accepted. For the previous example, the acceptance of the *subscription* option is expressed with the HTTP Response header “*Preference-Accepted: subscription*”.

This proposed solution requires however that a generic Subscription Management Service (SMS) exists and that the OGC API implementation introspects the HTTP Request headers and checks for the *Prefer* header. This checking can be achieved in a generic OGC API gateway for example. For the Code Sprint, the Testbed-18 team sought to extend the SMS prototype implemented during Testbed-18 with an additional “carry-on” communication: WebPush as defined by [W3C Push API](#). This required a client and a service implementation. The code sprint provided an opportunity for the Testbed-18 team to explore the proposed solution in collaboration with other sprint participants. The proposed solution leveraged the Authenix product, an OAuth2 / OpenID Connect compliant authorization server based on federated identity management.

#### **4.4.2. University of Manchester Natural Language Processing for Spatial Analysis**

Participants from the University of Manchester implemented a Natural Language Processing (NLP) toolkit for conducting spatial analysis. The toolkit takes as input a statement such as “I want to see parks in Westminster” and then displays the locations of the requested features (parks) in the location of interest (Westminster).

5

# RESULTS

---

# RESULTS

The code sprint included multiple software products and implementations of OGC and ISO Standards. This section presents some of the results from the code sprint.

## 5.1. gleo

One of the contributors of [gleo](#) implemented support for JSON-FG in the code sprint. Support for JSON-FG in GLeo was implemented to enable anyone to integrate the JSON-FG files into a leaflet application.

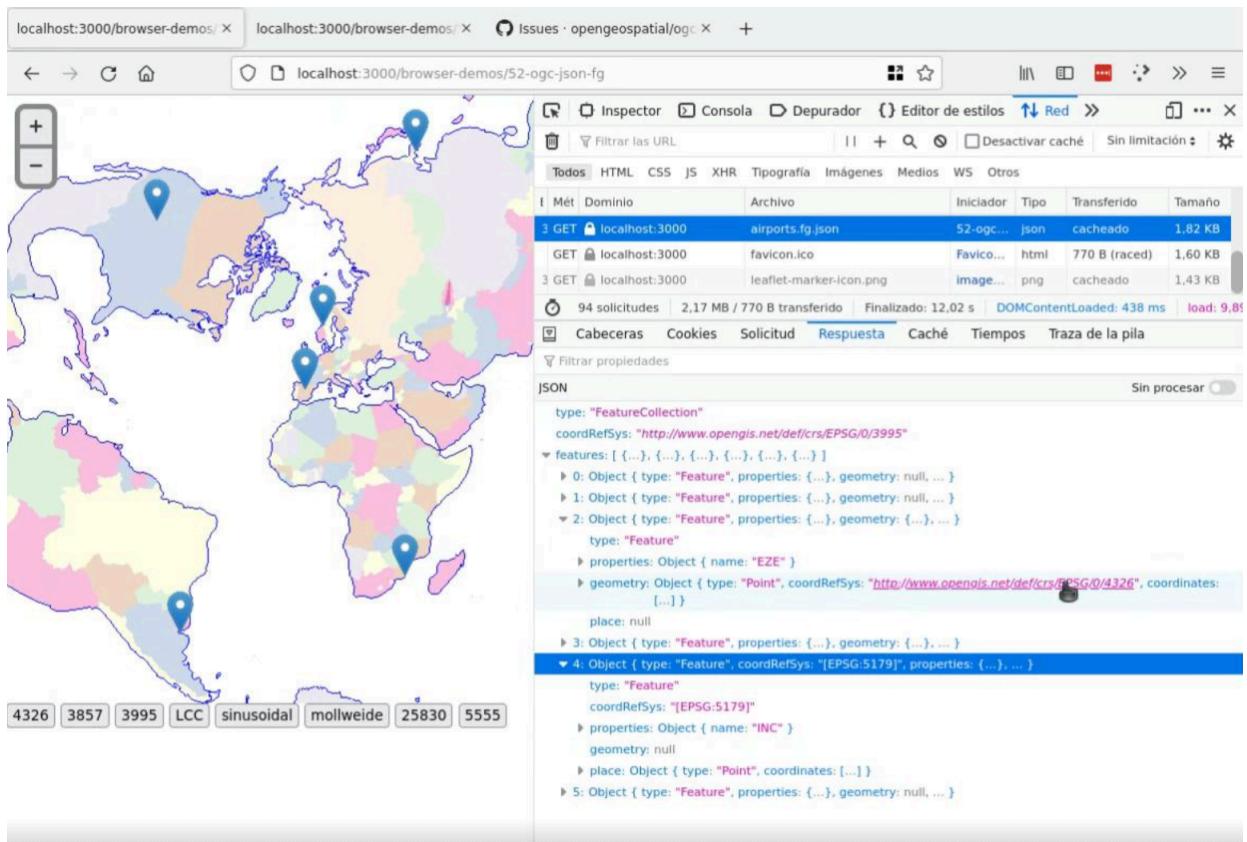


Figure 2 – Screenshot of the GLeo demo

## 5.2. MariaDB CubeWerx CubeSERV

---

The participants from CubeWerx worked on their implementation of OGC API – Records and the interoperability with STAC. A screenshot from their prototype implementation is shown in the figure below.

The screenshot shows a web browser window with the title "Sentinel-1 Catalogue". Below the title is a thumbnail image of a satellite radar scene. The main content area displays a table titled "SENTINEL-1 Product (S1A\_IW\_GRDH\_1SDV\_20220502T221918\_20220502T221947\_043038\_052395\_BA57)". The table contains the following data:


Name	Value
crs	<a href="http://www.opengis.net/def/crs/OGC/1.3/CRS84">http://www.opengis.net/def/crs/OGC/1.3/CRS84</a>
absoluteOrbitNumber	43038
urn:cv:def:ebRIM-SlotName:queryables:sentinel1:data	s3://sentinel-s1-l1c/GRD/2022/5/2/IW/DV/S1A_IW_GRDH_1SDV_20220502T221918_20220502T221947_043038_052395_BA57/measurement/iw-vv.tif s3://sentinel-s1-l1c/GRD/2022/5/2/IW/DV/S1A_IW_GRDH_1SDV_20220502T221918_20220502T221947_043038_052395_BA57/measurement/iw-vh.tif
mapOverlay	s3://sentinel-s1-l1c/GRD/2022/5/2/IW/DV/S1A_IW_GRDH_1SDV_20220502T221918_20220502T221947_043038_052395_BA57/preview/map-overlay.kml
missionDataTakeId	336769
missionId	S1A
mode	IW
passDirection	Ascending
path	GRD/2022/5/2/IW/DV/S1A_IW_GRDH_1SDV_20220502T221918_20220502T221947_043038_052395_BA57
polarization	DV
processingLevel	1
productClass	standard
productId	S1A_IW_GRDH_1SDV_20220502T221918_20220502T221947_043038_052395_BA57
productPreview	<a href="s3://sentinel-s1-l1c/GRD/2022/5/2/IW/DV/S1A_IW_GRDH_1SDV_20220502T221918_20220502T221947_043038_052395_BA57/preview/product-preview.html">s3://sentinel-s1-l1c/GRD/2022/5/2/IW/DV/S1A_IW_GRDH_1SDV_20220502T221918_20220502T221947_043038_052395_BA57/preview/product-preview.html</a>
productType	GRD
productVersionId	043038

Figure 3 – Screenshot of the CubeWerx CubeSERV demo

## 5.3. Idproxy

---

The participants from interactive instruments worked on their implementation of OGC API – Features to prototype support for JSON-FG. A screenshot from their prototype implementation is shown in the figure below.

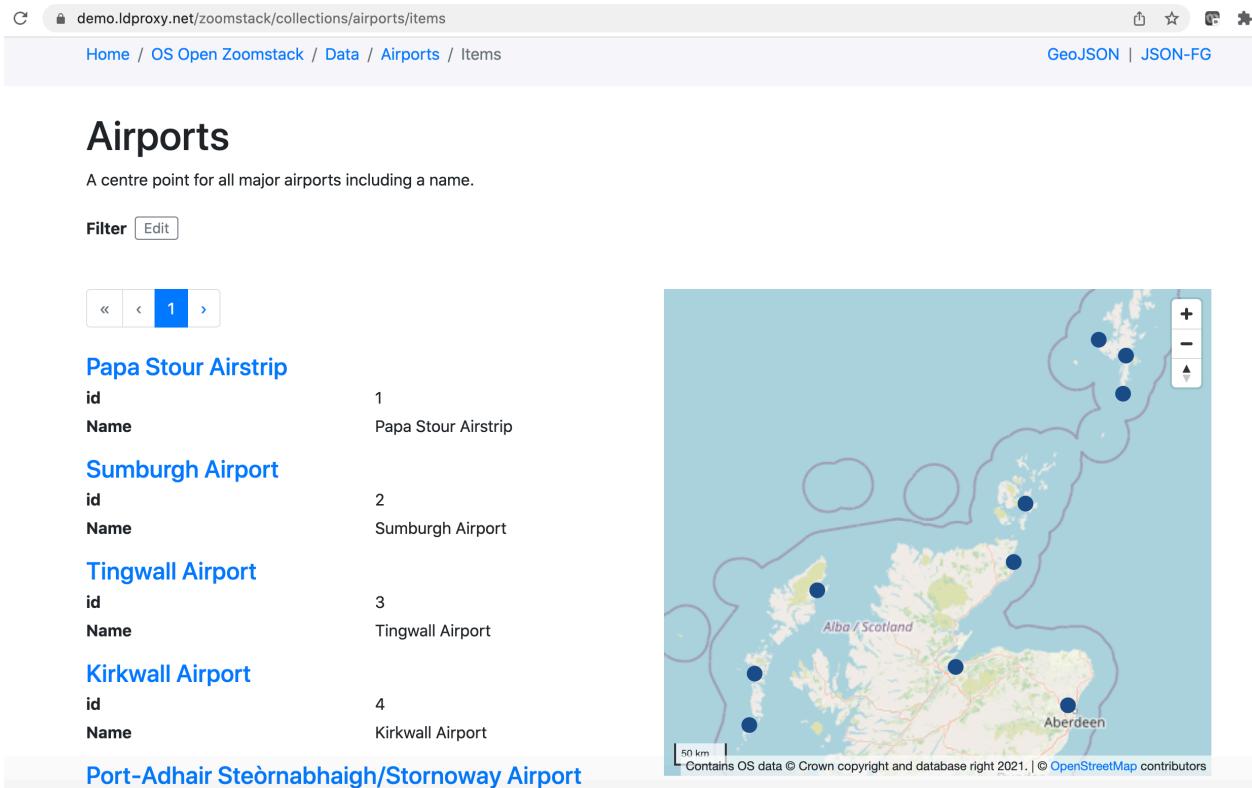

**Figure 4 – Screenshot of the CubeWerx CubeSERV demo**

## 5.4. GeoNetwork

---

The GeoNetwork team from GeoCat worked on the following topics during the Metadata Code Sprint.

### 5.4.1. Use of ISO 19115-3 for feature catalogues

Following discussions with participants, some would like to benefit from the possibility in ISO 19115-3 to describe the dataset's feature catalogue using the following method:

- As a citation in the dataset record (was also available in ISO 19139)
- As an embedded feature catalogue
- As a standalone feature catalogue

GeoNetwork supports the previous version of ISO 19110 as a standalone record. Given that it is more relevant now to use ISO 19115-3 (which contains the latest version of ISO 19110) for standalone (or embedded) feature catalogues, the code sprint provided an opportunity to implement this capability. With that change, users can decide how to relate dataset descriptions

and their corresponding feature catalogues using one of the 3 approaches above. The relevant work is in progress at <https://github.com/geonetwork/core-geonetwork/pull/6545>

### 5.4.2. OGC API – Records implementation

During the code sprint, support for the following output formats was improved:

- GeoJSON for /items and /items/uuid
- DCAT for /items (not only for /items/uuid). Improved DCAT conversion.

A conformance section was also added during the code sprint. A [Pull Request was created](#) for this purpose.

Note that Elasticsearch by default returns only 10K records. A [Pull Request was created](#) for adding support for larger catalogues using track total hits.

QGIS client interaction was tested and determined to require a conformance section and GeoJSON output. The work is to be continued.

## 5.5. Geonovum OGC API Testclient

Geonovum worked on an OGC API client, to showcase the interaction with APIs implementing OGC API Features and OGC API Records. It also shows loading a JSON-FG file with a different CRSes than WGS84.

The screenshot shows a web-based OGC API testclient. At the top, there's a navigation bar with tabs: Start, API info, Map & results, and Request log. Below the navigation bar is a section titled "Results". This section contains a map of the Netherlands with a blue rectangular selection box over the Amsterdam area. To the right of the map is a sidebar listing several data sources:

- feature Driver**: Dutch addresses (subset Otterlo). OGR GeoPackage  
Dutch addresses subset.  
Load items in current map view | Browse items (random)
- feature**: Global Deterministic Prediction System sample  
Global Deterministic Prediction System sample  
Load items in current map view | Browse items (random)
- feature**: International Comprehensive Ocean-Atmosphere Data Set (ICOADS)  
International Comprehensive Ocean-Atmosphere Data Set (ICOADS)  
Load items in current map view | Browse items (random)
- record**: Sample metadata records from Dutch Nationaal georegister  
Sample metadata records from Dutch Nationaal georegister  
Load items in current map view | Browse items (random)

At the bottom left is a "Request log" section containing three log entries:

```
Fri, 23 Sep 2022 07:01:30 GMT -> https://demo.pygeoapi.io/master/collections/dutch-metadata/items
Fri, 23 Sep 2022 07:01:15 GMT -> https://demo.pygeoapi.io/master/collections
Fri, 23 Sep 2022 07:01:15 GMT -> https://demo.pygeoapi.io/master/collections
```

Figure 5 – Screenshot of the OGC API testclient

## 5.6. GeM+

GeM+ is a desktop application developed in C for managing and editing geospatial metadata. The participants from CREAf have worked on the implementation and integration into GeM+ of a client application that supports OGC API – Records. The implemented prototype of GeM+ is able to read metadata in XML format according to ISO 19115 (ISO 19139) and ISO 19115-2 by connecting to OGC API – Records. The following figures show several screenshots of the implementation in GeM+.

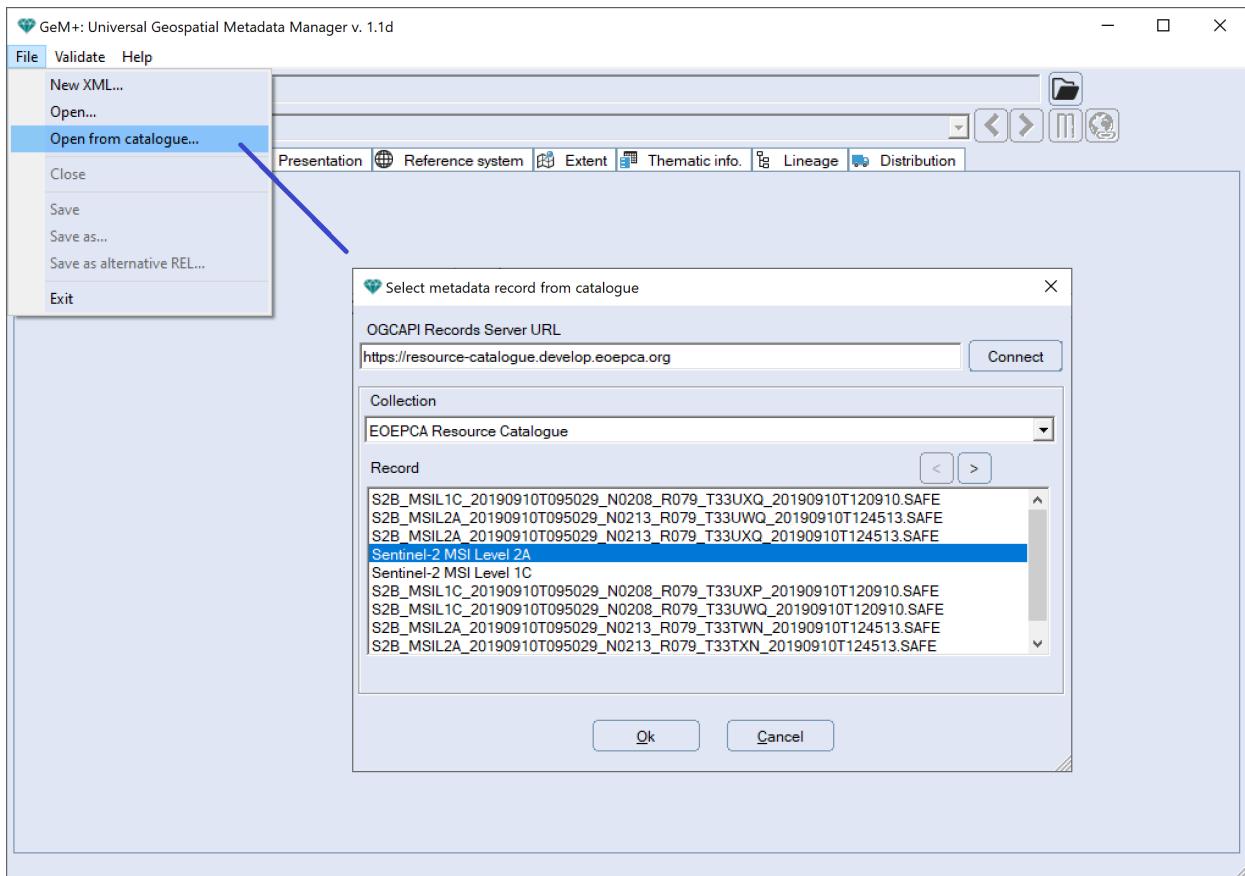


Figure 6

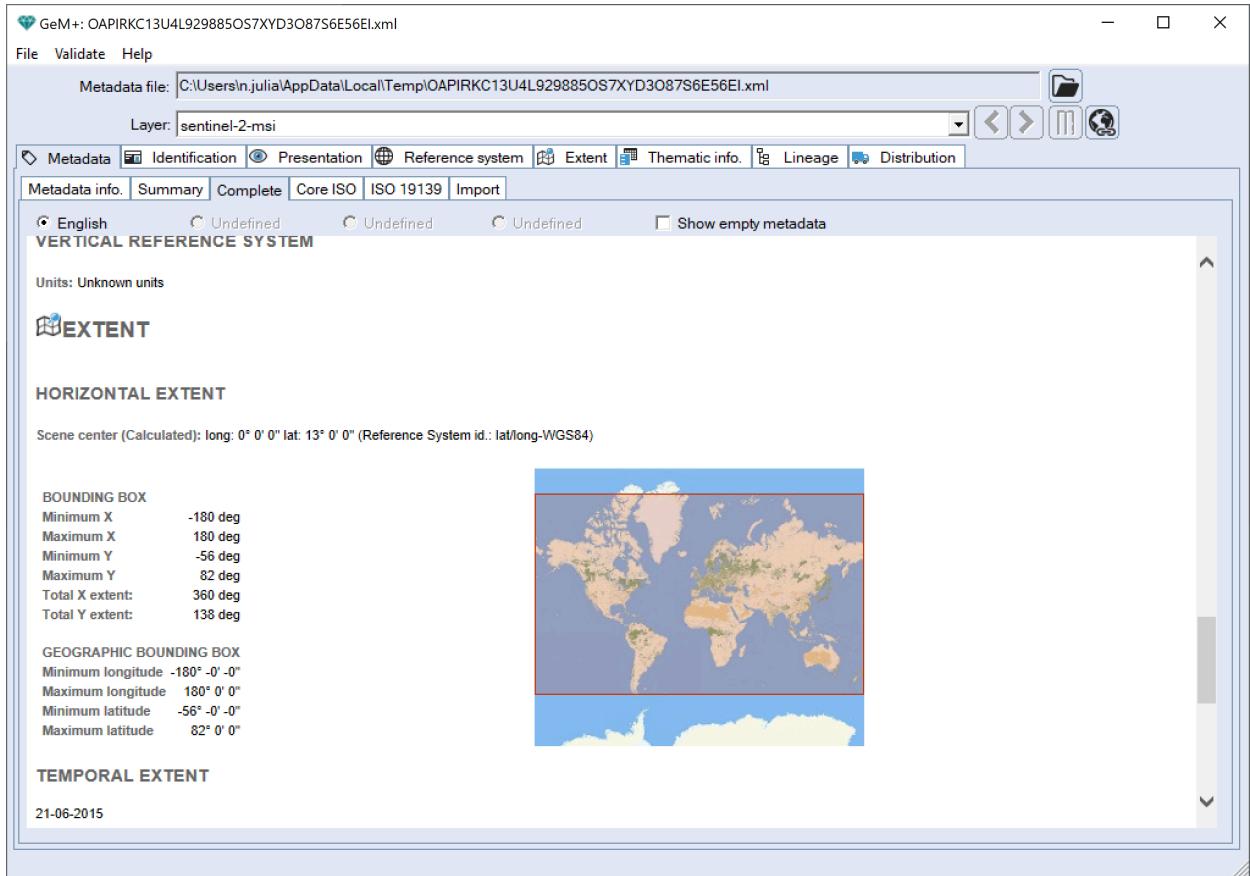



Figure 7

## 5.7. pygeoapi

---

The pygeoapi project implemented capability for metadata transactions following the OGC API – Records – Part 4: Create, Replace, Update and Delete draft specification. Support for the “Requirements Class “Create/Replace/Delete” was implemented, reviewed and approved by the pygeoapi development team. As a result, pygeoapi implementations are now able to easily define “editable” resources for metadata (OGC API – Records) as well as data (OGC API – Features) thanks to the building block approach of OGC API Standards.

The [official pygeoapi documentation](#) provides more information on how to enable the new functionality. A screenshot of the associated OpenAPI/Swagger interface from the implementation is shown in the figure below.

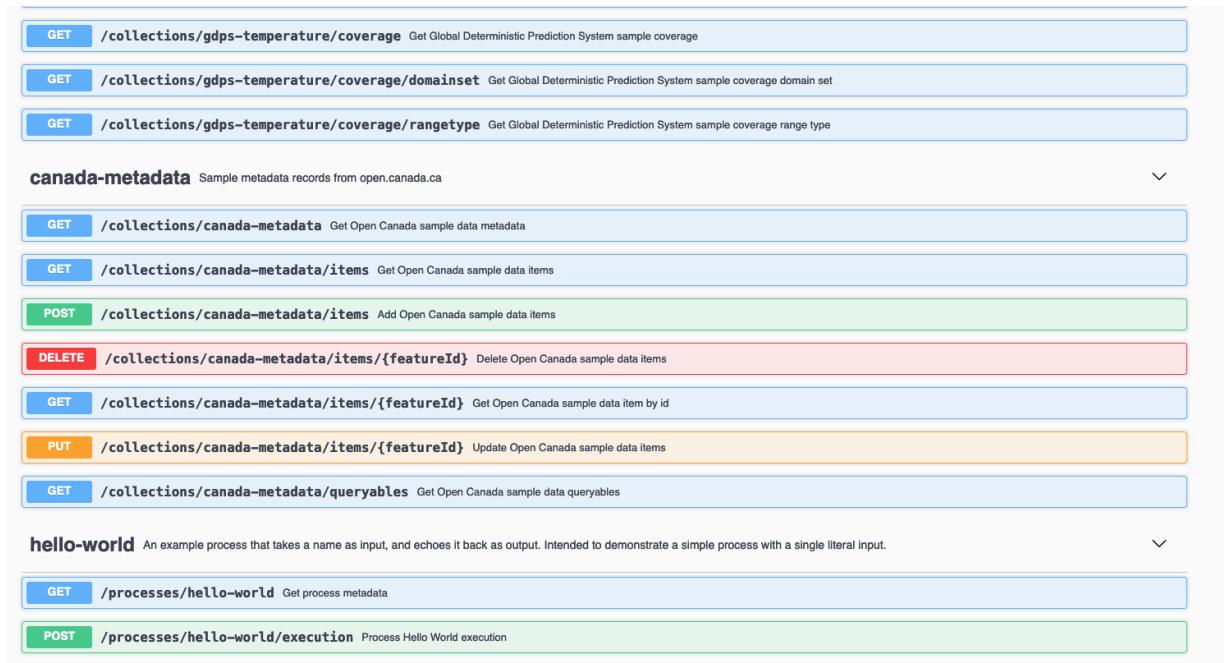

**Figure 8** – Screenshot of the pygeoapi transactions demo

pygeoapi also added support for STAC-based link relations (`rel=root`) in support of interoperability with STAC tooling.

## 5.8. pycsw

### 5.8.1. Transactions support

The pycsw project implemented capability for metadata transactions following the OGC API – Records – Part 4: Create, Replace, Update and Delete draft specification. Support for the “Requirements Class “Create/Replace/Delete” was implemented, in review and expected to be included in the main codebase. The functionality leverages pycsw’s existing underlying transactional support made available by transactional CSW. As a result, pycsw implementations are now able to provide OGC API based transactional support for metadata management via OGC API – Records.

A screenshot of the associated OpenAPI/Swagger interface from the implementation is shown in the figure below.

The screenshot shows a detailed API documentation interface for the pycsw transactions demo. It includes sections for Capabilities, Metadata, and specific endpoints like /collections/{collectionId}/items.

**Capabilities** essential characteristics of this API

- GET / Landing page
- GET /conformance Conformance page
- GET /collections Collections page
- GET /collections/{collectionId} Collection page

**Metadata** access to metadata (records)


**metadata**

- GET /collections/{collectionId}/items Records search items page
- POST /collections/{collectionId}/items Adds Records items
- GET /search Records search items page
- POST /search Adds Records items
- GET /collections/{collectionId}/items/{recordId} Records item page
- PUT /collections/{collectionId}/items/{recordId} Updates Records items
- DELETE /collections/{collectionId}/items/{recordId} Deletes Records items

Figure 9 – Screenshot of the pycsw transactions demo

### 5.8.2. OGC Testbed-18 instance of pycsw

An instance of pycsw, implemented for Testbed-18, was included in the code sprint to support a demonstration of asynchronous catalogues that implement OGC API – Records.

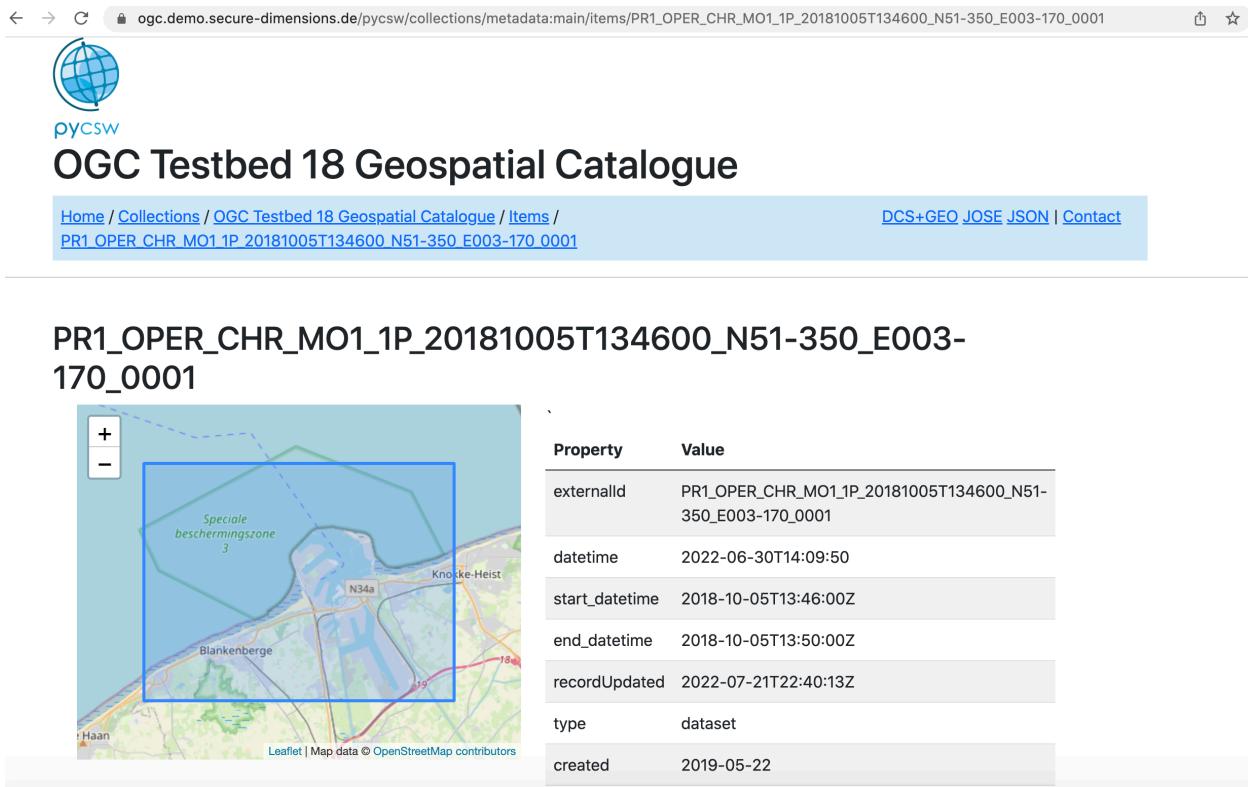

**Figure 10 – Screenshot of the instance of pycsw**

## 5.9. OWSLib

---

The OWSLib project implemented capability for client transactions following the OGC API – Records – Part 4: Create, Replace, Update and Delete draft specification. Support for the “Requirements Class “Create/Replace/Delete” was implemented, reviewed and approved by the OWSLib development team. As a result, Python clients can now use OWSLib for simple and Pythonic workflows to handle resource transactions for metadata (OGC API – Records) as well as data (OGC API – Features).

A screenshot of a sample Python/OWSLib workflow of the new functionality is shown in the figure below.

```

import json

from owslib.ogcapi.records import Records

record_data = 'sample-record.json'

url = 'http://localhost:8000'
collection_id = 'metadata:main'

r = Records(url)

cat = r.collection(collection_id)

with open(record_data) as fh:
    data = json.load(fh)

identifier = data['id']

r.collection_item_delete(collection_id, identifier)

# insert metadata
r.collection_item_create(collection_id, data)

# update metadata
r.collection_item_update(collection_id, identifier, data)

# delete metadata
r.collection_item_delete(collection_id, identifier)

```

**Figure 11** – Screenshot of the OWSLib transactions demo

## 5.10. Geopython stack


---

The GeoPython suite of tooling was integrated and demonstrated as part of a Mentor Stream during the code sprint in order to demonstrate end-to-end metadata lifecycle management.

- pygeometa: create / manage metadata from simple YAML configurations, exporting to numerous metadata formats
- OWSLib: publish metadata via OGC API – Features – Part 4: Create, Replace, Update and Delete to an OGC API – Records server
- pygeoapi: serve published metadata via OGC API – Records
- pycsw: serve published metadata via OGC API – Records

- QGIS: use QGIS' MetaSearch capability to discover resources via OGC API – Records

A screenshot from the mentor session is shown in the figure below.

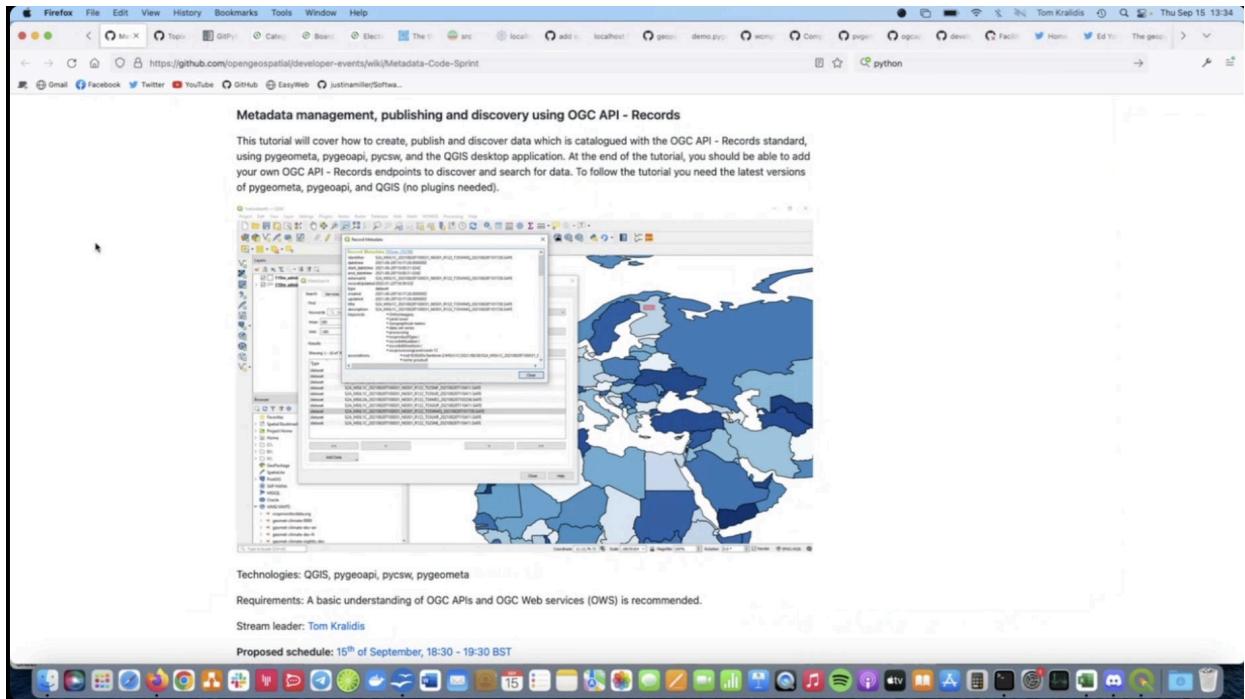

**Figure 12** – Screenshot of metadata lifecycle management mentor stream using pygeometa, OWSLib, pygeoapi/pycsw, and QGIS

## 5.11. ISO 19115 activity by OpenWork

---

### 5.11.1. Background

OpenWork participated in the code sprint, supported by both the OGC and the Australia and New Zealand Intergovernmental Committee on Survey and Mapping (ICSM). Byron Cochrane, a metadata expert from OpenWork, participated on behalf of OpenWork with the primary role in the code sprint of sharing technical expertise on ISO 19115 metadata. This expertise included participation in standard development, implementation, development of tools and guidance. A significant part of this expertise has been gained through involvement in the ICSM Metadata Working Group (MDWG) and chairing of the OGC Metadata and Catalogue Domain Working Group, as well as participation in the OGC API – Records Standards Working Group.

One of the challenges of assisting and advising organizations in creating, managing and using spatial metadata is that due to the apparent proliferation of solutions, it has become more challenging to advise on which metadata solutions are best suited to a particular organization's needs. This is partly because the role of metadata and catalogues is multifaceted and varied across domains. Currently, unfortunately, some of the communities providing the tools or

solutions do not offer such guidance. A framework by which such guidance could be created and shared was a primary goal of OpenWork's participation.

Other sprint goals included to:

- Examine the possibility of creating a JSON encoding of ISO 19115-1
- Create Crosswalks between ISO 19115-1, STAC and OGC API Records

## 5.11.2. Day 1

The focus of Day One of the code sprint was for participants to better understand the primary components: OGC API – Records, STAC, ISO 19115, and JSON-FG, as well as their histories, capabilities, use and future development plans. OpenWork led an hour-long presentation and discussion on ISO 19115 and related standards.

### 5.11.2.1. Presentation of ISO 19115

OpenWork briefed the sprint participants, highlighting issues around the lack of understanding of the differences between the standard names and versions of ISO 19115. In Australia and New Zealand, ICSM strongly endorsed the ISO 19115-1 metadata standard and deprecated the previous ISO 19115 profiles. This support includes the latest version, ISO 19115-1:2014/Amd2:2020, which provides improved support for capturing information related to coordinate drift due to tectonic movement — a significant issue in Australia where coordinate values can change over one and a half meters in 20 years. However, it is clear that many professionals confuse the versions and do not understand why changes exist. For example, a common confusion is referencing ISO 19115:2003 as ISO 19115-1 (initially likely to contrast with ISO 19115-2:2009 Extensions for imagery and gridded data). Yet ISO 19115-1 was not released until 2014. As a result, today, many software vendors claim support for ISO 19115-1 when they only support the older ISO 19115:2003 standard. Byron Cochrane explained that, for Europe, this issue is aggravated by the fact that the INSPIRE framework of the European Union (EU) has yet to provide a mechanism to support ISO 19115-1 even though work on this standard was well underway when the EU launched INSPIRE. The INSPIRE community must address this situation as it prohibits many in Europe from using the improved standards and limits software developers' willingness to include support for enhanced standards worldwide.

Two significant discussions resulted from this presentation. The first involved the value of namespaces in encoded metadata. The namespace issue is closely related to the desire to create a canonical JSON encoding of ISO 19115-1. One position was that many JSON developers dislike using namespaces and tend to remove them if they are present. A contrasting view posited that namespaces are an elegant approach for reducing ambiguity in data and, when not used, are often eventually replaced by less friendly solutions. A question raised and unanswered was whether a canonical encoding of ISO 19115-1 would be possible.

This first discussion led to the second. The question was, "What would the best approach to a JSON encoding of ISO 19115-1 be?" Would it be best to create a fully compliant canonical version like ISO 19115-3 encoded in JSON? Or would it be better to take a more piecemeal approach and extend OGC API – Records where needed until it could provide a fully compliant

record? The challenges of directly aligning the GeoJSON format used by OGC API – Records with ISO 19115-1 and the desire to improve crosswalks for at least some elements during the code sprint led OpenWork to take the latter approach. This proved to be the right approach for this sprint's shorter-term purposes and outcomes.

### 5.11.2.2. Crosswalks

For the remainder of Day 1, taking the advice and support of participants from MariaDB CubeWerx and the Meteorological Service of Canada (MSC), OpenWork undertook an effort to improve the ability to create crosswalks for keywords in ISO 19115-1 to OGC API – Records. OGC API – Records offers two possible locations for Keywords – Keywords and Themes/Concepts. Themes/Concepts were chosen as the natural fit. OGC API – Records follows the pattern of DCAT in this. The "Keywords" class is to hold free text tags. The Theme/Concepts can also contain free text but primarily support keyword concepts sourced from controlled vocabularies. (This could potentially confuse developers, thus one of the classes might need to be considered for removal.)

By the end of the evening, OpenWork had altered the YAML schema to support the ingestion of ISO 19115-1 keyword elements with controlled vocabularies. OpenWork also proposed changing the names of the relevant classes for clarity suggesting "keywords" be "tags" and "themes" be "keywords". In addition, to provide a method to retrieve the original entire ISO 19115-1 record, OpenWork proposed a new element, "source", to link a complete ISO 19115-3 record, should it exist. This latter recommendation was rejected in favor of guidance on using the existing "link" class to provide this functionality.

### 5.11.3. Day 2

On Day 2, OpenWork focused on creating a Record document conforming to the OGC API – Records candidate standard to test the guidance that OpenWork had developed the previous evening. Several changes ensued, mainly relating to the ability to provide resolvable URIs to both the concepts and their controlled vocabularies. There is a need for more work and testing.

Discussions clarified the roles that traditional catalogues, OGC API – Records and STAC serve. These can be summarized as follows:

- STAC is most appropriate for fine-level metadata – particularly cataloguing scenes in a collection of images to allow their discovery
- Part 1 (the Core part) of OGC API – Records focuses on the general discovery of spatial resources of any type. Because of this, it may not be useful or appropriate to capture in the Core part of OGC API – Records any ISO 19115-1 metadata that exists for purposes other than discovery. However, future extensions of OGC API – Records may support purposes other than discovery.
- ISO 19115-1 exists to document and manage a resource fully. Provenance, structural, informative, administrative and other metadata elements exist in this standard catalogue. This resource is most useful after discovery.

## 5.11.4. Day 3

The focus of OpenWork on Day 3 was to start providing a framework to guide the use of OGC API – Records. This followed the early discussion regarding how much structure should be encoded in the standard. Creating a rigid standard was not seen as desirable. However, a guidance document that could provide authoritative direction would be acceptable. The immediate aim was to support crosswalks from ISO 19115 through this approach.

On Day 3, OpenWork focused on the keyword (themes) class for which Byron Cochrane had created crosswalks earlier in the sprint. Inclusion of additional classes and crosswalked elements could be added over time. A pattern language approach, applied in OpenWork's work with ICSM, was used as a template. Such documentation, while useful, requires a great deal of effort to produce. But it allows the schema to remain simple. However, automated validation is difficult to provide through this approach.

## 5.12. 3DGI CityJSON and JSON-FG Viewer

The viewer was extended to support the loading of JSON-FG files, the querying of the feature data, and the display of the feature data. The viewer was implemented to support polyhedrons, as well as multipolygons.

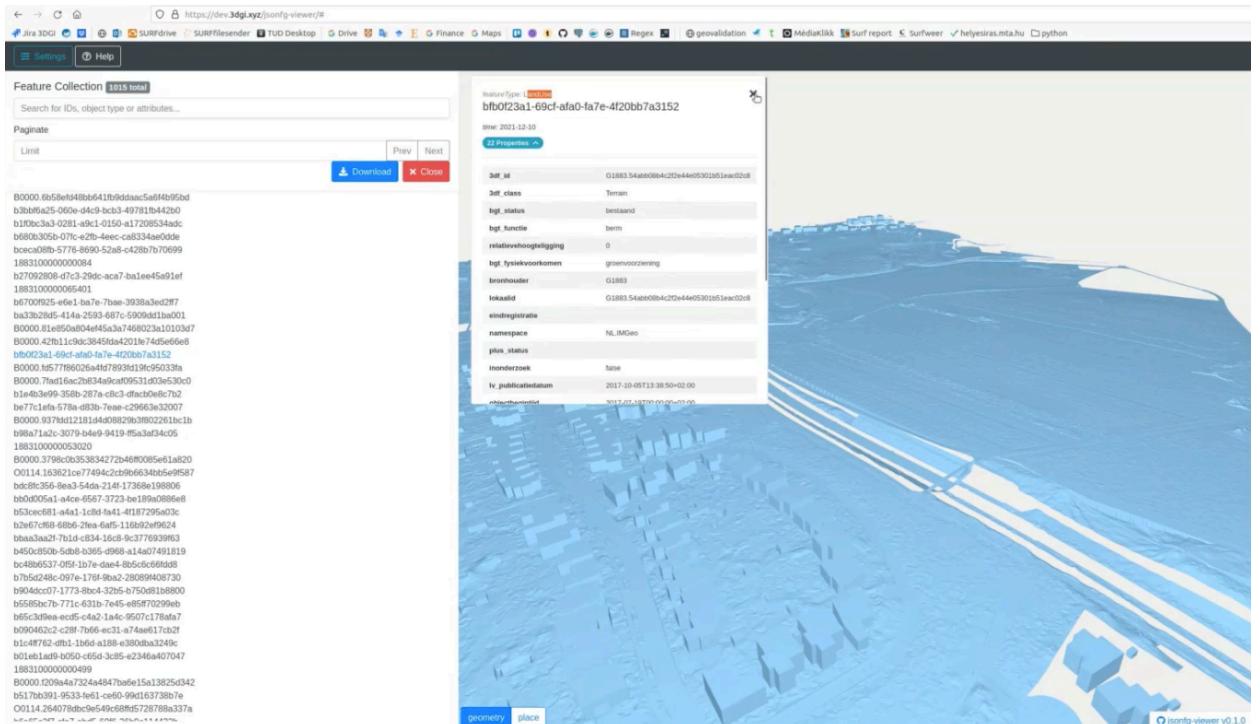


Figure 13 – Screenshot of the 3DGI CityJSON and JSON-FG Viewer

The viewer has been deployed at <https://dev.3dgi.xyz/jsonfg-viewer>

## 5.13. Secure and Asynchronous Catalogue

---

During the Code Sprint, a demo was implemented that introduces the use of WebPush to a Web Browser / device to notify the user when a Catalogue resource changes. To make the demo work, a simple client application was implemented that allows the use of Web Push notifications to the Google Chrome and Firefox Web Browser. The demo does currently not work on a MAC OS with Safari and mobile devices operating iOS 15. To make the demo work in a Chrome Browser on a MAC OS, WebPush settings must be enabled in “notifications and alerts”.

The focus was to demonstrate the ability to use WebPush with OGC API records. The actual demo does not demonstrate the use of the Prefer header; instead, the demo focuses on creating a subscription with WebPush notification.

From the Secure Dimensions [index](#) page of the OGC Testbed 18 contributions, you can access all relevant services.

A subscription can be created via the OpenAPI page by pasting a JSON object representing the Web Push details and providing a resources-uri. The resources-uri is the OGC Records API URL that is to be observed for changes.

(1) Use Google Chrome or Firefox browser and go to <https://ogc.demo.secure-dimensions.de/sms/api>

(2) Click the button “ENABLE PUSH MESSAGING” which will display the web push subscription details such as

```
{  
    "endpoint": "https://updates.push.services.mozilla.com/wpush/v2/gAAAAABjJD6  
BS4NUg76G5ozRH5kwnR5sl3cT4RwCWLwtDjk8ebnwm53lU_M3ppWTPE_3_JyQdDd3hZnaHZ90M_vz1  
rFXzu4W9GN2Xakxplk943b1R4J8vRATmL4Ny0chjrZfBmLuo8x9IzTHQf-7BxuGh43stVak926qFfkH  
Gd90R8K8k8sJjo",  
    "expirationTime": null,  
    "keys": {  
        "auth": "HmhIs6yKqb-EgVRkYstsvQ",  
        "p256dh": "BNmU2tQiJc5R3vM2hPHz9vPvxxkakPtp93F2I90H-JQPjpjWbaVhKeMl-h8E  
RQULcjCaswvx1Qq0B0Lei4jsNk"  
    }  
}
```

(3) Obtain an access token from the [OGC Testbed Token APP](#)

(4) Copy the access token into the Swagger form (click “Authorize” and paste the access token)

(5) Go to the POST operation to [create](#) a subscription.

(6) Copy the following JSON object (including the web push details from above). Make sure you replace this information with the information displayed in your Web Browser

```
{  
    "name": "mySubscription",  
    "delivery": "webpush://",
```

```

    "schedule": "* */1 * * *",
    "resources-uri": "https://ogc.demo.secure-dimensions.de/pycsw/collections/metadata:main/items/e17fe655-987c-4c5f-bbae-b10dcd4fccc3?f=json",
    "expires": 1759104237,
    "sec-opts": {
        "push-subscription": {
            "endpoint": "https://updates.push.services.mozilla.com/wpush/v2/gAAAAABjJD6BS4NUg76G5ozRH5kwnR5s13cT4RwCWLwtDjk8ebnwm53lU_M3ppWTPE_3_JyQdD3hZnaHZ90M_vZlrFXzu4W9GN2Xakxplk943b1R4J8vRATmL4Ny0chjrZfBmLuo8x9IzTHQf-7BxuGh43stVak926qFfkHGd90R8K8k8sJjo",
            "expirationTime": null,
            "keys": {
                "auth": "HmhIs6yKqb-EgVRkYstsvQ",
                "p256dh": "BNmU2tQiJc5R3vM2hPHz9vPvxxkakPtp93F2I90H-JQPjpjWbaVhKeMl-h8ERQUlcjCaswvxz1Qq0B0Lei4jsNk"
            }
        }
    }
}

```

The created subscription will run every 1 minute and compare the result from the resources-uri. You should receive one notification after 1 minute unless the record changes.

(7) To start the subscription, you need to do a state change via the PATCH operation. You can paste the following JSON to start the subscription. For all states of the subscription, please observe [this diagram](#).

```
{
    "state": "start"
}
```

After one minute, you should see the notification in your browser / on your device. Clicking on the notification will open a new Web Browser window opening the resources-uri from the subscription.


### 5.13.1. Follow-Up

The results of the Code Sprint will be contributed to Testbed 18. In particular, more details will become available in the Testbed 18 Engineering Report “Secure and Asynchronous Catalogue”. Also, the demo of using the *Prefer* header with OGC API Records to control the asynchronous follow-up communication, will be available with the Testbed 18 results.

## 5.14. University of Manchester Natural Language Processing for Spatial Analysis

---

The team from the University of Manchester implemented a Natural Language Processing (NLP) toolkit for conducting spatial analysis. The toolkit was configured to ingest feature data represented as a GeoJSON FeatureCollection. The team experimented with the use of OGC API – Features for serving feature data to an implementation of the Leaflet client application. A screenshot showing the toolkit is presented in Figure 14.

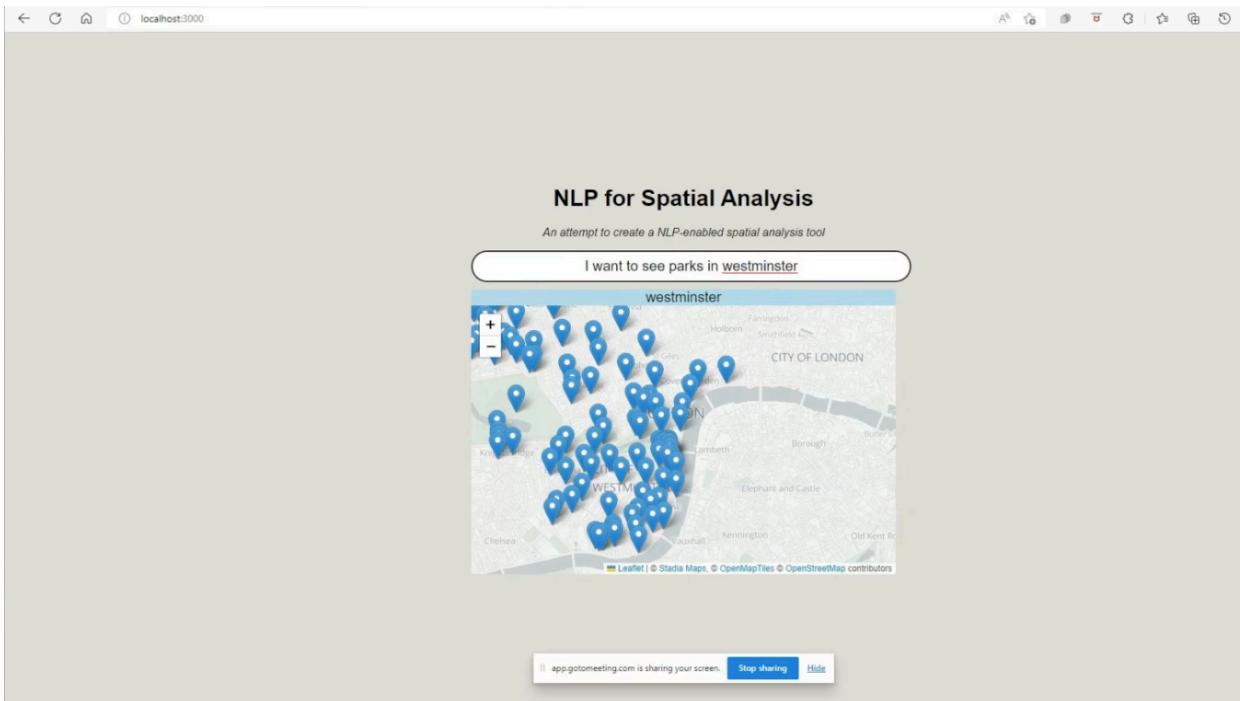

**Figure 14** – Screenshot of the Natural Language Processing for Spatial Analysis toolkit prototype by the University of Manchester

## 5.15. STAC Browser

During the code sprint, an implementation of the [STAC Browser](#) was configured to enable access to implementations of OGC API – Features and OGC API – Records. The STAC Browser is a web application for browsing static STAC catalogs and STAC APIs. Figure 15 shows a screenshot of the STAC Browser accessing an implementation of OGC API – Features.

**371**

in Observations

[Go to Parent](#) [Go to Collection](#) [Browse](#)
[Source](#) [Share](#)


## Collection

30.10.2000, 18:24:39 UTC - 30.10.2007, 08:57:29 UTC

Observations

Observations

## Metadata

### General

Stn Id	35
Acquired	30.10.2001, 14:24:55 UTC
Value	89.9

## Additional resources

### Alternative representation

- This document as RDF (JSON-LD)
- This document as HTML

**Figure 15 – Screenshot of the STAC Browser accessing an implementation of OGC API – Features**

Figure 16 shows a screenshot of the STAC Browser accessing an implementation of OGC API – Records.

## Sample metadata records from Dutch Nationaal georegister

in master [Go to Parent](#) [Browse](#)
[Source](#) [Share](#)


### Description

Sample metadata records from Dutch Nationaal georegister

[netherlands](#) [open data](#) [georegister](#)

### License

### proprietary

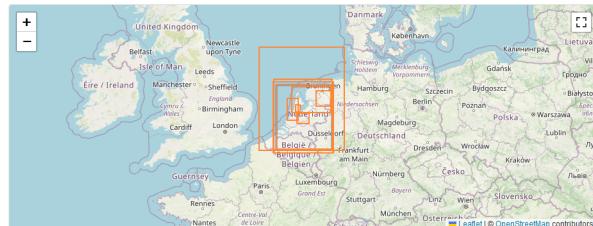

### Items

[First](#) [Previous](#) [Next](#) [Filter](#)

Kaartboek 1635	WarmteAtlas WMS
No time given	No time given
Diepteliggig onderkant keileem (t.o.v. NAP)	DANK-Delfstofwinning op land: zand, grind en klei
No time given	No time given
Clusters geluid - wegen gecumuleerd	Luchtfoto 2018
No time given	No time given
Geesten van Holland	Zonpotentie velden
No time given	No time given
Grondwaterstandsonderzoek, downloadservice	Monitoring van ontwikkelingtoxiciteit in de embryonale stamceltest
No time given	No time given
Hemelhelderheidskaart	Omgevingsvisie 2018 – Toets verwachte archeologische waarden es
No time given	

### Metadata

#### General

Item Type	record

### Additional resources

#### Alternative representation

- This document as RDF (JSON-LD)
- This document as HTML

#### Origin of this document

- information

**Figure 16 – Screenshot of the STAC Browser accessing an implementation of OGC API – Records**

6

# DISCUSSION

---

## 6.1. Harmonization between STAC and OGC API Records

Although both STAC and OGC API – Records use GeoJSON for encoding metadata, alignment is necessary in order to improve metadata exchange. STAC has an Asset construct and OGC API – Records uses a Link construct. If OGC API – Records adopts the use of Assets, then there is a need to be clear about the difference between Assets and Links.

There is a perception that STAC is focused on Earth Observation (EO). The Record metadata model which is specified in OGC API – Records is supposed to cover more than just EO. The idea with the Records metadata model is that it offers a small set of generic properties that can be used to describe anything. This makes it possible for communities of interest to extend the model to support their particular use case. The way that one uses a Record depends on how the person wants to make the resource discoverable. This impacts how the record is created and how it is linked with other Records.

There is a conflict between some elements where they may have the same name but different meaning (e.g. created and updated dates in STAC and OGC API – Records). The Records metadata model targets a resource, whereas STAC targets a distribution. This creates a challenge for Records because it would be impossible to give different dates of update for different distributions of the same resource. To align OGC API – Records with STAC there would be a need to change ‘record-created’ and ‘record-updated’ fields to simply ‘created’ and ‘updated’. Other potential opportunities for alignment include the use a ‘roles’ element in the links section.

It was also determined that the STAC ‘root’ link relation types need to be further clarified as OGC link relation types or Compact URIs (CURIEs).

Every Item has a link to one collection. You could create a hierarchy using a collection. One level of collection and then the items are records. In this context, STAC and OGC API – Records are already aligned.

The lessons identified regarding harmonization can be summarized as:

- Modify the create and updated fields by removing them from the Record class and add them to the links. This would improve alignment with STAC.
- In some cases, it may be necessary to use either STAC or OGC API – Records, depending on the needs of the community of interest.
- Clarify definition and intent of STAC ‘root’ link relation types in relation to OGC link relation types or Compact URIs (CURIEs).

## 6.2. Harvesting

---

It is important to be clear about what harvesting means. It is the complementary operation to Transactions. In Transactions you push a record to the catalogue, that requires the client to take the source and push that to the catalogue. For harvesting, you tell the catalogue “here is the resource” and the catalogue extracts the metadata and takes care of the rest. It is always possible that the catalogue will go to the resource and not know what to do with it. In the CSW standard there was support for harvesting. With harvesting the onus is on the catalogue to determine how to transform the resource and create the record for that resource.

There is also the question of: if the user points the harvestor to a resource through the client, should the user leave the transformation of the resource to the harvestor? The simplest approach is to leave it up to the harvestor once the client has directed the harvestor towards a resource. In the CSW-ebRIM model there was guidance of how to harvest a GetCapabilities response. As a minimum they would look for all of the fields that are in the record and try to populate those. More guidance would be needed for OGC API Standards, for example how deep to go in navigating the link graph.

An example workflow could be to: The client application submits a harvest request, with a prefer header, then the request would be executed synchronously or asynchronously. The server would notify the client application that it has initiated a job, meaning that the client application can monitor the job and retrieve the results when the job is complete. To achieve such a workflow, there is a need to define an API for harvesting resources or collections of resources. Providing guidance on how to crawl an OGC API resource tree and to harvest the resources it offers.

There are some aspects of harvesting that are shared with transactions. For example, the ability to create a record is an aspect of both harvesting and transactions. There are some aspects, for example ‘deletion’, however of transactions that are less likely to be used in harvesting. Currently, OGC API – Features – Part 4: Create, Replace, Update and Delete defines two requirements classes (“Create/Replace/Delete”, and “Update”). Given that the intention is for OGC API – Records to leverage the capabilities specified by OGC API – Features – Part 4, it would be valuable to split the “Create/Replace/Delete” requirements class into 3 separate classes, to allow for finer granularity for resource management. This would make it possible for a harvestor to only implement the ability to ‘create’ a record, without needing to implement the ability to replace nor delete a record.

The lessons identified regarding harvesting can be summarized as:

- It is important to be clear about what harvesting means.
- Keeping the metadata close to the data is more efficient than copying the metadata to a separate server. However, there is a need to be clear about what is meant by “close to the data”.
- Ideally harvesting would be of selected bits of metadata instead of the complete metadata record.

- There are different types of harvesting, in some cases there may be some processing needed. One type of approach means harvesting the discovery metadata.
- In some cases, augmented metadata may need to be pushed back to the source.
- It would be valuable to split the “Create/Replace/Delete” requirements class of OGC API – Features – Part 4 into 3 separate classes, to allow for finer granularity for resource management.

## 6.3. ISO 19115 metadata and OGC API Records

---

There was a view put forward that the metadata should be managed with the data. It should not be stored away from the dataset it describes. If one wants to harvest ISO 19115 metadata, then they should be able to retrieve it from the API. Currently there is little guidance of how to harvest or link ISO 19115 metadata from the API definition documents or the API landing pages. There was an alternative view that often people want to catalogue things that they do not have access to, for example, for future reference. In some cases, the resource being catalogue might not even be online.

One could initiate a harvest, the catalogue could then go to the product directory and then finds the associated metadata, and then harvests information from that into a record, including a link to that associated metadata. This approach means that the metadata does not actually need to be stored away from the dataset it describes. The enduring question is whether or not such a workflow requires an ISO 19115 metadata profile or some custom guidance. There is also a question of how much needs to be mapped between OGC API – Records and ISO 19115.

Given the focus of OGC API – Records – Part 1 on discovery, fields that are related to ‘search’ are worth focusing on initially. That is part of the reason that the OpenWork activity in the code sprint focused initially on the Keywords class. The Keyword Type is meant to represent a category of Keywords.

The lessons identified regarding ISO 19115 metadata and OGC API – Records can be summarized as:

- Expressing ISO 19115 metadata in OGC API Records should focus on discovery elements.
- Initial prototyping has been focused on Keywords to Themes
- What is needed is a profile that enables us to work with ISO 19115
- Content negotiation by profile could be useful.
- The incremental approach would be useful.
- It may be necessary to also design a JSON profile of ISO 19139 as well.
- There are various considerations relating to alignment with ISO 19115 e.g. alignment with DCAT

- There is need to balance how deeply ISO metadata is represented in JSON

The following section presents the conclusions.

## 6.4. JSON-FG

---

The lessons identified regarding addition of JSON-FG as another encoding for OGC API Records can be summarized as:

- There is not an identified need for JSON-FG encodings in OGC API Records and STAC. However, it could be identified in the future.
- The canonical time is a top-level element in JSON-FG. This could be useful for OGC API Records.

More feedback from implementers is needed in order to improve understanding of the potential use of JSON-FG in OGC API – Records.

7

# CONCLUSIONS

---

# CONCLUSIONS

---

This was the first hybrid code sprint (consisting of both in-person and remote elements) organized by the OGC in more than two years, due to the pandemic. A record number of participants registered to attend the code sprint, exceeding pre-pandemic registration numbers. There were however, more remote participants than those attending in-person. This suggests that there continues to be significant interest in code sprints, and that the online collaboration environment should continue to be used post-pandemic.

The code sprint facilitated the development and testing of prototype implementations of OGC and ISO Standards that relate to geospatial metadata and catalogues. The code sprint also enabled the participating developers to provide feedback to the editors of candidate standards. The code sprint therefore met all of its objectives and achieved its goal of accelerating the support of open geospatial standards that relate to geospatial metadata and catalogues.

## 7.1. Future Work

---

The sprint participants made the following recommendations for future innovation work items:

- Initiatives to facilitate implementation of JSON-FG (e.g. 3D, cadastral data, etc)
- Initiatives to facilitate implementation of catalogues
- Prototyping of tools for creating metadata (e.g. the automated STAC metadata crawler demonstrated during the sprint)

The sprint participants also made the following recommendations for things that the SWGs should consider:

- Outreach for JSON-FG
- Code Sprint for designing profiles of JSON-FG for different communities of interest
- Documentation of the different roles of catalogues and API, as well as guidance on when to use them
- Code Sprint on versioning, possibly combining an OGC API Features Part 4 with OGC API Records
- Exploring how to move GeoDCAT forward within OGC

It is envisaged that the SWGs will consider the above-listed recommendations for future work items.

A

# ANNEX A (INFORMATIVE) REVISION HISTORY

---

## ANNEX A (INFORMATIVE) REVISION HISTORY

---

DATE	RELEASE AUTHOR	PRIMARY CLAUSES MODIFIED	DESCRIPTION
2022-09-26	0.1	G. Hobona	all



# BIBLIOGRAPHY

---



## BIBLIOGRAPHY

---

1. Vretanos, P.A, Kralidis, T., Heazel, C.: OGC 20-004: Draft OGC API – Records – Part 1: Core, <http://docs.ogc.org/DRAFTS/20-004.html>
2. Portele, C., Vretanos, P.A: OGC 21-045: OGC Features and Geometries JSON – Part 1: Core, <https://docs.ogc.org/DRAFTS/21-045.html>
3. STAC Community: SpatioTemporal Asset Catalog, <https://stacspec.org/en>
4. Holmes, C.: Static SpatioTemporal Asset Catalogs in Depth, Available at <https://medium.com/radiant-earth-insights/static-spatiotemporal-asset-catalogs-in-depth-710530934a84>