

BlenDaViz, scientific visualization library for Blender in Python

Simon Candelaresi^{1*} and Christopher Berg Smiet^{2*}

¹ High-Performance Scientific Computing, University of Augsburg, Universitätsstraße 12a, Augsburg, 86159, Germany ² BergTop fusion, Rochussenstraat 281B, 3023DE Rotterdam, Netherlands

Corresponding author * These authors contributed equally.

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#)
- [Repository](#)
- [Archive](#)

Editor: [Johan Larsson](#)

Reviewers:

- [@Miko997](#)
- [@Chilipp](#)
- [@MaaniBeigy](#)

Submitted: 20 May 2026

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

Summary

BlenDaViz is a 3d plotting library for the visualization tool Blender, written in Python. It is able to visualize line plots, scatter plots, surfaces, iso-surfaces, glyphs (arrows) and streamlines from Numpy arrays. The user can load BlenDaViz within a Blender Python console as any other library. Its design is close to other plotting libraries, especially Matplotlib, which means that every part of a plot is treated as an object that can be changed when updating the plot with new parameters or data. Compared to other 3d visualization software, we achieve higher image quality, thanks to Blender's ray tracing capabilities.

Statement of need

In scientific fields, like structure mechanics, computational fluid dynamics, astrophysics, or molecular dynamics, it is common to use 3d visualization tools like [Paraview](#) ([Ahrens et al., 2005](#)), [Vapor](#) ([Gruchalla et al., 2009](#)), [Mayavi](#) or [Visit](#). They are capable to load a variety of data formats and visualize different aspects of the data using filters. However, they often lack the image quality needed that would make understanding the data easy. Their limited shaders can create optical illusions where the depth of the geometry is not clear, or the colors are off due to unrealistic image generation.

Realistically rendered or ray-traced images, like those generated by 3d modelling tools like [Blender](#), not only improve the image quality, but make it easier to understand the three-dimensional structure and colors. For instance, contextually-implied scattered light can have a significant impact on the perceived color of objects, as exemplified by *The Dress* controversy ([Chetverikov & Ivanchei, 2016](#)). Using lighting, shadow, depth and scattering can be used to generate photorealistic images where the interpretation is made easier.

State of the field

So far Blender has seen only limited use in 3d data visualization. [Bioblender](#) has been developed specifically for biological data and requires significant Blender knowledge. Similarly, suggestions to use Blender in Astrophysics ([Kent, 2015](#)) require the generation of the geometry by hand. High quality plots by the Oak Ridge National Laboratory shows that to achieve high quality a collaboration between Blender experts and scientists is sometimes required.

Attempts at creating libraries were made with [AstroBlender](#) ([Naiman, 2016](#)) and [BlenderSciViz](#), but their applications are relatively limited and they have not been maintained in years. Perhaps [BVtkNodes](#) and [SciBlender](#) ([Marín et al., 2025](#)) stand out, as they are able to load VTK data and apply filters on it.

39 With [BlendaViz](#) ([Simon Candelaresi & Berg Smiet, 2025](#)) we give the users all the rendering
40 and ray tracing capabilities of Blender, combined with the ease of use and modularity we know
41 from libraries like [Matplotlib](#) ([Caswell et al., 2020](#); [Hunter, 2007](#)). It is general purpose, thanks
42 to the implementation of some of the most used 3d plotting methods.

43 Software design

44 With BlendaViz we keep the design very close to Matplotlib. The user supplies the input data
45 in the form of Numpy arrays and the resulting plots are objects that can be freely modified.
46 These objects contain members, such as the data and parameters (e.g. color), and methods,
47 like the plotting function. That way, the user can modify their plots and replot them. An
48 example is shown here where we generate a simple line plot, change the data of the resulting
49 plot object and replot it:

```
50 import blendaViz as blt
51 import numpy as np
52
53 # Generate the data.
54 y = np.linspace(0, 6*np.pi, 400)
55 x = 2*np.cos(y)
56 z = 2*np.sin(y)
57
58 # Generate the line plot.
59 pl = blt.plot(x, y, z, radius=0.5)
60
61 # Change the data.
62 pl.x = 2*pl.x
63
64 # Replot the data.
65 pl.plot()
```

66 Every of our plotting functions follows a similar pipeline. As the plotting function is called,
67 the input is checked for consistency. Then any existing geometry or textures for this plot are
68 deleted. Depending on the plotting function, different kind of meshes are generated (lines,
69 surfaces, arrows, etc.). To finalize the plot object a texture is add. Geometry and texture
70 are then part of the plotting object and can, in principle, be accessed. After the geometry
71 generation we add lights and a camera, if not already present.

72 An example is shown in [Figure 1](#) where we plot a two-dimensional array as a surface with the
73 values used as z -coordinates as colors. To highlight its geometry we added a plane with a
74 checker board texture in the background and readjusted the camera. Such manual adjustments
75 can be done directly in Blender and can greatly improve the plot quality.

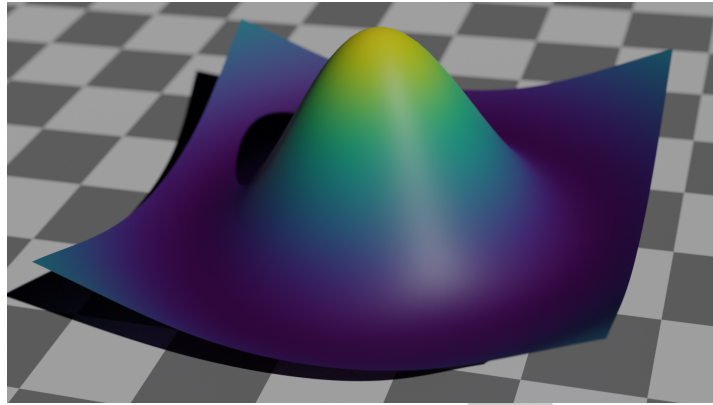


Figure 1: Mesh plot of a Gaussian using a colormap.

Handling of time

We make handling time dependent data easy in BlenDaViz. All that is required is that the data arrays contain one more dimension. For instance, if we want to plot the position of n particles at p different times, our arrays x , y and z would have the shape $[n, p]$. Parameters that take the same shape, like colors, follow the same structure.

BlenDaViz recognizes the data and input parameters as time dependent. It then adds the plotting method of this plot object to the `bpy.app.handlers.frame_change_pre` handler of Blender. That way, any change in the time via e.g. the slider, results in an update of all present plots.

Research impact statement

In (S. Candelaresi et al., 2021) it was used to visualize the vortex field of a turbulent finite difference simulation using the Pencil Code. Later (Israeli et al., 2023) and (S. Candelaresi & Beck, 2023) used it to visualize magnetic field configurations obtained from simulations. The former also uses BlenDaViz to present particle trajectories.

AI usage disclosure

We used Claude Sonnet 4.6 for some code debugging and to help write the majority of tests. All changed by Claude were verified by hand.

Acknowledgements

This work was supported by a grant from the Simons Foundation (1013657, JL). This work has been carried out within the framework of the EUROfusion Consortium, via the Euratom Research and Training Programme (Grant Agreement No 101052200 — EUROfusion) and funded by the Swiss State Secretariat for Education, Research and Innovation (SERI). Views and opinions expressed are however those of the author(s) only and do not necessarily reflect those of the European Union, the European Commission, or SERI. Neither the European Union nor the European Commission nor SERI can be held responsible for them. This project has benefited from funding by the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) through the research unit FOR 5409 “Structure-Preserving Numerical Methods for Bulk- and Interface Coupling of Heterogeneous Models (SNUBIC)” (project number 463312734).

References

- Ahrens, J., Geveci, B., & Law, C. (2005). *ParaView: An end-user tool for large data visualization* (C. D. Hansen & C. R. Johnson, Eds.; pp. 717–731). Elsevier. <https://doi.org/10.1016/B978-012387582-2/50038-1>
- Candelaresi, S., & Beck, C. (2023). Twisted magnetic knots and links. *Physics of Plasmas*, 30, 082102. <https://doi.org/10.1063/5.0148156>
- Candelaresi, Simon, & Berg Smiet, C. (2025). *Reproducibility repository for BlenDaViz, scientific visualization library for blender in python*. Zenodo. <https://doi.org/10.5281/zenodo.15988189>
- Candelaresi, S., Hornig, G., Podger, B., & Pontin, D. I. (2021). Topological constraints in the reconnection of vortex braids. *Phys. Fluids*, 33(5), 056101. <https://doi.org/10.1063/5.0047033>
- Caswell, T. A., Droettboom, M., Lee, A., Hunter, J., Firing, E., Stansby, D., Klymak, J., Hoffmann, T., Andrade, E. S. de, Varoquaux, N., & al., et. (2020). *Matplotlib/matplotlib: REL: v3.2.1*. <https://doi.org/10.5281/zenodo.3714460>
- Chetverikov, A., & Ivanchei, I. (2016). Seeing “the dress” in the right light: Perceived colors and inferred light sources. *Perception*, 45, 910–930. <https://doi.org/10.1177/0301006616643664>
- Gruchalla, K., Rast, M., Bradley, E., Clyne, J., & Mininni, P. (2009). Visualization-driven structural and statistical analysis of turbulent flows. In N. M. Adams, C. Robardet, A. Siebes, & J.-F. Boulicaut (Eds.), *Advances in intelligent data analysis VIII* (pp. 321–332). Springer Berlin Heidelberg. <https://doi.org/10.1007/978-3-642-03915-7>
- Hunter, J. D. (2007). Matplotlib: A 2D graphics environment. *Computing in Science & Engineering*, 9, 90–95. <https://doi.org/10.1109/MCSE.2007.55>
- Israeli, B. Y., Smiet, C. B., Simeni Simeni, M., & Diallo, A. (2023). EUV debris mitigation using magnetic nulls. *Applied Physics Letters*, 123. <https://doi.org/10.1063/5.0152083>
- Kent, B. R. (2015). *3D scientific visualization with blender*. Morgan & Claypool Publishers. <https://doi.org/10.1088/978-1-6270-5612-0>
- Marín, J., Baptiste, T. M. G., Rodero, C., Williams, S. E., Niederer, S. A., & García-Fernández, I. (2025). SciBlend: Advanced data visualization workflows within blender. *Comput. Graphics*, 130, 104264. <https://doi.org/10.1016/j.cag.2025.104264>
- Naiman, J. P. (2016). AstroBlend: An astrophysical visualization package for blender. *Astronomy and Computing*, 15, 50–60. <https://doi.org/10.1016/j.ascom.2016.02.002>