

# sprtt: An R Package and Toolbox for Sequential Probability Ratio Tests

Meike Snijder-Steinhilber<sup>1</sup>, Martin Schnuerch<sup>2</sup>, and Anna-Lena Schubert<sup>2</sup>

<sup>1</sup> University of Mainz, Germany <sup>2</sup> University of Mannheim, Germany

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

## Software

- [Review](#)
- [Repository](#)
- [Archive](#)

Editor: [↗](#)

Submitted: 05 August 2026

Published: unpublished

## License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](https://creativecommons.org/licenses/by/4.0/)).

## Summary

The `sprtt` package provides a toolbox for Sequential Probability Ratio Tests (SPRTs), implementing modern variants including sequential  $t$ -tests and sequential ANOVA for applied and methodological research. While traditional fixed-sample designs require researchers to commit to a predetermined sample size, SPRTs enable continuous evidence evaluation with predefined stopping rules – terminating data collection as soon as evidence crosses a threshold for rejecting or accepting the null hypothesis (Wald, 1945). Crucially, this flexibility comes without inflating long-run Type I and Type II error rates beyond the levels specified in advance. For Wald's original SPRT under simple hypotheses, 50% fewer observations are required compared to a Neyman-Pearson fixed-sample design (Wald, 1945). Newer variants extend these methods to composite hypotheses through sequential  $t$ -tests and sequential ANOVA – designs standard in fields like psychology and medicine. For the composite-hypothesis extensions implemented in `sprtt`, efficiency cannot be derived analytically (Cox, 1952; Köllerström & Wetherill, 1979; Schnuerch & Erdfelder, 2020; Wald, 1945), but simulation studies have shown that error rates are well-controlled and efficiency gains remain of similar magnitude (Schnuerch & Erdfelder, 2020; Stefan et al., 2022; Steinhilber et al., 2024). Despite the long history of SPRTs, the `sprtt` package is the first to provide accessible software implementations for both sequential  $t$ -tests (Hajnal, 1961; Rushton, 1950; Schnuerch & Erdfelder, 2020) and sequential ANOVA (Steinhilber et al., 2024; Wetherill & Glazebrook, 1986). The package implements these validated procedures and additionally provides example datasets, data generating functions, sample size planning, and visualization tools to facilitate the adoption of SPRTs in applied research.

## Statement of need

Due to the replication crisis (Bogdan, 2025; Ioannidis, 2005; Open Science Collaboration, 2015) in empirical fields like psychology and medicine, statistical procedures have been scrutinized, and new alternatives have gained attention (Cumming, 2014; Daniël Lakens et al., 2018; Wagenmakers et al., 2018). Sequential testing methods have become increasingly popular in recent years as they directly address pressing demands in empirical research: the need to minimize resource expenditure and participant burden without sacrificing statistical rigor (Erdfelder & Schnuerch, 2021; Daniel Lakens et al., 2021; Ly et al., 2025; Schnuerch & Erdfelder, 2020; Steinhilber et al., 2024). This is relevant across all empirical research, and particularly vital in clinical settings where continued data collection can carry real ethical costs.

Although SPRTs are well-established in the statistical literature (Bartroff et al., 2012; Siegmund, 1985; Tartakovsky et al., 2014; Wald, 1947), their original formulation relies on simple hypotheses, which are rarely used in applied research: they require researchers to specify nuisance parameters – such as the variance – which are rarely known in advance. As a first


step toward practical applicability, variants based on composite hypotheses were developed, namely the sequential  $t$ -test (Hajnal, 1961; Rushton, 1950) and sequential ANOVA (Wetherill & Glazebrook, 1986). As a second step, these variants were recently validated in simulation studies, establishing their statistical properties under realistic conditions (Schnuerch & Erdfelder, 2020; Steinhilber et al., 2024). As a third step, this methodological progress needed to be matched by accessible software: prior to `sprtt`, the only available implementation was a bare R script provided alongside validation work (Schnuerch & Erdfelder, 2020). Translating these promising statistical methods into accessible, user-friendly, and open-source software is therefore essential for finally closing the gap between statistical theory and adoption in practice.

## State of the field

The landscape of sequential testing software is sparse. Beyond R, very few software packages appear to exist, though several major technology companies including Netflix, Uber, and Spotify have either published on sequential testing and SPRT variants or stated their use, suggesting that proprietary implementations may exist in industry (Bibaut et al., 2024; Deb et al., 2018; Schultzberg & Ankargren, 2023). The only Python implementation, the `sprt` package on PyPI (Yu, 2017), covers Wald's SPRT for Normal, Binomial, and Poisson distributions but has not been updated since its initial release in 2017 and lacks documentation. No SPRT implementations seem to exist in Julia. A JavaScript library for sequential generalized likelihood ratio tests `SeGLiR` (Øygard, 2014) targets browser-based A/B testing and has not been maintained since 2017. JASP (Love et al., 2019) is a free and open-source application that implements sequential Bayesian hypothesis testing (Schönbrodt et al., 2017), using a Bayes Factor rather than a likelihood ratio as the monitoring statistic, which requires the specification of prior distributions. These Bayesian tools address an important but different use case. The present package is intended for researchers who prefer a frequentist sequential framework, want to control long-run Type I and Type II error rates in familiar Neyman–Pearson terms, or wish to avoid the need to specify prior distributions. In R, the package `SPRT` (Budihai, 2025) implements Wald's original sequential tests for simple hypotheses, the `gsDesign` (Anderson, 2026) package provides a function for truncated binomial SPRTs, and the `MSPRT` (Pramanik et al., 2020) and `Sequential` (Silva & Kulldorff, 2025) packages cover a variety of truncated SPRT variants. Beyond the SPRT, anytime-valid inference has emerged as an alternative sequential testing framework, using  $e$ -values to guarantee validity at any sample size (Grünwald et al., 2023; Ramdas et al., 2023) – current software implementations include the R package `safestats` (Ly et al., 2024; Ly et al., 2025) and the Python package `savvi` (Assunção, 2024). To our knowledge, no publicly available software implements sequential  $t$ -tests or sequential one-way ANOVA as described and validated by Schnuerch & Erdfelder (2020) and Steinhilber et al. (2024). The `sprtt` package fills this gap directly.

## Research impact

The `sprtt` package was first published on CRAN in 2021 and has since accumulated more than 14,000 downloads, averaging approximately 250 downloads per month in the 12 months preceding August 2026 (Steinhilber et al., 2023). The package has been used in experimental research (Quevedo Pütter & Erdfelder, 2022), simulation studies (Steinhilber et al., 2024, 2025), and has been referenced in methodological work (Fischer & Ramdas, 2025; Schubert et al., 2025). The target audience includes applied researchers using SPRT variants in their empirical work, as well as methodologists conducting simulation studies to gain further insights into the properties of SPRTs.

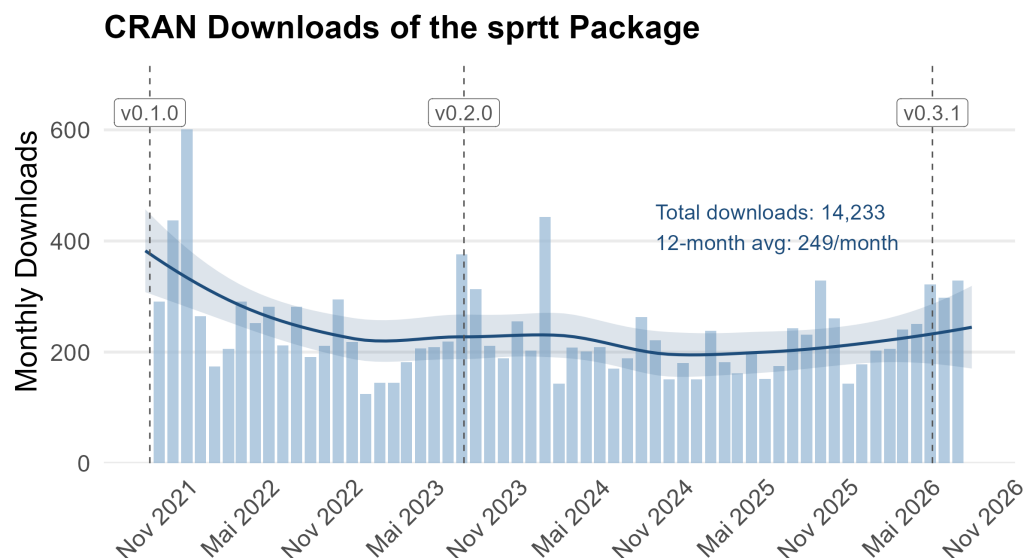

**Figure 1:** Monthly CRAN downloads of the `sprtt` package since its first release in August 2021. Dashed vertical lines indicate CRAN release versions. The LOESS trend line with 95% confidence band reflects the overall download trajectory across complete months.

## Software design

The `sprtt` package is built around two main user-facing functions: `seq_ttest()` and `seq_anova()`. The `seq_ttest()` function implements the sequential  $t$ -test and deliberately mirrors the interface of the `t.test()` function from the `stats` package to ensure familiarity for R users. The `seq_anova()` function follows a similar design philosophy, maintaining consistency across the package's interface.

## Design principle

The core design principle is modularity: each internal function should perform one task well. This approach emphasizes simplicity, testability, clear structure, and minimal code repetition. The internal architecture of the core functions is documented in more detail in the developer vignette of the `sprtt` package. The package is designed to return interpretable results not only when a stopping boundary is crossed, but also when monitoring remains inconclusive at the current stage of data collection. More generally, functions perform input validation to catch common issues such as invalid argument types, missing values, or out-of-range parameters.

While the primary focus remains on implementing well-tested SPRT variants with proven efficiency and error rate control, the package continuously expands its functionality to improve user experience. Supporting features include example datasets, data simulation functions, visualization tools for sequential ANOVA results, and sample size planning for sequential ANOVA. The `lifecycle` package is used throughout to clearly communicate the maturity status of each function – an important consideration for research software where interface stability directly affects reproducibility. The core functions `seq_ttest()`, `seq_anova()`, and the data simulation utilities are stable: we commit to not introducing silent breaking changes to these functions. Where changes are unavoidable, users will be informed through deprecation warnings and messaging well in advance. Newer additions, including the visualization tools and the sample size planning function, are marked as experimental, reflecting that their interfaces may still undergo substantial revisions as they mature.

A concrete illustration of why this distinction matters is the `plot` function for `seq_ttest()`.

114 Mirroring the `t.test()` interface was a deliberate choice to lower the barrier to adoption, but  
115 as the package grew, a complication emerged: the wide variety of input formats accepted by  
116 `t.test()` has so far prevented the implementation of a consistent plot function for `seq_ttest()`  
117 – a feature that already exists for `seq_anova()` and is planned for a future release. Resolving  
118 this may require interface adjustments to `seq_ttest()`, which will be handled through the  
119 deprecation-with-messaging approach rather than silent breaking changes.

## 120 External data

121 Sample size planning for the implemented tests cannot be derived analytically and instead  
122 requires extensive Monte Carlo simulations to characterize sampling behavior across a wide range  
123 of parameter combinations. The `plan_sample_size()` function addresses this by generating an  
124 HTML report based on a pre-computed simulation dataset covering multiple effect sizes, group  
125 sizes, and Type II error rates – each estimated from 10,000 replications per condition, run on a  
126 high-performance computing cluster. Pre-computing this dataset offers several advantages  
127 over on-demand simulation: recommendations are returned instantly, all users access identical  
128 results ensuring reproducibility, and redundant computation across research groups is avoided.  
129 The trade-off is that the lookup covers only a predefined set of parameter combinations; users  
130 with custom scenarios are therefore directed to the simulation functions to generate tailored  
131 estimates.

132 However, the comprehensive nature of these simulations produces a dataset too large to  
133 bundle directly with the package under CRAN size constraints. To resolve this tension,  
134 the simulation dataset is maintained in a separate GitHub repository ([https://github.com/MeikeSteinhilber/sprtt\\_plan\\_sample\\_size](https://github.com/MeikeSteinhilber/sprtt_plan_sample_size)) and downloaded on demand, after which it is  
135 cached locally to avoid repeated downloads. This separation also serves a transparency  
136 purpose: the full simulation pipeline including the hierarchical SLURM scripts used for  
137 cluster execution is publicly available for inspection and verification. To give users direct  
138 control over this external dependency, the `sprtt` package includes dedicated helper functions  
139 (`download_sample_size_data()`, `cache_info()`, `cache_clear()`) for manually downloading,  
140 inspecting, and clearing the locally cached dataset. The generated HTML report records the  
141 package version and the exact version of the downloaded simulation dataset, allowing users to  
142 reproduce recommendations even if the external repository is updated later.  
143

## 144 Software documentation

145 The `sprtt` package is documented through a dedicated website (<https://meikesteinhilber.github.io/sprtt/>). The package further includes a comprehensive set of vignettes. Introductory  
146 vignettes cover general package usage and a recommended workflow and an introduction to  
147 SPRTs, complemented by a simple  $t$ -test use case. More advanced vignettes provide dedicated  
148 guidance on the sequential  $t$ -test and sequential one-way ANOVA. Finally, further topics are  
149 addressed in vignettes on sample size planning and a developer guide for users who want to  
150 contribute to or extend the package.  
151

## 152 AI usage disclosure

153 The core `sprtt` implementation, all architectural decisions, and the research contributions  
154 are original human intellectual work. Development began in February 2021 and predates  
155 the widespread availability of modern AI-assisted programming tools, with the majority of  
156 the codebase written without AI assistance (CRAN releases: August 2021 and July 2023).  
157 For the latest release in May 2026, generative AI (Claude by Anthropic) was used to assist  
158 with debugging new code, writing unit tests, and reviewing the package documentation for  
159 improvements. For this manuscript, AI was additionally used to support writing tasks such as  
160 improving grammar and spelling, formatting of references, and suggesting manuscript structure.

In all cases, AI served an assistive role only, and all output was thoroughly reviewed and verified by the authors.

## Acknowledgements

We thank the Carl Zeiss Foundation for the generous 5-year funding of SMART-AGE (P2019-01-003; 2021-2026). Parts of this research were supported by a grant from the German Research Foundation (Deutsche Forschungsgemeinschaft, GRK 2277) to the Research Training Group “Statistical Modeling in Psychology”. Parts of this research were conducted using the supercomputer Mogon II and services offered by Johannes Gutenberg University Mainz (hpc.uni-mainz.de).

## References

- Anderson, K. (2026). *gsDesign: Group Sequential Design* (Version 3.9.0) [R Package]. <https://CRAN.R-project.org/package=gsDesign>.
- Assunção, L. (2024). *Savvi: Safe Anytime Valid Inference* (Version 0.3.1) [Python Package]. <https://pypi.org/project/savvi/>.
- Bartroff, J., Lai, T. L., & Shih, M.-C. (2012). *Sequential Experimentation in Clinical Trials: Design and Analysis*. Springer Science & Business Media. ISBN: 978-1-4614-6114-2
- Bibaut, A., Kallus, N., & Lindon, M. (2024). *Near-Optimal Non-Parametric Sequential Tests and Confidence Sequences with Possibly Dependent Observations* (No. arXiv:2212.14411). arXiv. <https://doi.org/10.48550/arXiv.2212.14411>
- Bogdan, P. C. (2025). One Decade Into the Replication Crisis, How Have Psychological Results Changed? *Advances in Methods and Practices in Psychological Science*, 8(2), 25152459251323480. <https://doi.org/10.1177/25152459251323480>
- Budihal, H. (2025). *SPRT: Sequential Probability Ratio Test Method* (Version 1.1.0) [R Package]. <https://CRAN.R-project.org/package=SPRT>.
- Cox, D. R. (1952). Sequential tests for composite hypotheses. *Mathematical Proceedings of the Cambridge Philosophical Society*, 48(2), 290–299. <https://doi.org/10.1017/S030500410002764X>
- Cumming, G. (2014). The new statistics: Why and how. *Psychological Science*, 25(1), 7–29. <https://doi.org/10.1177/0956797613504966>
- Deb, A., Bhattacharya, S., Gu, J., Zhou, T., Feng, E., & Liu, M. (2018). *Under the Hood of Uber's Experimentation Platform*. Uber Engineering Blog. <https://www.uber.com/en-EG/blog/xp/>
- Erdfelder, E., & Schnuerch, M. (2021). On the efficiency of the independent segments procedure: A direct comparison with sequential probability ratio tests. *Psychological Methods*, 26(4), 501–506. <https://doi.org/10.1037/met0000404>
- Fischer, L., & Ramdas, A. (2025). *Improving Wald's (approximate) sequential probability ratio test by avoiding overshoot* (No. arXiv:2410.16076). arXiv. <https://doi.org/10.48550/arXiv.2410.16076>
- Grünwald, P., Heide, R. de, & Koolen, W. (2023). *Safe Testing* (No. arXiv:1906.07801). arXiv. <https://arxiv.org/abs/1906.07801>
- Hajnal, J. (1961). A two-sample sequential t-test. *Biometrika*, 48(1/2), 65–75. <https://doi.org/10.2307/2333131>
- Ioannidis, J. P. A. (2005). Why most published research findings are false. *PLoS Medicine*,



- 204 2(8), e124. <https://doi.org/10.1371/journal.pmed.0020124>
- 205 Köllerström, J., & Wetherill, G. B. (1979). SPRT's for the Normal Correlation Coefficient.  
206 *Journal of the American Statistical Association*, 74(368), 815–821. <https://doi.org/10.2307/2286405>
- 207
- 208 Lakens, Daniel, Pahlke, F., & Wassmer, G. (2021). *Group sequential designs: A tutorial*  
209 [Preprint]. PsyArXiv. <https://doi.org/10.31234/osf.io/x4azm>
- 210 Lakens, Daniël, Scheel, A. M., & Isager, P. M. (2018). Equivalence Testing for Psychological  
211 Research: A Tutorial. *Advances in Methods and Practices in Psychological Science*, 1(2),  
212 259–269. <https://doi.org/10.1177/2515245918770963>
- 213 Love, J., Selker, R., Marsman, M., Jamil, T., Dropmann, D., Verhagen, J., Ly, A., Gronau, Q.  
214 F., Šmíra, M., Epskamp, S., Matzke, D., Wild, A., Knight, P., Rouder, J. N., Morey, R. D.,  
215 & Wagenmakers, E.-J. (2019). JASP: Graphical statistical software for common statistical  
216 designs. *Journal of Statistical Software*, 88(2), 1–17. <https://doi.org/10.18637/jss.v088.i02>
- 217 Ly, A., Boehm, U., Grünwald, P., Ramdas, A., & van Ravenzwaaij, D. (2025). A Tutorial  
218 on Safe Anytime-Valid Inference: Practical Maximally Flexible Sampling Designs for  
219 Experiments Based on e-Values. *PsyArXiv*. <https://doi.org/10.31234/osf.io/h5vae>
- 220 Ly, A., Turner, R., Schure, J. ter, Pérez-Ortiz, M., & Grünwald, P. (2024). *Safestats:*  
221 *Safe Anytime-Valid Inference* (Version 0.8.7) [R Package]. [https://CRAN.R-](https://CRAN.R-project.org/package=safestats)  
222 [project.org/package=safestats](https://CRAN.R-project.org/package=safestats).
- 223 Open Science Collaboration. (2015). Estimating the reproducibility of psychological science.  
224 *Science*, 349(6251), aac4716–aac4716. <https://doi.org/10.1126/science.aac4716>
- 225 Øygard, A. M. (2014). *SeGLiR: Javascript Library for Rapid A/B-Testing with*  
226 *Sequential Generalized Likelihood Ratio Tests* (last commit 2016) [JavaScript  
227 Package]. <https://github.com/auduno/SeGLiR>.
- 228 Pramanik, S., Johnson, V. E., & Bhattacharya, A. (2020). *MSPRT: Modified*  
229 *Sequential Probability Ratio Test* (Version 3.0) [R Package]. [https://CRAN.R-](https://CRAN.R-project.org/package=MSPRT)  
230 [project.org/package=MSPRT](https://CRAN.R-project.org/package=MSPRT).
- 231 Quevedo Pütter, J., & Erdfelder, E. (2022). Alcohol-induced retrograde facilitation? Mixed  
232 evidence in a preregistered replication and encoding-maintenance-retrieval analysis.  
233 *Experimental Psychology*, 69(6), 335–350. <https://doi.org/10.1027/1618-3169/a000569>
- 234 Ramdas, A., Grünwald, P., Vovk, V., & Shafer, G. (2023). Game-Theoretic Statistics and Safe  
235 Anytime-Valid Inference. *Statistical Science*, 38(4), 576–601. [https://doi.org/10.1214/23-](https://doi.org/10.1214/23-ST894)  
236 [STS894](https://doi.org/10.1214/23-ST894)
- 237 Rushton, S. (1950). On a sequential t-test. *Biometrika*, 37, 326–333. <https://doi.org/10.2307/2332385>
- 238
- 239 Schnuerch, M., & Erdfelder, E. (2020). Controlling decision errors with minimal costs:  
240 The sequential probability ratio t test. *Psychological Methods*, 25(2), 206–226. <https://doi.org/10.1037/met0000234>
- 241
- 242 Schönbrodt, F. D., Wagenmakers, E.-J., Zehetleitner, M., & Perugini, M. (2017). Sequential  
243 hypothesis testing with Bayes factors: Efficiently testing mean differences. *Psychological*  
244 *Methods*, 22(2), 322–339. <https://doi.org/10.1037/met0000061>
- 245 Schubert, A.-L., Steinhilber, M., Kang, H., & Quintana, D. S. (2025). Improving statistical  
246 reporting in psychology. *Communications Psychology*, 3(1), 156.
- 247 Schultzberg, M., & Ankargren, S. (2023). *Choosing a Sequential Testing Framework —*  
248 *Comparisons and Discussions*. Spotify Engineering Blog. [https://engineering.atspotify.](https://engineering.atspotify.com/2023/03/choosing-sequential-testing-framework-comparisons-and-discussions)  
249 [com/2023/03/choosing-sequential-testing-framework-comparisons-and-discussions](https://engineering.atspotify.com/2023/03/choosing-sequential-testing-framework-comparisons-and-discussions)

- 250 Siegmund, D. (1985). *Sequential Analysis*. Springer. [https://doi.org/10.1007/978-1-4757-](https://doi.org/10.1007/978-1-4757-1862-1)  
251 [1862-1](https://doi.org/10.1007/978-1-4757-1862-1)
- 252 Silva, I. R., & Kulldorff, M. (2025). *Sequential: Exact Sequential Analysis for*  
253 *Poisson and Binomial Data* (Version 4.5.2) [R Package]. [https://CRAN.R-](https://CRAN.R-project.org/package=Sequential)  
254 [project.org/package=Sequential](https://CRAN.R-project.org/package=Sequential).
- 255 Stefan, A. M., Schönbrodt, F. D., Evans, N. J., & Wagenmakers, E.-J. (2022). Efficiency  
256 in sequential testing: Comparing the sequential probability ratio test and the sequential  
257 Bayes factor test. *Behavior Research Methods*, 54(6), 3100–3117. [https://doi.org/10.](https://doi.org/10.3758/s13428-021-01754-8)  
258 [3758/s13428-021-01754-8](https://doi.org/10.3758/s13428-021-01754-8)
- 259 Steinhilber, M., Schnuerch, M., & Schubert, A.-L. (2023). *Sprtt: Sequential probability ratio*  
260 *test toolbox* (Version 0.2.0) [R Package]. <https://CRAN.R-project.org/package=sprtt>.
- 261 Steinhilber, M., Schnuerch, M., & Schubert, A.-L. (2024). Sequential analysis of variance:  
262 Increasing efficiency of hypothesis testing. *Psychological Methods*. [https://doi.org/10.](https://doi.org/10.1037/met0000677)  
263 [1037/met0000677](https://doi.org/10.1037/met0000677)
- 264 Steinhilber, M., Schnuerch, M., & Schubert, A.-L. (2025). *The Dark Side of Sequential*  
265 *Testing: A Simulation Study on Questionable Research Practices*. PsyArXiv. [https:](https://doi.org/10.31234/osf.io/vkbu3_v1)  
266 [//doi.org/10.31234/osf.io/vkbu3\\_v1](https://doi.org/10.31234/osf.io/vkbu3_v1)
- 267 Tartakovsky, A., Nikiforov, I., & Basseville, M. (2014). *Sequential Analysis: Hypothesis Testing*  
268 *and Changepoint Detection*. CRC Press. ISBN: 978-1-4398-3820-4
- 269 Wagenmakers, E.-J., Marsman, M., Jamil, T., Ly, A., Verhagen, J., Love, J., Selker, R.,  
270 Gronau, Q. F., Šmíra, M., Epskamp, S., Matzke, D., Rouder, J. N., & Morey, R. D. (2018).  
271 Bayesian inference for psychology. Part I: Theoretical advantages and practical ramifications.  
272 *Psychonomic Bulletin & Review*, 25(1), 35–57. [https://doi.org/10.3758/s13423-017-1343-](https://doi.org/10.3758/s13423-017-1343-3)  
273 [3](https://doi.org/10.3758/s13423-017-1343-3)
- 274 Wald, A. (1945). Sequential tests of statistical hypotheses. *The Annals of Mathematical*  
275 *Statistics*, 16(2), 117–186.
- 276 Wald, A. (1947). *Sequential analysis*. Wiley. ISBN: 978-0-486-61579-0
- 277 Wetherill, G. B., & Glazebrook, K. D. (1986). *Sequential methods in statistics* (3rd ed).  
278 Chapman and Hall. ISBN: 978-0-412-28150-1
- 279 Yu, Z. (2017). *Sprt: Sequential Probability Ratio Test* (Version 0.0.1) [Python Package].  
280 <https://pypi.org/project/sprt/>.