

Smokescreen: A Python package for data vector blinding and encryption in cosmological analyses

Arthur Loureiro^{1,2}[¶], Jessica Muir³, Jonathan Blazek⁴, Nora Elisa Chisari^{5,6}, Pedro H. Costa Ribeiro^{7,8}, Christos Georgiou⁹, Mustapha Ishak¹⁰, C. Danielle Leonard¹¹, Bruno Moraes^{12,7}, Marc Paterno¹³, Nikolina Šarčević¹⁴, Tilman Tröster¹⁵, Sandro D. P. Vitenti⁸, and the LSST Dark Energy Science Collaboration¹⁶

¹ Oskar Klein Centre for Cosmoparticle Physics, Department of Physics, Stockholm University, Stockholm, SE-106 91, Sweden ² Astrophysics Group, Blackett Laboratory, Imperial College London, London SW7 2AZ, UK ³ University of Cincinnati, Cincinnati, Ohio 45221, USA ⁴ Department of Physics, Northeastern University, Boston, MA 02115, USA ⁵ Institute for Theoretical Physics, Utrecht University, Princetonplein 5, 3584 CC, Utrecht, the Netherlands ⁶ Leiden Observatory, Leiden University, Niels Bohrweg 2, 2333 CA, Leiden, the Netherlands ⁷ Instituto de Física, Universidade Federal do Rio de Janeiro, Cidade Universitária, Rio de Janeiro, 21941-909, Brazil ⁸ Departamento de Física, Universidade Estadual de Londrina, Rod. Celso Garcia Cid, Km 380, 86057 970, Londrina, Paraná, Brazil ⁹ Institut de Física d'Altes Energies (IFAE), The Barcelona Institute of Science and Technology, Campus UAB, 08193 Bellaterra (Barcelona), Spain ¹⁰ Department of Physics, The University of Texas at Dallas, Richardson, Texas, USA ¹¹ School of Mathematics, Statistics and Physics, Newcastle University, Newcastle upon Tyne, NE1 7RU, United Kingdom ¹² CBPF - Centro Brasileiro de Pesquisas Físicas, 22290-180, Rio de Janeiro, RJ, Brazil ¹³ Fermi National Accelerator Laboratory, Batavia, IL 60510-0500, U.S.A. ¹⁴ Department of Physics, Duke University, Science Dr, Durham, NC 27710, USA ¹⁵ Institute for Particle Physics and Astrophysics, ETH Zurich, 8093 Zurich, Switzerland ¹⁶ SLAC National Accelerator Laboratory, Menlo Park, CA 94025, USA [¶] Corresponding author

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#) 
- [Repository](#) 
- [Archive](#) 

Editor: 

Submitted: 30 April 2026

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](https://creativecommons.org/licenses/by/4.0/)).

Summary

Smokescreen is an open-source Python library for data-vector concealment (blinding) in cosmological analyses. Data-vector blinding works by applying cosmology-dependent shifts to the observed data vector, moving it away from the true cosmological signal without affecting its statistical properties, so that analysts cannot infer the true result until the analysis is frozen and the blinding is lifted. The package computes these shifts using Firecrown¹ likelihoods applied to data vectors stored in the SACC format², ensuring that the theoretical model used for blinding is identical to that used for inference whilst remaining agnostic to the specific observable being blinded. To prevent accidental unblinding, the original SACC file, containing the true cosmology, is encrypted. Although developed for the Vera C. Rubin Observatory Legacy Survey of Space and Time (LSST), Smokescreen is applicable to any experiment using Firecrown likelihoods and the SACC data format.

Statement of need

Modern cosmological analyses require robust data concealment (blinding) strategies to prevent experimenter bias. Cosmological experiments are particularly challenging to blind due to a fundamental limitation: we can only observe one Universe, making it extremely hard to design analyses in a double-blind or even single-blind manner. Additionally, cosmological signals are

¹<https://firecrown.readthedocs.io/en/latest/>

²<https://sacc.readthedocs.io/en/latest/intro.html>

not localized events but statistical patterns distributed across large data sets such as correlation functions or power spectra, leaving no clear “signal region” that can simply be hidden. Without a principled approach, analysts risk unconsciously tuning their pipelines towards an expected result or towards the results of other experiments, compromising the scientific integrity of the measurement.

Muir et al. (2020) formalised this discussion by defining three criteria for a reliable data concealment strategy: (I) the concealment must hide the true results while producing a physically reasonable posterior that preserves known parameter degeneracies; (II) it must retain the ability to perform validation tests, including goodness-of-fit and systematic null tests; and (III) it must be straightforward to implement and unblind, while still preventing accidental unblinding. Muir et al. (2020) further showed that applying cosmology-dependent shifts in data vector space satisfies all three requirements.

Smokescreen follows this approach: given a reference cosmology and a randomly-drawn blinded cosmology, it computes the difference between the corresponding theory predictions and applies the shift to the observed data vector. With LSST Y1 data forthcoming and DESC analyses (LSST Dark Energy Science Collaboration, 2012) requiring a collaboration-wide blinding strategy, no existing tool in the DESC software ecosystem (or outside it) provided a standardised implementation of this method. Smokescreen was developed to fill this gap.

State of the field

Blinding in cosmological surveys can be implemented at several stages of the analysis pipeline. Catalogue-level methods (Brieden et al., 2020; e.g., Jarvis et al., 2016) provide robust concealment but are difficult to implement, particularly for multi-probe experiments. Posterior-level methods (e.g., Conley et al., 2006) are simple but leave the data vectors unblinded throughout the analysis. Covariance-level blinding (Sellentin, 2020) is mathematically elegant but harder to apply in practice, as covariance matrices in multi-probe analyses are constructed in a variety of ways — analytically, from simulations, or via resampling methods, for example. Data vector blinding (Muir et al., 2020) provides a practical compromise, offering stronger guarantees than posterior-level methods while remaining easier to implement than catalogue- or covariance-level methods.

The Dark Energy Survey (DES Collaboration et al., 2026), Kilo Degree Survey (Wright et al., 2025), and Hyper Suprime-Cam (Miyatake et al., 2023) have used combinations of these strategies in their analyses, but these implementations were largely *ad hoc* and not easily reusable. Smokescreen provides a dedicated open-source library for data vector blinding designed to integrate with collaboration-wide analysis pipelines. By making the concealment procedure transparent and reproducible, it also allows the wider community to inspect and verify how blinding shifts are computed prior to and post unblinding.

Software design

Smokescreen is structured around a single primary abstraction, the `ConcealDataVector` class, with thin command-line and encryption wrappers layered on top. The design follows a separation-of-concerns principle keeping four responsibilities independent: (I) cosmological parameter perturbation (`param_shifts.py`), (II) theory vector computation via an external likelihood framework (`datavector.py`), (III) data security (`encryption.py`), and (IV) user-facing orchestration (`__main__.py`). This structure allows any Firecrown³-compatible likelihood to be used, guaranteeing that the theoretical modelling used for concealment is identical to that used for inference, preserving Criterion II of Muir et al. (2020). Smokescreen can perform shifts in any of the base cosmological parameters present in CCL (Chisari et al., 2019).

³Firecrown is DESC’s likelihood library, see <https://github.com/LSSTDESC/firecrown> for more information.

87 Smokescreen's test suite is implemented using pytest and currently achieves 94% code coverage
 88 as tracked by Codecov. Rather than merely checking array shapes or return types, tests verify
 89 physical correctness: for instance, that additive and multiplicative blinding factors are computed
 90 exactly as prescribed by 4.1–4.1, that SACC consistency checks raise errors on data vector
 91 or covariance mismatches to floating-point tolerance, that invalid parameter keys or shift
 92 distributions are caught at instantiation, and that the full concealment pipeline, from shift
 93 sampling through to the saved output file and its metadata, produces the expected result
 94 end-to-end.

95 Core blinding algorithm

96 Smokescreen implements the data vector blinding methodology of Muir et al. (2020) in five
 97 steps. First, for each cosmological parameter θ_i the user specifies the parameters of a shift
 98 distribution (deterministic, flat uniform, or Gaussian; see *Parameter shift strategies* below)
 99 from which $\Delta\theta_i$ is drawn. Second, a concealed cosmology is constructed:

$$\theta_{\text{blind}} = \theta_{\text{ref}} + \Delta\theta.$$

100 where θ_{ref} is a reference cosmology defined by the user. Third, the theory vector, $T(\theta, s)$, is
 101 evaluated by the Firecrown likelihood object at both cosmologies with nuisance parameters
 102 s_{ref} fixed at their reference values:

$$\mathbf{d}_{\text{ref}} = T(\theta_{\text{ref}}, s_{\text{ref}}), \quad \mathbf{d}_{\text{blind}} = T(\theta_{\text{blind}}, s_{\text{ref}}).$$

103 Fourth, a blinding factor is computed in either additive or multiplicative form:

$$f^{\text{add}} = \mathbf{d}_{\text{blind}} - \mathbf{d}_{\text{ref}}, \quad f^{\text{mult}} = \mathbf{d}_{\text{blind}} / \mathbf{d}_{\text{ref}},$$

104 applied according to the observable. Fifth, the factor is applied to the measured data vector:

$$\hat{\mathbf{d}} = \mathbf{d}_{\text{obs}} + f^{\text{add}} \quad \text{or} \quad \hat{\mathbf{d}} = \mathbf{d}_{\text{obs}} \cdot f^{\text{mult}}.$$

105 Fixing s_{ref} in both evaluations ensures the blinding factor carries only the cosmological shift,
 106 leaving the covariance matrix unchanged and allowing standard inference pipelines to run on $\hat{\mathbf{d}}$
 107 without modification.

108 Software architecture

109 Figure 1 shows the workflow as a sequential data-flow diagram. The `ConcealDataVector` class
 110 orchestrates the process: it evaluates the theory vectors (4.1–4.1), applies the blinding factor
 111 (4.1), and writes the output SACC file⁴.

112 Two validation guards prevent common configuration errors. `_verify_sacc_consistency()`
 113 checks the return SACC from the likelihood matches the user's input to floating-point
 114 tolerance (10^{-10}), while `_check_amplitude_parameter()` ensures consistent specification
 115 of the amplitude parameters A_s/σ_8 across the reference cosmology, Firecrown's CCLFactory⁵,
 116 and the shift dictionary.

117 Supporting modules handle parameter shift generation (`param_shifts.py`, implemented as a
 118 stateless module for independent unit testing and modularity), symmetric encryption via Fernet⁶
 119 (AES-128-CBC + HMAC-SHA256 with a fresh key per blinding operation) (`encryption.py`, also

⁴The SACC file format stores correlations, covariances, and associated metadata for cosmological analyses.

⁵Firecrown interfaces with the DESC Core Cosmology Library, CCL (Chisari et al., 2019).

⁶<https://github.com/pyca/cryptography>

120 exposed through command line interface (CLI) subcommands), and SACC format auto-detection
121 with cosmology construction (utils.py).

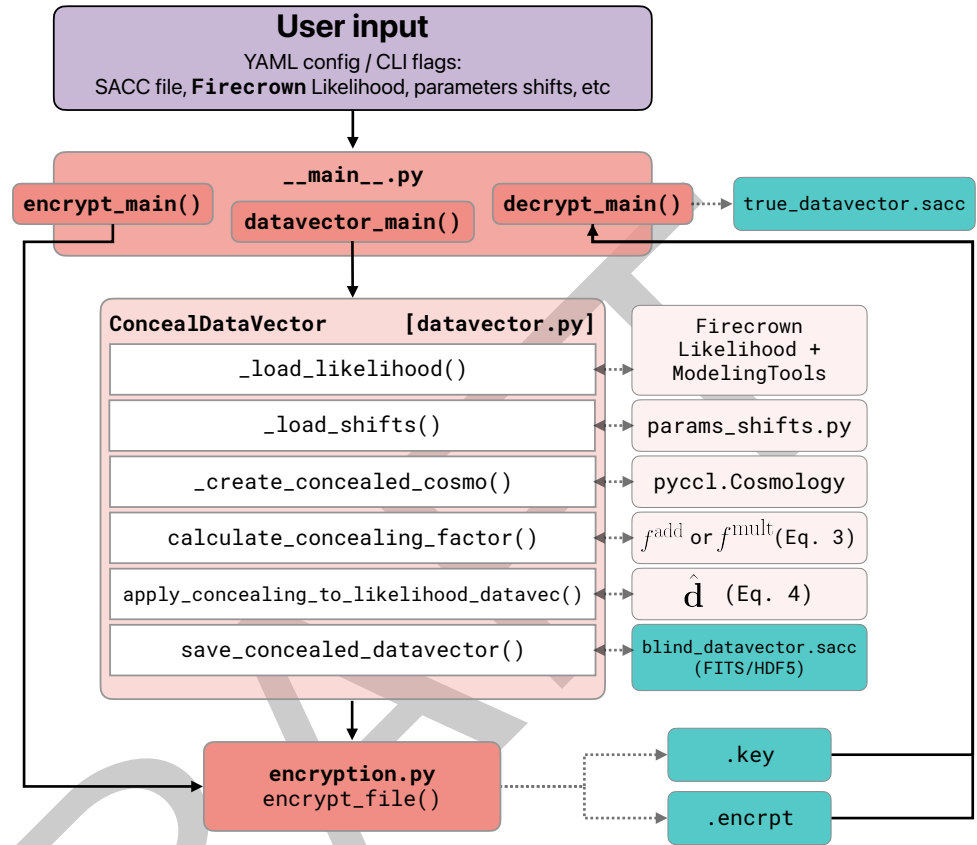


Figure 1: Smokescreen data-flow architecture. Solid arrows show the main execution sequence; dashed arrows show outputs produced by each step; green boxes show outputs. `datavector_main()` orchestrates `ConcealDataVector`, which triggers encryption; `encrypt_main()` provides a standalone encryption path; `decrypt_main()` restores the original SACC file given the `.encrpt` and `.key` files.

Firecrown likelihood integration

Smokescreen requires only a Python module exporting a `build_likelihood(build_parameters)` factory returning a `(Likelihood, ModelingTools)` tuple conforming to the Firecrown interface — the same interface used by Firecrown with the CosmoSIS/Cobaya/NumCosmos (Torrado & Lewis, 2021; Vitenti & Penna-Lima, 2014, respectively; Zuntz et al., 2015) connectors. Therefore, existing likelihood modules do not require modification.

Parameter shift strategies

Three shift distributions are implemented: deterministic ($\theta_i^{\text{blind}} = \text{const}$), uniform ($\theta_i^{\text{blind}} \sim \mathcal{U}(a, b)$), and Gaussian ($\theta_i^{\text{blind}} \sim \mathcal{N}(\mu, \sigma)$). Reproducibility is ensured through integer or string seeds, with strings mapped to NumPy-compatible integers via MD5 hashing. Unknown parameter keys raise a `ValueError` during validation, preventing silent misapplication of shifts.

133 Security and data integrity

134 After the concealed SACC file is written, the original is encrypted with Fernet and deleted
 135 by default. The .key file is stored separately from the .encrypt data file, allowing a blinding
 136 committee to distribute them through independent channels. The blinded SACC embeds audit
 137 metadata (seed, timestamp, username) sufficient to reconstruct the blinding configuration
 138 without external logs.

139 CLI and configuration

140 Smokescreen exposes three subcommands — datavector, encrypt, and decrypt —
 141 implemented with `jsonargparse`⁷. Arguments may be provided as command-line interface
 142 (CLI) flags or through a YAML configuration file (`--config config.yaml`); `--print_config`
 143 displays the current argument schema. The `reference_cosmology` argument accepts a partial
 144 parameter dictionary, completed using `pyccl.CosmologyVanillaLCDM` (Chisari et al., 2019)
 145 defaults. Input/output format (FITS or HDF5) is auto-detected and preserved.

146 Application: LSST Y1 3×2pt concealment

147 We demonstrate Smokescreen on a simulated LSST Y1 3×2pt data vector comprising cosmic
 148 shear $C_{\ell}^{\gamma\gamma}$, galaxy–galaxy lensing C_{ℓ}^{gg} , and galaxy clustering C_{ℓ}^{gg} (Prat et al., 2023) across
 149 five tomographic redshift bins, yielding 415 data points sampled at 20 log-spaced multipoles
 150 $\ell \in [20, 2000]$ with the samples containing galaxy clustering restricted to scales $k \leq 0.1$
 151 Mpc^{-1} .

152 Smokescreen configuration

153 Two blinded realisations (“Blind A” and “Blind B”) were produced with deterministic A_s and
 154 w shifts from the fiducial value $A_s^{\text{fid}} = 1.9019 \times 10^{-9}$, and $w^{\text{fid}} = -1.0$.

155 Blind A settings are:

```
path_to_sacc: "./sacc_forecasting_y1_3x2pt.sacc"
likelihood_path: "./3x2pt_likelihood.py"
output_suffix: "blind_A"
shifts_dict:
  A_s: 2.00e-09 # +5.2% shift from fiducial
  w: -1.1 # +10.0% shift from fiducial
shift_distribution: "flat"
systematics:
  lens0_bias: 1.2497
  lens1_bias: 1.3809
  lens2_bias: 1.5231
  lens3_bias: 1.6716
  lens4_bias: 1.8245
  ia_bias: 1.0
  alphaz: 0.0
  z_piv: 0.62
reference_cosmology:
  A_s: 1.9019e-09
  Omega_c: 0.2906
keep_original_sacc: true
```

156 While Blind B uses:

⁷<https://github.com/omni-us/jsonargparse/>

```
output_suffix: "blind_B"
shifts_dict:
  A_s: 1.80e-09 # -5.2% shift from fiducial
  w: -0.9 # -10.0% shift from fiducial
```

and is otherwise identical.

In a non-determinist shift case, the user would specify a list with two values, e.g. the limits of a uniform distribution and a seed:

```
shifts_dict:
  A_s: [1.70e-09, 2.20e-09]
  w: [-1.3, -0.8]
shift_distribution: "flat"
seed: 2112
```

Finally, the concealment of the data vector is invoked as:

```
smokescreen datavector --config conceal_lsst_y1_3x2pt_blind_[A/B].yaml
```

producing `sacc_forecasting_y1_3x2pt_blind_[A/B].sacc` and an encrypted copy of the original. The resulting concealed data vectors are shown in Figure 2.

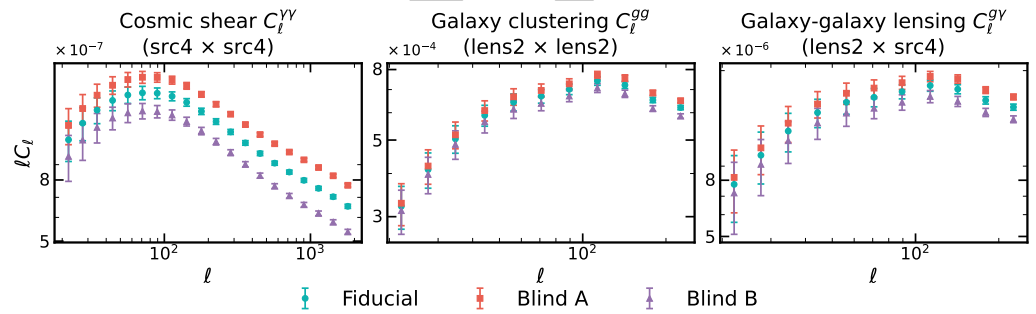


Figure 2: Example of multi-probe concealment for a simulated LSST Y1 3×2pt data vector: (left) cosmic shear, (middle) galaxy clustering, and (right) galaxy–galaxy lensing. Green circles show the original data vector ($A_s = 1.9 \times 10^{-9}$, $w = -1.0$). Red squares (purple triangles) show *Blind A* (*Blind B*), produced by deterministic shifts to $A_s = 2.0 \times 10^{-9}$, $w = -1.1$ ($A_s = 1.8 \times 10^{-9}$, $w = -0.9$).

Cosmological validation

Following Muir et al. (2020), valid concealment shifts should move the posterior best-fit sufficiently to blind the posterior while leaving the goodness-of-fit unchanged (Criterion II). We verify this with a lightweight inference over three cosmological parameters: A_s , w , and Ω_{cdm} only⁸, using CosmoSIS (Zuntz et al., 2015) and the same Firecrown likelihood supplied to Smokescreen. Deterministic shifts allow direct comparison with the known input cosmology. A full validation on realistic simulated analyses, including the complete parameter space and systematics, will be presented in a forthcoming LSST DESC study.

Figure 3 confirms the expected behaviour: posteriors shift towards the blinded cosmology, whilst the goodness-of-fit remains unchanged ($\chi^2_{\text{red}} = 0$ for the noiseless fiducial vector). The Bayesian log-evidence $\log Z$, computed via Nautilus (Lange, 2023), is likewise unaffected: $|\Delta \log Z| \leq 1$ for both blinded runs (Blind A: -0.97 , Blind B: -0.47), which is inconclusive on the Jeffreys scale and confirms the blinded analyses are statistically indistinguishable from the unblinded one. The results are summarised in Table 1.

⁸Note that only A_s and w are concealed in this test, while Ω_{cdm} is kept the same.

Table 1: Best fit values, goodness-of-fit, and log-evidence for all three cases in Figure 3.

	$A_s \times 10^{-9}$	w	Ω_{cdm}	χ^2_{red}	$\log Z$
True Cosmology	1.88	-0.99	0.292	0.0039	-16.67 ± 0.03
Blind A	1.97	-1.09	0.294	0.0084	-17.64 ± 0.03
Blind B	1.79	-0.90	0.290	0.0069	-17.14 ± 0.03

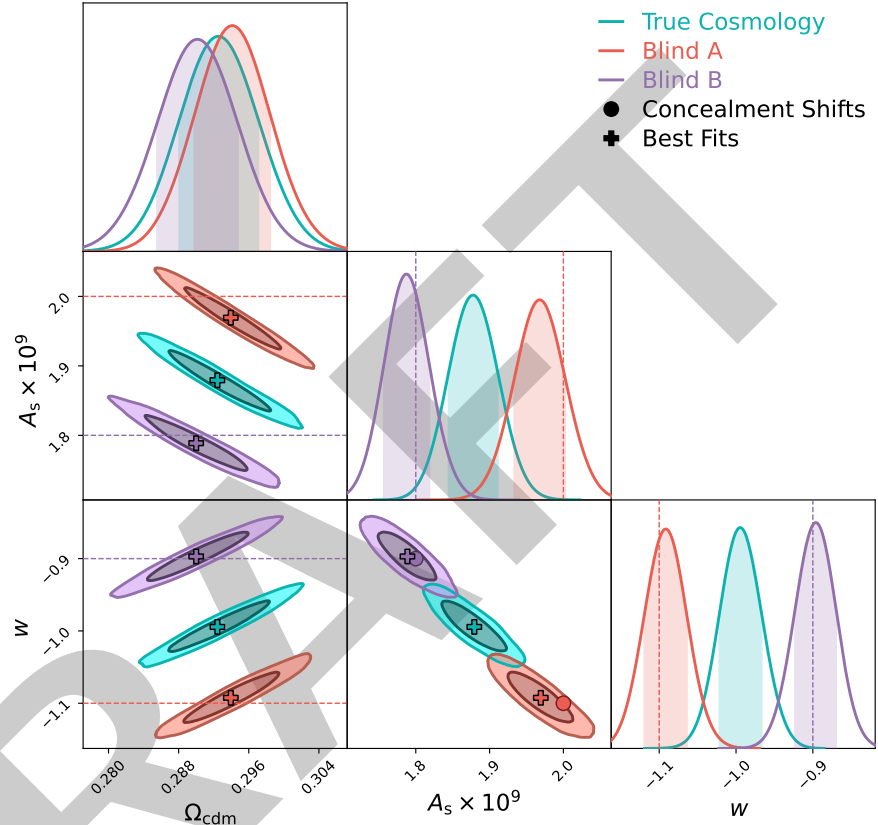


Figure 3: Marginalised 1D and 2D posterior distributions from cosmological inference on the data vectors shown in Figure 2, using the same Firecrown likelihood provided to Smokescreen. The true cosmology (cyan), Blind A (red), and Blind B (purple) posteriors shift consistently towards their respective input concealing cosmologies, marked by filled circles and dashed lines. Cross markers indicate the posterior best-fits reported in Table 1. Note that Ω_{cdm} was not shifted by Smokescreen, yet its posterior shifts a tiny amount as a consequence of the known A_s - Ω_{cdm} - w degeneracy, demonstrating that Criterion I is satisfied.

Research impact statement

Smokescreen is designed as a standard blinding infrastructure for LSST DESC cosmological analyses ahead of LSST's decade-long survey. It eliminates inconsistencies between blinding and inference models that can arise from independent *ad hoc* implementations across analysis teams. Adoption is already extending beyond LSST DESC: the KiDS collaboration is using Smokescreen to blind their upcoming $6 \times 2\text{pt}$ legacy analysis, demonstrating its applicability to any experiment using Firecrown likelihoods and the SACC format. More broadly, we hope Smokescreen will help drive the community towards more consistent, open, and verifiable blinding infrastructures ahead of the Stage-IV survey era.

Availability

- Source: github.com/LSSTDESC/Smokescreen
- License: BSD 3-Clause License.
- Install (conda): `conda install -c conda-forge lsstdesc-smokescreen`
- Install (PyPI): `pip install smokescreen`
- Documentation: lsstdesc.org/Smokescreen/
- Examples: github.com/LSSTDESC/Smokescreen/tree/main/examples
- Notebooks: github.com/LSSTDESC/Smokescreen/tree/main/notebooks

AI usage disclosure

Generative AI tools, including GitHub Copilot and Claude Code, played a minor supporting role in the development of Smokescreen, primarily in the generation of unit tests and in resolving small, localised bugs. All AI-assisted code was reviewed and edited by the authors before being incorporated into the codebase. The core design of the library, its scientific grounding, and all key implementation decisions were made entirely by the authors. The writing in this paper is our own; AI assistance was limited to occasional grammar corrections and light rephrasing to improve fluency, as several of the authors are non-native English speakers.

Acknowledgments

This paper has undergone internal review in the LSST Dark Energy Science Collaboration. We thank Joe Zuntz and Jayme Ruiz-Zapatero for acting as DESC internal reviewers for this work. AL acknowledges support from the Swedish National Space Agency (Rymdstyrelsen) under Career Grant Project Dnr 2024-00171 and from the research project grant 'Understanding the Dynamic Universe' funded by the Knut and Alice Wallenberg Foundation under Dnr KAW 2018.0067. Smokescreen was developed as a part of the Stockholm University in-kind software contributions to the Vera Rubin Observatory's Legacy Survey of Space and Time. CG is funded by the MICINN project PID2022-141079NB-C32. IFAE is partially funded by the CERCA program of the Generalitat de Catalunya. NŠ is supported in part by the OpenUniverse effort, which is funded by NASA under JPL Contract Task 70-711320, 'Maximizing Science Exploitation of Simulated Cosmological Survey Data Across Surveys.' TT acknowledges funding from the Swiss National Science Foundation under the Ambizione project PZ00P2_193352

Software acknowledgments

This project is largely possible thanks to several key software tools and packages. We gratefully acknowledge the Python programming language, without which this work would not have been possible.⁹ Our development and analysis efforts relied heavily on essential Python libraries, including: NumPy ([Harris et al., 2020](#)), SciPy ([Virtanen et al., 2020](#)), Matplotlib ([Hunter, 2007](#)), ChainConsumer ([Hinton, 2016](#)), AstroPy ([Astropy Collaboration et al., 2013, 2018, 2022](#)), HDF5 ([Collette et al., 2022](#)) and cosmology packages like CCL ([Chisari et al., 2019](#)), CosmoSIS ([Zuntz et al., 2015](#)), CAMB ([Howlett et al., 2012](#); [Lewis et al., 2000](#)), HMCode2020 ([Mead et al., 2021](#)), and NaMaster ([Alonso et al., 2019](#)).

We also acknowledge the use of Jupyter Notebooks ([Kluyver et al., 2016](#)) as an interactive computing environment for prototyping and documenting analyses.

⁹<https://www.python.org>

227 Author contributions

228 We outline the different contributions below using keywords based on the Contribution
 229 Roles Taxonomy (CRediT; Brand et al. (2015)). **AL (core developer & maintainer of**
 230 **Smokescreen)**: Conceptualization, Methodology, Software, Validation, Formal analysis,
 231 Investigation, Resources, Writing - Original Draft, Visualization, Project administration; **JM**:
 232 Conceptualization, Methodology, Project administration; **JB**: Conceptualization, Project
 233 administration; **NEC**: LSST DESC Builder, contributor to pyCCL; **PHCR**: Data Curation,
 234 Software*; **CG**: Software; **MI** LSST DESC Builder, contributor to pyCCL; **CDL**: LSST DESC
 235 Builder, contributor to pyCCL; **BM**: Software*; **MP**: Software; **NŠ**: Writing - Review &
 236 Editing, Visualization; **TT**: LSST DESC Builder, contributor to pyCCL & Firecrown. **SPDV**:
 237 Software*;

238 * not direct Smokescreen development, but software used in the work presented here.

239 Alonso, D., Sanchez, J., Slosar, A., & LSST Dark Energy Science Collaboration. (2019). A
 240 unified pseudo- C_ℓ framework. *484*(3), 4127–4151. <https://doi.org/10.1093/mnras/stz093>

241 Astropy Collaboration, Price-Whelan, A. M., Lim, P. L., Earl, N., Starkman, N., Bradley, L.,
 242 Shupe, D. L., Patil, A. A., Corrales, L., Brasseur, C. E., N'othé, M., Donath, A., Tollerud,
 243 E., Morris, B. M., Ginsburg, A., Vaher, E., Weaver, B. A., Tocknell, J., Jamieson, W., ...
 244 Astropy Project Contributors. (2022). The Astropy Project: Sustaining and Growing a
 245 Community-oriented Open-source Project and the Latest Major Release (v5.0) of the Core
 246 Package. *935*(2), 167. <https://doi.org/10.3847/1538-4357/ac7c74>

247 Astropy Collaboration, Price-Whelan, A. M., Sipőcz, B. M., Günther, H. M., Lim, P. L.,
 248 Crawford, S. M., Conseil, S., Shupe, D. L., Craig, M. W., Dencheva, N., Ginsburg, A.,
 249 VanderPlas, J. T., Bradley, L. D., Pérez-Suárez, D., de Val-Borro, M., Aldcroft, T. L.,
 250 Cruz, K. L., Robitaille, T. P., Tollerud, E. J., ... Astropy Contributors. (2018). The Astropy
 251 Project: Building an Open-science Project and Status of the v2.0 Core Package. *156*(3),
 252 123. <https://doi.org/10.3847/1538-3881/aabc4f>

253 Astropy Collaboration, Robitaille, T. P., Tollerud, E. J., Greenfield, P., Droettboom, M., Bray,
 254 E., Aldcroft, T., Davis, M., Ginsburg, A., Price-Whelan, A. M., Kerzendorf, W. E., Conley,
 255 A., Crighton, N., Barbary, K., Muna, D., Ferguson, H., Grollier, F., Parikh, M. M., Nair, P.
 256 H., ... Streicher, O. (2013). Astropy: A community Python package for astronomy. *558*,
 257 A33. <https://doi.org/10.1051/0004-6361/201322068>

258 Brand, A., Allen, L., Altman, M., Hlava, M., & Scott, J. (2015). Beyond authorship:
 259 Attribution, contribution, collaboration, and credit. *Learned Publishing*, *28*(2), 151–155.
 260 <https://doi.org/10.1087/20150211>

261 Brieden, S., Gil-Marín, H., Verde, L., & Bernal, J. L. (2020). Blind Observers of the Sky.
 262 *2020*(9), 052. <https://doi.org/10.1088/1475-7516/2020/09/052>

263 Chisari, N. E., Alonso, D., Krause, E., Leonard, C. D., Bull, P., Neveu, J., Villarreal, A. S.,
 264 Singh, S., McClintock, T., Ellison, J., Du, Z., Zuntz, J., Mead, A., Joudaki, S., Lorenz,
 265 C. S., Tröster, T., Sanchez, J., Lanusse, F., Ishak, M., ... LSST Dark Energy Science
 266 Collaboration. (2019). Core Cosmology Library: Precision Cosmological Predictions for
 267 LSST. *242*(1), 2. <https://doi.org/10.3847/1538-4365/ab1658>

268 Collette, A., Kluyver, T., Caswell, T. A., Tocknell, J., Kieffer, J., Jelenak, A., Scopatz, A.,
 269 Dale, D., Chen, VINCENT, T., Einhorn, M., payno, juliagarriga, Sciarelli, P., Valls, V.,
 270 Ghosh, S., Pedersen, U. K., jakirkham, Raspaud, M., ... Kittisopikul, M. (2022). *h5py/h5py*:
 271 *3.7.0* (Version 3.7.0). Zenodo. <https://doi.org/10.5281/zenodo.6575970>

272 Conley, A., Goldhaber, G., Wang, L., Aldering, G., Amanullah, R., Commings, E. D., Fadeyev,
 273 V., Folatelli, G., Garavini, G., Gibbons, R., Goobar, A., Groom, D. E., Hook, I., Howell,
 274 D. A., Kim, A. G., Knop, R. A., Kowalski, M., Kuznetsova, N., Lidman, C., ... Supernova
 275 Cosmology Project. (2006). Measurement of Ω_m , Ω_Λ from a Blind Analysis of Type

- 276 Ia Supernovae with CMAGIC: Using Color Information to Verify the Acceleration of the
277 Universe. *644*(1), 1–20. <https://doi.org/10.1086/503533>
- 278 DES Collaboration, Abbott, T. M. C., Adamow, M., Agüena, M., Alarcon, A., Allam, S.
279 S., Alves, O., Amon, A., Anbajagane, D., Andrade-Oliveira, F., Avila, S., Bacon, D.,
280 Baxter, E. J., Beas-Gonzalez, J., Bechtol, K., Becker, M. R., Bernstein, G. M., Bertin,
281 E., Blazek, J., ... Zuntz, J. (2026). Dark Energy Survey Year 6 Results: Cosmological
282 Constraints from Galaxy Clustering and Weak Lensing. *arXiv e-Prints*, arXiv:2601.14559.
283 <https://doi.org/10.48550/arXiv.2601.14559>
- 284 Harris, C. R., Millman, K. J., Walt, S. J. van der, Gommers, R., Virtanen, P., Cournapeau, D.,
285 Wieser, E., Taylor, J., Berg, S., Smith, N. J., Kern, R., Picus, M., Hoyer, S., Kerkwijk,
286 M. H. van, Brett, M., Haldane, A., Río, J. F. del, Wiebe, M., Peterson, P., ... Oliphant,
287 T. E. (2020). Array programming with NumPy. *Nature*, *585*(7825), 357–362. <https://doi.org/10.1038/s41586-020-2649-2>
- 288
- 289 Hinton, S. R. (2016). ChainConsumer. *The Journal of Open Source Software*, *1*, 00045.
290 <https://doi.org/10.21105/joss.00045>
- 291 Howlett, C., Lewis, A., Hall, A., & Challinor, A. (2012). CMB power spectrum parameter
292 degeneracies in the era of precision cosmology. *2012*(4), 027. <https://doi.org/10.1088/1475-7516/2012/04/027>
- 293
- 294 Hunter, J. D. (2007). Matplotlib: A 2D graphics environment. *Computing in Science &*
295 *Engineering*, *9*(3), 90–95. <https://doi.org/10.1109/MCSE.2007.55>
- 296 Jarvis, M., Sheldon, E., Zuntz, J., Kacprzak, T., Bridle, S. L., Amara, A., Armstrong, R.,
297 Becker, M. R., Bernstein, G. M., Bonnett, C., Chang, C., Das, R., Dietrich, J. P., Drlica-
298 Wagner, A., Eifler, T. F., Gangkofner, C., Gruen, D., Hirsch, M., Huff, E. M., ... Wechsler,
299 R. H. (2016). The DES Science Verification weak lensing shear catalogues. *460*(2),
300 2245–2281. <https://doi.org/10.1093/mnras/stw990>
- 301 Kluyver, T., Ragan-Kelley, B., Pérez, F., Granger, B., Bussonnier, M., Frederic, J., Kelley, K.,
302 Hamrick, J., Grout, J., Corlay, S., Ivanov, P., Avila, D., Abdalla, S., Willing, C., & Jupyter
303 Development Team. (2016). Jupyter Notebooks—a publishing format for reproducible
304 computational workflows. In *IOS press* (pp. 87–90). <https://doi.org/10.3233/978-1-61499-649-1-87>
- 305
- 306 Lange, J. U. (2023). nautilus: boosting Bayesian importance nested sampling with deep
307 learning. *Monthly Notices of the Royal Astronomical Society*, *525*(2), 3181–3194. <https://doi.org/10.1093/mnras/stad2441>
- 308
- 309 Lewis, A., Challinor, A., & Lasenby, A. (2000). Efficient Computation of Cosmic Microwave
310 Background Anisotropies in Closed Friedmann-Robertson-Walker Models. *538*(2), 473–476.
311 <https://doi.org/10.1086/309179>
- 312 LSST Dark Energy Science Collaboration. (2012). Large Synoptic Survey Telescope: Dark
313 Energy Science Collaboration. *arXiv e-Prints*, arXiv:1211.0310. <https://doi.org/10.48550/arXiv.1211.0310>
- 314
- 315 Mead, A. J., Brieden, S., Tröster, T., & Heymans, C. (2021). HMCODE-2020: improved
316 modelling of non-linear cosmological power spectra with baryonic feedback. *502*(1),
317 1401–1422. <https://doi.org/10.1093/mnras/stab082>
- 318 Miyatake, H., Sugiyama, S., Takada, M., Nishimichi, T., Li, X., Shirasaki, M., More, S.,
319 Kobayashi, Y., Nishizawa, A. J., Rau, M. M., Zhang, T., Takahashi, R., Dalal, R.,
320 Mandelbaum, R., Strauss, M. A., Hamana, T., Oguri, M., Osato, K., Luo, W., ... Wang,
321 S.-Y. (2023). Hyper Suprime-Cam Year 3 results: Cosmology from galaxy clustering and
322 weak lensing with HSC and SDSS using the emulator based halo model. *108*(12), 123517.
323 <https://doi.org/10.1103/PhysRevD.108.123517>

- 324 Muir, J., Bernstein, G. M., Huterer, D., Elsner, F., Krause, E., Roodman, A., Allam, S.,
 325 Annis, J., Avila, S., Bechtol, K., Bertin, E., Brooks, D., Buckley-Geer, E., Burke, D. L.,
 326 Carnero Rosell, A., Carrasco Kind, M., Carretero, J., Cawthon, R., Costanzi, M., ... DES
 327 Collaboration. (2020). Blinding multiprobe cosmological experiments. *494*(3), 4454–4470.
 328 <https://doi.org/10.1093/mnras/staa965>
- 329 Prat, J., Zuntz, J., Chang, C., Tröster, T., Pedersen, E., García-García, C., Phillips-Longley,
 330 E., Sanchez, J., Alonso, D., Fang, X., Gawiser, E., Heitmann, K., Ishak, M., Jarvis,
 331 M., Kovacs, E., Larsen, P., Mao, Y.-Y., Medina Varela, L., Paterno, M., ... LSST Dark
 332 Energy Science Collaboration. (2023). The catalog-to-cosmology framework for weak
 333 lensing and galaxy clustering for LSST. *The Open Journal of Astrophysics*, *6*, 13. <https://doi.org/10.21105/astro.2212.09345>
- 335 Sellentin, E. (2020). A blinding solution for inference from astronomical data. *492*(3),
 336 3396–3407. <https://doi.org/10.1093/mnras/staa043>
- 337 Torrado, J., & Lewis, A. (2021). Cobaya: code for Bayesian analysis of hierarchical physical
 338 models. *2021*(5), 057. <https://doi.org/10.1088/1475-7516/2021/05/057>
- 339 Virtanen, P., Gommers, R., Oliphant, T. E., Haberland, M., Reddy, T., Cournapeau, D.,
 340 Burovski, E., Peterson, P., Weckesser, W., Bright, J., van der Walt, S. J., Brett, M., Wilson,
 341 J., Millman, K. J., Mayorov, N., Nelson, A. R. J., Jones, E., Kern, R., Larson, E., ... SciPy
 342 1.0 Contributors. (2020). SciPy 1.0: Fundamental Algorithms for Scientific Computing in
 343 Python. *Nature Methods*, *17*, 261–272. <https://doi.org/10.1038/s41592-019-0686-2>
- 344 Vitenti, S. D. P., & Penna-Lima, M. (2014). Astrophysics Source Code Library.
- 345 Wright, A. H., Stölzner, B., Asgari, M., Bilicki, M., Giblin, B., Heymans, C., Hildebrandt, H.,
 346 Hoekstra, H., Joachimi, B., Kuijken, K., Li, S.-S., Reischke, R., von Wietersheim-Kramsta,
 347 M., Yoon, M., Burger, P., Chisari, N. E., de Jong, J., Dvornik, A., Georgiou, C., ... Zhang,
 348 Y.-H. (2025). KiDS-Legacy: Cosmological constraints from cosmic shear with the complete
 349 Kilo-Degree Survey. *703*, A158. <https://doi.org/10.1051/0004-6361/202554908>
- 350 Zuntz, J., Paterno, M., Jennings, E., Rudd, D., Manzotti, A., Dodelson, S., Bridle, S., Sehrish,
 351 S., & Kowalkowski, J. (2015). CosmoSIS: Modular cosmological parameter estimation.
 352 *Astronomy and Computing*, *12*, 45–59. <https://doi.org/10.1016/j.ascom.2015.05.005>