

Metage2Metabo PostAViz: a Python package for exploring, visualising, and comparing the metabolic potential of microbial communities

Léonard Brindel ¹ and Clémence Frioux ¹✉

¹ Inria, Univ. Bordeaux, INRAE, F-33400 Talence, France ✉ Corresponding author

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#) 
- [Repository](#) 
- [Archive](#) 

Editor: [Erik Whiting](#) 

Reviewers:

- [@benyamindsmith](#)
- [@NehaAr](#)
- [@98ketaki](#)

Submitted: 25 August 2025

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#))

Summary

Microbial communities comprise up to several thousand distinct microbial populations, each defined by its genomic DNA sequences and sharing a common habitat and environmental conditions. The term *microbiome* describes the holistic concept encompassing these microorganisms and their environment ([Berg et al., 2020](#)). Characterising the populations within samples and understanding their roles and interactions in the microbiome requires a combination of experimentation, high-throughput data acquisition and computational modelling ([Klitgord & Segrè, 2011](#)).

The role of microbial populations can be abstracted through the study of their *metabolism*, encompassing the full set of biochemical reactions performed by cells. Within a microbiome, metabolic functions often display both redundancy and complementarity: distinct microbial compositions may support similar overall functions. This functional overlap motivates the systematic inference of metabolic potential. Because the genome encodes the information underlying metabolism, it can be used to estimate the metabolic capabilities of microorganisms, typically represented as *metabolic networks*. These networks form the basis of *metabolic models*, which integrate additional data within mathematical or computational frameworks to predict the behaviour of microbial communities under specific environmental conditions.

Advances in experimental strategies and large-scale DNA sequencing in metagenomics now enable the analysis of increasing numbers of samples. Scalable approaches are therefore required to explore potential behaviours and interactions among microbial populations across environments. Comparing predictions across multiple samples is essential for generating actionable hypotheses, but doing so requires integration of sample metadata, statistical analysis, and careful interpretation of modelling outputs. Effective visualisation and customisable exploration tools are therefore important to make metabolic modelling results accessible and usable for end users.

Statement of need

Metage2Metabo-PostAViz (M2M-PostAViz) is a Python package that performs analyses on the predictions generated by the metabolic-modelling tool [Metage2Metabo](#) (M2M) ([Belcour et al., 2020](#)). Concretely, it takes as input multiple metabolic network files (one per microbial population of the modelled community) together with a set of seed metabolites that describe the environmental conditions. M2M encodes these networks as a discrete model in the symbolic AI framework of Answer Set Programming (ASP) and computes which metabolites are reachable from the provided seeds. The inference accounts for the complementarity between networks, allowing metabolites produced by one population to be used by others, thereby modelling potential metabolic interactions within the community.

41 When working with cohorts of hundreds or thousands of samples, M2M must be executed
42 separately for each sample. The resulting outputs then need to be collected and analysed across
43 samples to enable comparison and interpretation of model predictions. For each community,
44 M2M produces several data frames describing the role of each microorganism with respect to
45 the community-level functions. Proper cross-sample comparison therefore requires aggregating
46 these outputs and integrating sample metadata, such as microbial composition, lifestyle
47 variables, or clinical information.

48 M2M-PostAViz addresses this need by integrating M2M outputs across samples together with
49 associated metadata into a unified data structure that supports systematic comparison. Results
50 and metadata are stored in the parquet columnar format, enabling efficient disk-based storage
51 and fast data access while limiting memory usage. This design allows the exploration of
52 hundreds to thousands of samples without degrading user experience. In addition, M2M-
53 PostAViz provides a preprocessing step in which outputs are structured and stored in advance,
54 so that subsequent exploratory sessions can be launched efficiently.

55 The package offers a visualisation interface for custom plot generation and statistical analyses,
56 enabling stratified exploration of metabolic capabilities across samples or groups. Exploration
57 can be conducted at multiple levels: individual metabolites that may or may not be producible
58 across samples; microorganisms, whose predicted behaviour may vary depending on interactions
59 with other community members; and broader summaries of community-level functions. The
60 tool operates as a local web-based application.

61 Overall, M2M-PostAViz was designed to address three complementary needs: (i) enabling the
62 comparison of metabolic modelling results across large metagenomic cohorts by structuring and
63 aggregating per-sample M2M outputs; (ii) integrating modelling predictions with additional
64 data sources, such as microbial community composition and sample metadata, to support
65 statistically informed analyses; and (iii) making these analyses accessible to non-specialists
66 through a graphical user interface that supports customisable workflows.

67 State of the field

68 Metabolic modelling is widely used to investigate the roles of microorganisms in microbial
69 communities, including which molecules they can produce and which interactions may occur
70 under particular environmental conditions (Cerk et al., 2024). Many models rely on integer
71 linear programming optimisations (García-Jiménez et al., 2021) and some alternatives use
72 Boolean abstractions (Belcour et al., 2020; Frioux et al., 2018) or probabilistic approaches
73 (Bernstein et al., 2019) to provide predictions on community behaviours. Key questions are
74 scalability to large communities, and also integration of these predictions when analysing many
75 samples or community compositions, which is more and more frequent as large metagenomic
76 cohorts get published (Asnicar et al., 2025).

77 In practice, each microorganism is abstracted by a collection of biochemical reactions it may
78 perform according to its genomic information, thus forming a network connecting transformed
79 molecules (Cerk et al., 2024). A community of microorganisms is therefore represented as
80 a collection of such networks, referred to as genome-scale metabolic networks. A metabolic
81 model will provide predictions on the possible behaviour of microorganisms and communities in
82 defined simulation conditions. Boolean abstractions, as used by M2M, ensure the scalability of
83 predictions; although the model is qualitative and does not quantify interactions, such methods
84 are considered a reasonable proxy for more quantitative models (Kruse & Ebenhöf, 2008)
85 (Figure Figure 1A).

86 Software design

87 Data integration and storage

88 M2M-PostaViz is implemented in Python (3.12). Each sample must first be processed with M2M.
89 The inputs to M2M-PostaViz are the directories generated by M2M for each sample, which contain
90 multiple tabulated and JSON files. Additional inputs include microbial relative abundances
91 (used to weight predictions), sample metadata (e.g. lifestyle or clinical variables), and optionally
92 metadata describing metabolites and microbial taxonomy. These inputs are provided as tabular
93 files.

94 Integrating these heterogeneous data sources across hundreds or thousands of samples can be
95 computationally demanding, particularly since each sample corresponds to a separate output
96 directory. Moreover, users typically explore the same dataset across multiple sessions. To avoid
97 repeated parsing and integration of raw outputs, M2M-PostaViz implements a preprocessing
98 step that consolidates and structures all required data into a unified representation.

99 The processed data are stored using the parquet columnar format. This enables efficient
100 disk-based storage and fast, selective data access while limiting memory usage. As a result,
101 the initial preprocessing step may be time-consuming, but subsequent application runs directly
102 load the structured data, substantially reducing startup time and improving responsiveness
103 during interactive exploration.

104 Data manipulation and storage rely primarily on pandas (McKinney, 2010; team, 2020), polars
105 (The Polars development team, 2024), and pyarrow (Richardson et al., 2026) for tabular
106 processing and parquet integration.

107 Application content

108 The application opens as a multi-tab browser page. The first tab provides an overview of the
109 dataset and enables initial analyses that can be customised using metadata variables. Two
110 additional tabs provide analyses centred on microbial roles and metabolites, respectively (see
111 below), and a final tab summarises the metadata and allows users to customise variable types
112 to fine-tune analyses and plots. Statistical analyses are performed using scipy (Virtanen et al.,
113 2020) and statsmodels (Seabold & Perktold, 2010). Visualisations are generated with plotly
114 (Inc., 2015), matplotlib (Hunter, 2007), and seaborn (Waskom, 2021), and the web interface is
115 implemented using shiny for Python (The Shiny development team, 2024) (Figure 1B).

116 Exploration of microorganism roles

117 The second tab of the application focuses on the role of microorganisms in the production of
118 metabolites across samples. The same species and thus the same metabolic network can appear
119 in several samples, but behave differently because of possible interactions with other microbial
120 populations. In addition, microbial species can be grouped according to their taxonomy,
121 enabling users to consider not only the role of a metabolic network but the role of all those
122 falling in taxonomic groups of different levels (e.g. phylum, family, genus). Again, sample
123 metadata variables can refine the analysis, enabling users to compare groups or filter certain
124 samples.

125 Exploration of metabolite production across samples

126 The third tab of the application is dedicated to the analysis of metabolites, which can also be
127 grouped into families if a suitable ontology is provided (Aite et al., 2018; Caspi et al., 2019).
128 Focusing on metabolites enables a targeted analysis in order to compare samples or groups of
129 samples on specific metabolic functions.

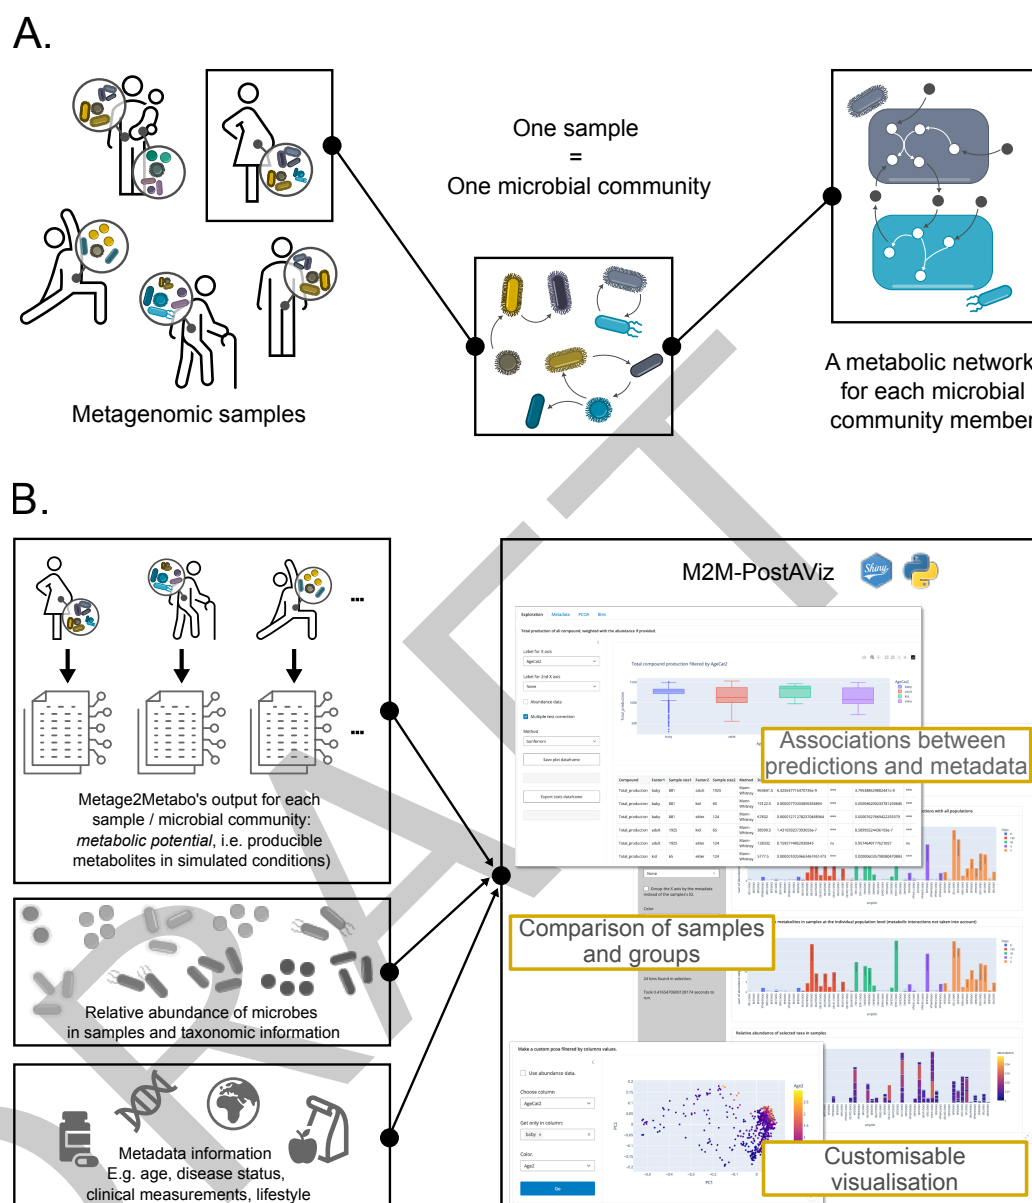


Figure 1: Illustration of the context and functionalities of Metage2Metabo-PostAViz. A. Metagenomic context. Samples consist of microbial communities, each composed of several interacting microbial populations. These populations are represented as metabolic networks used to predict community behaviour and interactions within dedicated modelling frameworks. **B.** Functionalities of M2M-PostAViz. Inputs include Metage2Metabo outputs for each sample, metadata, relative abundances, and taxonomic information associated with the samples. The application enables comparison of the metabolic potential of samples and exploration of their associations with metadata through a graphical user interface.

Research impact statement

M2M-PostAViz builds on the widely used M2M framework, which has been cited more than one hundred times and remains actively maintained, by addressing key barriers that currently limit the broader adoption of large-scale metabolic modelling. While M2M enables powerful predictions of metabolic complementarity and community-level functions, its complexity and the volume of generated outputs require substantial expertise, restricting its use to a limited and expert audience.

M2M-PostAViz overcomes these limitations by providing an interactive and user-friendly graphical interface that enables systematic exploration, comparison, and interpretation of M2M outputs across large metagenomic datasets consisting of up to thousands of samples. The tool integrates metabolic modelling results with microbial community composition and associated metadata, facilitating multi-dimensional analyses at scales that were previously difficult to achieve.

By lowering technical barriers, M2M-PostAViz broadens access to metabolic modelling approaches and enables their application by non-specialists. To promote transparency, reproducibility, and adoption, M2M-PostAViz is accompanied by an extensive tutorial and curated test datasets, supporting users in applying metabolic modelling analyses to diverse microbial ecosystems.

AI usage disclosure

AI tools (GitHub Copilot and GPT-5) were used occasionally for code generation, particularly for debugging, and for grammar and language checks of the manuscript. All suggestions were reviewed and validated by the human authors.

Acknowledgements

CF is supported by the French National Research Agency (ANR) France 2030 PEPR Agroécologie et Numérique MISTIC ANR-22-PEAE-0011. Experiments and developments were carried on the PlaFRIM experimental testbed, supported by Inria, CNRS (LABRI and IMB), Université de Bordeaux, Bordeaux INP and Conseil Régional d'Aquitaine (see <https://www.plafrim.fr>).

References

- Aite, M., Chevallier, M., Frioux, C., Trottier, C., Got, J., Cortés, M. P., Mendoza, S. N., Carrier, G., Dameron, O., Guillaudeau, N., Latorre, M., Loira, N., Markov, G. V., Maass, A., & Siegel, A. (2018). Traceability, reproducibility and wiki-exploration for “à-la-carte” reconstructions of genome-scale metabolic models. *PLOS Computational Biology*, 14(5), e1006146. <https://doi.org/10.1371/journal.pcbi.1006146>
- Asnicar, F., Manghi, P., Fackelmann, G., Baldanzi, G., Bakker, E., Ricci, L., Piccinno, G., Piperni, E., Mladenovic, K., Amati, F., Arrè, A., Ganesh, S., Giordano, F., Davies, R., Wolf, J., Bermingham, K. M., Berry, S. E., Spector, T. D., & Segata, N. (2025). Gut micro-organisms associated with health, nutrition and dietary interventions. *Nature*, 1–9. <https://doi.org/10.1038/s41586-025-09854-7>
- Belcour, A., Frioux, C., Aite, M., Bretaudeau, A., Hildebrand, F., & Siegel, A. (2020). Metage2Metabo, microbiota-scale metabolic complementarity for the identification of key species. *eLife*, 9, e61968. <https://doi.org/10.7554/elife.61968>
- Berg, G., Rybakova, D., Fischer, D., Cernava, T., Vergès, M.-C. C., Charles, T., Chen, X., Cocolin, L., Eversole, K., Corral, G. H., Kazou, M., Kinkel, L., Lange, L., Lima, N., Loy, A., Macklin, J. A., Maguin, E., Mauchline, T., McClure, R., ... Schlöter, M. (2020). Microbiome definition re-visited: old concepts and new challenges. *Microbiome*, 8(1), 103. <https://doi.org/10.1186/s40168-020-00875-0>
- Bernstein, D. B., Dewhirst, F. E., & Segrè, D. (2019). Metabolic network percolation quantifies biosynthetic capabilities across the human oral microbiome. *eLife*, 8, e39733. <https://doi.org/10.7554/elife.39733>
- Caspi, R., Billington, R., Keseler, I. M., Kothari, A., Krummenacker, M., Midford, P. E., Ong, W. K., Paley, S., Subhraveti, P., & Karp, P. D. (2019). The MetaCyc database

- 181 of metabolic pathways and enzymes—a 2019 update. *Nucleic Acids Research*, 48(D1),
182 D445–D453. <https://doi.org/10.1093/nar/gkz862>
- 183 Cerk, K., Ugalde-Salas, P., Nedjad, C. G., Lecomte, M., Muller, C., Sherman, D. J., Hildebrand,
184 F., Labarthe, S., & Frioux, C. (2024). Community-scale models of microbiomes: Articulating
185 metabolic modelling and metagenome sequencing. *Microbial Biotechnology*, 17(1), e14396.
186 <https://doi.org/10.1111/1751-7915.14396>
- 187 Frioux, C., Fremy, E., Trottier, C., & Siegel, A. (2018). Scalable and exhaustive screening of
188 metabolic functions carried out by microbial consortia. *Bioinformatics*, 34(17), i934–i943.
189 <https://doi.org/10.1093/bioinformatics/bty588>
- 190 García-Jiménez, B., Torres-Bacete, J., & Nogales, J. (2021). Metabolic modelling approaches
191 for describing and engineering microbial communities. *Computational and Structural*
192 *Biotechnology Journal*, 19, 226–246. <https://doi.org/10.1016/j.csbj.2020.12.003>
- 193 Hunter, J. D. (2007). Matplotlib: A 2D graphics environment. *Computing in Science &*
194 *Engineering*, 9(3), 90–95. <https://doi.org/10.1109/MCSE.2007.55>
- 195 Inc., P. T. (2015). *Collaborative data science*. Plotly Technologies Inc. <https://plot.ly>
- 196 Klitgord, N., & Segrè, D. (2011). Ecosystems biology of microbial metabolism. *Current*
197 *Opinion in Biotechnology*, 22(4), 541–546. <https://doi.org/10.1016/j.copbio.2011.04.018>
- 198 Kruse, K., & Ebenhöf, O. (2008). [Comparing flux balance analysis to network expansion:](#)
199 [producibility, sustainability and the scope of compounds](#). *Genome Informatics. International*
200 *Conference on Genome Informatics*, 20, 91–101.
- 201 McKinney, Wes. (2010). Data Structures for Statistical Computing in Python. In Stéfan van
202 der Walt & Jarrod Millman (Eds.), *Proceedings of the 9th Python in Science Conference*
203 (pp. 56–61). <https://doi.org/10.25080/Majora-92bf1922-00a>
- 204 Richardson, N., Cook, I., Crane, N., Dunnington, D., François, R., Keane, J., Mecum, B.,
205 Moldovan-Grünfeld, D., Ooms, J., Wujciak-Jens, J., & Apache Arrow. (2026). *Arrow:*
206 *Integration to 'apache' 'arrow'*. <https://github.com/apache/arrow/>
- 207 Seabold, S., & Perktold, J. (2010). Statsmodels: Econometric and statistical modeling with
208 python. *9th Python in Science Conference*.
- 209 team, T. pandas development. (2020). *Pandas-dev/pandas: pandas* (latest). Zenodo.
210 <https://doi.org/10.5281/zenodo.3509134>
- 211 The Polars development team. (2024). *Polars: Extremely fast query engine for DataFrames,*
212 *written in rust*. <https://pola.rs>
- 213 The Shiny development team. (2024). *Shiny for python*. <https://shiny.posit.co/py/>
- 214 Virtanen, P., Gommers, R., Oliphant, T. E., Haberland, M., Reddy, T., Cournapeau, D.,
215 Burovski, E., Peterson, P., Weckesser, W., Bright, J., van der Walt, S. J., Brett, M., Wilson,
216 J., Millman, K. J., Mayorov, N., Nelson, A. R. J., Jones, E., Kern, R., Larson, E., ... SciPy
217 1.0 Contributors. (2020). SciPy 1.0: Fundamental Algorithms for Scientific Computing in
218 Python. *Nature Methods*, 17, 261–272. <https://doi.org/10.1038/s41592-019-0686-2>
- 219 Waskom, M. L. (2021). Seaborn: Statistical data visualization. *Journal of Open Source*
220 *Software*, 6(60), 3021. <https://doi.org/10.21105/joss.03021>