

DeformView: Quantitative Visualization of Non-Linear Deformation Fields

Isabel Frolick^{1,2*}, Elise Donszelmann-Lund^{1,2*}, Taj Choksi³, Étienne Léger², Raphaël Christin^{1,2}, Kaleem Siddiqi¹, and D. Louis Collins^{1,2}

¹ McGill University, Canada ² Montreal Neurological Institute, Canada ³ Imperial College London, United Kingdom * These authors contributed equally.

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#)
- [Repository](#)
- [Archive](#)

Editor: [Johan Larsson](#)

Reviewers:

- [@CompEng0001](#)
- [@dbirman](#)
- [@lavrovaliz](#)

Submitted: 07 July 2026

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

Summary

DeformView is a new 3D Slicer module ([Fedorov et al., 2012](#)) designed for dense, intuitive, and quantitative visualization of non-linear deformation fields for image registration. In addition to the local, sparse displacement vectors shown by the current Transform module in 3D Slicer, DeformView introduces two interactive, voxel-wise overlays: a displacement magnitude colour map (millimeters) and a Jacobian determinant colour map (percentage) encoding local volumetric expansion and compression. We additionally introduce real-time cursor interaction to enable point-wise deformation values to be displayed directly on the image volume. As well, an Increment Transform feature supports visualization of the progressive deformation over discrete steps. DeformView is available from our GitHub repository: <https://github.com/elisedl1/DeformView>, using the 3D Slicer Extension Wizard.

Statement of need

Non-linear image registration is a key task in medical imaging, where a spatially varying deformation field maps a source image onto a fixed target image. There is an extensive body of work on non-linear registration methods, reflecting its broad applicability across imaging modalities ([Ferrante & Paragios, 2017](#); [Sotiras et al., 2013](#)). While the primary output of a registration pipeline is the deformed source image – warped into alignment with the target image – the underlying deformation field itself encodes quantitative information about spatial correspondences and local tissue mechanics.

Clinicians and surgeons must interpret these resulting deformation fields, either to guide clinical decision-making or to validate that a registration algorithm is performing correctly. However, existing deformation visualization software for non-linear image registration is largely sparse and qualitative, making it difficult to interpret and localize tissue deformation ([Brock et al., 2017](#)). Correct interpretation of deformed anatomy is especially difficult for inexperienced surgeons or researchers.

For example, in image-guided neurosurgery (IGNS), patient-to-image registration is used to align preoperative scans with patient anatomy during surgery. 'Brain shift', or non-linear shifts in brain tissue, causes a mismatch between preoperative images and the patient's current anatomy, necessitating the use of non-linear image registration to deform preoperative images into the intraoperative image space ([Abhari et al., 2014](#)). Other use cases include longitudinal studies to monitor disease progression or interventional guidance to maximize therapeutic precision. As non-linear image registration is a general problem, these use cases extend across many anatomical systems and modalities.

DeformView is designed to address these challenges by providing an intuitive, user-friendly 3D

41 Slicer module that enables efficient, dense, and quantitative visualization of deformation fields
42 in medical imaging tasks where registration is applied.

43 State of the field

44 The primary existing tool for deformation visualization within 3D Slicer is the Transform
45 module, which offers three sparse representations of the deformation field: glyphs (arrows),
46 a uniform grid, and iso-contours (King et al., 2015). The glyph visualization conveys the
47 direction of local deformation, providing a qualitative sense of how the image has deformed
48 from its initial state.

49 However, all three representations are sampled at a subset of voxel locations. As such,
50 the deformation between sampled points is entirely invisible to the user and no numerical
51 displacement information is displayed. In addition to providing only a sparse visualization,
52 existing tools like the Transform module only show the final state deformation; the user is
53 unable to visualize how the deformation is incrementally applied or how specific anatomical
54 regions are compressed or expanded to accommodate the deformation. The absence of these
55 features limits the ability of users to interpret deformation fields.

56 Software design

57 DeformView is implemented as a Python extension for 3D Slicer, an open-source platform
58 available on Linux, macOS, and Windows under a BSD-style license. Most Slicer basic
59 infrastructure is implemented in C++ and made available in Python using PythonQt and VTK
60 Python Wrapper (Kapur et al., 2016). The DeformView module is developed using Python
61 following community guidelines for Slicer extension development and built from the official
62 Slicer extension template to ensure consistency and modularity with the Slicer ecosystem
63 (Fedorov et al., 2012).

64 A key design principle of DeformView is compatibility, both with Slicer's data model and with
65 existing modules. All input selectors expose only the data types relevant to each function:
66 for example, the transformation input only accepts transform types available in Slicer (linear,
67 BSpline, grid, thin-plate spline, and composite) (3D Slicer Community, 2026). As well,
68 DeformView is designed to operate in conjunction with existing Slicer tools. For example,
69 the DeformView colour maps can be displayed alongside the sparse overlays of the existing
70 Transform module. As shown in Figure 1, this combination of the displacement magnitude
71 colour map and glyphs provides both a quantified, spatially localized interpretation and an
72 intuitive representation of local direction change. DeformView includes an automated self-test
73 (built on Slicer's ScriptedLoadableModuleTest framework) that verifies module loading and
74 validates the displacement and Jacobian computations against known analytic results without
75 the need for additional downloads or external files, see the repository README for instructions.

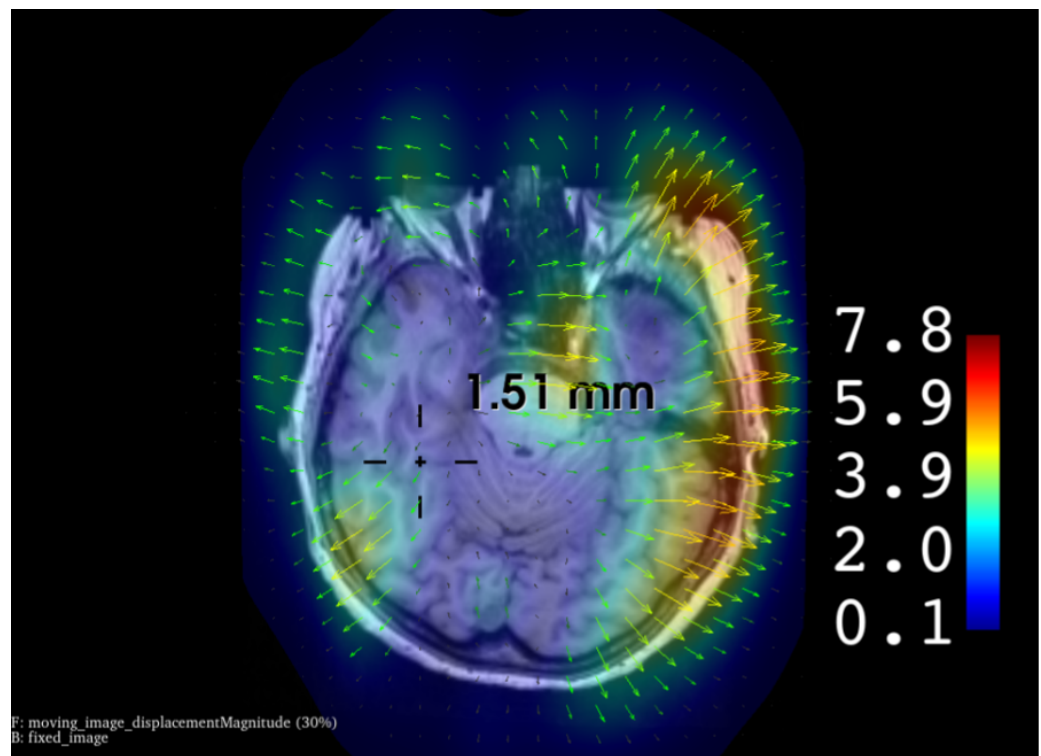


Figure 1: Integration of DeformView displacement magnitude and existing Transform glyph visualization.

Research Impact Statement

DeformView has generated demonstrable interest from the medical imaging research community beyond its core development team. The module was presented at NA-MIC Project Week 43 and 44 (Kapur et al., 2016; NA-MIC, 2025, 2026), the biannual workshop hosted by the National Alliance for Medical Image Computing (NA-MIC), the organization responsible for the continued development of 3D Slicer. DeformView generated discussion among Slicer developers and requests for adoption from external research groups, including for applications in orofacial surgery and mechanical engineering. The DeformView module has also been used in ongoing research on groupwise ultrasound-CT image registration for spinal surgery (Donszelmann-Lund, 2026).

This work was additionally presented as a peer-reviewed poster at the Imaging Network of Ontario (ImNO) 2026 symposium in the Image-Guided Intervention and Surgery category (Donszelmann-Lund et al., 2026).

Overview of DeformView Module

DeformView accepts a deformation field (transform node) and a reference image (typically the deformed source image) as inputs and produces two complementary, dense quantitative visualizations overlaid directly on the image, as shown in Figure 2.

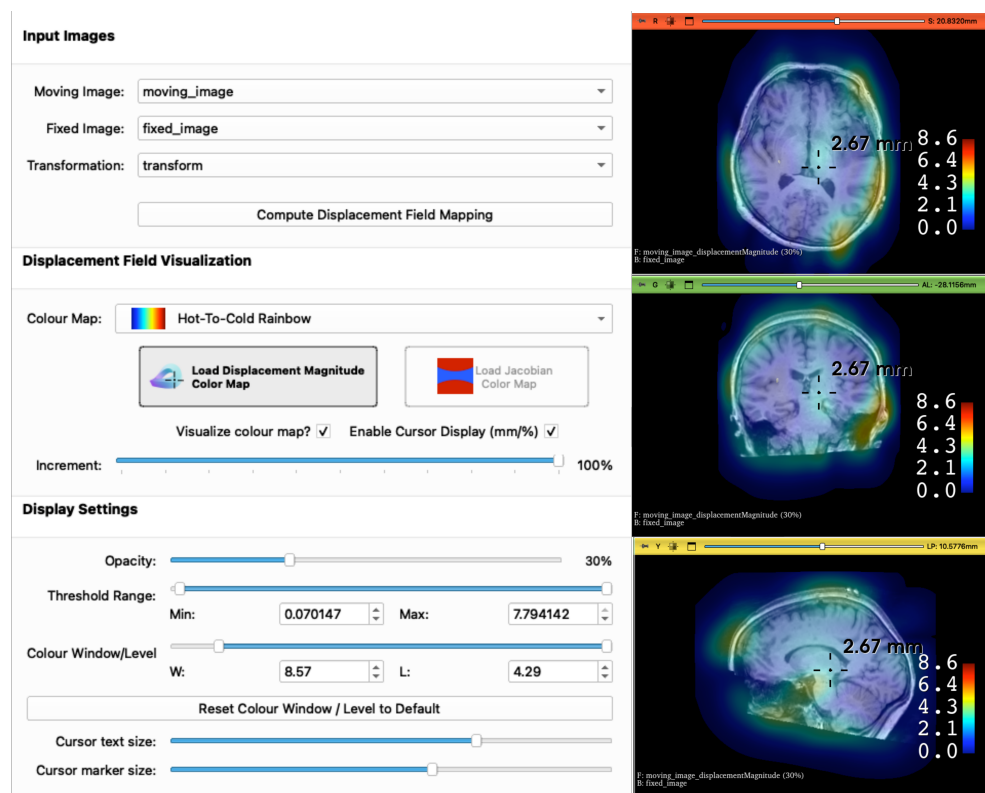


Figure 2: Overview of DeformView 3D Slicer Module. Left: user interface for the proposed module Right: dense colour map (red is higher deformation) with cursor displaying point-wise deformation magnitude on hover in axial (top), coronal (middle), and sagittal (bottom) views

Displacement Magnitude Map

The first new dense colour map renders the Euclidean magnitude of the displacement vector (the distance each voxel has moved between its original and deformed position), in millimeters. Our module converts the transform into a dense vector field sampled across the entire reference image grid, and the length of each displacement vector is stored as a scalar value at each voxel location and displayed using one of eight scientific colour maps, with options for colour-blind readability (Cramer & Hason, 2024). An interactive voxel-wise cursor displays the numerical displacement magnitude at the pointer location in real time, as shown in Figure 3. This provides a dense spatial understanding of deformation quantity and position across the full 3D volume.

Jacobian Determinant Map

This map renders the Jacobian determinant of the deformation field at every voxel as a percentage of local volumetric change, indicating whether a region has expanded or contracted under the deformation (Chung et al., 2001). Tissue expansion (percentage > 0%) is rendered in red, tissue compression (percentage < 0%) in blue, and no change (percentage = 0%) in white, as shown in Figure 3. This allows researchers to identify changes to anatomical regions or areas of physiologically implausible deformation that may indicate registration errors.

Increment Transform:

Rather than only displaying the final deformation, as existing modules do, the transformation is incrementally applied to the source image across 10 discrete steps (0.1x, 0.2x, ... 1.0x of the

full transform), allowing users to observe how the deformation accumulates spatially. This is particularly useful for training and for diagnosing registration behaviour at intermediate stages. We visualize the difference between DeformView visualization compared to the existing 3D Slicer functionality in Transform module for both displaying displacement magnitude and local volume change (compression/ expansion) in Figure 3.

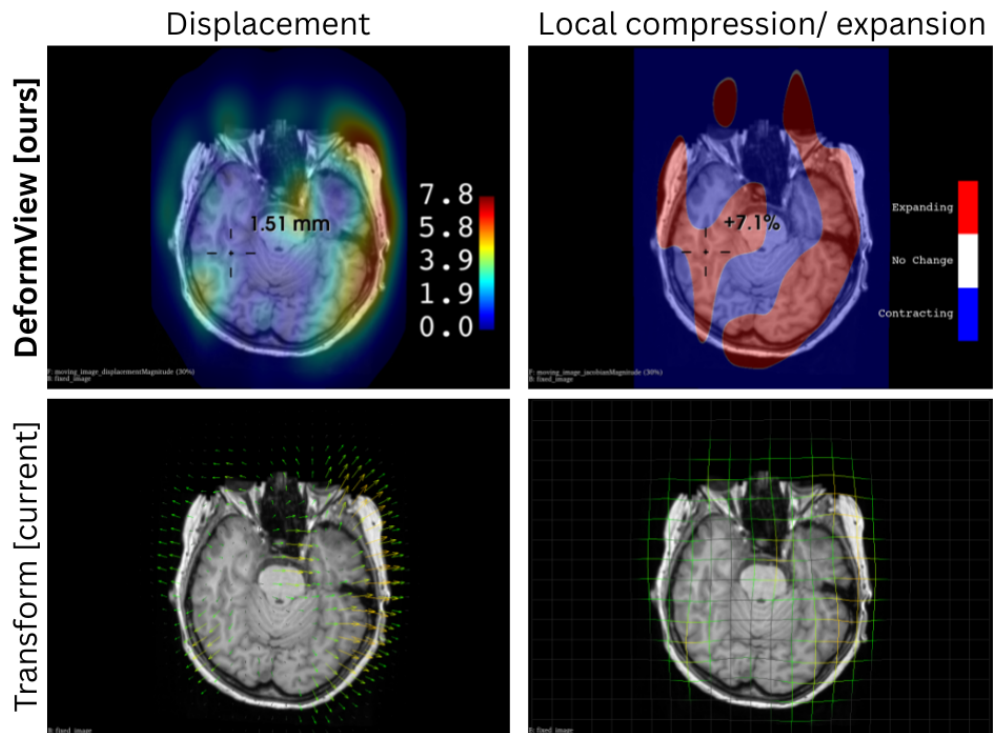


Figure 3: DeformView visualizations (top row) versus existing Transform module visualizations (bottom row). Top left: DeformView displacement magnitude colour map. Top right: DeformView Jacobian colour map. Bottom left: Transform module glyph display. Bottom right: Transform module grid display.

Preliminary Results

To evaluate whether DeformView has achieved its stated goals to improve user interpretability and confidence when visualizing deformed images, a user study was conducted. Participants were randomly shown one image pair from three cases of preoperative-intraoperative T2-FLAIR brain MRI volumes and tasked with interpreting the deformation using both DeformView and the Transform module. The test data comes from the ReMIND dataset (Juvekar et al., 2024). Ten participants (technical researchers without clinical expertise, mean imaging research experience: 2.9 years) completed the study. Module functionality was assessed on four attributes: helpfulness in comprehension, interpretability, intuitiveness, and user confidence. The assessment was conducted using a 5-point Likert scale (1 = None, 5 = Great) and the System Usability Scale (Vlachogianni & Tselios, 2022). Participants were given unlimited time to freely explore each module before providing responses. The image pairs were randomized and a counterbalanced design was employed to control for order effects. As shown in Figure 4, DeformView achieved higher mean scores than the Transform module across all four attributes (mean: 4.1/5.0 vs. 3.2/5.0; per-attribute mean range: 4.0–4.3 vs. 3.0–3.5). Improvements in helpfulness and intuitiveness reached statistical significance ($p = 0.008$ and $p = 0.027$, respectively). Overall, 80% of the participants preferred DeformView

over Transform and 80% indicated they would choose DeformView for similar applications in the future. On the System Usability Scale, DeformView achieved a mean score of 82.8/100 (std: 14.6), which falls in the “excellent” usability range per established SUS benchmarks (above 80/100) (Bangor et al., 2009).

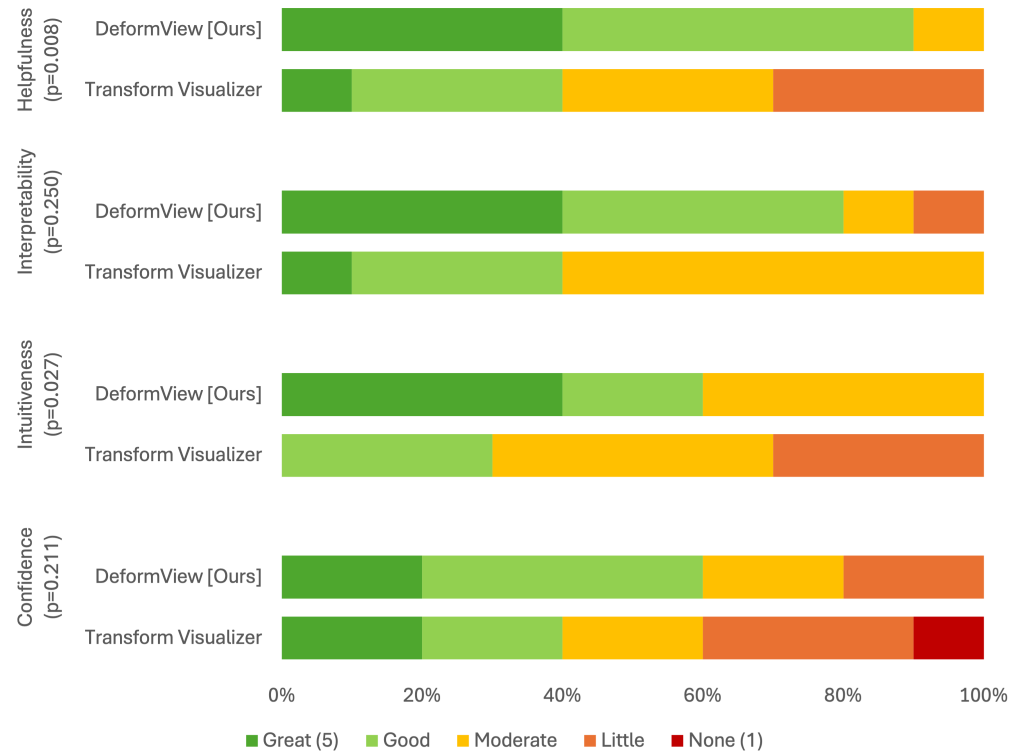


Figure 4: User study (n=10) results comparing our DeformView module and existing Transform module on four attributes (1–5 scale; green is better). DeformView significantly outperforms existing module on helpfulness (p=0.008) and intuitiveness (p=0.027), with higher mean scores across all metrics.

With the introduction of dense, quantitative colour maps for displacement magnitude and Jacobian determinant, DeformView provides an intuitive, Slicer compatible module that allows users to confidently interpret deformation fields in medical imaging tasks.

AI usage disclosure

Generative AI tools (Claude Sonnet 4.6) were used in the development of this software, specifically for debugging purposes. Authors have reviewed and validated all AI-assisted code output and made all core design decisions. AI was not used for writing this manuscript, or the preparation of supporting materials.

References

- 3D Slicer Community. (2026). *Transforms — 3D Slicer documentation*. https://slicer.readthedocs.io/en/latest/user_guide/modules/transforms.html.
- Abhari, K., Baxter, J. S. H., Chen, E. C. S., Khan, A. R., Peters, T. M., De Ribaupierre, S., & Eagleson, R. (2014). Training for planning tumour resection: Augmented reality

- 152 and human factors. *IEEE Transactions on Biomedical Engineering*, 62(6), 1466–1477.
153 <https://doi.org/10.1109/TBME.2014.2385874>
- 154 Bangor, A., Kortum, P. T., & Miller, J. T. (2009). Determining what individual SUS
155 scores mean: Adding an adjective rating scale. *Journal of Usability Studies*, 4, 114–123.
156 <https://api.semanticscholar.org/CorpusID:7812093>
- 157 Brock, K. K., Mutic, S., McNutt, T. R., Li, H., & Kessler, M. L. (2017). Use of image
158 registration and fusion algorithms and techniques in radiotherapy: Report of the AAPM
159 radiation therapy committee task group no. 132. *Medical Physics*, 44(7), e43–e76. <https://doi.org/10.1002/mp.12256>
- 161 Chung, M. K., Worsley, K. J., Paus, T., Cherif, C., Collins, D. L., Giedd, J. N., & Evans, A. C.
162 (2001). A unified statistical approach to deformation-based morphometry. *NeuroImage*,
163 14(3), 595–606. <https://doi.org/10.1006/nimg.2001.0862>
- 164 Cramer, F., & Hason, S. (2024). Navigating color integrity in data visualization. *Patterns*,
165 5(5), 100972. <https://doi.org/10.1016/j.patter.2024.100972>
- 166 Donszelmann-Lund, E. (2026). *US-CT_Registration*. https://github.com/elised11/US-CT_Registration
- 168 Donszelmann-Lund, E., Frolick, I., Choksi, T., Léger, É., Christin, R., Siddiqi, K., & Collins, D.
169 L. (2026). *DeformView: Quantitative visualization of non-linear deformation fields for use*
170 *in image-guided neurosurgery*. Peer-reviewed poster presented at the Imaging Network of
171 Ontario (ImNO) 2026 Symposium, Image-Guided Intervention and Surgery category.
- 172 Fedorov, A., Beichel, R., Kalpathy-Cramer, J., Finet, J., Fillion-Robin, J.-C., Pujol, S.,
173 Bauer, C., Jennings, D., Fennessy, F. M., Sonka, M., Buatti, J., Aylward, S. R., Miller,
174 J. V., Pieper, S., & Kikinis, R. (2012). 3D Slicer as an image computing platform
175 for the quantitative imaging network. *Magnetic Resonance Imaging*, 30(9), 1323–1341.
176 <https://doi.org/10.1016/j.mri.2012.05.001>
- 177 Ferrante, E., & Paragios, N. (2017). Slice-to-volume medical image registration: A survey.
178 *Medical Image Analysis*, 39, 101–123. <https://doi.org/10.1016/j.media.2017.04.010>
- 179 Juvekar, P., Dorent, R., Kögl, F., Torio, E., Barr, C., Rigolo, L., & Kapur, T. (2024).
180 ReMIND: The brain resection multimodal imaging database. *Scientific Data*, 11(1), 494.
181 <https://doi.org/10.1038/s41597-024-03229-3>
- 182 Kapur, T., Pieper, S., Fedorov, A., Fillion-Robin, J.-C., Halle, M., O'Donnell, L., Lasso, A.,
183 Ungi, T., Pinter, C., Finet, J., Pujol, S., Jagadeesan, J., Tokuda, J., Norton, I., Estepar,
184 R. S. J., Gering, D., Aerts, H. J. W. L., Jakab, M., Hata, N., ... Kikinis, R. (2016).
185 Increasing the impact of medical image computing using community-based open-access
186 hackathons: The NA-MIC and 3D Slicer experience. *Medical Image Analysis*, 33, 176–180.
187 <https://doi.org/10.1016/j.media.2016.06.035>
- 188 King, F., Lasso, A., & Pinter, C. (2015). *TransformVisualizer (documentation/nightly/modules)*.
189 3D Slicer Wiki. <https://www.slicer.org/wiki/Documentation/Nightly/Modules/TransformVisualizer>
- 191 NA-MIC. (2025). *43rd NA-MIC project week*. https://github.com/NA-MIC/ProjectWeek/tree/master/PW43_2025_Montreal.
- 193 NA-MIC. (2026). *44th NA-MIC project week*. https://github.com/NA-MIC/ProjectWeek/tree/master/PW44_2026_GranCanaria.
- 195 Sotiras, A., Davatzikos, C., & Paragios, N. (2013). Deformable medical image registration:
196 A survey. *IEEE Transactions on Medical Imaging*, 32(7), 1153–1190. <https://doi.org/10.1109/TMI.2013.2265603>
- 197
- 198 Vlachogianni, P., & Tselios, N. (2022). Perceived usability evaluation of educational technology

199 using the system usability scale (SUS): A systematic review. *Journal of Research on*
200 *Technology in Education*, 54(3), 392–409. [https://doi.org/10.1080/15391523.2020.](https://doi.org/10.1080/15391523.2020.1832064)
201 [1832064](https://doi.org/10.1080/15391523.2020.1832064)

DRAFT