

RGraphSpace: Rendering graphs as coherent spatial objects in ggplot2

Flávio Gabriel Carazza-Kessler^{1*}, Jonathan André Back^{1*}, Lana Bazan Peters Querne^{1*}, Victor Henrique Apolonio dos Santos¹, and Mauro Antônio Alves Castro¹

¹ Bioinformatics and Systems Biology Laboratory, Federal University of Paraná, Curitiba, PR, 81520-260, Brazil  Corresponding author * These authors contributed equally.

DOI: 10.xxxxxx/draft

Software

- [Review](#) 
- [Repository](#) 
- [Archive](#) 

Editor: [Nikoleta Glynatsi](#) 

Reviewers:

- [@schochastics](#)
- [@christopherkenny](#)

Submitted: 01 August 2026

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

Summary

A graph describes a network structure of nodes connected by edges, and is used across many areas of science to represent relationships between entities. When the relationships themselves are spatial, node positions carry physical meaning, and the graph must be further represented within an external frame of reference. In R, *igraph* (Csardi & Nepusz, 2006) provides powerful tools for network analysis, and the *ggplot2* ecosystem (Wickham, 2016) for visualization, drawing nodes and edges as separate layers. Integrating the two remains challenging, however, because the geometry of these layers is not fully coordinated at rendering time, a consequence of *ggplot2*'s input model, in which each plot layer consumes a single rectangular table and is resolved independently. This design works remarkably well for most applications but is restrictive for graph structures with mutually dependent components. Because layers do not share transformed states, the graph is not rendered as a single coherent object. Here we introduce *RGraphSpace*, a streamlined interface that integrates *igraph* with *ggplot2* graphics within a normalized coordinate space. It synchronizes node and edge layers, jointly resolving their geometry under standard aesthetic mappings. This coherence lets the graph be anchored to external reference frames, where it becomes a spatial object embedded in a wider context.

Statement of need

Graph handling in R rests on two mature foundations: *igraph* (Csardi & Nepusz, 2006) for network analysis and *ggplot2* (Wickham, 2016) for layered visualization. The *ggraph* package (Pedersen, 2025a) bridges these, exposing relational data to the grammar of graphics. Graph data manipulation has similarly matured through *tidygraph* (Pedersen, 2025b), which represents graphs as tidy node and edge tables.

Yet rendering a graph as a spatial object requires coordination across its components. Because *ggplot2* resolves each layer independently, node and edge layers are not fully synchronized. Positional coordinates are shared, but other aesthetics are resolved per layer, so edges have no access to the rendered sizes of the nodes.

RGraphSpace addresses this by mapping an *igraph* object into a normalized coordinate space in which nodes, edges, and their associated elements are resolved together. With node and edge geometries synchronized at rendering time, edges are drawn with respect to the final extent of the nodes they connect, and this correspondence is maintained even when node attributes are rescaled through the *ggplot2* grammar.

This normalized space serves a second purpose, placing the graph within a broader spatial context, aligned to external reference frames such as microscopy images. Graph-image alignment

requires consistent coordinate conventions; a mismatch in axis orientation, for example a top-left versus bottom-left origin, leaves the nodes reflected relative to the image (Figure 1A). Moreover, because each pixel cell occupies a finite square area, a half-pixel offset is needed to prevent node positions from drifting toward the borders (Figure 1B). This discrepancy may seem negligible but can matter when nodes represent measurements anchored to specific spatial features. Reconciling these conventions lets the graph be rendered as a coherent spatial object rather than an isolated diagram.

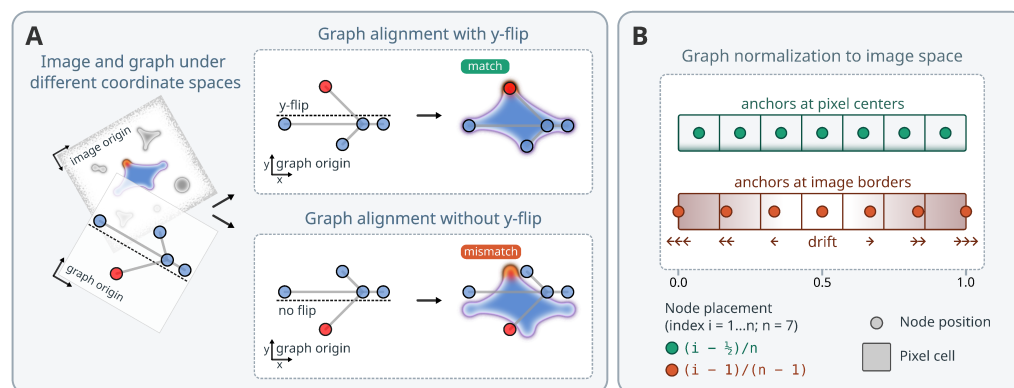


Figure 1: Spatial alignment. (A) Aligning a toy graph to a background image. Left: node coordinates are assumed to be pixel indices of the reference image, but rendering both in *ggplot2* requires a shared, normalized coordinate space. Top right: with y-flip, the two are rendered in correspondence. Bottom right: without it, the graph is reflected relative to the image. The red node breaks symmetry and highlights orientation. (B) Two normalization schemes, where i denotes a pixel or node index along the axis. Top: *anchors at pixel centers* use $(i - \frac{1}{2})/n$, introducing a half-pixel offset. Bottom: *anchors at image borders* use $(i - 1)/(n - 1)$, mapping positions across the full normalized interval $[0, 1]$. The two coincide mid-axis but drift apart toward the ends. *RGraphSpace* applies the y-flip and pixel-center anchoring by default.

State of the field

The Grammar of Graphics (Wilkinson, 2005) constructs statistical graphics by decomposing a plot into independent, composable elements: data, aesthetic mappings, geometric objects, scales, coordinate systems, and statistical transformations. A plot is then built declaratively by combining these components. In R, the *ggplot2* package implements a layered form of this grammar (Wickham, 2010), assembling plots by adding successive layers to a shared coordinate system, and has become the dominant visualization framework in the R ecosystem.

Central to this design is how *ggplot2* consumes data: each layer is bound to a single rectangular table and resolved independently, applying its own transformations, scales, and position adjustments before being drawn (Wickham, 2016). This independence is a deliberate strength, since layers can be freely combined, reordered, and reused, and it pairs naturally with the tidy data convention (Wickham, 2014), in which each variable is a column and each observation a row.

This design has allowed *ggplot2* to accommodate data structures beyond simple flat tables. The *sf* package (Pebesma, 2018), for example, represents spatial vector data as list-columns and integrates with *ggplot2* through a dedicated *geom_sf* layer, extending the grammar to handle spatial geometry while preserving its declarative interface. Graph data has received similar attention. The *ggraph* package (Pedersen, 2025a) extends *ggplot2* with an extensive family of node and edge geometries, bringing graph layouts into the grammar, while other tools such as *ggnetwork* (Briatte, 2026) and *GGally* (Schloerke et al., 2025) provide comparable functionality for plotting network data. These packages establish that the node and edge tables

of a graph can be expressed through aesthetic mappings and rendered as separate *ggplot2* layers. They do not, however, synchronize node and edge geometry during rendering.

Alongside these visualization tools, a parallel line of work has focused on making complex data structures accessible to the tidyverse (Wickham et al., 2019), a collection of R packages sharing a common design for data manipulation. The *tidygraph* package (Pedersen, 2025b) represents a graph as a pair of tidy node and edge tables, allowing graph manipulation through familiar tidyverse verbs while preserving its relational structure. This tidy philosophy extends to multi-component containers common in computational biology (Hutchison et al., 2024), including *Seurat* (Hao et al., 2024) and *SpatialExperiment* (Righelli et al., 2022), which bundle components such as assays, metadata, reductions, spatial coordinates, and graphs within a single object. *RGraphSpace* builds on this well-supported foundation, integrating with *tidygraph* to contribute the rendering step.

Research impact statement

RGraphSpace provides the spatial foundation for the *PathwaySpace* package (Sysbiolab Team, 2026), which projects network signals onto a normalized coordinate space, transforming discrete vertex signals into continuous surfaces over the graph topology. This integration has supported published analyses in systems biology (Ellrott et al., 2025; Tercan et al., 2025), demonstrating *RGraphSpace*'s utility for downstream spatial analysis tools.

Software design

RGraphSpace is built around the *GraphSpace* S4 class, which encapsulates a graph together with the components required for coherent rendering: node and edge tables, feature data, source and render-ready images, and metadata (Figure 2A). Object validity enforces a shared node identity across the graph vertices, node table, and feature rows. Rather than embedding node-associated features as node attributes, *GraphSpace* stores them in `@fdata`, a sparse-matrix slot aligned to nodes but independent of the node table. When a feature is mapped to an aesthetic, only the requested feature is retrieved for plotting, so graphs carrying thousands of features are never expanded into dense node tables.

Graphs can be supplied as either *igraph* or *tidygraph* objects through a common interface (Figure 2B). *RGraphSpace* also works with *ggraph*, accepting its layouts as input and providing geometries that can be used within *ggraph* plots. Coercion methods extend this interface to selected multi-component containers, loading their node-associated features into the `@fdata` slot.

The `normalizeGraphSpace()` function scales node coordinates into a unit square aligned to a reference frame. By default, this frame is the graph's own extent, centered within the square; when a background image is available, the image space is used instead. In this case, node coordinates are assumed to be pixel indices of the image matrix. The orientation and pixel-anchoring corrections are depicted in Figure 1. The `normalizeGraphSpace()` function also exposes arguments for graph-image alignment operations, demonstrated in the online tutorials.

A *GraphSpace* supplied to `ggplot()` produces a subclassed plot that verifies, through a shared `@uuid`, that the node and edge layers originate from the same graph before coordinating them. *RGraphSpace* then intercepts the build pipeline after the node layer has been fully processed, and the resulting rendered sizes are passed to the edge layer, allowing edge construction to use the final node representation. This synchronization is available through three geometries: `geom_nodesspace()`, `geom_edgespace()`, and the convenience wrapper `geom_graphspace()`.

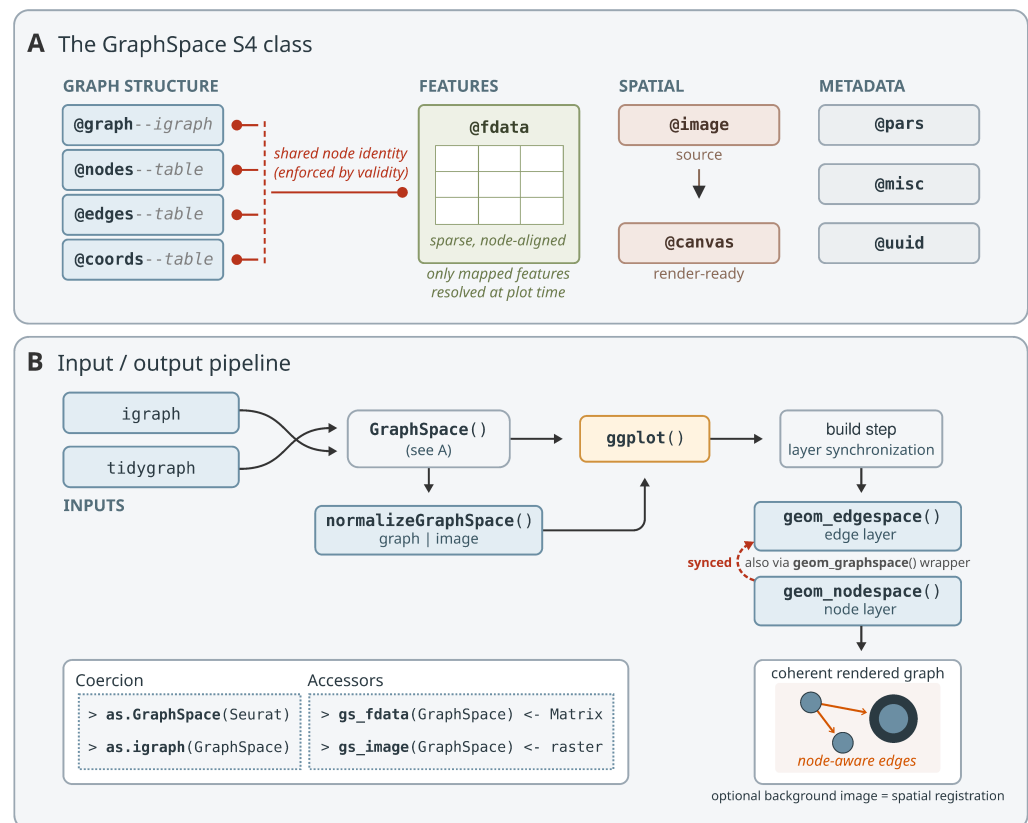


Figure 2: Architecture of *RGraphSpace*. (A) The *GraphSpace* S4 class stores a graph, its node and edge tables, feature data, source and render-ready images, and metadata. Node identity is enforced by `setValidity`, and `@coords` preserves the original coordinates for non-destructive transformations. (B) Graph inputs (`igraph` or `tidygraph`) are used to construct a *GraphSpace*; selected non-graph objects are handled through coercion and accessors (inset). Coordinates are normalized to a unit square, centered on the graph extent or aligned to a background image. At the *ggplot2* build step, the node and edge layers are synchronized and rendered over an optional background image.

Availability and documentation

RGraphSpace is available from CRAN (<https://cran.r-project.org/package=RGraphSpace>), and the development version is hosted on GitHub (<https://github.com/sysbiolab/RGraphSpace>). The documentation site (<https://sysbiolab.github.io/RGraphSpace>) provides comprehensive tutorials covering the full workflow. Figure 3 illustrates three examples from these tutorials: constructing a graph from an *igraph* object (A), rendering the graph as a spatial object over a background image (B), and applying *RGraphSpace* to spatial feature data (C).

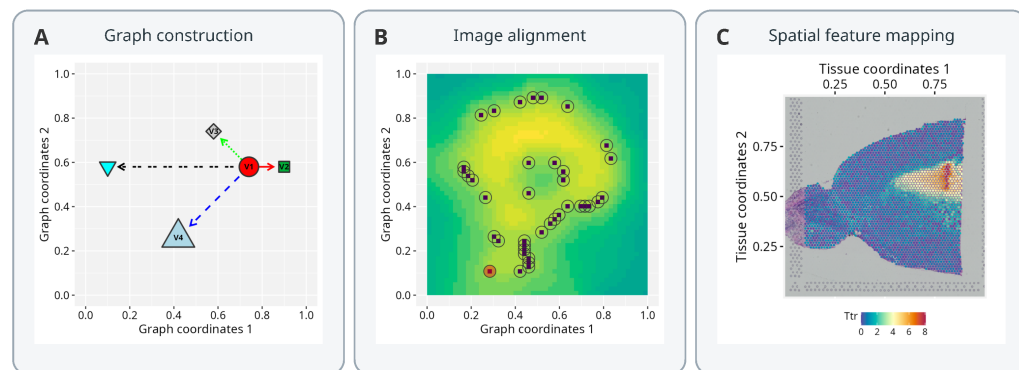


Figure 3: Selected tutorials available at <https://sysbiolab.github.io/RGraphSpace>. (A) Graph construction: a graph rendered from an *igraph* object using *RGraphSpace* geometries. (B) Image alignment: a graph rendered as a spatial object over a background image. (C) Spatial feature mapping: graph and feature data rendered together, illustrated with spatial transcriptomics data.

AI usage disclosure

During the preparation of this work, the authors used ChatGPT (OpenAI) and Claude (Anthropic) to improve text readability and assist with code audit and review. The authors carefully reviewed and edited the content as needed after using these tools and assume full responsibility for the published content.

Acknowledgements

This work was funded by CNPq (440412/2022-6 and 307144/2025-9), CAPES (Finance Code 001), and Fundação Araucária (NAPI Bioinformática).

References

- Briatte, F. (2026). *ggnetwork: Geometries to plot networks with 'ggplot2'*. <https://doi.org/10.32614/CRAN.package.ggnetwork>
- Csardi, G., & Nepusz, T. (2006). The igraph software package for complex network research. *InterJournal, Complex Systems*, 1695. <https://igraph.org/>
- Ellrott, K., Wong, C. K., Yau, C., Castro, M. A. A., & others. (2025). Classification of non-TCGA cancer samples to TCGA molecular subtypes using compact feature sets. *Cancer Cell*, 43(2), 195–212.e11. <https://doi.org/10.1016/j.ccell.2024.12.002>
- Hao, Y., Stuart, T., Kowalski, M. H., Choudhary, S., Hoffman, P., Hartman, A., Srivastava, A., Molla, G., Madad, S., Fernandez-Granda, C., & Satija, R. (2024). Dictionary learning for integrative, multimodal and scalable single-cell analysis. *Nature Biotechnology*, 42(2), 293–304. <https://doi.org/10.1038/s41587-023-01767-y>
- Hutchison, W. J., Keyes, T. J., & The tidyomics Consortium. (2024). The tidyomics ecosystem: Enhancing omic data analyses. *Nature Methods*, 21, 1166–1170. <https://doi.org/10.1038/s41592-024-02299-2>
- Pebesma, E. (2018). Simple features for R: Standardized support for spatial vector data. *The R Journal*, 10(1), 439–446. <https://doi.org/10.32614/RJ-2018-009>
- Pedersen, T. L. (2025a). *ggraph: An implementation of grammar of graphics for graphs and networks*. <https://doi.org/10.32614/CRAN.package.ggraph>

- 148 Pedersen, T. L. (2025b). *tidygraph: A tidy API for graph manipulation*. <https://doi.org/10.32614/CRAN.package.tidygraph>
- 149
- 150 Righelli, D., Weber, L. M., Crowell, H. L., Pardo, B., Collado-Torres, L., Ghazanfar, S.,
151 Lun, A. T. L., Hicks, S. C., & Risso, D. (2022). SpatialExperiment: Infrastructure for
152 spatially-resolved transcriptomics data in r using bioconductor. *Bioinformatics*, 38(11),
153 3128–3131. <https://doi.org/10.1093/bioinformatics/btac299>
- 154 Schloerke, B., Cook, D., Larmarange, J., Briatte, F., Marbach, M., Thoen, E., Elberg, A.,
155 & Crowley, J. (2025). *GGally: Extension to 'ggplot2'*. <https://doi.org/10.32614/CRAN.package.GGally>
- 156
- 157 Sysbiolab Team. (2026). *PathwaySpace: Spatial projection of network signals along geodesic*
158 *paths*. <https://doi.org/10.32614/CRAN.package.PathwaySpace>
- 159 Tercan, B., Apolonio, V. H., Chagas, V. S., Wong, C. K., & others. (2025). Protocol
160 for assessing distances in pathway space for classifier feature sets from machine learning
161 methods. *STAR Protocols*, 6(2), 103681. <https://doi.org/10.1016/j.xpro.2025.103681>
- 162 Wickham, H. (2010). A layered grammar of graphics. *Journal of Computational and Graphical*
163 *Statistics*, 19(1), 3–28. <https://doi.org/10.1198/jcgs.2009.07098>
- 164 Wickham, H. (2014). Tidy data. *Journal of Statistical Software*, 59(10), 1–23. <https://doi.org/10.18637/jss.v059.i10>
- 165
- 166 Wickham, H. (2016). *ggplot2: Elegant graphics for data analysis*. Springer-Verlag New York.
167 <https://doi.org/10.1007/978-3-319-24277-4>
- 168 Wickham, H., Averick, M., Bryan, J., Chang, W., McGowan, L. D., François, R., Golemund,
169 G., Hayes, A., Henry, L., Hester, J., Kuhn, M., Pedersen, T. L., Miller, E., Bache, S. M.,
170 Müller, K., Ooms, J., Robinson, D., Seidel, D. P., Spinu, V., ... Yutani, H. (2019). Welcome
171 to the tidyverse. *Journal of Open Source Software*, 4(43), 1686. <https://doi.org/10.21105/joss.01686>
- 172
- 173 Wilkinson, L. (2005). *The grammar of graphics* (2nd ed.). Springer-Verlag. <https://doi.org/10.1007/0-387-28695-0>
- 174