

segregation: Segregation Analysis, Inference, and Decomposition in Python

Renan X. Cortes^{1*}, Elijah Knaap^{2*}, and Sergio J. Rey^{3*}

¹ Federal University of Rio Grande do Sul ² University of California, Irvine ³ San Diego State University
* These authors contributed equally.

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#) ↗
- [Repository](#) ↗
- [Archive](#) ↗

Editor: [Henrik Finsberg](#) ↗ 

Reviewers:

- [@mandarc64](#)
- [@Sidrcs](#)

Submitted: 29 June 2026

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

Summary

segregation is an open-source Python library for measuring, analyzing, inferring, and decomposing social and spatial segregation. Developed within the PySAL ecosystem, it provides a comprehensive framework for quantifying segregation across demographic, socioeconomic, and geographic contexts using both aspatial and spatially explicit measures. The package implements over 40 single-group, multigroup, local, and spatial segregation indices, capturing dimensions such as evenness, exposure, concentration, clustering, centralization, and spatial proximity. It supports multiple spatial representations, including adjacency, distance-based, and network-based relationships.

Beyond computing single index values (point estimation), segregation provides Monte Carlo inference for single-value and comparative hypothesis testing under alternative null models, as well as decomposition methods that separate differences in segregation into demographic composition and spatial structure. Built for Pandas and GeoPandas, segregation integrates seamlessly with the PySAL ecosystem ([S. J. Rey et al., 2022](#); [S. J. Rey & Anselin, 2007](#)), providing transparent, reproducible, and extensible tools for segregation research and spatial data science.

Statement of need

Residential segregation is a central topic in urban studies, sociology, demography, geography, and public policy. Although demographic and spatial data are increasingly available, existing software often provides a limited set of segregation measures, relies on proprietary platforms, or lacks support for modern inference and decomposition methods. Within Python, segregation analysis has historically depended on custom implementations despite the widespread adoption of Pandas and GeoPandas.

segregation addresses these limitations by providing:

- A comprehensive, well-documented API for segregation analysis
- Native integration with Pandas, GeoPandas, and the PySAL ecosystem
- 27 single-group, 11 multigroup, and 7 local segregation indices (aspatial and spatial) at present, with new measures still being added
- Multiscalar segregation profiles
- Simulation-based inference for hypothesis testing
- Decomposition of segregation into demographic and spatial components
- Transparent, reproducible, and extensible implementations

These capabilities establish segregation as a unified, open-source framework for reproducible segregation analysis in Python.

State of the field

segregation is part of the PySAL ecosystem, where it provides tools for residential segregation analysis within the **Explore** family of spatial analysis libraries. Unlike desktop GIS software, it supports reproducible, scriptable workflows that integrate naturally with broader Python data science pipelines.

The most closely related tools are the R packages *OasisR* (Tivadar, 2019), *seg* (Hong, 2011), and *segregation* (Elbers, 2021). *OasisR* provides a broad catalog of aspatial and spatial evenness indices with simulation-based inference; *seg* targets spatial evenness and exposure measures; and the R *segregation* package focuses on the entropy family (the Mutual Information index and Theil's H) with within/between and temporal decomposition and Bayesian bias correction. PySAL's *segregation* is distinguished less by any single index than by combining, in one class-based API, index families that these packages cover separately. These include single-group, multigroup, local, and explicitly spatial measures of evenness, exposure, concentration, clustering, and centralization, together with Monte Carlo inference under several null models, Shapley decomposition of differences into demographic and spatial components, multiscalar profiles, and batch computation. It builds on the open-source Scientific Python and PySAL ecosystems, with no proprietary or desktop-GIS requirements. A native Python implementation, rather than a wrapper around the R packages, keeps these workflows within the PySAL ecosystem and lets them share a common index interface. The package has been under continuous development within PySAL since 2018 (Cortes et al., 2020).

Software design

segregation is organized into subpackages by analysis task (singlegroup, multigroup, local, inference, decomposition, batch, network, and dynamics¹), so that the large collection of indices stays navigable and users import only what they need. Each index is implemented as a Python class rather than a bare function: fitting a class stores the input data, parameters, and result on one object, which inference and decomposition then consume directly. This estimator-style pattern follows a convention familiar from *scikit-learn* and avoids threading many arguments through a functional API. The design also distinguishes two kinds of indices. *Spatially-explicit* indices include space in their formula. *Spatially-implicit* indices instead accept spatial weights or a network and transform the data before estimation, following Sean F. Reardon & O'Sullivan (2004); one class therefore serves both aspatial and spatial use, at the cost of expressing spatial behavior through parameters rather than through distinct types.

Figure 1 summarizes the resulting data flow: a pandas or geopandas object is passed to an index class, which returns a fitted object holding the data, parameters, and statistic; inference and decomposition consume that fitted object directly. *batch*, which covers both single-group and multigroup measures, instead takes the raw pandas/geopandas object directly, while the multiscalar-profile tool additionally takes an explicit index-class argument.

¹Cortes et al. (2020) introduced *segregation* but many new implementations were developed recently and the API underwent a major revision.

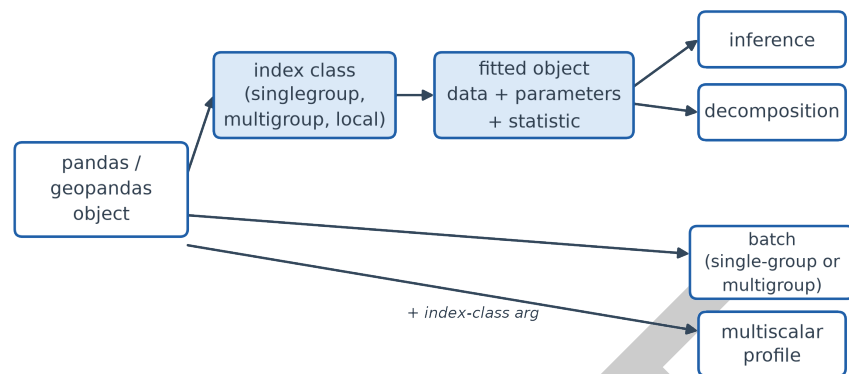


Figure 1: Data flow through the segregation API. A pandas or geopandas object is passed to an index class, which returns a fitted object holding the data, parameters, and computed statistic; inference and decomposition consume that fitted object, while batch (single-group or multigroup) and multiscalar-profile tools take the raw data directly, the latter also requiring an explicit index-class argument.

77 Additionally, segregation is developed with testing and documentation standards consistent
78 with the Scientific Python ecosystem, ensuring reliability and maintainability.

79 Core Functionality

80 segregation organizes its functionality around the type of segregation analysis the user is
81 interested in, and each subpackage is explained as follows.

82 Single and Multigroup Indices

83 Single-group measures assess segregation between two different groups in a given location (i.e.,
84 one group vs. everyone else). Multigroup segregation evaluates the simultaneous separation of
85 all groups in a population (e.g., the distribution of White, Black, Asian, and Hispanic residents)
86 across areas.

87 Currently, segregation provides 27 single-group and 11 multigroup indices, which together
88 are, to our knowledge, among the most extensive selections in any segregation software, and
89 the batch subpackage can fit many of them at once.

90 Local Indices

91 Unlike global indices that summarize an entire metropolitan area into a single value, local indices
92 decompose segregation to the individual geographic unit level. Using these disaggregated
93 measures helps identify precise spatial clusters where social isolation is most acute, uncovering
94 micro-level dynamics that global metrics often mask. Currently, segregation has seven local
95 indices.

96 Multiscalar

97 The multiscalar profile (Sean F. Reardon et al., 2008) is a tool for measuring spatial segregation
98 dynamics—the way that a segregation index changes values as the concept of a neighborhood
99 changes, and what that tells us about macro versus micro patterns of segregation. The core
100 idea is to calculate a segregation statistic, then expand the spatial scope of a neighborhood,
101 recalculate the statistic, and repeat. The set of distance thresholds chosen sets the range of
102 scales the profile can reveal, so it should reflect the neighborhood definitions relevant to the
103 research question.

104 The wrapper `compute_multiscalar_profile` builds these profiles.

105 Simulation-based Inference

106 PySAL's segregation module provides Monte Carlo inference for evaluating the statistical
107 significance of segregation indices under different null hypotheses. For single-value
108 inference, it supports resampling approaches such as bootstrap, systematic, evenness, and
109 geographic_permutation. For comparative inference, it includes methods such as bootstrap
110 and composition, which generate synthetic distributions through counterfactual estimates.
111 Because different null hypotheses test distinct assumptions, their specification is critical
112 and can lead to substantially different conclusions. Likewise, not all segregation indices are
113 appropriate for every null hypothesis, particularly in comparative analyses, making careful
114 selection of both the index and inference procedure essential.

115 Decomposition

116 The PySAL segregation module implements a decomposition framework for comparative
117 segregation analysis that partitions differences in segregation into population composition and
118 spatial structure. Building on S. Rey et al. (2021), it combines spatially explicit counterfactual
119 distributions with Shapley value decomposition to quantify each component's contribution to
120 differences in segregation across cities, time periods, and spatiotemporal contexts. Applicable
121 to multiple segregation indices, the framework provides a richer interpretation than direct
122 index comparisons by identifying whether observed differences primarily reflect demographic
123 composition or neighborhood spatial organization. As in inference, the counterfactual approach
124 chosen encodes an assumption about what is held fixed when the two contexts are compared,
125 and different choices can shift the attribution between the demographic and spatial components.
126 This functionality is available through the DecomposeSegregation class in the decomposition
127 subpackage.

128 Example workflow

129 Assuming a pandas or geopandas DataFrame named data_1, a segregation index can be
130 computed as:

```
131 from segregation.singlegroup import Dissim
132
133 seg_index = Dissim(
134     data_1,
135     group_pop_var="group_A",
136     total_pop_var="total_population",
137 )
```

131 The estimated value is available through the statistic attribute. Statistical significance can
132 be evaluated using Monte Carlo inference:

```
133 from segregation.inference import SingleValueTest
134
135 result = SingleValueTest(seg_index, null_approach="bootstrap")
```

133 The package also provides wrappers for computing all single-group indices (batch_compute_singlegroup),
134 generating multiscalar profiles (compute_multiscalar_profile), comparing segregation
135 measures (TwoValueTest), and decomposing differences into demographic and spatial
136 components (DecomposeSegregation).

137 Research impact statement

138 segregation is actively used in research on urban inequality, spatial demography, and education
139 policy. Applications include comparative analyses of racial segregation (Cortes et al., 2020),
140 measurement of spatial information theory indices across U.S. metropolitan areas (Knaap &

141 [Rey, 2024](#)), studies of school-neighborhood segregation ([S. J. Rey et al., 2024](#)), optimization
142 approaches for reducing school segregation ([Wei et al., 2022](#)), comparative segregation analytics
143 ([S. Rey et al., 2021](#)), and analyses of historical redlining legacies ([S. Rey & Knaap, 2022](#)).

144 The package is also used in spatial data science education, including textbooks ([Knaap, 2026](#))
145 and instructional materials presented at conferences such as SciPy.²

146 AI usage disclosure

147 No generative AI or LLMs were used for code development in segregation. They were used
148 for grammar, spelling, and consistency edits during preparation of this paper.

149 Acknowledgements

150 segregation is developed as part of the PySAL community, which brings together researchers
151 and developers working on spatial analysis methods and software. The project builds on decades
152 of research in segregation, urban, and spatial data science, and benefits from contributions
153 across the open-source geospatial community.

154 Funding from National Science Foundation Grants [2345820](#) and [1831615](#) have supported
155 segregation development.

156 The following acknowledgement applies to Renan X. Cortes:

157 Coordenação de Aperfeiçoamento de Pessoal de Nível Superior (CAPES) through
158 process 88881.170553/2018-01 have supported segregation development.

159 References

- 160 Cortes, R. X., Rey, S., Knaap, E., & Wolf, L. J. (2020). An open-source framework for
161 non-spatial and spatial segregation measures: The PySAL segregation module. *Journal of*
162 *Computational Social Science*, 3(1), 135–166. [https://doi.org/10.1007/s42001-019-00059-](https://doi.org/10.1007/s42001-019-00059-3)
163 [3](https://doi.org/10.1007/s42001-019-00059-3)
- 164 Elbers, B. (2021). A method for studying differences in segregation across time and
165 space. *Sociological Methods & Research*, 52(1), 5–42. [https://doi.org/10.1177/](https://doi.org/10.1177/0049124121986204)
166 [0049124121986204](https://doi.org/10.1177/0049124121986204)
- 167 Hong, S.-Y. (2011). *Seg: Measuring spatial segregation*. [https://cran.r-project.org/web/](https://cran.r-project.org/web/packages/seg/packages/seg)
168 [packages/seg](https://cran.r-project.org/web/packages/seg/packages/seg)
- 169 Knaap, E. (2026). *Urban analysis & spatial science*. https://knaaptime.com/urban_analysis
- 170 Knaap, E., & Rey, S. J. (2024). Segregated by design? Street network topological structure
171 and the measurement of urban segregation. *Environment and Planning B: Urban Analytics*
172 *and City Science*, 51(7), 1408–1429. <https://doi.org/10.1177/23998083231197956>
- 173 Reardon, Sean F., Matthews, S. A., O'Sullivan, D., Lee, B. A., Firebaugh, G., Farrell, C. R., &
174 Bischoff, K. (2008). The geographic scale of metropolitan racial segregation. *Demography*,
175 45(3), 489–514. <https://doi.org/10.1353/dem.0.0019>
- 176 Reardon, Sean F., & O'Sullivan, D. (2004). Measures of spatial segregation. *Sociological*
177 *Methodology*, 34(1), 121–162. <https://doi.org/10.1111/j.0081-1750.2004.00150.x>
- 178 Rey, S. J., & Anselin, L. (2007). PySAL: A Python Library of Spatial Analytical Methods. *The*
179 *Review of Regional Studies*, 37(1), 5–27. <https://doi.org/10.52324/001c.8285>

²<https://www.youtube.com/watch?v=4AHJVMs7iH4>

- 180 Rey, S. J., Anselin, L., Amaral, P., Arribas-Bel, D., Cortes, R. X., Gaboardi, J. D., Kang, W.,
181 Knaap, E., Li, Z., Lumnitz, S., Oshan, T. M., Shao, H., & Wolf, L. J. (2022). The **PySAL**
182 Ecosystem: Philosophy and Implementation. *Geographical Analysis*, 54(3), 467–487.
183 <https://doi.org/10.1111/gean.12276>
- 184 Rey, S. J., Knaap, E., Wei, R., & Skrah, D. (2024). Measuring Spatial Congruence in the School-
185 Neighborhood Nexus. *Applied Spatial Analysis and Policy*. [https://doi.org/10.1007/s12061-](https://doi.org/10.1007/s12061-024-09603-9)
186 [024-09603-9](https://doi.org/10.1007/s12061-024-09603-9)
- 187 Rey, S., Cortes, R., & Knaap, E. (2021). Comparative spatial segregation analytics. *Spatial*
188 *Demography*, 9, 1–26. <https://doi.org/10.1007/s40980-021-00075-w>
- 189 Rey, S., & Knaap, E. (2022). The Legacy of Redlining: A Spatial Dynamics Perspective.
190 *International Regional Science Review*, 0(0). <https://doi.org/10.1177/01600176221116566>
- 191 Tivadar, M. (2019). OasisR: An R package to bring some order to the world of segregation
192 measurement. *Journal of Statistical Software*, 89(1), 1–39. [https://doi.org/10.18637/jss.](https://doi.org/10.18637/jss.v089.i07)
193 [v089.i07](https://doi.org/10.18637/jss.v089.i07)
- 194 Wei, R., Feng, X., Rey, S., & Knaap, E. (2022). Reducing Racial Segregation of Public School
195 Districts. *Socio-Economic Planning Sciences*, 101415. [https://doi.org/10.1016/j.seps.](https://doi.org/10.1016/j.seps.2022.101415)
196 [2022.101415](https://doi.org/10.1016/j.seps.2022.101415)