The Journal of Open Source Software

GroLink: A general application programming interface for the plant-modeling platform GroIMP

Tim Oberländer [1*], **Gaëtan Heidsieck** [1*], **Thomas Hay**[1], **and Winfried Kurth**[1]

1 Georg-August-Universität Göttingen, Lower Saxony, Germany * These authors contributed equally.

DOI: 10.xxxxxx/draft

Software

- Review
- Repository
- Archive

Editor: Rachel Wegener

Reviewers:

- @egonw
- @gaurav

Submitted: 20 February 2025
Published: unpublished

License
Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License (CC BY 4.0).

DRAFT

Summary

The plant modeling platform GroIMP (Kniemeyer, 2008), is broadly used by students and researchers. Its integrated design, keeping modeling, simulation, and analysis in the same graphical user interface, makes installation, learning, and modeling easy. However, as data size and computing power increased, so did the complexity of models, driving the need for integration into external tools and remote execution. The GroLink project (Oberländer, 2023) created a general HTTP API with additional client libraries to answer this need. Using this approach, it is possible to run and interact with GroIMP models from other software or devices using an extendable set of generalized commands.

Statement of need

GroIMP projects as well as the platform itself and the general usage of computers have evolved since the first release 20 years ago. In some cases, the focus shifted towards creating bigger pipelines, or, due to size and complexity, more performant executions were needed. From our experience with users and projects, we derived four main directions in automatization and integration to focus on.

3D model provider

Creating 3D models as (intermediate) results of simulations is a key feature of GroIMP. Yet direct export to another software is currently only possible after the simulation ended (Lanwert, 2008) or via non-interactive file-based approaches. Enabling other software to **execute simulation steps** of the model and to **export the scene at any time**, would support live integration (as seen on other platforms (Fabrika, 2021)) as well as forwarding structural information (Zhu et al., 2021).

Custom model interfaces

There are cases where simpler or more model-specific interfaces are needed. Yet creating a new interface for a model is currently limited to either an implementation inside the platform (Smoleňová et al., 2012, 2013) or an external interface that restarts a non-interactive simulation in the background after each input (Spehle, 2023). To enable real-time external model interfaces, a **software independent interactive connection** would be required.

GroIMP as a service

The idea of providing a file containing a model and set of instructions to GroIMP from another software was already introduced by the work of Qinqin Long (Long et al., 2018) on the

co-simulation with the plant modeling platform OpenAlea (Pradal et al., 2008). Yet this work focused more on the theory of co-simulation and model transfer, therefore the integration follows a quite strict procedure. A more general integration as a service would need an approach that can work **independent from specific file formats or scenarios**.

Orchestration of multiple simulations

To automatically execute multiple models, users commonly run GroIMP headless for each simulation using external scripts (Streit et al., 2016). However, the headless mode has three main limitations. First, it requires additional manual configuration. Second, every model execution deploys, configures, and starts the platform. Finally, it is non-interactive. Thus it is more complex to adapt the orchestration based on intermediate feedback (having a "user in the loop").

An HTTP server (Kniemeyer, 2008; Lanwert, 2008) was added to GroIMP to resolves the second limitation. However, it is not covering the other two and requires additional technical expertise and implementation.

Therefore, an improved solution needs to allow users to easily execute several simulations on a running instance **in parallel while being able to interact** with them **without additional implementation** on the simulation.

GroLink

GroLink adds a non-blocking HTTP server to GroIMP, which provides a stateless API. The design uses the fact that each project (workbench) runs independently on its thread and that any interaction is done through predefined commands. For each request, the API server pushes the referenced command to the specified workbench for execution.

This design was chosen based on the discussion above:

- Software independence is given by the usage of HTTP
- Id-based addressing of workbenches allows for parallel interactive simulation.
- By using commands, quite general access to GroIMP's functionalities is provided.
- As the interaction mimics the GUI, changes to the model are rarely necessary.

We created additional libraries in Python(GroPy) and R(GroR) to simplify interacting with the server and individual projects.

Installation and usage

GroLink can be installed directly from within GroIMP through the plugin manager. To start the software as an API server the additional command-line argument "`-a API`" is required, as explained in the wiki.

To send requests to the running API server a web browser or a client library can be used, tutorials and install instructions can be found in the wiki.

Examples

We created three different client projects aiming in the directions we considered above. Additionally, two students' projects conducted a parallelized sensitivity analysis, and first tests on a Kubernetes setup were done.

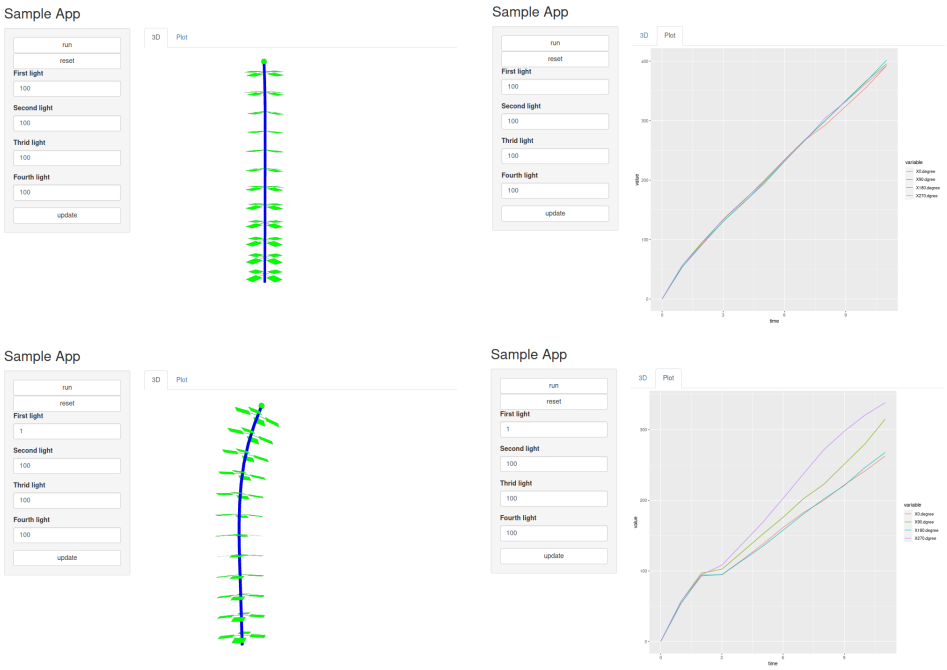

Figure 1: An interactive R-Shiny web interface to visualize a plant and manipulate its environment.

Figure 2: The interactive visualization of a GroIMP forestery scene in the Godot game engine.

1. To demonstrate the usage of import and export, GroPy, and the possibilities for automation, we created a processing pipeline that applies GroIMP's spectral ray tracer on

the imported 3D model and returns a colored model with the colors representing the absorbed radiation for each organ of the simulated plant.

2. For highlighting project-based interaction, data transfer, GroR, and the ability to create custom UIs, we implemented two interactive RShiny web applications: A generalized viewer for models including interaction, and an interface to manipulate the environment of a specific plant model and observe the reactions (Figure 1).

3. Focused on the interaction with the 3D scene through live integration as well as the software independence of an HTTP API, different forest models were linked to a Godot game (Godot, n.d.) where a user can walk through the forest, cut or plant trees, and trigger growth steps which are then simulated in GroIMP (Figure 2).

Discussion

The proposed project shows potential to improve the use of GroIMP in all four of the discussed directions, as shown in the examples. For the first three, the improvements are significant because such usage was almost impossible before. For the orchestration of non-interactive executions, the functional improvements over the original HTTP server are minimal, yet the usability through the client libraries shows improvement.

References

Fabrika, M. (2021). Interactive procedural forest in game engine environment as background for forest modelling. *DVFFA – Sektion Ertragskunde, Beiträge zur Jahrestagung 2021*, 86–95. https://sektionertragskunde.nw-fva.de/2021/06_Fabrika.pdf

Godot. (n.d.). *Godot Engine - Free and open source 2D and 3D game engine — godotengine.org*. https://godotengine.org/

Kniemeyer, O. (2008). *Design and implementation of a graph grammar based language for functional-structural plant modelling* [Doctoralthesis, BTU Cottbus]. https://nbn-resolving.org/urn:nbn:de:kobv:co1-opus-5937

Lanwert, D. (2008). *Funktions-/Strukturorientierte Pflanzenmodellierung in E-Learning-Szenarien.* [Doctoralthesis, University of Göttingen]. https://doi.org/11858/00-1735-0000-0006-B10B-A

Long, Q., Kurth, W., Pradal, C., Migault, V., & Pallas, B. (2018). An architecture for the integration of different functional and structural plant models. *Proceedings of the 7th International Conference on Informatics, Environment, Energy and Applications*, 107–113. https://doi.org/10.1145/3208854.3208875

Oberländer, T. (2023). *GroLink: Implementing and testing a general application programming interface for the plant-modelling platform GroIMP* [Masterthesis, University of Göttingen]. https://wkurth.grogra.de/oberlaender_msc.pdf

Pradal, C., Dufour-Kowalski, S., Boudon, F., Fournier, C., & Godin, C. (2008). OpenAlea: A visual programming and component-based software platform for plant modelling. *Functional Plant Biology*, *35*(10), 751–760. https://doi.org/10.1071/FP08084

Smoleňová, K., Henke, M., & Kurth, W. (2012). Rule-based integration of GreenLab into GroIMP with GUI aided parameter input. *2012 IEEE 4th International Symposium on Plant Growth Modeling, Simulation, Visualization and Applications*, 347–354. https://doi.org/10.1109/PMA.2012.6524856

Smoleňová, K., Henke, M., Ong, Y., & Kurth, W. (2013). Rule-based integration of LIGNUM into GroIMP. *Proceedings of the 7th International Conference on Functional-Structural*

DRAFT

Plant Models, Saariselkä, Finland, Eds.: Risto Sievänen Et Al., 214. https://ojs.silvafennica.fi/index.php/fspm2013/article/view/850

Spehle, B. (2023). Conveying the Effects of Climate Change. In *Book of abstracts of the 10th international conference on functional-structural plant models: FSPM2023, 27- 31 March 2023* (p. 151). https://hi.converia.de/custom/media/FSPM2023/FSPM2_2ss24_BOA_2023_v1.pdf

Streit, K., Henke, M., Bayol, B., Cournède, P.-H., Sievänen, R., & Kurth, W. (2016). Impact of geometrical traits on light interception in conifers: Analysis using an FSPM for Scots pine. *2016 IEEE International Conference on Functional-Structural Plant Growth Modeling, Simulation, Visualization and Applications (FSPMA)*, 194–203. https://doi.org/10.1109/FSPMA.2016.7818307

Zhu, J., Gou, F., Rossouw, G., Begum, F., Henke, M., Johnson, E., Holzapfel, B., Field, S., & Seleznyova, A. (2021). Simulating organ biomass variability and carbohydrate distribution in perennial fruit crops: A comparison between the common assimilate pool and phloem carbohydrate transport models. *In Silico Plants*, *3*(2), diab024. https://doi.org/10.1093/insilicoplants/diab024

DRAFT