

SCEMATK: Single Cell Morphological Profiling in Whole Slide Images

Hugh Warden¹, Jesko Wagner¹, and Ava Khamseh^{1,2}

¹ MRC Human Genetics Unit, Institute of Genetics and Cancer, University of Edinburgh, Edinburgh, UK

² School of Informatics, University of Edinburgh, Edinburgh, UK  Corresponding author

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#) 
- [Repository](#) 
- [Archive](#) 

Editor: 

Submitted: 20 July 2026

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](https://creativecommons.org/licenses/by/4.0/))

Summary

Digital pathology is an important field of study for fast and accurate diagnostic processes as well as for structural analysis of diseased tissue. High resolution pathology images are often shared amongst pathologists and annotated. In recent years, there has been substantial work to apply machine learning to these images for investigative and diagnostic tasks such as disease status prediction. Due to the large size of the images, technical expertise and computational resources are often required to open and analyse these images at scale. SCEMATK (Single Cell Extraction and Morphological Analysis Tool-Kit) provides an efficient way to open and convert digital pathology images into a phenotypic data set of morphological features, rather than image pixel-level input, at single cell resolution, for performing interpretable/explainable machine learning tasks at scale. Furthermore, SCEMATK focuses on the uniform processing of patches, allowing for spatial analysis of the morphology of cells across patches to capture detailed information about local and global tissue structure. All of these processes can be run interactively in a Jupyter notebook, allowing for easy manipulation of images too large to fit into memory, as well as in parallel on High Performance Computing platforms.

Statement of Need

Due to the large size of digital pathology whole slide images (WSIs), substantial computational resources are required to load, process, and analyse these data. Existing open source tools typically do not focus primarily on the morphological profiling of these images at single cell resolution. QuPath provides comprehensive tools for image viewing, cell detection and manual annotation ([Bankhead et al., 2017](#)). QuPath can perform some morphological profiling however more complex analytical workflows require a steep learning curve. Other software focuses on preparing WSIs for image level machine learning using efficient tiling and patch extraction strategies ([Barcellona et al., 2024](#); [Dolezal et al., 2024](#); [Pocock et al., 2022](#); [Pourakpour et al., 2025](#)). Although some of these tools support morphological profiling, the independent processing of tiles, rather than treating the image as a whole, can introduce inconsistencies when calculating spatial morphological statistics. Experiments using SCEMATK show that inclusion of spatial statistics can significantly increase performance in prediction tasks. This makes the consistent application of algorithms across an image vital for these calculations and why SCEMATK was made to focus on this in a performant manner.

SCEMATK addresses this gap by providing a unified, easily extensible interface for whole slide image preprocessing, object segmentation, and morphological profiling, implemented using lazy-loading strategies and applicable to any staining modality including H&E, IHC and multiplex. This design enables efficient analysis on standard personal computers while remaining scalable to high-performance computing environments. In contrast to existing morphological profiling tools, SCEMATK applies image transformations consistently across

the entire slide prior to feature extraction of dozens of interpretable cellular features, allowing computation of spatial statistics that characterise the local distribution of phenotypes within each cell's neighbourhood.

SCEMATK has been applied to a data set of WSI's of hepatocellular carcinoma in an in vivo model. It enabled researchers to extract morphological features and use these to train a machine learning classifier to identify cancerous cells, mutations and time from onset of cancer. The uniform processing of slides made possible the calculation of spatial statistics that greatly increased the accuracy of these predictions. The ability to use morphological profiles, rather than operating on image based machine learning, allowed for more robust interpretable machine learning techniques to be used to identify key changed in morphology driving the prediction

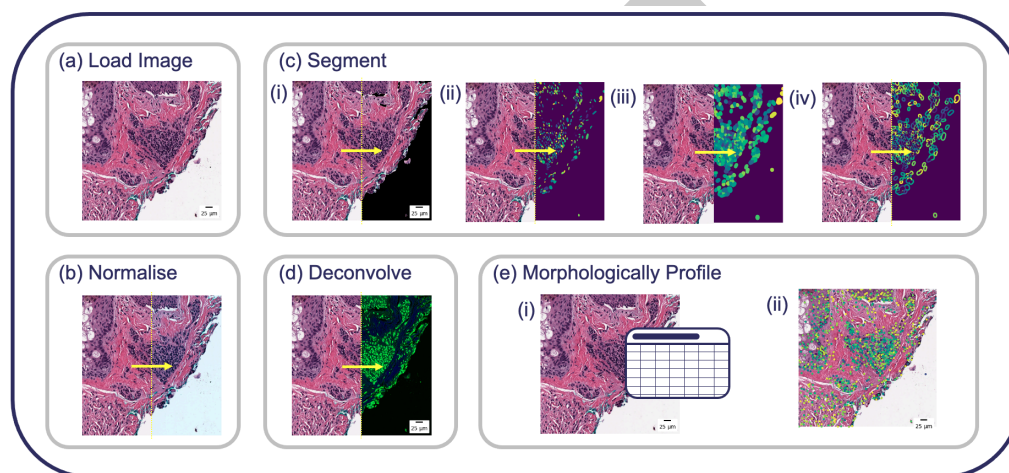


Figure 1: Example outputs of scematk. (a) The image patch can be loaded and viewed with scale bar. (b) Normalisation can be applied with reference to a target image to reduce inter image stain variability. (c) Various segmentation strategies can be applied to identify regions of the tissue corresponding to (i) tissue, (ii) nuclei, (iii) cytoplasm and (iv) cells. (d) The image can be deconvolved to quantify the presence of H&E and IHC stains. (e) (i) Masks and images are passed to a morphological profiler to calculate dozens of interpretable morphological features and (ii) these features can be viewed overlaid on the original image.

SCEMATK provides these basic tools for analysing images:

- Image Viewing: Enables the user to view a thumbnail of an image or a specify a region to view in full resolution.
- Image Normalisation: Apply a colour transform to the image to fit that of a target image, combatting batch effects that may arise from differences in staining protocols between samples.
- Stain Deconvolution: Convert the image from RGB to a new colour space showing the intensities of different stains applied to the sample, indicating different biological properties of the tissue.
- Object Segmentation: Identify nuclei of cells within an image as well as an approximation of the cell and cytoplasm.
- Morphological Profiling: Convert the masks and deconvolved image into a table of morphological properties of each cell.
- Feature Plotting: Overlay morphological features on an image to view them over a tissue.

SCEMATK provides an all in one easy to use interface for carrying out single cell morphological profiling on digital pathology images with limited computational resources.

Acknowledgements

HW and JW are supported by an MRC PhD studentship (grant no. MC_ST_00035). AK was supported by a Langmuir Talent Development Fellowship from the Institute of Genetics and Cancer, and a philanthropic donation from Hugh and Josseline Langmuir.

References

- Bankhead, P., Loughrey, M. B., Fernández, J. A., Dombrowski, Y., McArt, D. G., Dunne, P. D., McQuaid, S., Gray, R. T., Murray, L. J., Coleman, H. G., & others. (2017). QuPath: Open source software for digital pathology image analysis. *Scientific Reports*, 7(1), 1–7.
- Barcellona, L., Nicolè, L., Cappellesso, R., Dei Tos, A. P., & Ghidoni, S. (2024). SlideTiler: A dataset creator software for boosting deep learning on histological whole slide images. *Journal of Pathology Informatics*, 15, 100356.
- Dolezal, J. M., Kochanny, S., Dyer, E., Ramesh, S., Srisuwananukorn, A., Sacco, M., Howard, F. M., Li, A., Mohan, P., & Pearson, A. T. (2024). Slideflow: Deep learning for digital histopathology with real-time whole-slide visualization. *BMC Bioinformatics*, 25(1), 134.
- Pocock, J., Graham, S., Vu, Q. D., Jahanifar, M., Deshpande, S., Hadjigeorgiou, G., Shephard, A., Bashir, R. M. S., Bilal, M., Lu, W., & others. (2022). TIAToolbox as an end-to-end library for advanced tissue image analytics. *Communications Medicine*, 2(1), 120.
- Pourakpour, F., Szölgyén, Á., Nateghi, R., Gutman, D. A., Manthey, D., & Cooper, L. A. (2025). HistomicsTK: A python toolkit for pathology image analysis algorithms. *SoftwareX*, 31, 102318.