The Journal of Open Source Software

SlicerSPECTRecon: A 3D Slicer Extension for SPECT Image Reconstruction

Obed Dzikunu [2,3¶], **Maziar Sabouri** [1,2], **Shadab Ahamed** [1,2], **Carlos Uribe** [2,4,5], **Arman Rahmim** [1,2,3,5], and **Lucas A. Polson** [1,2]

1 Department of Physics & Astronomy, University of British Columbia, Vancouver Canada **2** Department of Integrative Oncology, BC Cancer Research Institute, Vancouver, Canada **3** School of Biomedical Engineering, University of British Columbia, Vancouver, Canada **4** Department of Radiology, University of British Columbia, Vancouver, Canada **5** Molecular Imaging and Therapy Department, BC Cancer Research Institute, Vancouver, Canada ¶ Corresponding author

DOI: 10.xxxxxx/draft

Software

- Review
- Repository
- Archive

Editor: Marcel Stimberg

Reviewers:

- @zapaishchykova
- @cnmy-ro

Submitted: 06 September 2024
Published: unpublished

License
Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License (CC BY 4.0).

DRAFT

Summary

`SlicerSPECTRecon` is a `3D Slicer` (Kikinis et al., 2014) extension designed for Single Photon Emission Computed Tomography (SPECT) image reconstruction. It offers a range of popular reconstruction algorithms and requires raw projection data from clinical or Monte Carlo simulated scanners. Built with the PyTomography Python library (Polson et al., 2024), it features GPU-accelerated functionality for fast reconstruction. The extension includes a graphical user interface for the selection of reconstruction parameters, and reconstructed images can be post-processed using all available `3D Slicer` functionalities.

Statement of need

SPECT imaging is used to measure the 3D distribution of a radioactive molecule within a patient; it requires (i) acquisition of 2D `projection` images at different angles using a gamma camera followed by (ii) the use of a tomographic image reconstruction algorithm to obtain a 3D radioactivity distribution consistent with the acquired data. While there exist many commercial products for image reconstruction, as well as multiple low-level software packages (Merlin et al., 2018; Polson et al., 2024; Thielemans et al., 2006), there is currently no open source graphic user interface (GUI) that provides access to the latest reconstruction algorithms. Due to continuing research interest in the implications of different reconstruction techniques on various clinical tasks (Shao et al., 2021; Vuohijoki et al., 2023), there is a need for a open-source GUI for SPECT reconstruction.

Overview of SlicerSPECTRecon

Typical reconstruction algorithms in nuclear medicine attempt to maximize a likelihood function via

$$\hat{x} = \underset{x;A}{\text{argmax}}\ L(y|x, H, s) \tag{1}$$

where $\hat{x}$ is the 3D image estimate, A is the reconstruction algorithm, L is a statistical likelihood function that describes the acquired data y, H is a linear operator that models the imaging system, s is an additive term that corrects for scatter, and $\text{argmax}_{x;A}$ signifies maximization of the likelihood with respect to x using algorithm A. Based on this formalism, SlicerSPECTRecon is partitioned into four main components: input data, system modeling,

likelihoods, and reconstruction algorithms. There are additional modules for input data conversion as well as post reconstruction applications.

Once the raw data is loaded into the 3D slicer interface, the user can select the projection data y to reconstruct in the `Input Data` tab. Data from multiple bed positions can be selected at this stage; resulting reconstructions will contain a single 3D image where all the bed positions are stitched. Upon selection of the projection data, necessary information about the acquired energy windows becomes stored internally. Users then select which energy window they want to reconstruct via the `Photopeak` option; it is possible to to reconstruct data from multiple photopeaks simultaneously provided the relative weighting between calibration factors is provided for each peak.

The `System Modeling` component considers the system matrix H, as well as additional corrections such as scatter s. Selecting `Attenuation Correction` enables attenuation correction during reconstruction; users must specify a corresponding CT image used to generate a mu-map. Selecting `Collimator Detector Response Modeling` enables modeling of the collimator and detector spatial resolution in image reconstruction. Users must specify the collimator code, defined on the PyTomography data page, as well as the intrinsic spatial resolution of the scintillator crystals. Selecting `Scatter Correction` enables scatter correction during reconstruction; users must select the scatter correction method as well as supporting data required for the method.

The third component, likelihoods, considers the likelihood function L. Currently, the extension only supports the `PoissonLogLikelihood` likelihood, which correctly describes the data acquired in SPECT imaging. It may be desirable in the future to test alternative likelihood functions, so this is left as a separate module.

The fourth component, algorithms, considers the reconstruction algorithm A. Currently, the extension supports the ordered subset expectation maximum (OSEM, Hudson & Larkin, 1994), block sequential regularized expectation maximum (BSREM, Ahn & Fessler, 2003) and ordered subset maximum a posteriori one step late (OSMAPOSL, Green, 1990) algorithms. Regularized algorithms can use the quadratic, log-cosh, and relative difference penalty (Nuyts et al., 2002) priors; these priors can also utilize a provided anatomical image to modify the weighting by only including contributions from the top N neighbours. Additional algorithms may be added based on community request.

The `Data Converters` component permits the conversion of raw SPECT data from various file formats, such as `SIMIND` (Ljungberg & Strand, 1989) and `GATE` (Jan et al., 2004), into DICOM format so it can be loaded using the native data readers of `3D Slicer`. While the extension currently has support for the conversion of `SIMIND` data, more data converters may be added in the future depending on community request. The `Post-Reconstruction` component contains functionality that is applicable for use on reconstructed images. One such example is the computation of uncertainty on total counts within segmented regions of interest.

Figure 1 contains a screenshot of the extension along with a sample reconstructed image in the 3D Slicer viewer.

DRAFT

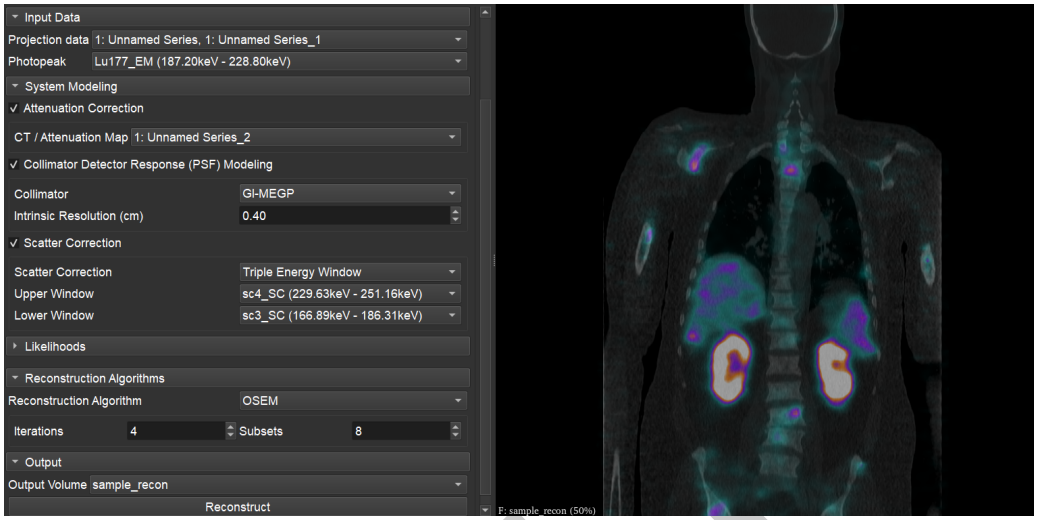

Figure 1: Left: user interface for the proposed extension. Right: reconstructed coronal slice from a patient receiving ^{177}Lu-PSMA-617 radiopharmaceutical therapy (color) overlaid on a corresponding CT (greyscale). Raw SPECT data consisted of two bed positions that were automatically stitched together after each was reconstructed; the raw data was acquired on a GE Discovery 670 camera.

Acknowledgements

We would like to acknowledge Peyman Sh.Zadeh from the Faculty of Medicine at the Tehran University of Medical Science for providing the patient data used in the paper. Also, we acknowledge funding from the Natural Sciences and Engineering Research Council of Canada (NSERC) Discovery Grant RGPIN-2019-06467, and Canadian Institutes of Health Research (CIHR) Project Grant PJT-162216.

References

Ahn, S., & Fessler, J. A. (2003). Globally convergent image reconstruction for emission tomography using relaxed ordered subsets algorithms. *IEEE Transactions on Medical Imaging*, *22*(5), 613–626. https://doi.org/10.1109/TMI.2003.812251

Green, P. J. (1990). Bayesian reconstructions from emission tomography data using a modified EM algorithm. *IEEE Transactions on Medical Imaging*, *9*(1), 84–93. https://doi.org/10.1109/42.52985

Hudson, H. M., & Larkin, R. S. (1994). Accelerated image reconstruction using ordered subsets of projection data. *IEEE Transactions on Medical Imaging*, *13*(4), 601–609. https://doi.org/10.1109/42.363108

Jan, S., Santin, G., Strul, D., Staelens, S., Assié, K., Autret, D., Avner, S., Barbier, R., Bardiès, M., Bloomfield, P. M., Brasse, D., Breton, V., Bruyndonckx, P., Buvat, I., Chatziioannou, A. F., Choi, Y., Chung, Y. H., Comtat, C., Donnarieix, D., … Morel, C. (2004). GATE: A simulation toolkit for PET and SPECT. *Physics in Medicine and Biology*, *49*(19), 4543–4561. https://doi.org/10.1088/0031-9155/49/19/007

Kikinis, R., Pieper, S. D., & Vosburgh, K. (2014). 3D Slicer: A platform for subject-specific image analysis, visualization, and clinical support. In F. A. Jolesz (Ed.), *Intraoperative Imaging Image-Guided Therapy* (Vol. 3(19), pp. 277–289). https://doi.org/10.1007/978-1-4614-7657-3_19

Ljungberg, M., & Strand, S.-E. (1989). A Monte Carlo program for the simulation of

DRAFT

scintillation camera characteristics. *Computer Methods and Programs in Biomedicine*, *29*(4), 257–272. https://doi.org/10.1016/0169-2607(89)90111-9

Merlin, T., Stute, S., Benoit, D., Bert, J., Carlier, T., Comtat, C., Filipovic, M., Lamare, F., & Visvikis, D. (2018). CASToR: A generic data organization and processing code framework for multi-modal and multi-dimensional tomographic reconstruction. *Physics in Medicine & Biology*, *63*(18), 185005. https://doi.org/10.1088/1361-6560/aadac1

Nuyts, J., Beque, D., Dupont, P., & Mortelmans, L. (2002). A concave prior penalizing relative differences for maximum-a-posteriori reconstruction in emission tomography. *IEEE Transactions on Nuclear Science*, *49*(1), 56–60. https://doi.org/10.1109/TNS.2002.998681

Polson, L., Fedrigo, R., Li, C., Sabouri, M., Dzikunu, O., Ahamed, S., Karakatsanis, N., Rahmim, A., & Uribe, C. (2024). *PyTomography: A Python library for quantitative medical image reconstruction*. https://doi.org/10.48550/arXiv.2309.01977

Shao, W., Rowe, S. P., & Du, Y. (2021). Artificial intelligence in single photon emission computed tomography (SPECT) imaging: A narrative review. *Annals of Translational Medicine*, *9*(9), 820. https://doi.org/10.21037/atm-20-5988

Thielemans, K., Mustafovic, S., & Tsoumpas, C. (2006). STIR: Software for tomographic image reconstruction release 2. *2006 IEEE Nuclear Science Symposium Conference Record*, *4*, 2174–2176. https://doi.org/10.1109/NSSMIC.2006.354345

Vuohijoki, H. E., Constable, C. J., & Sohlberg, A. O. (2023). Anatomically guided reconstruction improves lesion quantitation and detectability in bone SPECT/CT. *Nuclear Medicine Communications*, *44*(4). https://doi.org/10.1097/MNM.0000000000001675

DRAFT