The Journal of Open Source Software

{fairmetrics}: An R package for group fairness evaluation

Benjamin Smith [1], **Jianhui Gao** [1], **and Jessica Gronsbell** [1]

1 Department of Statistical Science, University of Toronto

DOI: 10.xxxxxx/draft

Software

- Review
- Repository
- Archive

Editor: Nikoleta Glynatsi

Reviewers:

- @vankesteren
- @StevenGolovkine

Submitted: 04 June 2025
Published: unpublished

License
Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License (CC BY 4.0).

DRAFT

Summary

Fairness is a growing area of machine learning (ML) that focuses on ensuring that models do not produce systematically biased outcomes across groups defined by protected attributes, such as race, gender, or age. The {fairmetrics} R package provides a user-friendly framework for rigorously evaluating group-based fairness criteria, including independence (e.g., statistical parity), separation (e.g., equalized odds), and sufficiency (e.g., predictive parity). The package provides both point and interval estimates for a variety of commonly used criteria. {fairmetrics} also includes an example dataset derived from the Medical Information Mart for Intensive Care, version II (MIMIC-II) database (Goldberger et al., 2000; J. Raffa, 2016) to demonstrate its use.

Statement of Need

ML models are increasingly used in high-stakes domains such as criminal justice, healthcare, finance, employment, and education Mattu (2016). Existing fairness evaluation software report point estimates and/or visualizations, without any measures of uncertainty. This limits users' ability to determine whether observed disparities are statistically significant. {fairmetrics} addresses this limitation by including confidence intervals for both difference and ratio based fairness metrics to enable more robust and statistically grounded fairness assessments.

Fairness Criteria

{fairmetrics} is designed to evaluate fairness of binary classification models across binary protected attributes. The package supports the evaluation of metrics belonging to three major group fairness criteria:

- **Independence:** Statistical Parity (compares the overall rate of positive predictions between groups), Conditional Statistical Parity (compares the rate of positive predictions between groups within a specific subgroup).
- **Separation:** Equal Opportunity (compares false negative rates between groups), Predictive Equality (compares false positive rates between groups), Balance for Positive Class (compares the average predicted probabilities among individuals whose true outcome is positive across groups), and Balance for Negative Class (compares the average predicted probabilities among individuals whose true outcome is negative across groups).
- **Sufficiency:** Positive Predictive Parity (compares the positive predictive values across groups), Negative Predictive Parity (compares the negative predictive values across groups).

The package also includes additional metrics, such as the Brier Score Parity (compares the Brier score across groups), Accuracy Parity (compares the overall accuracy across groups), and

Treatment Equality (compares the ratio of false negatives to false positives across groups).

Evaluating Fairness Criteria

The input required to evaluate model fairness with the {fairmetrics} package is a data frame or tibble containing the model's predicted probabilities, the true outcomes, and the protected attribute. Figure 1 shows the workflow for using {fairmetrics}.

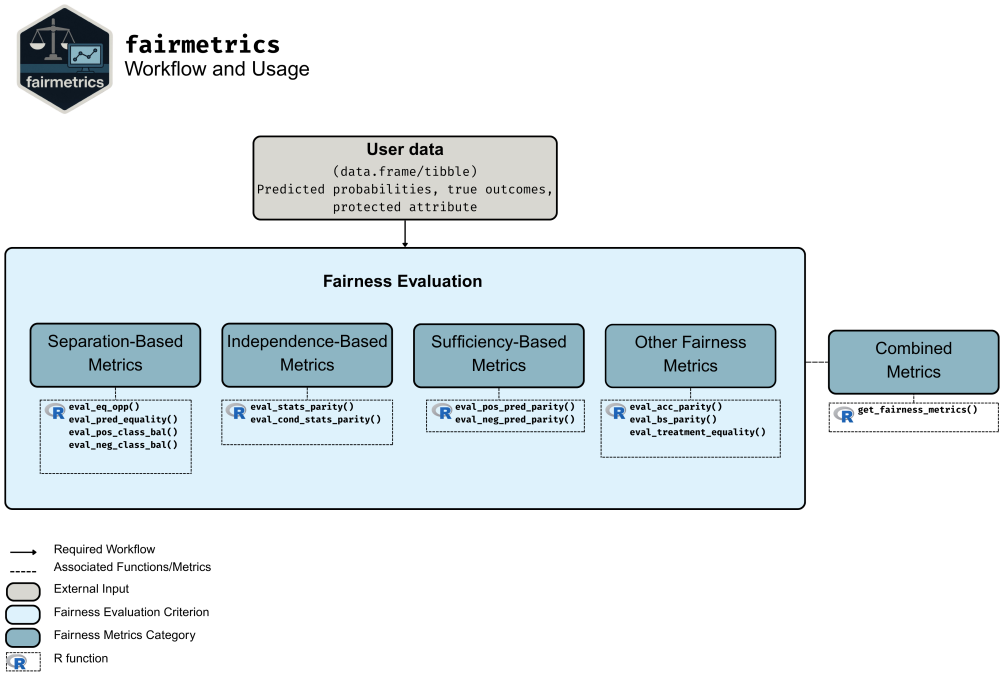

Figure 1: Workflow for using {fairmetrics} to evaluate model fairness across multiple criteria.

A simple example of how to use the {fairmetrics} package is illustrated below. The example makes use of the `mimic_preprocessed` dataset, a pre-processed version of the Indwelling Arterial Catheter (IAC) Clinical dataset, from the MIMIC-II clinical database (Goldberger et al., 2000; J. Raffa, 2016; J. D. Raffa et al., 2016).

While the choice of fairness metric used is context dependent, we show all criteria available with the `get_fairness_metrics()` function for illustrative purposes. In this example, we evaluate the model's fairness with respect to the protected attribute `gender`. For conditional statistical parity, we condition on age greater than 60 years. The model is trained on a subset of the data and the predictions are made and evaluated on a test set. A statistically significant difference across groups at a given level of significance is indicated when the confidence interval for a difference-based metric does not include zero or when the interval for a ratio-based metric does not include one.

```
# Train a classification model (e.g., random forest).
# Add the vector of predicted probabilities to the test data
# to evaluate fairness.
library(fairmetrics)
# Setting alpha=0.05 for 95% confidence intervals
get_fairness_metrics(
 data = test_data,
```

```
 outcome = "day_28_flg",
 group = "gender",
 group2 = "age",
 condition = ">=60",
 probs = "pred",
 cutoff = 0.41,
 alpha = 0.05
)

$performance
                                   Metric GroupFemale GroupMale
1                 Positive Prediction Rate        0.18      0.09
2                 Positive Prediction Rate        0.35      0.24
3                      False Negative Rate        0.36      0.59
4                      False Positive Rate        0.08      0.03
5                     Avg. Predicted Prob.        0.47      0.37
6                     Avg. Predicted Prob.        0.16      0.11
7                Positive Predictive Value        0.62      0.67
8                Negative Predictive Value        0.93      0.91
9                              Brier Score        0.09      0.08
10                                Accuracy        0.87      0.89
11 (False Negative)/(False Positive) Ratio        0.93      2.89

$fairness
                         Metric Difference    95% Diff CI Ratio 95% Ratio CI
1              Statistical Parity       0.08   [0.04, 0.12]  2.00 [1.41, 2.83]
2  Conditional Statistical Parity       0.10   [0.02, 0.18]  1.43 [1.05, 1.96]
3               Equal Opportunity      -0.21 [-0.36, -0.06]  0.64  [0.45, 0.9]
4             Predictive Equality       0.04   [0.01, 0.07]  2.33  [1.13, 4.8]
5      Balance for Positive Class       0.09   [0.04, 0.14]  1.24 [1.09, 1.42]
6      Balance for Negative Class       0.05   [0.03, 0.07]  1.50 [1.29, 1.75]
7      Positive Predictive Parity      -0.06  [-0.23, 0.11]  0.92 [0.71, 1.18]
8      Negative Predictive Parity       0.01  [-0.15, 0.17]  1.01 [0.79, 1.29]
9              Brier Score Parity       0.01  [-0.01, 0.03]  1.12 [0.89, 1.43]
10        Overall Accuracy Parity      -0.01  [-0.05, 0.03]  0.99 [0.95, 1.03]
11             Treatment Equality      -2.28  [-4.72, 0.16]  0.33 [0.15, 0.73]
```

Users can also compute individual metrics using functions like `eval_eq_opp()` to test specific fairness conditions. Full usage examples are provided in the package documentation.

Related Work

Other R packages similar to {fairmetrics} include {fairness} (Kozodoi & V. Varga, 2021), {fairmodels} (Wiśniewski & Biecek, 2022) and {mlr3fairness} (Pfisterer et al., 2024). {fairmetrics} differs from these packages in two ways. The first difference is that {fairmetrics} calculates ratio and difference-based group fairness metrics and their corresponding confidence intervals, allowing for more meaningful inferences about the fairness criteria. The second difference is that {fairmetrics} does not possess any external dependencies and has a lower memory footprint. Table 1 shows the comparison of memory used and dependencies required when loading each library.

For Python users, the {fairlearn} library (Weerts et al., 2023) provides additional fairness metrics and algorithms. The {fairmetrics} package is designed for seamless integration with R workflows, making it a more convenient choice for R users.

DRAFT

Package	Memory (MB)	Dependencies
fairmodels	17.02	29
fairness	117.61	141
mlr3fairness	58.11	45
fairmetrics	0.05	0

Table 1: Memory usage (in MB) and dependencies of fairmetrics vs similar packages.

Licensing and Availability

The {fairmetrics} package is under the MIT license. It is available on CRAN and can be installed by using `install.packages("fairmetrics")`. Full documentation and its examples are available at: https://jianhuig.github.io/fairmetrics/articles/fairmetrics.html. Source code and issue tracking are hosted on GitHub: https://github.com/jianhuig/fairmetrics/.

References

Anderson, J. W., & Visweswaran, S. (2024). Algorithmic individual fairness and healthcare: A scoping review. *JAMIA Open*, *8*(1). https://doi.org/10.1093/jamiaopen/ooae149

Awasthi, P., Cortes, C., Mansour, Y., & Mohri, M. (2020). Beyond individual and group fairness. In *arXiv.org*. https://doi.org/10.48550/arXiv.2008.09490

Barocas, S., Hardt, M., & Narayanan, A. (2023). *Fairness and machine learning: Limitations and opportunities*. The MIT Press.

Berk, R., Heidari, H., Jabbari, S., Kearns, M., & Roth, A. (2018). Fairness in criminal justice risk assessments: The state of the art. *Sociological Methods & Research*, *50*(1), 3–44. https://doi.org/10.1177/0049124118782533

Castelnovo, A., Crupi, R., Greco, G., Regoli, D., Penco, I. G., & Cosentini, A. C. (2022). A clarification of the nuances in the fairness metrics landscape. *Scientific Reports*, *12*(1). https://doi.org/10.1038/s41598-022-07939-1

Dwork, C., Hardt, M., Pitassi, T., Reingold, O., & Zemel, R. (2012). Fairness through awareness. *Proceedings of the 3rd Innovations in Theoretical Computer Science Conference*, 214–226. https://doi.org/10.1145/2090236.2090255

Fazelpour, S., & Danks, D. (2021). Algorithmic bias: Senses, sources, solutions. *Philosophy Compass*, *16*(8). https://doi.org/10.1111/phc3.12760

Gao, J., Chou, B., McCaw, Z. R., Thurston, H., Varghese, P., Hong, C., & Gronsbell, J. (2024). What is fair? Defining fairness in machine learning for health. In *arXiv.org*. https://doi.org/10.48550/arXiv.2406.09307

Goldberger, A. L., Amaral, L. A. N., Glass, L., Hausdorff, J. M., Ivanov, P. Ch., Mark, R. G., Mietus, J. E., Moody, G. B., Peng, C.-K., & Stanley, H. E. (2000). PhysioBank, PhysioToolkit, and PhysioNet: Components of a new research resource for complex physiologic signals. *Circulation [Online]*, *101*(23), e215–e220. https://doi.org/10.1161/01.CIR.101.23.e215

Grolemund, H. W., & Garrett. (n.d.). *10 tibbles | r for data science*. https://r4ds.had.co.nz/tibbles.html

Grote, T., & Keeling, G. (2022). Enabling fairness in healthcare through machine learning. *Ethics and Information Technology*, *24*(3), 39. https://doi.org/10.1007/s10676-022-09658-7

Hastie, T., Tibshirani, R., & Friedman, J. (2009). *The Elements of Statistical Learning*.

DRAFT

Springer New York. https://doi.org/10.1007/978-0-387-84858-7

Initiative, O. S. (n.d.). The MIT license. In *Open Source Initiative*. https://opensource.org/license/mit

Kozodoi, N., & V. Varga, T. (2021). *Fairness: Algorithmic fairness metrics*. https://doi.org/10.32614/cran.package.fairness

Lum, K., Zhang, Y., & Bower, A. (2022). De-biasing "bias" measurement. *Proceedings of the 2022 ACM Conference on Fairness, Accountability, and Transparency*, 379–389. https://doi.org/10.1145/3531146.3533105

Makhlouf, K., Zhioua, S., & Palamidessi, C. (2024). When causality meets fairness: A survey. *Journal of Logical and Algebraic Methods in Programming*, *141*, 101000. https://doi.org/10.1016/j.jlamp.2024.101000

Mattu, L. K., Jeff Larson. (2016). Machine Bias. In *ProPublica*. https://www.propublica.org/article/machine-bias-risk-assessments-in-criminal-sentencing.

Mehrabi, N., Morstatter, F., Saxena, N., Lerman, K., & Galstyan, A. (2021a). A survey on bias and fairness in machine learning. *ACM Comput. Surv.*, *54*(6). https://doi.org/10.1145/3457607

Mehrabi, N., Morstatter, F., Saxena, N., Lerman, K., & Galstyan, A. (2021b). A Survey on Bias and Fairness in Machine Learning. *ACM Computing Surveys*, *54*(6), 115:1–115:35. https://doi.org/10.1145/3457607

Obermeyer, Z., Powers, B., Vogeli, C., & Mullainathan, S. (2019). Dissecting racial bias in an algorithm used to manage the health of populations. *Science*, *366*(6464), 447–453. https://doi.org/10.1126/science.aax2342

Pfisterer, F., Siyi, W., & Lang, M. (2024). *mlr3fairness: Fairness auditing and debiasing for 'mlr3'*. https://doi.org/10.32614/cran.package.mlr3fairness

Plecko, D., & Bareinboim, E. (2022). Causal fairness analysis. In *arXiv.org*. https://doi.org/10.48550/arXiv.2207.11385

Raffa, J. (2016). *Clinical data from the MIMIC-II database for a case study on indwelling arterial catheters (version 1.0)*. https://doi.org/10.13026/C2NC7F. https://doi.org/10.13026/C2NC7F

Raffa, J. D., Ghassemi, M., Naumann, T., Feng, M., & Hsu, D. J. (2016). Data analysis. In *Secondary analysis of electronic health records* (pp. 109–122). Springer, Cham. https://doi.org/10.1007/978-3-319-43742-2_9

Rajpurkar, P., Chen, E., Banerjee, O., & Topol, E. J. (2022). AI in health and medicine. *Nature Medicine*, *28*(1), 31–38. https://doi.org/10.1038/s41591-021-01614-0

Ueda, D., Kakinuma, T., Fujita, S., Kamagata, K., Fushimi, Y., Ito, R., Matsui, Y., Nozaki, T., Nakaura, T., Fujima, N., Tatsugami, F., Yanagawa, M., Hirata, K., Yamada, A., Tsuboyama, T., Kawamura, M., Fujioka, T., & Naganawa, S. (2023). Fairness of artificial intelligence in healthcare: Review and recommendations. *Japanese Journal of Radiology*, *42*(1), 3–15. https://doi.org/10.1007/s11604-023-01474-3

Weerts, H., Dudík, M., Edgar, R., Jalali, A., Lutz, R., & Madaio, M. (2023). FairLearn: Assessing and improving fairness of AI systems. In *arXiv.org*. https://doi.org/10.48550/arXiv.2303.16626

Wickham, H., Hester, J., Chang, W., & Bryan, J. (2022). *Devtools: Tools to make developing r packages easier*. https://doi.org/10.32614/cran.package.devtools

Wiśniewski, J., & Biecek, P. (2022). Fairmodels: A flexible tool for bias detection, visualization, and mitigation in binary classification models. *The R Journal*, *14*(1), 227–243. https:

DRAFT

//doi.org/10.32614/RJ-2022-019

Yfantidou, S., Constantinides, M., Spathis, D., Vakali, A., Quercia, D., & Kawsar, F. (2023). Beyond accuracy: A critical review of fairness in machine learning for mobile and wearable computing. In *arXiv.org*. https://doi.org/10.48550/arXiv.2303.15585

DRAFT