

What is OPENRNDR?

OPENRNDR is an application framework and a library for creative coding written in [Kotlin](#).

OPENRNDR offers APIs for easy and flexible programming of accelerated graphics.


OPENRNDR is intended for prototyping as well as building production quality software.

OPENRNDR is free and open source software. The source code can be found on [Github](#).

OPENRNDR is an initiative of the [RNDR](#) studio for interactive and interaction design based in The Netherlands.

A simple OPENRNDR program

Here we show a very simple program written using OPENRNDR.

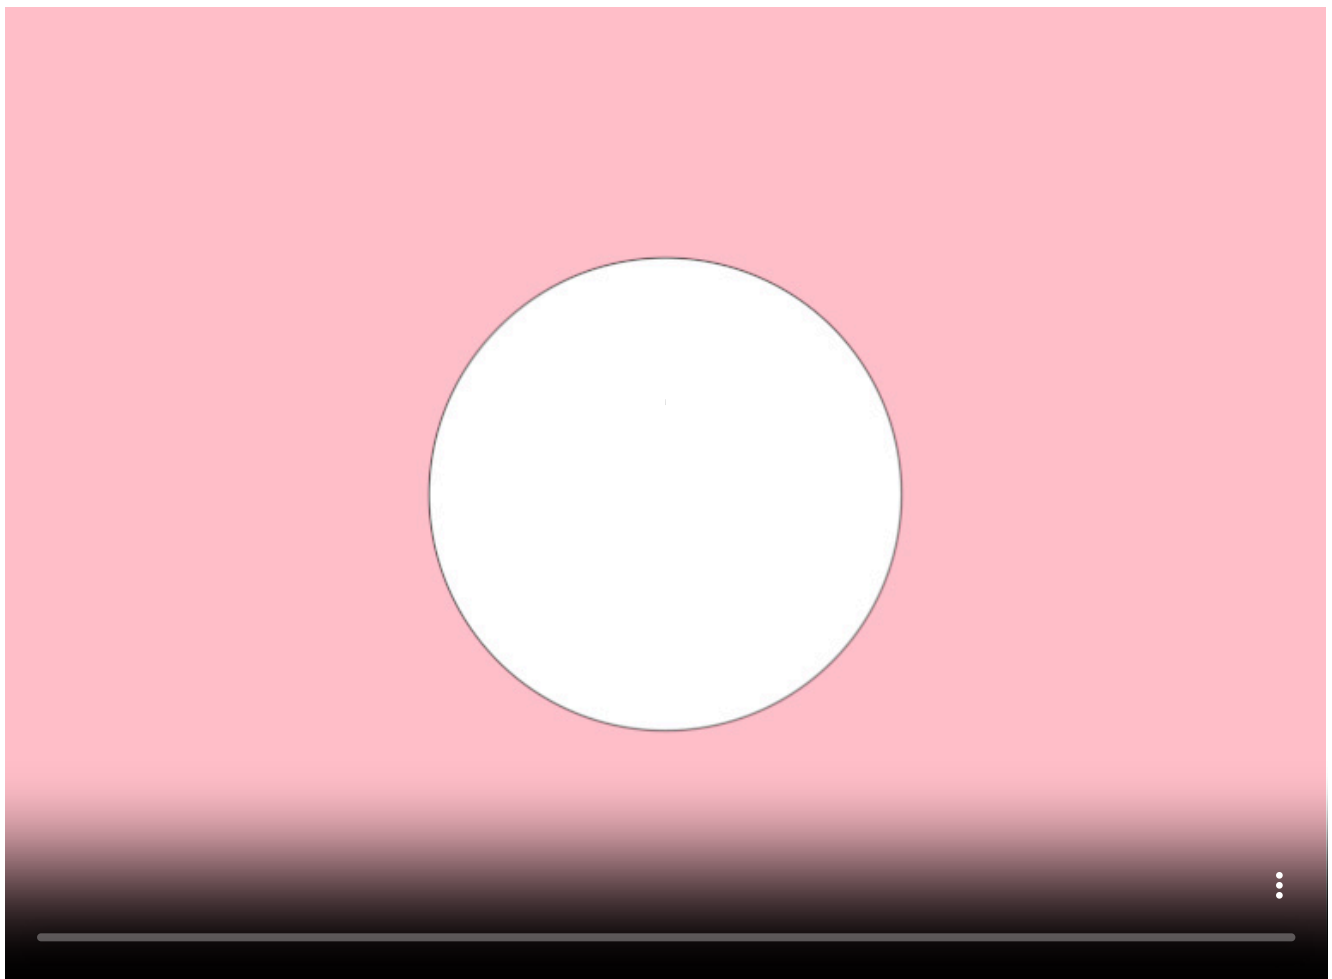

```
fun main() = application {  
    program {  
        extend {  
            drawer.clear(ColorRGBa.PINK)  
            drawer.fill = ColorRGBa.WHITE  
            drawer.circle(  
                drawer.bounds.center,  
                abs(cos(seconds)) * height * 0.51  
            )  
        }  
    }  
}
```

```
}  
  }  
}  
}
```

[Link to the full example](#)

[edit on GitHub](#)

TABLE OF CONTENTS

- [Requirements](#)
- [Set up your first program](#)
- [Next steps](#)
- [MacOS and Windows tips](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

OPENRNDR GUIDE

[What is OPENRNDR?](#) / [Requirements](#)

OPENRNDR currently supports desktop platforms including macOS, Windows and Linux. Additionally there's experimental support for running programs in web browsers via KotlinJS.

Operating systems known to work

macOS	10.10 up to 13, both Intel and ARM
Window	10 and 11
Linux	Ubuntu LTS version 18.04, 20.04, 22.04, ArchLinux, Manjaro

Other versions and distributions may work, but it is hard for us to verify.

OpenGL version

OPENRNDR requires a GPU that supports at least **OpenGL 3.3**. This includes relatively old ones like the nVidia 320M (2007) or the Intel HD4000 (2012) but excludes others like the Intel HD3000 (2011).

Programming languages

OPENRNDR is written in [Kotlin](#) and intended to run on the [JVM](#). We believe Kotlin offers a well-balanced programming language that is both expressive and easy to read.

The library can likely be used from Java 8+ as that's one of the promises of Kotlin's Java-interop, however the APIs that OPENRNDR provides are making extensive use of Kotlin-specific features that may not translate well to Java.

Development environments

OPENRNDR is environment agnostic, however all our tutorial and reference material assumes [Gradle](#) and [Intellij IDEA](#) are used.

Long-term support

We have not reached the point at which we can make promises regarding API stability. OPENRNDR is pre-1.0 software, which implies we try not to break things, but at times we have to. At times it is better to make incompatible changes than to continue with inconsistencies in or incompleteness of the API.

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Getting Started with OPENRNDR

Download the code editor

To edit and run OPENRNDR programs, we will install an IDE (Integrated Development Environment) called IntelliJ IDEA.

- Download and install [IntelliJ IDEA](#).
- Start it. On the first run it will offer the option to pick your default settings and continue. Use the default settings.

Download the template program

Instead of creating a project from scratch, the simplest way to start an OPENRNDR-based project is to use the [openrndr-template](#):

- If you are running IntelliJ IDEA for the first time, the program menus are hidden. In that case click “Clone Repository” at the top-right area.
 - If program menus are visible, select “File > New > Project from version control...”.
- In the dialog that appears:
 - Version Control: choose “Git”.
 - URL: enter `https://github.com/openrndr/openrndr-template`
 - Directory: ensure it looks OK.
- When asked where the project should be opened, click on “new window”.

If downloading the template fails:

- Make sure [Git](#) is installed.
- Did you enter the repository URL correctly?

Run the template program

After downloading the template, IntelliJ IDEA will download the necessary dependencies. See the progress in the status bar at the bottom of the window.

When IntelliJ IDEA opens a project for the first time, its `README.md` file is presented automatically. This file contains hints to help you navigate the template project.

When the status bar shows no more activity, go to the Project view (left panel) and click on `src/main/kotlin/TemplateProgram.kt` to open that file

Note: the Project view can be shown and hidden by clicking the Project button in the top-left area of the window.

Once the source code of `TemplateProgram.kt` is visible, a small green triangle will appear before the words `fun main()`. Click that triangle to run the program.

Ta-da!

Next steps

Simplifying the Project View

By default, the Project View can look intimidating. The list contains many files and folders, and you haven't even started writing a program! But we can simplify it by hiding files that are not Kotlin programs.

First, let's enable some new scopes for the Project View:

- Make the Gradle panel visible by clicking on the Gradle elephant on the right side of the screen.
- In the panel that shows up, double-click on `openrndr-template > Tasks > openrndr > "add IDE file scopes"`.
- Hide the Gradle panel by clicking on the elephant again.

After running the `add IDE file scopes` task, let's enable the scope that shows code files:

- Click on `Project ▾` at the top-left of the Project View.
- Choose `★ Code` at the bottom of the list.

Only two Kotlin files should be listed, everything else is now hidden. Isn't that a relief?

You can always switch back to the `Project` scope to see all files or switch to one of the others. For instance, the `★ Media` scope will display only sound, image and video files from your project.

Multiple programs in one project

By default, the `openrndr-template` project comes with two programs. One is called `TemplateProgram.kt` and the other `TemplateLiveProgram.kt`.

The second one provides live-coding! If you run that program by clicking on the green triangle next to `fun main()`, any changes you make to the code will be visible in the running program after you save your changes. No need to stop and start the program.

But you are not limited to two programs, of course. In the Project View on the left, you can copy and paste `.kt` files (using keyboard shortcuts or the mouse). IntelliJ IDEA will ask you to name the new file (the name must start with an Upper-Case letter). It will also ask whether you want to add the new file to Git. It's fine to click Cancel.

If you created a third `.kt` file, make some changes to it and then click the green triangle next to `fun main()` to run it.

All your Kotlin programs must be placed under `src/main/kotlin`, otherwise they won't run.

Note: at the top of the window, there is also a green triangle to run programs. By default, clicking that green triangle will re-run the last program you ran, no matter which file you are editing now. This can be surprising when you start editing a different program in your project. For a more intuitive behavior, click on the drop-down on the left of the triangle and select `Current File`. After this change, the top green triangle will run whatever program you are currently editing.

import statements

OPENRNDR is very modular. Not every possible feature is available by default: to make classes available, they need to be "imported". For example, if we want to create a `Circle` object, we need to add a line at the top of the program that imports the `Circle` class. After doing this, the compiler will understand what a `Circle` is. Fortunately, we do not need to type such import lines by hand. Let's see how IntelliJ IDEA helps with this.

Inside the `extend { ... }` block, go ahead and type `val v = Vector3`. When you do this, a floating dialog should appear. What this dialog is doing is asking you “which `Vector3` do you mean?”. See, different classes may provide something that sounds like a `Vector3`. Some of these classes can be part of `OPENRNDR`, and other classes may be provided by Java or other frameworks.

The one we are looking for is “`Vector3 (org.openrndr.math)`”. If it is highlighted in that floating dialog, press the `ENTER` key. This will add the necessary `import` statement to the beginning of the file, making `Vector3` available for you. If the highlighted item was not the one we were looking for, press the `UP` and `DOWN` arrow keys to choose the right one, then press `ENTER`.

If you accidentally import the wrong one, you can `undo`, or you can also manually delete the import from the top of the file.

When an import is missing, the unrecognized word will be highlighted in red. Let’s try this. Delete any `Vector3` related imports from the top of the file. The `Vector3` word will be highlighted as an error. When this happens, we can automatically import the right class by clicking the word (highlighted in red), then press `ALT+ENTER` (or `Command+ENTER` on Mac). A tool tip will show up letting you choose the right import to add.

IntelliJ IDEA cleanup tips

In IntelliJ IDEA, you can double-tap the `SHIFT` key to open a global search tool that will find whatever you type in your source code, but also in the program settings, menus and actions you can perform.

Let’s try it:

- Double-tap `SHIFT` and type `optimize`. In the search results choose `optimize imports`. This will remove no longer used import statements from the beginning of your program.
- Double-tap `SHIFT` and type `reformat`. In the search results choose `reformat code`. This will tidy up the spacing and indentation of your program.

What’s next?

At this point you are likely interested in how this program is structured. The guide explains more in the [Program basics](#) chapter.

If you are more interested in reading source code, you can find the code for the examples in this guide in the [openrndr-examples repository](#).

If you are interested in more advanced examples, we recommend checking out the demo programs in the [orx repository](#); most `orx` modules have demos in their `src/demo/kotlin` folder.

[edit on GitHub](#)

OPENRNDR GUIDE

[What is OPENRNDR?](#) / MacOS and Windows tips

macOS: debugging and profiling

Trying to *debug* or *profile* in macOS may display a warning or error message mentioning `-XstartOnFirstThread`. The solution is simple:

- Open the `Run > Edit Configurations...` menu.
- Add `-XstartOnFirstThread` in the VM Options [text field](#).
- Click `ok` to close the dialog.

Windows: multiple GPUs

If your computer has multiple GPUs, you can choose which one OPENRNDR uses like this:

- Run the `openrndr-template` program by clicking on the green triangle. In IntelliJ IDEA, look at the console in the bottom area and note down the full path of the `java.exe` program being used. It probably starts with something like `C:\Users\...`
- Open the Windows Graphics Settings.
- Click `Browse` and find the exact same `java.exe` you noted down earlier.
- Click `Options` and choose your preferred GPU, then click `Save`.

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Kotlin language and tools

OPENRNDR is written using the Kotlin programming language, which is similar to Java but more modern and less verbose.

The Gradle build tool is used by the OPENRNDR projects to download dependencies, build and distribute projects.

We recommend to have some fun with the [drawing](#) chapter first, then come back to this chapter when you start wondering about the language, the syntax and the framework.

[edit on GitHub](#)

TABLE OF CONTENTS

- [Introduction to Kotlin](#)
 - [Kotlin collections](#)
 - [Functions and lambdas](#)
 - [Immutability](#)
 - [What is Gradle?](#)
-

This site uses [Just the Docs](#), a documentation theme for Jekyll.

The Kotlin programming language

Kotlin is a modern, readable and fun language, perfect for creative coding.

A good place to start discovering the language is the [Kotlin Tour](#)

Most of the examples on that website can be edited and run to immediately see the result.

From the [Official documentation](#) we recommend exploring the [Basic syntax overview](#), [Types](#), [Conditions and loops](#) and the section about [collections](#). Data structures like `List`, `Map` and `Set` are explained under the *collections* section, and they are one of the aspects that make working with Kotlin enjoyable. Check them out!

Kotlin in OPENRNDR

When designing a framework like OPENRNDR, many decisions need to be made. What should be favored? Brief syntax? Flexibility? Expressiveness? Execution speed? Similarity with other frameworks?

Those decisions shape what user code will look like. In this section we attempt to explain some of those decisions and possible differences with other languages and frameworks.

Most concepts in the Kotlin programming language will sound familiar to anyone experienced in other languages, but some may be new.

Let's take a look at them.

[edit on GitHub](#)

Collection in Kotlin

The Collections in Kotlin's standard library are powerful tools for computational design and creative purposes. It provides Lists, Maps and Sets with mutable and immutable variants.

Each of these data structures has many methods for querying and manipulating its elements, which can then be made visible using OPENRNDR's drawing capabilities.

List

A list is a collection of elements of the same type. Let's see some immutable `List` examples:

```
// Create an immutable list with specific Integers
val list = listOf(1, 2, 3, 5, 7)

// Accessing elements
println(list[0]) // 1
println(list.first()) // 1
println(list.last()) // 7

println(list.size) // 5
println(list.lastIndex) // 4
```

We can also create lists using the `List` constructor:

```
// Generate a list of 10 random numbers
val randomNumbers = List(10) {
    Math.random().toInt()
}

// Generate a list of even numbers
val evenNumbers = List(10) {
    it * 2
}
```

Once we have a list, we can iterate over its elements:

```
val list = listOf(1, 2, 3, 4, 5)
for (item in list) {
    println(item)
}
```

`forEach` and `forEachIndexed` can also be used to iterate over a list, although breaking out of the loop is not possible with them.

```
val list = listOf(2, 7, 7, 1, 100)

list.forEach { println(it) }
```

```
list.forEachIndexed { index, item ->
    println("$index: $item")
}
```

Mutable lists behave mostly like immutable lists, but they can be modified:

```
val mutableList = mutableListOf(1, 2, 3, 4, 5)
mutableList.add(6) // 1, 2, 3, 4, 5, 6
mutableList.remove(0) // 2, 3, 4, 5, 6
```

Lists provide many useful methods, such as `filter`, `map`, `sortedBy`, `groupBy`, `chunked`, and others. We will not discuss them all in detail in this introduction, but here some examples:

```
val list = List(16) { it } // Integers between 0 and 15
val evenNumbers = list.filter { it % 2 == 0 }
val squares = list.map { it * it }
val shuffled = list.shuffled()
val first5 = list.take(5)
val last5 = list.takeLast(5)
val asDouble = list.map { it.toDouble() }
```

Visual examples

We haven't yet taken a look at any drawing operations, so don't worry if you don't yet fully understand how that works, it will be introduced in next chapters.

These examples are just to give you a taste of how lists can be used to create visual output.

Here's how to create and use a list with 20 double value:



```
fun main() = application {
    program {
        // A list containing 1.0, 2.0, 5.0, 10.0, 17.0 ...
        val radii = List(20) { i -> 1.0 + i * i }
        extend {
```


```

        drawer.clear(ColorRGBa.WHITE)
        drawer.fill = null
        drawer.stroke = ColorRGBa.PINK
        // Go over each radius in the list and use it
        // for the stroke weight and the radius of a circle
        radii.forEach { radius ->
            drawer.strokeWeight = radius * 0.1
            drawer.circle(drawer.bounds.center, radius)
        }
    }
}
}

```

[Link to the full example](#)

And one final example populating a list of `Double` values, then filtering out some items, and finally mapping the remaining elements into `LineSegment` instances.

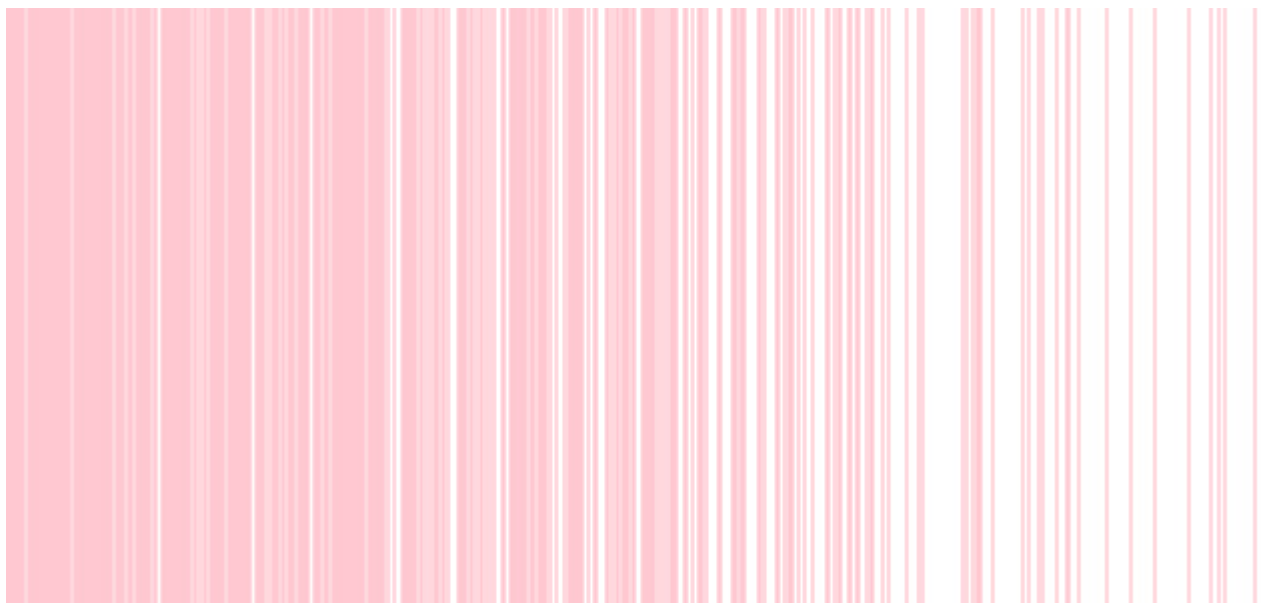

```

fun main() = application {
    program {
        // Generate a list containing values between 0.0 and 1.0
        val x = List(width) { it.toDouble() / width }

        // Filter out high `x` values.
        // The condition is likely to be false for high `it` values, making them fail the test.
        val filtered = x.filter { Math.random() > it }

        // Map the lucky Double values to LineSegment instances.
        // `segs` is a `List<LineSegment>` and `it` is the current list element being processed (a double).
        val segs = filtered.map {
            LineSegment(it * width, 0.0, it * width, height.toDouble())
        }
        extend {
            drawer.clear(ColorRGBa.WHITE)
            drawer.stroke = ColorRGBa.PINK
            // Draw the line segments in our list

```



```

        drawer.lineSegments(segs)
    }
}
}

```

[Link to the full example](#)

Map

Maps and Sets are arguably more niche data structures than lists, but it's still worth mentioning them.

A map is a collection of key-value pairs, sometimes known as a dictionary. There are two main constructors for maps: `mapOf()` and `mutableMapOf()`.

```


// Create maps from integers to strings
val map = mapOf(1 to "one", 2 to "two", 3 to "three")
val mutableMap = mutableMapOf(1 to "one", 2 to "two", 3 to "three")

println(map[2]) // two
mutableMap[4] = "four" // add `4 to "four"` to the mutable map
mutableMap.remove(2) // remove a pair from the mutable map

// Create a map from a list of numbers to their squares
val squares = listOf(1, 3, 7).associateWith { it * it }
println(squares) // {1=1, 3=9, 7=49}

```

An example with a mutable map containing positions to colors.

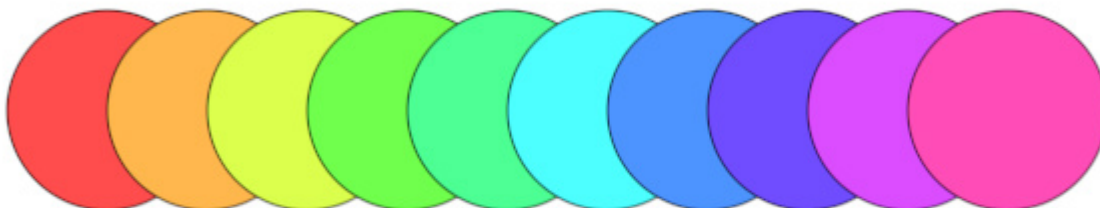

```

fun main() = application {
    program {
        // Notice how we can specify the key and value types
        val data = mutableMapOf<Vector2, ColorRGBA>()
        // Populate the map with 10 positions and colors
        repeat(10) {
            val pos = Vector2(60.0 + 50.0 * it, height * 0.5)
            val color = ColorHSV(it * 36.0, 0.7, 1.0).toRGBA()

```

```

        data[pos] = color
    }
    extend {
        drawer.clear(ColorRGBA.WHITE)
        // Iterate over all the map items using the position and color of each
        data.forEach { (pos, c) ->
            drawer.fill = c
            drawer.circle(pos, 50.0)
        }
    }
}
}
}

```

[Link to the full example](#)

Set

A set is a collection of *unique* elements.

There are two main constructors for sets: `setOf()` and `mutableSetOf()`.

```

// Immutable set
val s = setOf(1, 2, 3, 4, 5, 5, 5)
println(s) // [1, 2, 3, 4, 5]
println(s.contains(6)) // false

// Mutable set
val mutableS = mutableSetOf(1, 2, 3, 4, 5)
println(mutableS.add(6)) // true (added successfully)
println(mutableS.add(6)) // false (not added, already there)
println(mutableS.remove(3)) // true (removed successfully)
println(mutableS.remove(3)) // false (item does not exist)

```

One can also convert a list into a set to make sure its elements are unique:

```

val nonUnique = List(20) {
    (Math.random() * 10).toInt()
}
val unique = nonUnique.toSet()
println(nonUnique) // [4, 1, 4, 1, 0, 1, 4, 1, 1, 0]
println(unique) // [4, 1, 0]

```

There are endless possibilities with Lists, Sets, and Maps. Learn more about them in the [Kotlin standard library documentation](#).

[edit on GitHub](#)

Functions and Lambdas

If you look at a basic OPENRNDR program and can't stop thinking about that syntax with curly brackets following certain words, this section is for you.

Functions

Please read the section on functions in the [Kotlin Tour](#) all the way to the end. There you will learn about Lambda functions.

When you're done, you should probably be able to understand the syntax of a basic OPENRNDR program: when we encounter code like `extend { ... }` we know that we are dealing with two functions. The first one is called `extend()` and the second one, `{ ... }`, is an anonymous lambda function. In Kotlin, it's not necessary to include the parentheses, as in `extend({ ... })`, if the last argument of the `extend` function is a Lambda function.

What `extend { ... }` does is calling the `extend` function to tell OPENRNDR: "here, take this anonymous function and execute it on every animation frame".

Other creative coding frameworks usually expect *one* specific method, often called `draw`, where the user can draw to the screen.

Having an `extend` method that accepts a lambda function gives OPENRNDR the unique capability of combining multiple `extend` blocks in the same program.

The framework provides several such `extend` blocks (called Extensions), for instance, [Screenshots](#), [ScreenRecorder](#) and [Camera2D](#), among others. This makes it possible to build programs by composing code blocks as if they were LEGO pieces and add powerful functionality with just one or two lines of code.

[edit on GitHub](#)

OPENRNDR GUIDE

[Kotlin language and tools](#) / Immutability

Mutability and immutability

According to the [coding conventions](#) section of the Kotlin guide, we should prefer using immutable to mutable data structures and declare local variables and properties as `val` rather than `var` if they are not modified after initialization.

To learn more about this topic, please take a look at the [hello world](#), [basic types](#) and [collections](#) sections of the Kotlin Tour.

This should help you familiarize with the idea of mutable and immutable data in Kotlin.

OPENRNDR data structures

Vectors and Matrices

OPENRNDR makes extensive use of data types like `Vector2`, `Vector3`, `Vector4`, `Matrix2x2`, `Matrix3x3`, `Matrix4x4` and `Matrix5x5` for creating and drawing 2D and 3D shapes

Such data structures are immutable in OPENRNDR. That means that the following would not work:

```
val v = Vector2.ZERO
v.x += 0.1 // error: x is immutable
```

We could switch from `val` to `var`:

```
var v = Vector2.ZERO
```

but we still can't modify the `x` component of that vector, because `x` is still immutable. The solution is to not try changing the components independently, but to assign a new value to the variable:

```
var v = Vector2.ZERO
v += Vector2(0.1, 0.0)
```

The same idea applies to matrices. For example:

```
var m = Matrix4x4.IDENTITY // One of the existing Matrix4x4 "presets"
m = m * 2.0 + 1.0 // Assign a new matrix with all components multiplied by 2.0 and incremented by 1.0
```

In a nutshell, don't try changing individual properties of OPENRNDR objects but assign a new value to the variable instead.

The drawer state is mutable

One area in the framework that does have a mutable state is the [drawer](#).

We can alter properties like `drawer.fill`, `drawer.stroke`, `drawer.strokeWeight` and doing so will affect any following shapes we draw.

One detail: `drawer.fill` holds a `ColorRGBA` variable. This variable has `r`, `g`, `b` and `a` components. But the same way we could not modify the `x` component of a `Vector2`, we cannot modify the `r` component of a `ColorRGBA`. We just need to assign a new value to the `fill`, instead of trying to modify the components of the color.

Mutating other OPENRNDR objects

A [ShapeContour](#) is a core OPENRNDR class that holds an open or closed contour made out of straight or curved segments.

Let's imagine we have a circular contour made out of four curved segments. Could we mutate it? Could we animate the position of one of its vertices? Again, the same rule applies here. Contours, segments and vertices are all immutable.

If we want to animate and deform the circle, we need to recreate the contour on every animation frame. We could do this based on the `seconds` variable, based on the previous version of the contour, or based on some other changing data.

OPENRNDR provides many powerful tools to construct and deform contours. We only need to get used to the idea of working with immutable data.

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

What is Gradle?

Gradle is a build tool used by OPENRNDR components like the core, extensions, template, and guide.

What is a build tool?

A core task a build tool performs is telling the compiler to compile programs. Compiling involves reading your source code files (human-readable text files describing algorithms) and converting each line into instructions the machine can execute. A compiler program usually takes several source code files and outputs one executable program. Compilers often have complex command-line arguments, and build tools take care of such details so we don't need to.

Other essential steps built tools perform include downloading dependencies (third-party libraries used by our source code) and packing those dependencies into our executable program.

Gradle is a complex tool that supports multiple programming languages. It has many plugins providing all kinds of functionality needed by people building and distributing applications.

To configure Gradle, one uses Tasks which are text files describing the steps required to complete something.

Do we always need to use a build tool?

Theoretically, one could write Kotlin or Java programs without using any build tool, but that would involve manually downloading all the dependencies and writing long instructions in the command line to build your programs. Using Gradle makes our life easier.

Do I need to know Gradle to use OPENRNDR?

In most cases, one can happily write OPENRNDR programs without knowing that Gradle exists, although we may need to edit Gradle configuration files in some cases.

Enable or disable extensions

Suppose a program requires access to a MIDI hardware controller. In that case we are lucky, because someone already wrote an OPENRNDR extension for this specific use case. OPENRNDR extensions are called ORX. The only thing we need to do is to edit the `build.gradle.kts` file and add a dependency to the MIDI ORX.

- 1 Explore the list of [available extensions](#). We can see one called `orx-midi`.
- 2 Open `build.gradle.kts` in your `openrndr-template` based project.
- 3 Inside the `dependencies { ... }` block, add `implementation(orx.midi)` (converting any - characters in the name into `.`).
- 4 Click "Sync All Gradle Projects" in the IDE to trigger the downloading of the MIDI libraries.
- 5 Now the extension can be used in your code.

Add or remove dependencies

In some cases we want to use algorithms or services not implemented by an ORX. Luckily there are thousands of JAVA libraries available to us, just one line away.

Three such dependencies (JSON, CSV, and XML) are predefined and can be easily added as explained under [fileIO](#).

Other dependencies (for instance a 2D physics library) can be easily added in this format:

```
implementation("org.jbox2d:jbox2d-library:2.2.1.1").
```

- 1 Find such dependencies in [maven central](#).

- 2 Choose the `Gradle` snippet and copy it to the clipboard.
- 3 Paste it into `build.gradle.kts` inside the `dependencies { ... }` block.
- 4 Click “Sync All Gradle Projects” in the IDE to trigger the downloading of the dependency.
- 5 Now the library can be imported in your code.

What else does Gradle do for OPENRNDR?

- It converts the OPENRNDR source code into multiple distributable libraries.
- It helps publish those libraries to an [online database](#), making them accessible to everyone.
- Similarly, it builds all the ORX extensions (called add-ons or plugins in other frameworks) and helps publish them to the same database.
- It runs your OPENRNDR programs and builds executables you can share with others.
- It builds the OPENRNDR Guide, creates images and video files, embeds them in the documentation, and then publishes the guide online.
- Gradle runs tests to ensure code changes did not break any functionality.
- Gradle updates `readme.md` files, for example, to list all the ORX extensions in the root `readme` file.

Thanks to Gradle and the automation it enables, the whole OPENRNDR project can be maintained by a small team of developers.

Are there alternatives to Gradle?

Other build tools often used are Maven, Ant, and `cmake`.

Gradle is an excellent fit for Kotlin-based projects because Kotlin itself can be used to write Gradle tasks, avoiding the need to work with additional languages.

[edit on GitHub](#)

Program basics

[edit on GitHub](#)

TABLE OF CONTENTS

- [Application](#)
 - [Configure](#)
 - [Program](#)
 - [Extend](#)
-

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Program basics

Let's have a look at how an OPENRNDR program is structured. Most programs will share a structure like the one below.

```
fun main() = application {  
  configure {  
    // set Configuration options here  
  }  
  
  program {  
    // -- what is here is executed once  
    extend {  
      // -- what is here is executed 'as often as possible'  
    }  
  }  
}
```

application

The `application` block is used to setup the run-time environment of the software we are writing. This block houses two other blocks: `configure` and `program`. Think of it as an OPENRNDR application.

[edit on GitHub](#)

OPENRNDR GUIDE

[Program basics](#) / Configure

Configure

The `configure` block is an optional block that is used to configure the run-time environment. Most commonly it is used to configure the size of the window.

An example configuration that sets the window size, window resizable and title is as follows:

```
fun main() = application {
  configure {
    width = 1280
    height = 720
    windowResizable = true
    title = "OPENRNDR Example"
  }
  program {
  }
}
```

An example for a full screen window on your second monitor with the mouse pointer hidden:

```
fun main() = application {
  configure {
    fullscreen = Fullscreen.CURRENT_DISPLAY_MODE
    display = displays[1]
    hideCursor = true
  }
  program {
  }
}
```

Starting your program with a custom configuration looks roughly like this.

```
fun main() = application {
  configure {
    // settings go here
  }
  program {
    // -- one time set-up code goes here
    extend {
      // -- drawing code goes here
    }
  }
}
```

Commonly used configuration options:

Property	Type	Default value	Description
display	Display?	null (primary display)	The display on which to create the window. All detected displays are present in the displays list within the application {} block.
fullscreen	Fullscreen	Fullscreen.DISABLED	When specified, either Fullscreen.CURRENT_DISPLAY_MODE to make the window match the current display resolution, or Fullscreen.SET_DISPLAY_MODE to change the display resolution to match width and height.
height	Int	480	Initial window height
position	IntVector2?	null (center of the primary display)	Initial window position (top-left corner)
title	String	"OPENRNRD"	Window title
width	Int	640	Initial window width
multisample	WindowMultisample	WindowMultisample.Disabled	Can be increased to a value like WindowMultisample.SampleCount(8) for a smoother rendering

Other available options:

Property	Type	Default value	Description
hideCursor	Boolean	false	Hide the cursor?
hideWindowDecorations	Boolean	false	Hide window decorations?
maximumHeight	Int	Int.MAX_VALUE / 8	Maximum window height
maximumWidth	Int	Int.MAX_VALUE / 8	Maximum window width
minimumHeight	Int	128	Minimum window height
minimumWidth	Int	128	Minimum window width
unfocusBehaviour	UnfocusBehaviour	UnfocusBehaviour.NORMAL	The value UnfocusBehaviour.THROTTLE can be specified to throttle the program to 10Hz when unfocused.
vsync	Boolean	true	Should the program wait for vertical retrace to avoid tearing?
windowTransparent	Boolean	false	Should the window be transparent?
windowResizable	Boolean	false	Allow resizing of window?
windowAlwaysOnTop	Boolean	false	Keep the window floating above other windows?

See [the API](#) for an complete list.

Changing the configuration while the program runs

To modify the configuration after the program has started we can set [various properties](#) via application.

```
fun main() = application {
    program {
        extend {
            if (frameCount % 60 == 0) {
                application.cursorVisible = Boolean.random()
                application.windowPosition = Vector2.uniform(0.0, 200.0)
            }
        }
    }
}
```

```
}  
  }  
}
```

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

OPENRNDR GUIDE

[Program basics](#) / Program

Program

The program block houses the actual programming logic.

The code inside the `program` block is only executed after a window has been created and a graphical context has been set up. This code is only executed once.

In the `program` block one can install extensions using `extend`. Extensions are by default executed as often as possible. The most important type of extension is the one holding the user code.

A minimal application-program-extend setup would then look like this:

```
fun main() = application {  
  program {  
    // -- what is here is executed once  
    // -- It's a good place to load assets  
    extend {  
      // -- what is here is executed 'as often as possible'  
      drawer.circle(width / 2.0, height / 2.0, 100.0)  
    }  
  }  
}
```

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

OPENRNDR GUIDE

[Program basics](#) / Extend

Extend

The `program` block usually contains an `extend` block which gets executed as often as possible.

```
fun main() = application {  
  program {  
    extend {  
      drawer.circle(width / 2.0, height / 2.0, 50.0)  
    }  
  }  
}
```

The `extend` block serves as a “draw loop”, which is what we need for drawing smooth animations. To demonstrate that the result is not a still image, let’s draw a circle located wherever the mouse cursor is:

```
fun main() = application {  
  program {  
    extend {  
      drawer.circle(mouse.position, 50.0)  
    }  
  }  
}
```

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Drawing

To draw things in OPENRNDR you typically use the `drawer` object.

For example:

- `drawer.clear(ColorRGBa.PINK)` to clear the screen
- `drawer.fill = ColorRGBa.WHITE` to set the fill color
- `drawer.stroke = ColorRGBa.BLACK` to set the stroke color
- `drawer.circle(320.0, 240.0, 50.0)` to draw a circle

Explore the next pages to learn more about drawing.

[edit on GitHub](#)

TABLE OF CONTENTS


- [Drawing circles, rectangles and lines](#)
- [Images](#)
- [Color](#)
- [Managing draw style](#)
- [Curves and shapes](#)
- [Text](#)
- [Drawing SVG](#)
- [Video](#)
- [Tridimensional graphics](#)
- [Drawing primitives batched](#)
- [Transformations](#)
- [Vectors](#)
- [Quaternions](#)
- [Color buffers](#)
- [Render targets](#)
- [Filters and post processing](#)
- [Clipping](#)
- [Asynchronous image loading](#)
- [Shade styles](#)
- [Custom rendering](#)
- [Concurrency and multithreading](#)
- [Array textures](#)

OPENRNDR GUIDE

[Drawing](#) / Drawing circles, rectangles and lines

Drawing circles

A circle is drawn around coordinates x , y , i.e. x and y specify the center of the circle. Circles are filled with the color set in `drawer.fill` and their stroke is set to `drawer.stroke`. The width of the stroke follows `drawer.strokeWeight`.

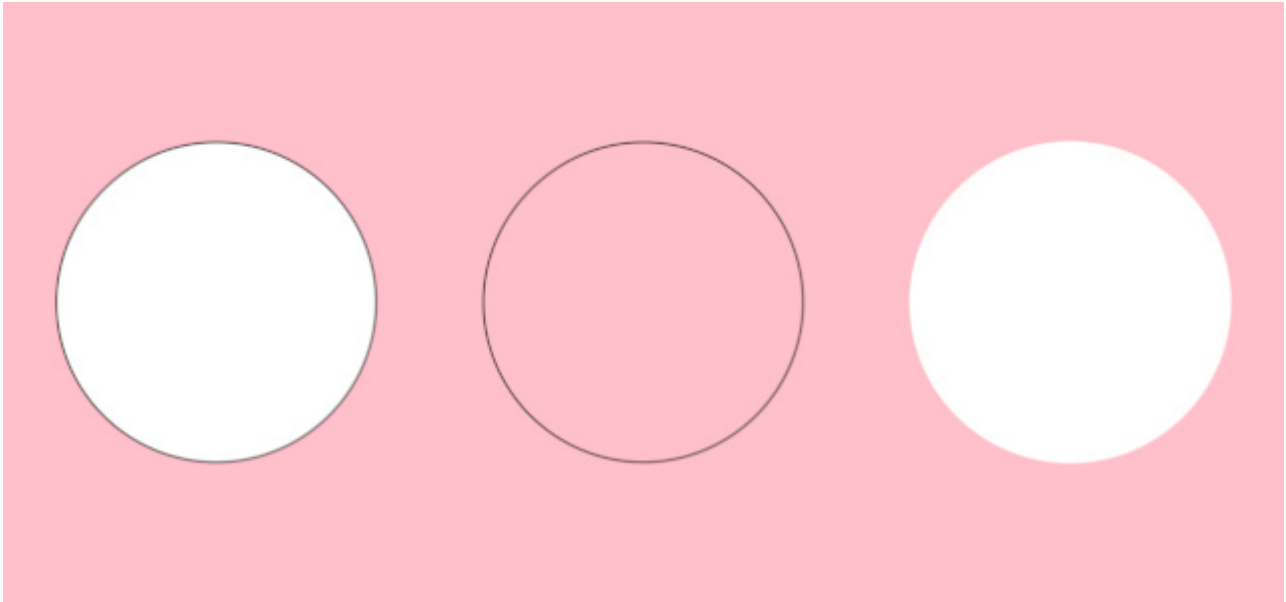

```
fun main() = application {
    configure {
        height = 300
    }
    program {
        extend {
            drawer.clear(ColorRGBa.PINK)

            // -- draw a circle with white fill and black stroke
            drawer.fill = ColorRGBa.WHITE
            drawer.stroke = ColorRGBa.BLACK
            drawer.strokeWeight = 1.0
            drawer.circle(width / 6.0, height / 2.0, width / 8.0)

            // -- draw a circle without a fill, but with black stroke
            drawer.fill = null
            drawer.stroke = ColorRGBa.BLACK
            drawer.strokeWeight = 1.0
            drawer.circle(
                width / 6.0 + width / 3.0,
                height / 2.0,
                width / 8.0
            )

            // -- draw a circle with white fill, but without a stroke
            drawer.fill = ColorRGBa.WHITE
            drawer.stroke = null
        }
    }
}
```



```

        drawer.strokeWeight = 1.0
        drawer.circle(
            width / 6.0 + 2 * width / 3.0,
            height / 2.0,
            width / 8.0
        )
    }
}
}

```

[Link to the full example](#)

You may have spotted other APIs for drawing circles; `Drawer.circle(center: Vector2, radius: Double)` and `Drawer.circle(circle: Circle)` and wonder what those are for.

They are for drawing the exact same circle, but using arguments that may be more convenient in scenarios in which values are provided by `Vector2` or `Circle` types.

For example, `mouse.position` is a `Vector2`, so we can do the following:


```

drawer.circle(mouse.position, 50.0)

```

Drawing rectangles

Rectangles can be drawn by specifying their top-left corner coordinates, width and height.

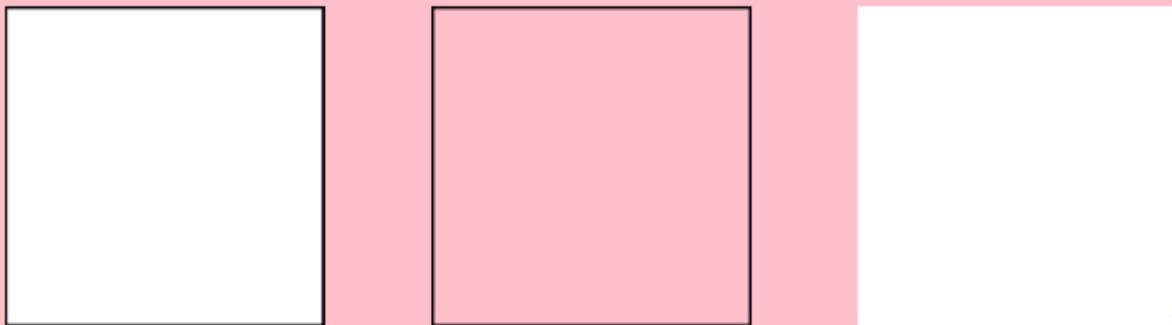

```

fun main() = application {
    configure {
        height = 300
    }
    program {
        extend {
            drawer.clear(ColorRGBa.PINK)

            // -- draw rectangle with white fill and black stroke
            drawer.fill = ColorRGBa.WHITE
            drawer.stroke = ColorRGBa.BLACK

```

```

        drawer.strokeWeight = 1.0
        drawer.rectangle(
            width / 6.0 - width / 8.0,
            height / 2.0 - width / 8.0,
            width / 4.0,
            width / 4.0
        )

        // -- draw rectangle without fill, but with black stroke
        drawer.fill = null
        drawer.stroke = ColorRGBA.BLACK
        drawer.strokeWeight = 1.0
        drawer.rectangle(
            width / 6.0 - width / 8.0 + width / 3.0,
            height / 2.0 - width / 8.0,
            width / 4.0,
            width / 4.0
        )

        // -- draw a rectangle with white fill, but without stroke
        drawer.fill = ColorRGBA.WHITE
        drawer.stroke = null
        drawer.strokeWeight = 1.0
        drawer.rectangle(
            width / 6.0 - width / 8.0 + 2.0 * width / 3.0,
            height / 2.0 - width / 8.0,
            width / 4.0,
            width / 4.0
        )
    }
}

```


[Link to the full example](#)

Drawing lines

Single lines are drawn per segment between two pairs of coordinates using `lineSegment`. Line primitives use `Drawer.stroke` to determine the color drawing color and `Drawer.strokeWeight` to determine the width of the line.

Line endings can be drawn in three styles by setting `Drawer.lineCap`

LineCap.	description
BUTT	butt cap
ROUND	round cap
SQUARE	square cap

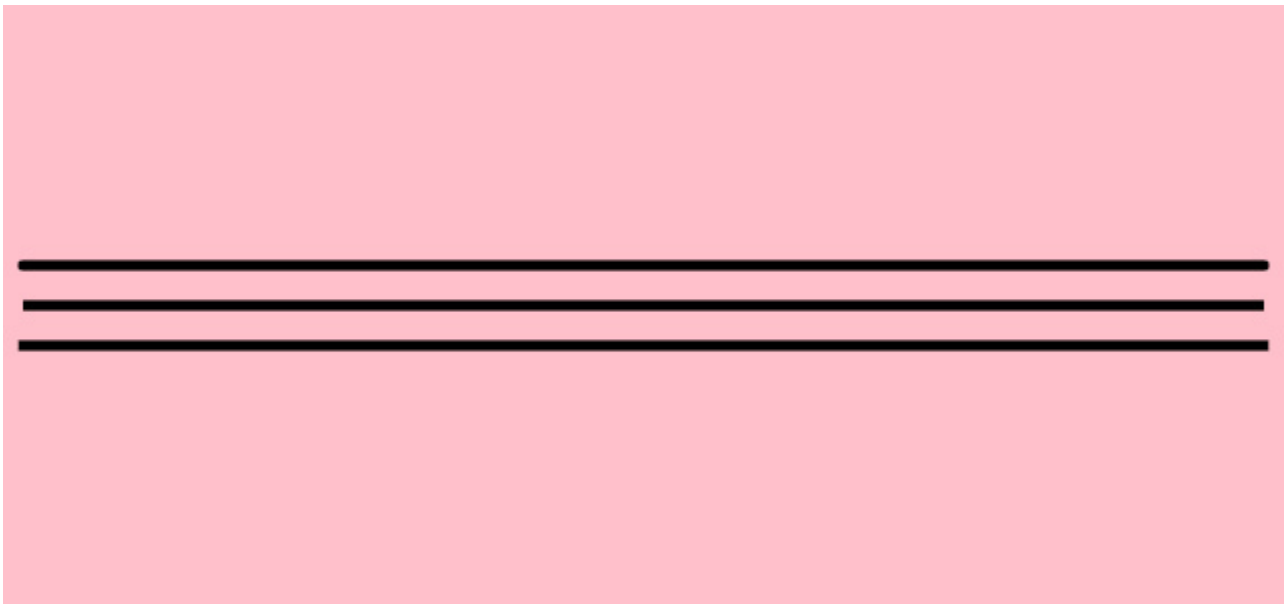

```
fun main() = application {
    configure {
        height = 300
    }
    program {
        extend {
            drawer.clear(ColorRGBA.PINK)
            // -- setup line appearance
            drawer.stroke = ColorRGBA.BLACK
            drawer.strokeWeight = 5.0

            drawer.lineCap = LineCap.ROUND
            drawer.lineSegment(10.0, height / 2.0 - 20.0, width - 10.0, height / 2.0 - 20.0)


            drawer.lineCap = LineCap.BUTT
            drawer.lineSegment(10.0, height / 2.0, width - 10.0, height / 2.0)

            drawer.lineCap = LineCap.SQUARE
            drawer.lineSegment(10.0, height / 2.0 + 20.0, width - 10.0, height / 2.0 + 20.0)
        }
    }
}
```

[Link to the full example](#)

Drawing line strips

A run of connected line segments is called a line strip and is drawn using `lineStrip`. To draw a line strip one supplies a list of points between which line segments should be drawn.

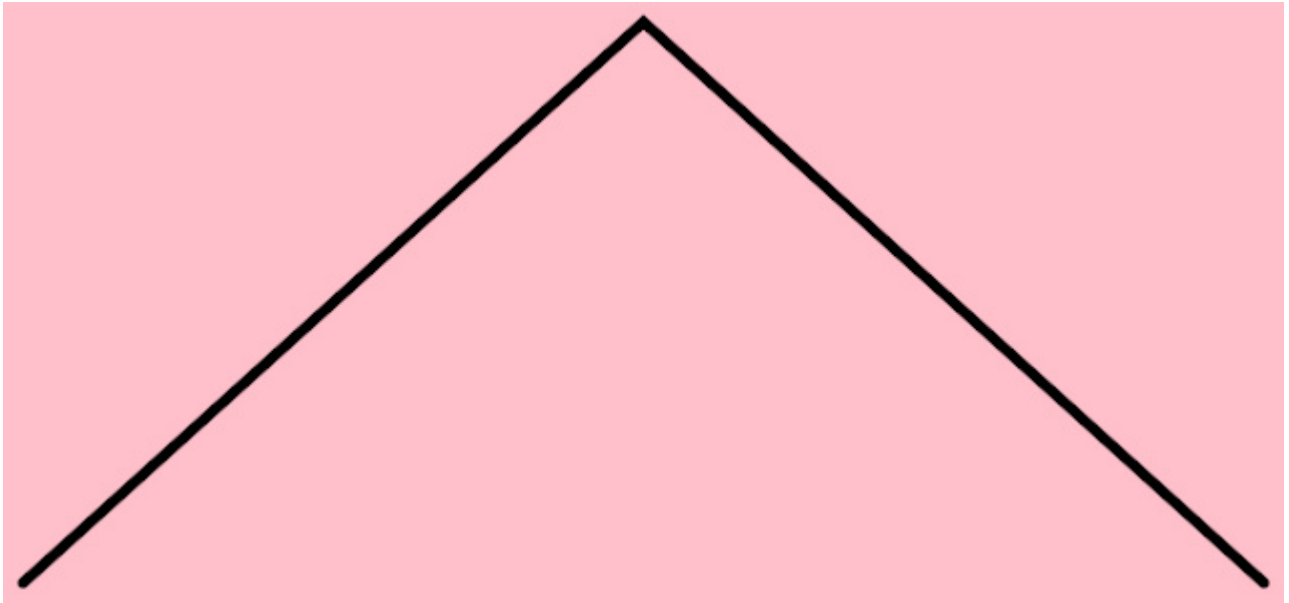

```
fun main() = application {
    configure {
        height = 300
    }
    program {
        extend {
            drawer.clear(ColorRGBA.PINK)
            // -- setup line appearance
            drawer.stroke = ColorRGBA.BLACK
            drawer.strokeWeight = 5.0
            drawer.lineCap = LineCap.ROUND

            val points = listOf(
                Vector2(10.0, height - 10.0),
                Vector2(width / 2.0, 10.0),
                Vector2(width - 10.0, height - 10.0)
            )
            drawer.lineStrip(points)
        }
    }
}
```

[Link to the full example](#)

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.


[Drawing](#) / Images

Images

Images are stored in `ColorBuffer` instances, the image data resides in GPU memory

Loading and drawing images

Images are loaded using the `loadImage` function and drawn using `Drawer.image`.

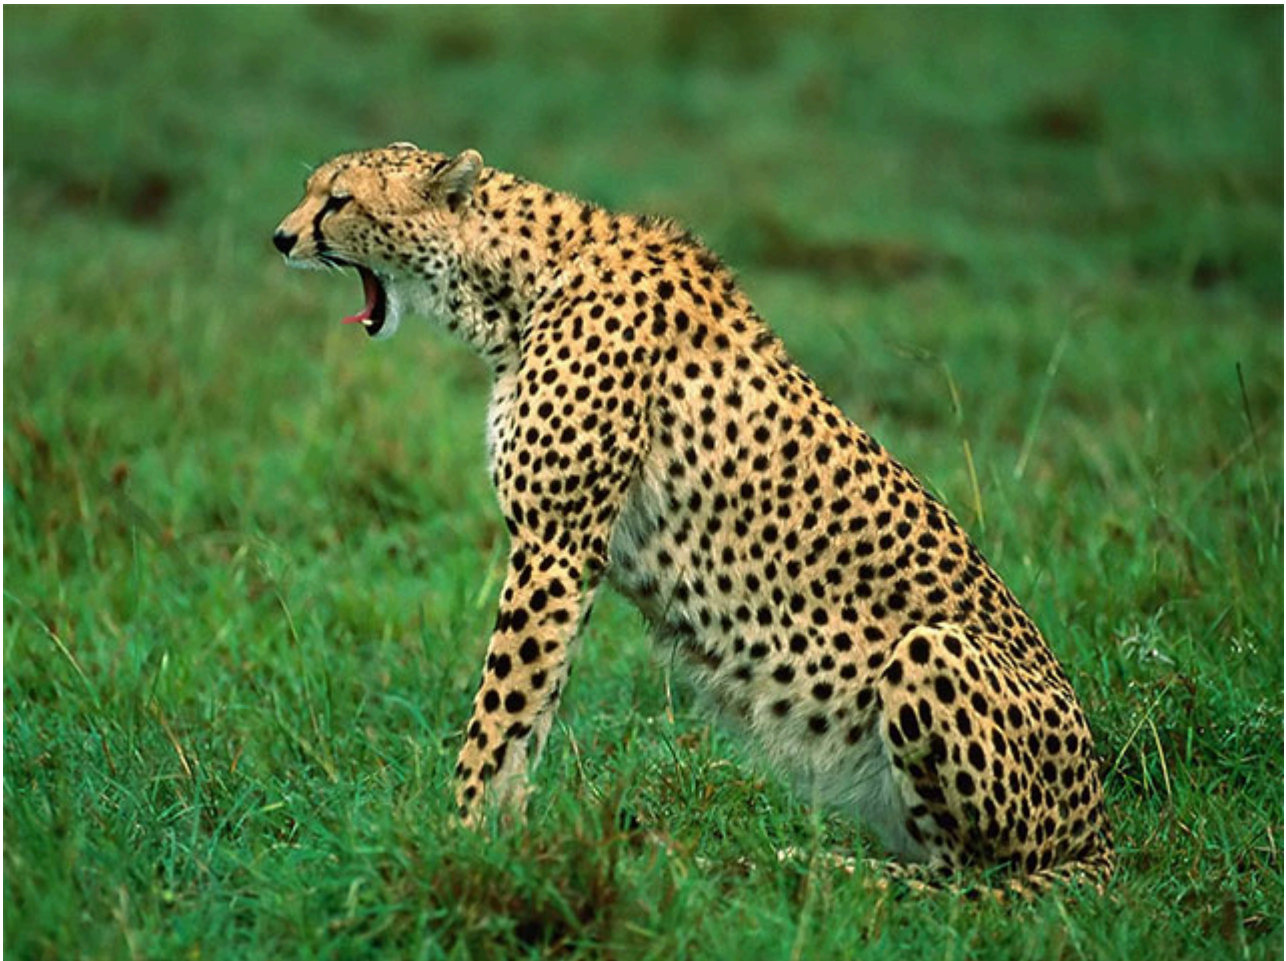

```
fun main() = application {  
    configure {}  
    program {  
        val image = loadImage("data/images/cheeta.jpg")  
  
        extend {  
            drawer.image(image)  
        }  
    }  
}
```

[Link to the full example](#)

To change the location of the image one can use `Drawer.image` with extra coordinates provided.

```
drawer.image(image, 40.0, 40.0)
```

Extra width and height arguments can be provided to draw a scaled version of the image.

```
drawer.image(image, 40.0, 40.0, 64.0, 48.0)
```

To rotate an image (or any other element you draw) apply [transformations](#).

Drawing parts of images


It is possible to draw parts of images by specifying *source* and *target* rectangles. The source rectangle describes the area that should be taken from the image and presented in the target rectangle.



```
fun main() = application {  
    program {  
        val image = loadImage("data/images/cheeta.jpg")  
  
        extend {  
            val source = Rectangle(0.0, 0.0, 320.0, 240.0)  
            val target = Rectangle(160.0, 120.0, 320.0, 240.0)  
            drawer.image(image, source, target)  
        }  
    }  
}
```

[Link to the full example](#)

Drawing many parts of images

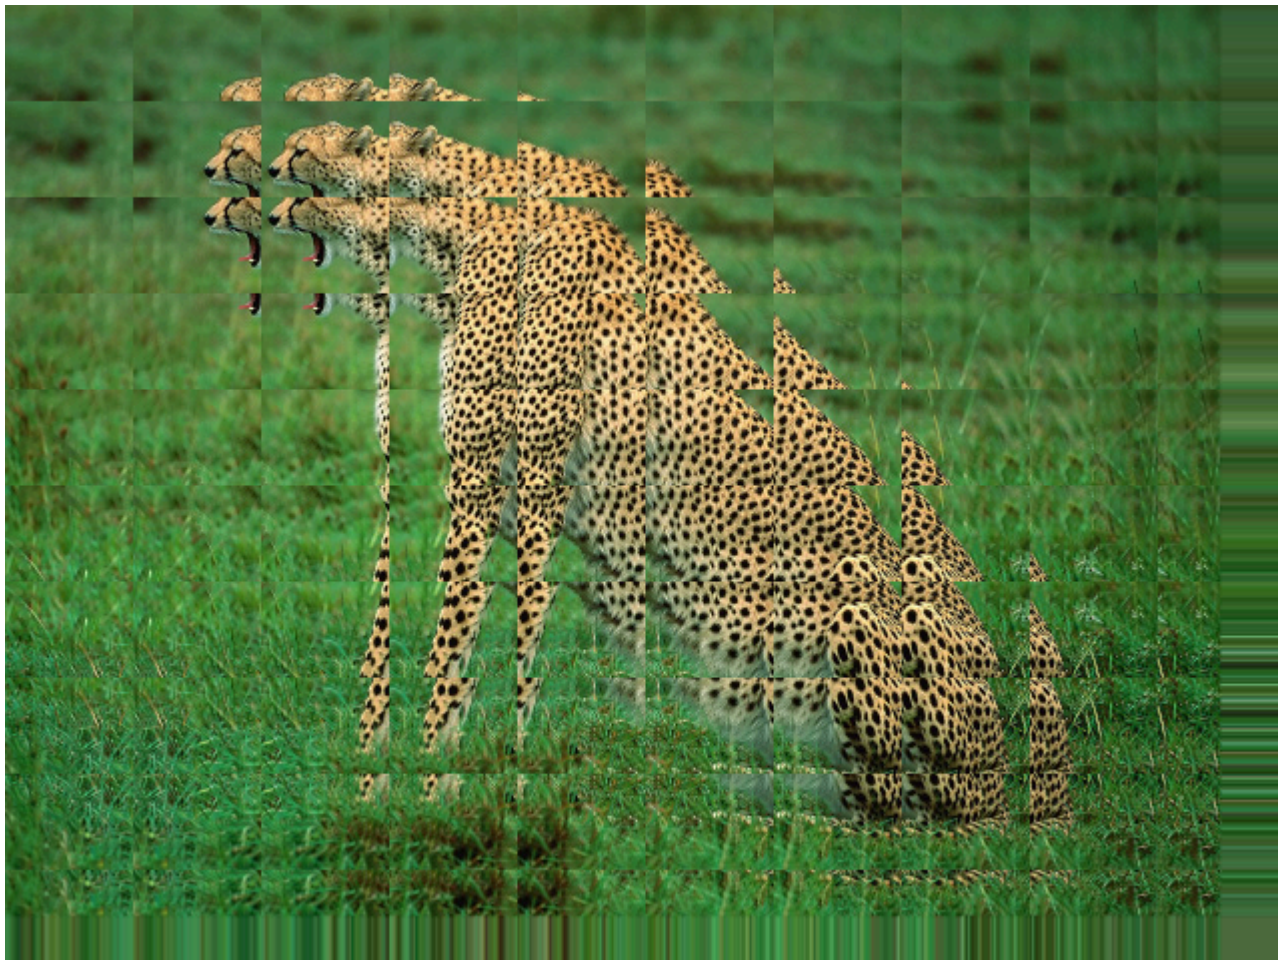

```
fun main() = application {
    program {
        val image = loadImage("data/images/cheeta.jpg")

        extend {
            val areas = (0..10).flatMap { y ->
                (0..10).map { x ->
                    val source = Rectangle(
                        x * (width / 10.0),
                        y * (height / 10.0),
                        width / 5.0,
                        height / 5.0
                    )
                    val target = Rectangle(
                        x * (width / 10.0),
                        y * (height / 10.0),
                        width / 10.0,
                        height / 10.0
                    )
                    source to target
                }
            }
        }
        drawer.image(image, areas)
    }
}
```

```
}  
}
```

[Link to the full example](#)

Changing the appearance of images

A linear color transform can be applied to images by setting `Drawer.drawStyle.colorMatrix` to a `Matrix55` value.

Tinting

Tinting multiplies the image color with a *tint color*.



```
fun main() = application {  
    program {  
        val image = loadImage("data/images/cheeta.jpg")  
  
        extend {  
            drawer.drawStyle.colorMatrix = tint(ColorRGBa.RED)  
            drawer.image(image, 0.0, 0.0)  
        }  
    }  
}
```

[Link to the full example](#)

Inverting

Drawing an image with inverted colors can be achieved by using the `invert` color matrix.



```
fun main() = application {  
    program {  
        val image = loadImage("data/images/cheeta.jpg")  
  
        extend {  
            drawer.drawStyle.colorMatrix = invert  
            drawer.image(image, 0.0, 0.0)  
        }  
    }  
}
```

[Link to the full example](#)

Grayscale

Drawing an image in grayscale can be achieved by using the `grayscale` color matrix.



```
fun main() = application {
    program {
        val image = loadImage("data/images/cheeta.jpg")

        extend {
            // -- the factors below determine the RGB mixing factors
            drawer.drawStyle.colorMatrix =
                grayscale(1.0 / 3.0, 1.0 / 3.0, 1.0 / 3.0)
            drawer.image(image)
        }
    }
}
```

[Link to the full example](#)

Concatenating color transforms

Color transforms can be combined using the multiplication operator. This is called transform concatenation. Keep in mind that transform concatenations are read from right to left, and in the following example we first apply the grayscale transform and then the tint transform.



```
fun main() = application {  
  program {  
    val image = loadImage("data/images/cheeta.jpg")  
  
    extend {  
      // -- here we concatenate the transforms using the multiplication operator.  
      drawer.drawStyle.colorMatrix = tint(ColorRGBa.PINK) * grayscale()  
      drawer.image(image)  
    }  
  }  
}
```

[Link to the full example](#)

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Color

In this chapter we discuss and demonstrate OPENRNDR's color functionality.

Basic color

OPENRNDR primarily uses red-green-blue(-alpha) color stored in `ColorRGBa` instances. `ColorRGBa`'s channels store values in the range [0, 1].

Predefined colors

```
ColorRGBa.BLACK
ColorRGBa.WHITE
ColorRGBa.RED
ColorRGBa.GREEN
ColorRGBa.BLUE
ColorRGBa.YELLOW
ColorRGBa.GRAY
ColorRGBa.PINK
```

Custom colors

Custom colors can be made using either the `ColorRGBa` constructor, or the `rgb` and `rgba` functions. Both use value ranges between 0.0 and 1.0.

```
// -- using the ColorRGBa constructor
val red = ColorRGBa(1.0, 0.0, 0.0)
val green = ColorRGBa(0.0, 1.0, 0.0)
val blue = ColorRGBa(0.0, 0.0, 1.0)
val blueOpaque = ColorRGBa(0.0, 0.0, 1.0, 0.5)

// -- using the rgb and rgba functions
val magenta = rgb(1.0, 0.0, 1.0)
val magentaOpaque = rgb(1.0, 0.0, 1.0, 0.5)
```

Conversion from hex color

RGB color is commonly communicated in hexadecimal codes. `ColorRGBa` provides simple tools to construct color from such hexadecimal codes.

```
// -- construct the OPENRNDR pink from hexadecimal code, using an integer argument
val color1 = ColorRGBa.fromHex(0xffc0cb)

// -- construct the OPENRNDR pink from hexadecimal code, using a string argument; the leading # is optional
val color2 = ColorRGBa.fromHex("#ffc0cb")
```

Color operations

The `ColorRGBa` class offers a number of tools to create variations of colors. For example `ColorRGBa.shade` can be used to create lighter or darker shades of a base color.



```
fun main() = application {
    program {
        extend {
            drawer.stroke = null
            val baseColor = ColorRGBA.PINK
            // -- draw 16 darker shades of pink
            for (i in 0..15) {
                drawer.fill = baseColor.shade(i / 15.0)
                drawer.rectangle(35.0 + (700 / 16.0) * i, 32.0, (700 / 16.0), 64.0)
            }
            // -- draw 16 lighter shades of pink
            for (i in 0..15) {
                drawer.fill = baseColor.shade(1.0 + i / 15.0)
                drawer.rectangle(35.0 + (700 / 16.0) * i, 96.0, (700 / 16.0), 64.0)
            }
        }
    }
}
```

[Link to the full example](#)

Using `ColorRGBA.opacity` colors can be made more or less opaque.



```
fun main() = application {
    program {
        extend {
            drawer.stroke = null
            val baseColor = ColorRGBA.PINK

            drawer.fill = ColorRGBA.GRAY.shade(0.5)
            drawer.rectangle(35.0, 32.0, 700.0, 64.00)

            // -- draw 16 darker shades of pink
            for (i in 0..15) {
                drawer.fill = baseColor.opacity(i / 15.0)
```


```

        drawer.rectangle( 35.0 + (700 / 16.0) * i, 64.0, (700 / 16.0), 64.0 )
    }
}
}
}

```

[Link to the full example](#)

Using `mix(ColorRGBa, ColorRGBa, Double)` colors can be mixed.

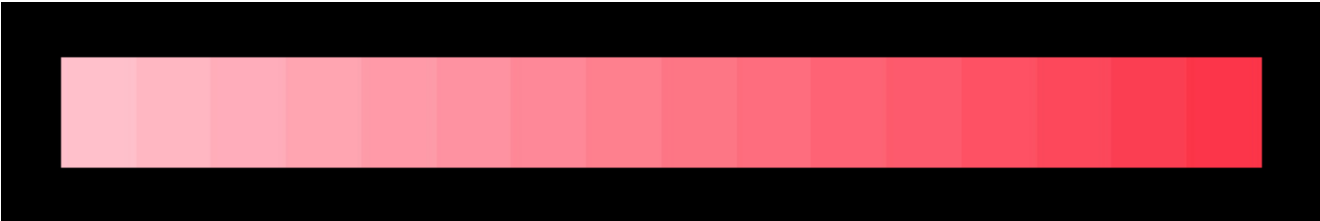

```

fun main() = application {
    program {
        extend {
            drawer.stroke = null
            val leftColor = ColorRGBa.PINK
            val rightColor = ColorRGBa.fromHex(0xFC3549)

            // -- draw 16 color mixes
            for (i in 0..15) {
                drawer.fill = mix(leftColor, rightColor, i / 15.0)
                drawer.rectangle(35.0 + (700 / 16.0) * i,32.0, (700 / 16.0), 64.0)
            }
        }
    }
}
}

```

[Link to the full example](#)

Alternative color models

OPENRNDR offers a wide range of alternative color models. The alternative models use primaries different from red, green and blue.

Class name	Color space description
ColorRGBa	sRGB and linear RGB
ColorHSVa	Hue, saturation, value
ColorHSLa	Hue, saturation, lightness
ColorXSVa	Xue, saturation, value, <i>Kuler</i> -like colorspace
ColorXSLa	Xue, saturation, lightness, <i>Kuler</i> -like colorspace
ColorXYZa	CIE XYZ colorspace
ColorYxya	CIE Yxy colorspace
ColorLABa	LAB colorspace


Class name	Color space description
ColorLCHABa	LCHab colorspace, a cylindrical variant of LAB
ColorLSHABa	LSHab colorspace, a cylindrical variant of LAB, chroma replaced with normalized saturation
ColorLUVa	LUV colorspace
ColorLCHUva	LCHuv colorspace, a cylindrical variant of LUV
ColorLSHUva	LSHuv colorspace, a cylindrical variant of LUV, chroma replaced with normalized saturation
ColorATVa	Coloroid color space, partial implementation

HSV, HSL, XSV and XSL color

HSV (hue-saturation-value) and HSL (“hue-saturation-lightness”) are cylindrical color spaces.

XSV and XSL (for lack of a better name) are transformed versions of HSV and HSL in which the hue component has been stretched and compressed to make the color space better suited for artists. The spaces are better suited for artists because it has red-green and blue-yellow primaries. The XSV and XSL spaces are based on (if not the same as) the Adobe Kuler color spaces.

Below is an example of plots of color swatches for (from top to bottom) HSV, HSL, XSV and XSL. The adjusted hue of the XSV and XSL spaces is clearly visible.

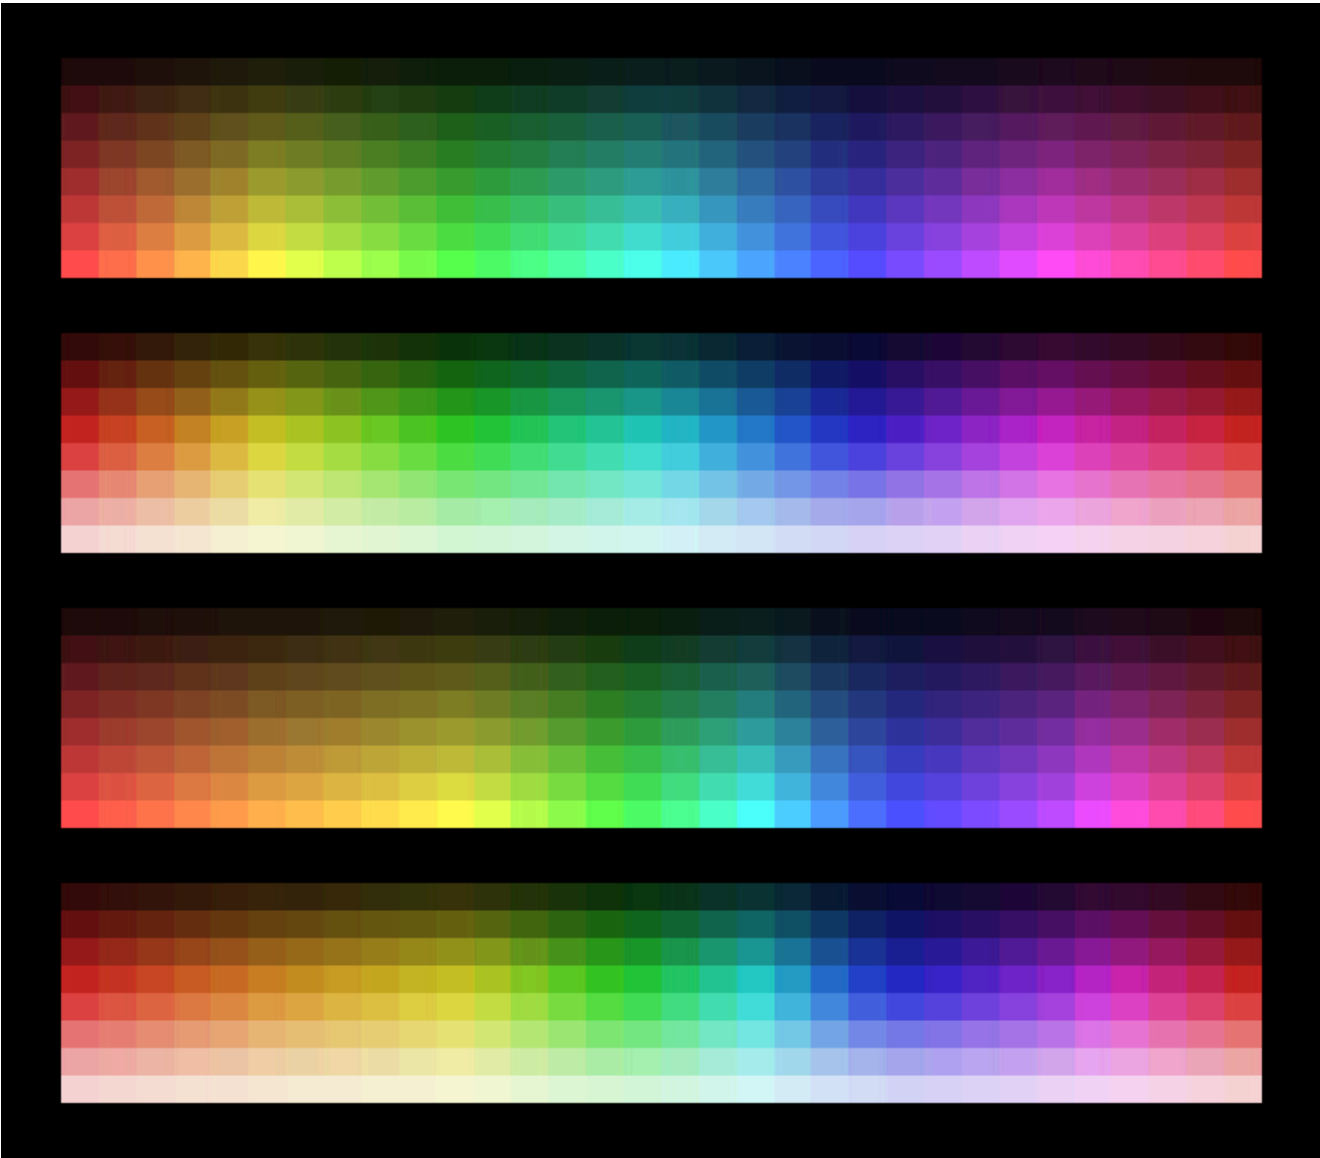

```

fun main() = application {
    configure {
        width = 770
        height = 672
    }
    program {
        extend {
            drawer.stroke = null

            // -- draw hsv swatches
            for (j in 0..7) {
                for (i in 0..31) {
                    drawer.fill = ColorHSV(360 * (i / 31.0), 0.7, 0.125 + j / 8.0).toRGBa()
                    drawer.rectangle(35.0 + (700 / 32.0) * i, 32.0 + j * 16.0, (700 / 32.0), 16.0)
                }
            }

            // -- draw hsl swatches
            drawer.translate(0.0, 160.0)
            for (j in 0..7) {
                for (i in 0..31) {
                    drawer.fill = ColorHSL(360 * (i / 31.0), 0.7, 0.125 + j / 9.0).toRGBa()
                    drawer.rectangle(35.0 + (700 / 32.0) * i, 32.0 + j * 16.0, (700 / 32.0), 16.0)
                }
            }

            // -- draw xsv (Kuler) swatches
            drawer.translate(0.0, 160.0)
            for (j in 0..7) {
                for (i in 0..31) {
                    drawer.fill = ColorXSv(360 * (i / 31.0), 0.7, 0.125 + j / 8.0).toRGBa()
                    drawer.rectangle(35.0 + (700 / 32.0) * i, 32.0 + j * 16.0, (700 / 32.0), 16.0)
                }
            }

            // -- draw xsl (Kuler) swatches
            drawer.translate(0.0, 160.0)
            for (j in 0..7) {
                for (i in 0..31) {
                    drawer.fill = ColorXSL(360 * (i / 31.0), 0.7, 0.125 + j / 9.0, 1.0).toRGBa()
                    drawer.rectangle(35.0 + (700 / 32.0) * i, 32.0 + j * 16.0, (700 / 32.0), 16.0)
                }
            }
        }
    }
}

```

[Link to the full example](#)

[edit on GitHub](#)

OPENRNDR GUIDE

[Drawing](#) / Managing draw style

Managing draw style

In previous sections we briefly talked about controlling the appearance of drawing primitives using `fill`, `stroke` and `lineCap`. In this section we present the existing draw style properties.

DRAWSTYLE PROPERTIES

Property	Type	Default	Description
<code>fill</code>	<code>ColorRGBA?</code>	<code>ColorRGBA.WHITE</code>	The fill color
<code>stroke</code>	<code>ColorRGBA?</code>	<code>ColorRGBA.BLACK</code>	The stroke color
<code>strokeWeight</code>	<code>Double</code>	<code>1.0</code>	The stroke weight
<code>smooth</code>	<code>Boolean</code>	<code>true</code>	Should contours and segments look smooth or pixelated?
<code>lineCap</code>	<code>LineCap</code>	<code>LineCap.BUTT</code>	The segment cap style
<code>lineJoin</code>	<code>LineJoin</code>	<code>LineJoin.MITER</code>	The segment join style
<code>miterLimit</code>	<code>Double</code>	<code>4.0</code>	The segment join maximum miter length
<code>fontMap</code>	<code>FontMap?</code>	<code>null</code>	The font to use
<code>kerning</code>	<code>KernMode</code>	<code>KernMode.METRIC</code>	The kerning mode used for rendering text
<code>textSetting</code>	<code>TextSettingMode</code>	<code>TextSettingMode.SUBPIXEL</code>	The text setting mode
<code>colorMatrix</code>	<code>Matrix55</code>	<code>Matrix55.IDENTITY</code>	The color matrix (used for images)
<code>channelWriteMask</code>	<code>ChannelMask</code>	<code>ChannelMask.ALL</code>	The channel write mask
<code>shadeStyle</code>	<code>ShadeStyle?</code>	<code>null</code>	The shade style
<code>blendMode</code>	<code>BlendMode</code>	<code>BlendMode.OVER</code>	The blend mode
<code>quality</code>	<code>DrawQuality</code>	<code>DrawQuality.QUALITY</code>	A hint that controls the quality of some primitives
<code>cullTestPass</code>	<code>CullTestPass</code>	<code>CullTestPass.ALWAYS</code>	What fragments be rendered: back or front facing?
<code>depthTestPass</code>	<code>DepthTestPass</code>	<code>DepthTestPass.ALWAYS</code>	When should fragments pass the depth test
<code>depthWrite</code>	<code>Boolean</code>	<code>false</code>	Should the fragment depth be written to the depth buffer?
<code>stencil</code>	<code>StencilStyle</code>	<code>StencilStyle()</code>	The stencil style
<code>frontStencil</code>	<code>StencilStyle</code>	<code>StencilStyle()</code>	The stencil style for front-facing fragments
<code>backStencil</code>	<code>StencilStyle</code>	<code>StencilStyle()</code>	The stencil style for back-facing fragments
<code>clip</code>	<code>Rectangle?</code>	<code>null</code>	A rectangle that describes where drawing will take place

The active draw style

```
val active = drawer.drawStyle.copy()
```

The draw style stack

Styles can be pushed on and popped from a stack maintained by `Drawer`.

```
extend {
  drawer.pushStyle()
  drawer.fill = ColorRGBA.PINK
  drawer.rectangle(100.0, 100.0, 100.0, 100.0)
  drawer.popStyle()
  // colorMatrix, channelWriteMask, blendMode, quality, stencil, frontStencil, backStencil, clip
  drawer.drawStyle
}
```

The `Drawer` provides a helper function called `isolated {}` that pushes style and transforms on a their respective stacks, executes the user code and pops style and transforms back.

```
extend {
  drawer.isolated {
    fill = ColorRGBA.PINK
    rectangle(100.0, 100.0, 100.0, 100.0)
  }
}
```

[edit on GitHub](#)


This site uses [Just the Docs](#), a documentation theme for Jekyll.

Segment2D, ShapeContour and Shape

OPENRNDR offers numerous tools for creating AND drawing two dimensional shapes.

Segment2D

The basic element for constructing 2D shapes is the `Segment2D`: a Bézier curve with a start point, an end point and zero, one or two control points.

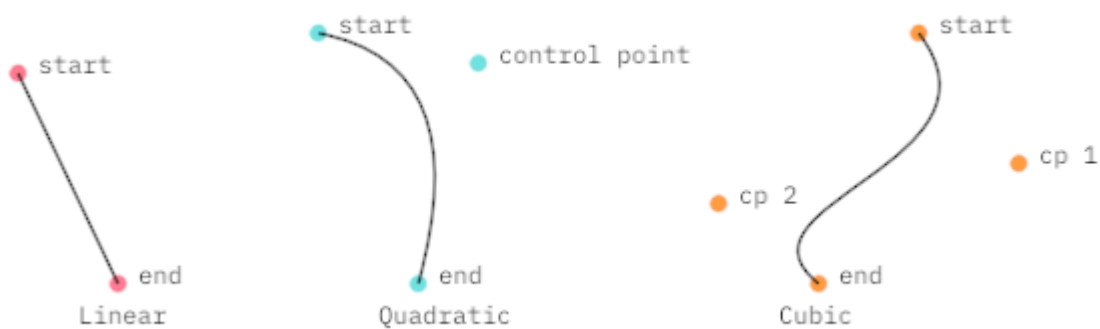

Constructing segments

```
// Linear Segment: start point, end point
val seg1 = Segment2D(
    Vector2(50.0, 55.0),
    Vector2(100.0, 160.0)
)

// Quadratic Segment: start point, control point, end point
val seg2 = Segment2D(
    Vector2(200.0, 35.0),
    Vector2(280.0, 50.0),
    Vector2(250.0, 160.0)
)

// Cubic Segment: start point, control point, control point, end point
val seg3 = Segment2D(
    Vector2(500.0, 35.0),
    Vector2(550.0, 100.0),
    Vector2(400.0, 120.0),
    Vector2(450.0, 160.0)
)
```

Drawing segments

```
// Draw one segment
drawer.segment(seg3)
```

```
// Draw multiple segments
drawer.segments(listOf(seg1, seg2, seg3))
```

Note the difference between `drawer.segment()`, which is used to *draw* a segment, and `Segment2D()`, which is used to *construct* a segment. These are two separate steps and it's perfectly valid to construct a segment without ever drawing it.

A reason to construct a segment can be to query its properties, as we will see next.

Segment properties

The `Segment2D` class provides multiple methods to query its properties. In the following examples, the `ut` argument is a normalized value that indicates a position in the segment between 0.0 (at the start) and 1.0 (at the end).

```
// Get a point on the curve near the start.
val pos = seg.position(ut = 0.1)

// Get the normal vector near the end.
// This is a vector of length 1.0 perpendicular to the curve.
val normal = seg.normal(ut = 0.9)

// Get the bounding box of the curve as a Rectangle instance.
val rect = seg.bounds

// Get the length of the curve.
val length = seg.length

// Get the point on the curve which is nearest to a given point.
val nearest = seg.nearest(Vector2(50.0, 50.0)).position

// Get 20 equally spaced curve points
val points = seg.equidistantPositions(20)
```

The list of available methods can be found at the [API website](#) or in the [source code](#).

Modifying segments

Several methods return a new `Segment` based on the original one.

```
// Split a segment at the center returning two segments
val segments = seg.split(0.5)


// Get the center part of a segment
val subSegment = seg.sub(0.25, 0.75)

// Get the segment reversed (the start becomes the end)
val revSegment = seg.reverse

// Get the segment offset by the given distance
val offsetSegment = seg.offset(5.0)
```

ShapeContour

A `ShapeContour` is a collection of `Segment` instances in which each segment ends where the next one starts. A `ShapeContour` can be closed like the letter O or open like the letter S. It can be used to describe simple shapes like a square, or more complex ones.

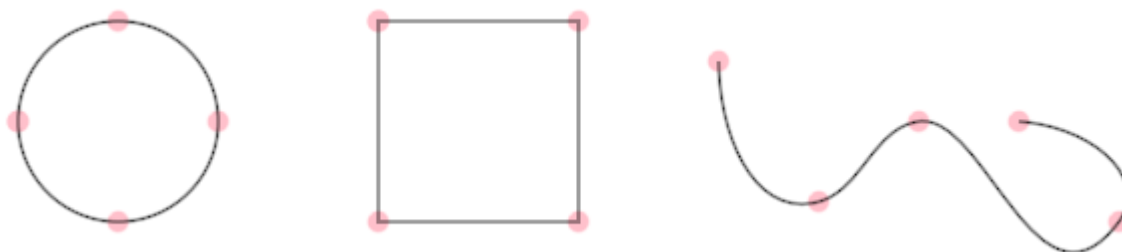

Three ShapeContours with 4 segments each. The one on the right is open.

Constructing a ShapeContour using the ContourBuilder

The `ContourBuilder` class offers a simple way of producing complex two dimensional shapes. It employs a vocabulary that is familiar to those who have used SVG.

- `moveTo(position)` move the cursor to the given position
- `lineTo(position)` insert a line contour starting from the cursor, ending at the given position
- `moveOrLineTo(position)` move the cursor if no cursor was previously set or draw a line
- `curveTo(control, position)` insert a quadratic bezier curve starting from the cursor, ending at position
- `curveTo(controlA, controlB, position)` insert a cubic bezier curve starting from the cursor, ending at position
- `continueTo(position)` inside a quadratic bezier curve starting from the cursor and reflecting the tangent of the last control
- `continueTo(controlB, position)` insert a cubic spline
- `arcTo(radiusX, radiusY, largeAngle, sweepFlag, position)`
- `close()` close the contour
- `cursor` a `Vector2` instance representing the current position
- `anchor` a `Vector2` instance representing the current anchor

Let's create a simple `Contour` and draw it. The following program shows how to use the contour builder to create a triangular contour.



```
fun main() = application {  
    program {  
        extend {
```

```

    val c = contour {
        moveTo(Vector2(width / 2.0 - 120.0, height / 2.0 - 120.00))
        // -- here `cursor` points to the end point of the previous command
        lineTo(cursor + Vector2(240.0, 0.0))
        lineTo(cursor + Vector2(0.0, 240.0))
        lineTo(anchor)
        close()
    }
    drawer.clear(ColorRGBA.WHITE)
    drawer.fill = ColorRGBA.PINK
    drawer.stroke = null
    drawer.contour(c)
}
}
}

```

[Link to the full example](#)

Constructing a ShapeContour from points

We can use `.fromPoints()` to connect points with straight segments.

The `hobbyCurve` method, found in `orx-shapes`, can be used to create smooth curves.



```

fun main() = application {
    program {
        val points = List(20) {
            Vector2(20.0 + it * 32.0, 100.0 + sin(it * 1.0) * it * 3)
        }
        val wavyContour = ShapeContour.fromPoints(points, closed = false)
        val smoothContour = hobbyCurve(points, closed = false)

        extend {
            drawer.clear(ColorRGBA.WHITE)
            drawer.fill = null
            drawer.strokeWeight = 5.0
            drawer.stroke = ColorRGBA.PINK
            drawer.contour(wavyContour)

            drawer.translate(0.0, 10.0) // displace 10px down
            drawer.stroke = ColorRGBA.BLACK.opacify(0.5)
            drawer.contour(smoothContour)
        }
    }
}

```

```
}  
}
```

[Link to the full example](#)

Constructing a ShapeContour from segments

Notice how each segment starts where the last one ends.



```
fun main() = application {  
    program {  
        val segments = listOf(  
            Segment2D(Vector2(10.0, 100.0), Vector2(200.0, 80.0)), // Linear Bézier Segment  
            Segment2D(  
                Vector2(200.0, 80.0),  
                Vector2(250.0, 280.0),  
                Vector2(400.0, 80.0)  
            ), // Quadratic Bézier segment  
            Segment2D(  
                Vector2(400.0, 80.0),  
                Vector2(450.0, 180.0),  
                Vector2(500.0, 0.0),  
                Vector2(630.0, 80.0)  
            ) // Cubic Bézier segment  
        )  
        val horizontalContour = ShapeContour.fromSegments(segments, closed = false)  
  
        extend {  
            drawer.clear(ColorRGBA.WHITE)  
            drawer.strokeWeight = 5.0  
            drawer.stroke = ColorRGBA.PINK  
            drawer.contour(horizontalContour)  
        }  
    }  
}
```

[Link to the full example](#)

Constructing a ShapeContour from a primitive

Primitives like Rectangle, Circle and LineSegment can be easily converted into a ShapeContour.

```
val c1 = Circle(200.0, 200.0, 50.0).contour
```

Even more ways to construct a ShapeContour

Take a look at [orx-turtle](#) and [orx-shapes](#) for other ways to create contours, including regular polygons, rounded rectangles and more.

Drawing a ShapeContour

```
// Draw one contour
drawer.contour(contour1)

// Draw multiple contours
drawer.contours(listOf(contour1, contour2, contour3))
```

Note that if the contour is closed, the current fill color is used.

ShapeContour properties

The ShapeContour provides methods to query its properties similar to the ones found in Segment.

```
// Get a point on the contour near the start.
val pos = contour.position(ut = 0.1)

// Get the normal vector near the end.
// This is a vector of length 1.0 perpendicular to the curve.
val normal = contour.normal(ut = 0.9)


// Get the bounding box of the curve as a Rectangle instance.
val rect = contour.bounds

// Get the length of the curve.
val length = contour.length

// Get the point on the curve which is nearest to a given point.
val nearest = contour.nearest(Vector2(50.0, 50.0)).position

// Get 20 equally spaced curve points
val points = contour.equidistantPositions(20)
```

An example of using `.position()` and `.equidistantPositions()`:

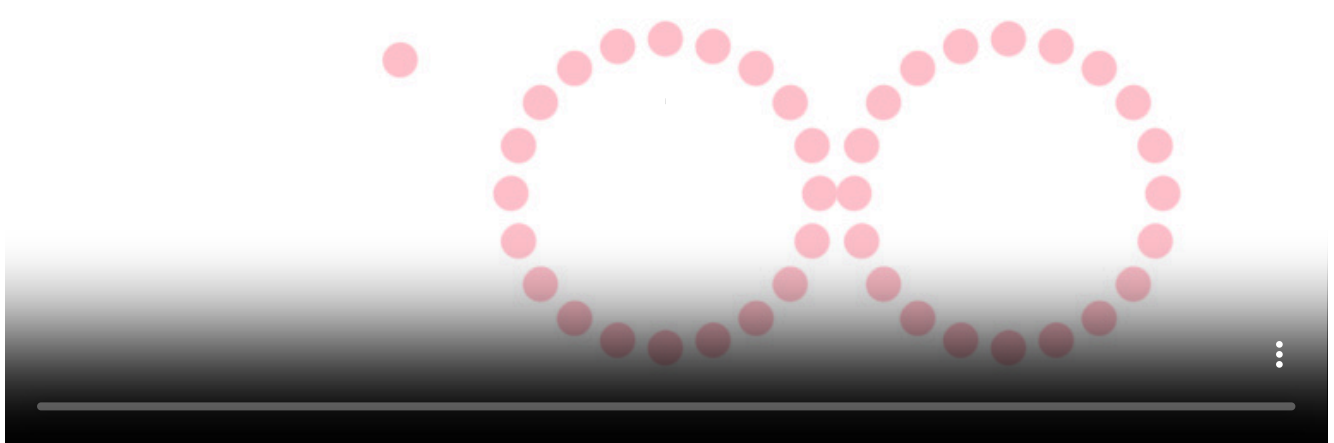


```

fun main() = application {
    program {
        extend {
            drawer.clear(ColorRGBa.WHITE)
            drawer.stroke = null
            drawer.fill = ColorRGBa.PINK

            val point = Circle(185.0, height / 2.0, 90.0).contour.position((seconds * 0.1) % 1.0)
            drawer.circle(point, 10.0)

            val points0 = Circle(385.0, height / 2.0, 90.0).contour.equidistantPositions(20)
            drawer.circles(points0, 10.0)

            val points1 =
                Circle(585.0, height / 2.0, 90.0).contour.equidistantPositions((cos(seconds) * 10.0 + 30.0).toInt())
            drawer.circles(points1, 10.0)

        }
    }
}

```


[Link to the full example](#)

The list of available methods can be found at the [API website](#) or in the [source code](#).

Rectified ShapeContour

The `ut` argument in the `ShapeContour.position()` and `ShapeContour.normal()` methods does not specify a linear position between the start and the end of the contour.

By using rectified contours (defined in `orx-shapes`) we can work with evenly spaced points on contours, or animate elements traveling on a contour at the desired speed even if the contour segments vary greatly in length.

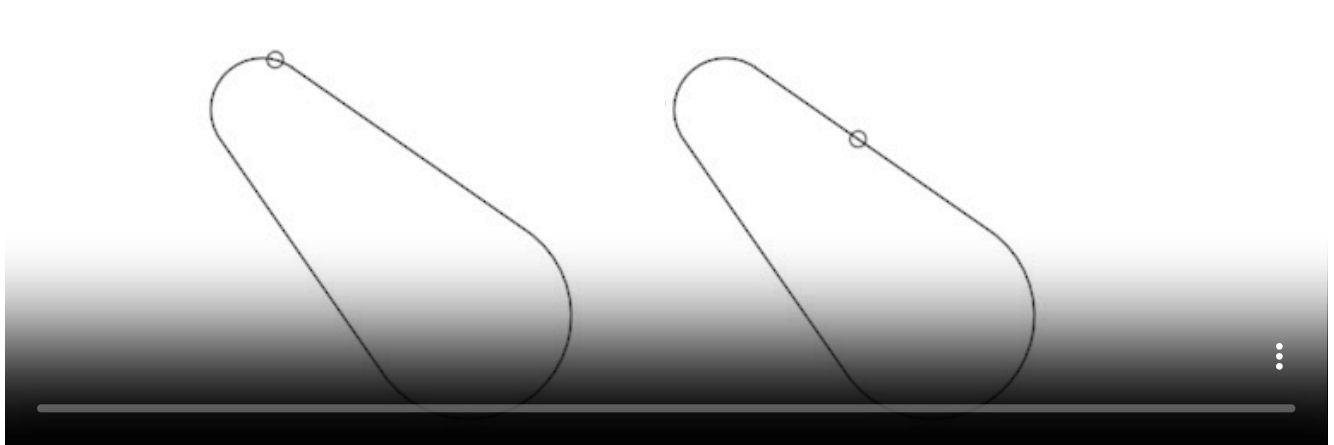

```

fun main() = application {
    program {
        val c = Pulley(
            Circle(Vector2.ZERO, 30.0),
            Circle(Vector2.ONE * 120.0, 60.0)
        ).contour
        val cr = c.rectified()
    }
}

```

```

    extend {
        drawer.clear(ColorRGBA.WHITE)
        drawer.fill = null

        // Go from 0.0 to 1.0 in two seconds
        // slowing down at both ends
        val t = cos(
            kotlin.math.PI * (seconds % 2.0) / 2.0
        ) * 0.5 + 0.5

        drawer.translate(150.0, 100.0)
        drawer.contour(c)
        // Note how segment length affects the speed
        drawer.circle(c.position(t), 5.0)

        drawer.translate(270.0, 0.0)
        drawer.contour(c)
        // The rectified contour provides a smooth animation
        drawer.circle(cr.position(t), 5.0)
    }
}
}

```

[Link to the full example](#)

Modifying a ShapeContour

SUB()

A contour can be cut into a shorter contour using `ShapeContour.sub()`.



```

fun main() = application {
    program {
        extend {
            drawer.clear(ColorRGBA.WHITE)
            drawer.fill = null
            drawer.stroke = ColorRGBA.PINK
            drawer.strokeWeight = 4.0

            val sub0 = Circle(185.0, height / 2.0, 100.0).contour.sub(0.0, 0.5 + 0.50 * sin(seconds))

```

```

        drawer.contour(sub0)

        val sub1 = Circle(385.0, height / 2.0, 100.0).contour.sub(seconds * 0.1, seconds * 0.1 + 0.1)
        drawer.contour(sub1)


        val sub2 = Circle(585.0, height / 2.0, 100.0).contour.sub(-seconds * 0.05, seconds * 0.05 + 0.1)
        drawer.contour(sub2)
    }
}

```

[Link to the full example](#)

OFFSET()

The function `ShapeContour.offset` can be used to create an offset version of a contour.

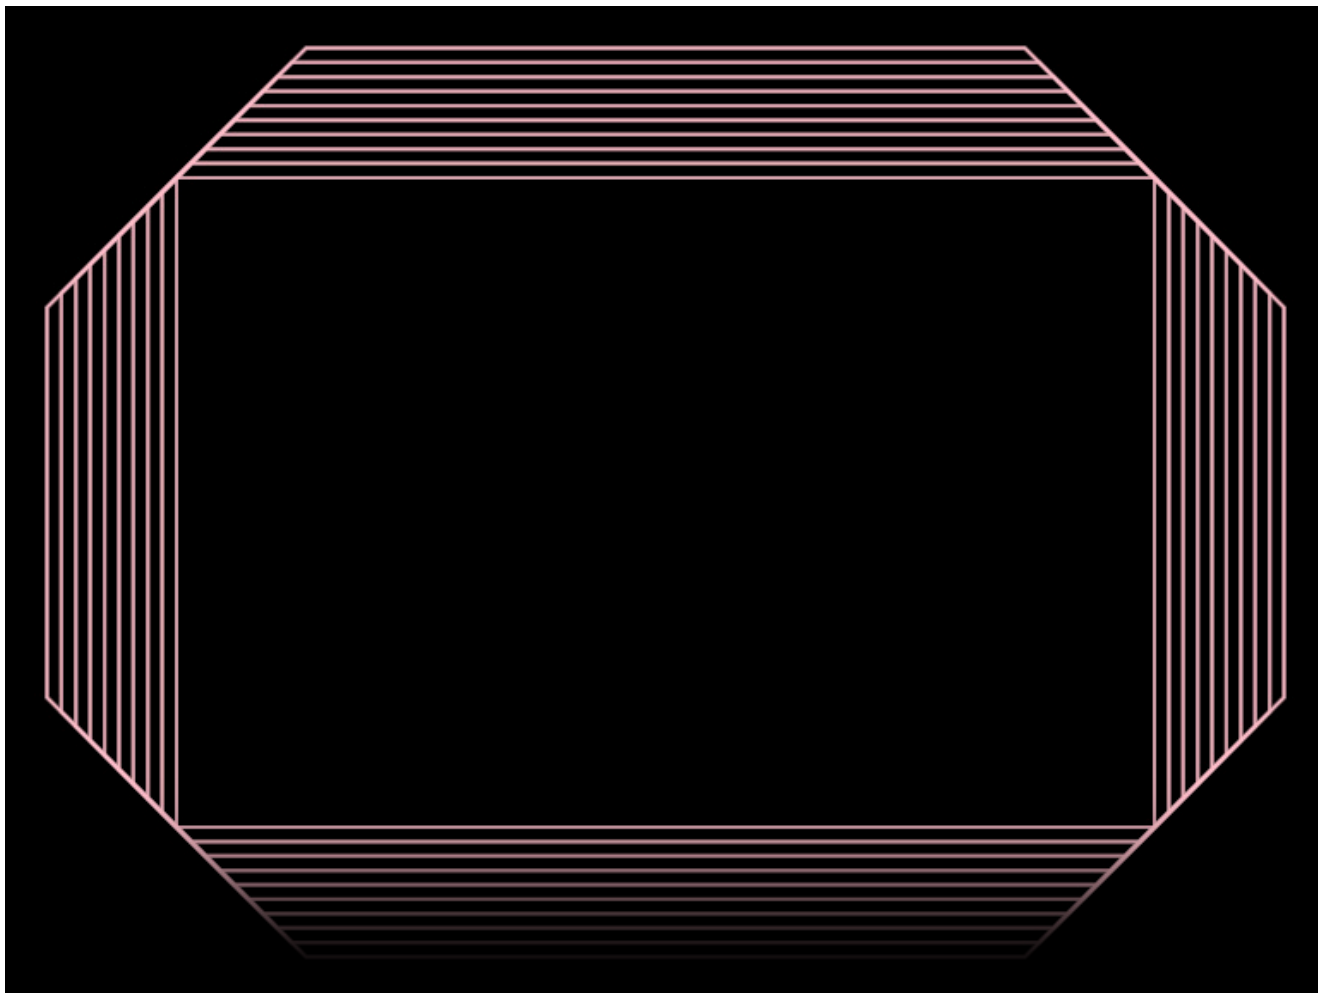

```

fun main() = application {
    program {
        // -- create a contour from a Rectangle object
        val c = Rectangle(100.0, 100.0, width - 200.0, height - 200.0).contour.reversed

        extend {
            drawer.fill = null
            drawer.stroke = ColorRGBA.PINK
            drawer.contour(c)
            for (i in 1 until 10) {
                val o = c.offset(cos(seconds + 0.5) * i * 10.0, SegmentJoin.BEVEL)
            }
        }
    }
}

```


```

        drawer.contour(o)
    }
}
}
}

```

[Link to the full example](#)

`ShapeContour.offset` can also be used to offset curved contours. The following demonstration shows a single cubic bezier offset at multiple distances.

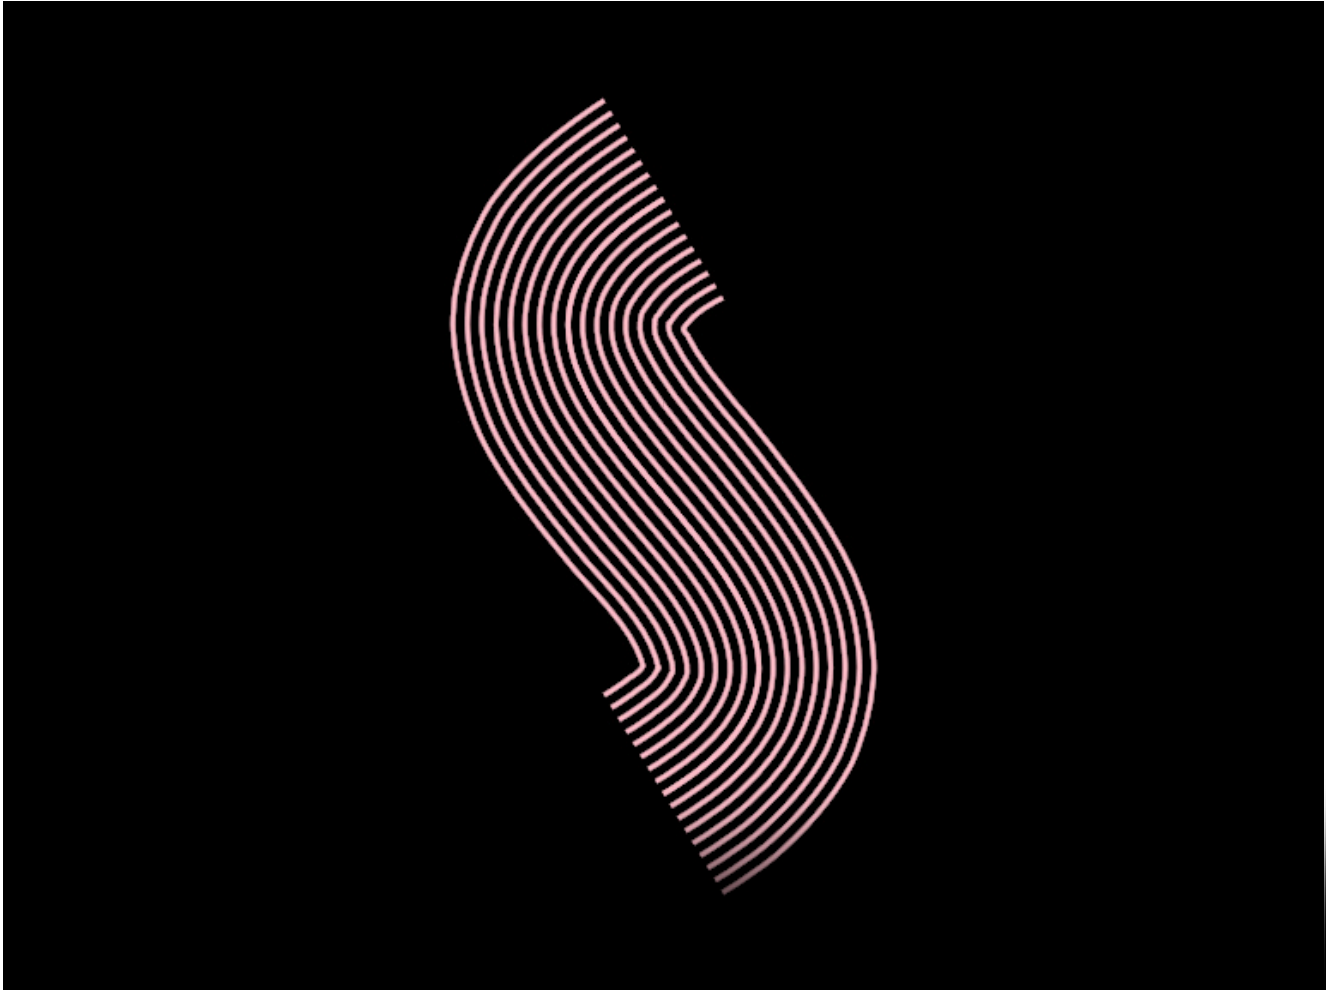

```

fun main() = application {
    program {
        val c = contour {
            moveTo(width * (1.0 / 2.0), height * (1.0 / 5.0))
            curveTo(
                width * (1.0 / 4.0),
                height * (2.0 / 5.0),
                width * (3.0 / 4.0),
                height * (3.0 / 5.0),
                width * (2.0 / 4.0),
                height * (4.0 / 5.0)
            )
        }
    }
    extend {
        drawer.stroke = ColorRGBA.PINK
        drawer.strokeWeight = 2.0
    }
}

```

```

        drawer.lineJoin = LineJoin.ROUND
        drawer.contour(c)
        for (i in -8..8) {
            val o = c.offset(i * 10.0 * cos(seconds + 0.5))
            drawer.contour(o)
        }
    }
}
}
}

```

[Link to the full example](#)

REVERSED, CLOSE(), TRANSFORM(), ...

For more properties and methods explore the [API website](#) or the [source code](#).

Shape

OPENRNDR uses Shape to represent planar shapes. We can think of a Shape as a group of ShapeContour instances, where each ShapeContour is a sequence of one or more Bézier Segment.

Constructing a Shape using the shape builder

Let's create a Shape using the *shape builder*. The shape is created using two contours, one for the *outline* of the shape, and one for the *hole* in the shape



```

fun main() = application {
    program {
        extend {
            val s = shape {
                contour {
                    moveTo(Vector2(width / 2.0 - 120.0, height / 2.0 - 120.00))
                    lineTo(cursor + Vector2(240.0, 0.0))
                    lineTo(cursor + Vector2(0.0, 240.0))
                    lineTo(anchor)
                    close()
                }
                contour {
                    moveTo(Vector2(width / 2.0 - 80.0, height / 2.0 - 100.0))
                    lineTo(cursor + Vector2(190.0, 0.0))
                    lineTo(cursor + Vector2(0.0, 190.00))
                }
            }
        }
    }
}

```

```

        lineTo(anchor)
        close()
    }
}
drawer.clear(ColorRGBa.WHITE)
drawer.fill = ColorRGBa.PINK
drawer.stroke = null
drawer.shape(s)
}
}
}

```

[Link to the full example](#)


Constructing a Shape from a primitive

Primitives like `Rectangle`, `Circle`, `LineSegment` and `ShapeContour` can be easily converted into a `Shape`.

```
val s = Circle(200.0, 200.0, 50.0).shape
```

Shape Boolean-operations

Boolean-operations can be performed on shapes using the `compound {}` builder. There are three kinds of compounds: *union*, *difference* and *intersection*, all three of them are shown in the example below.

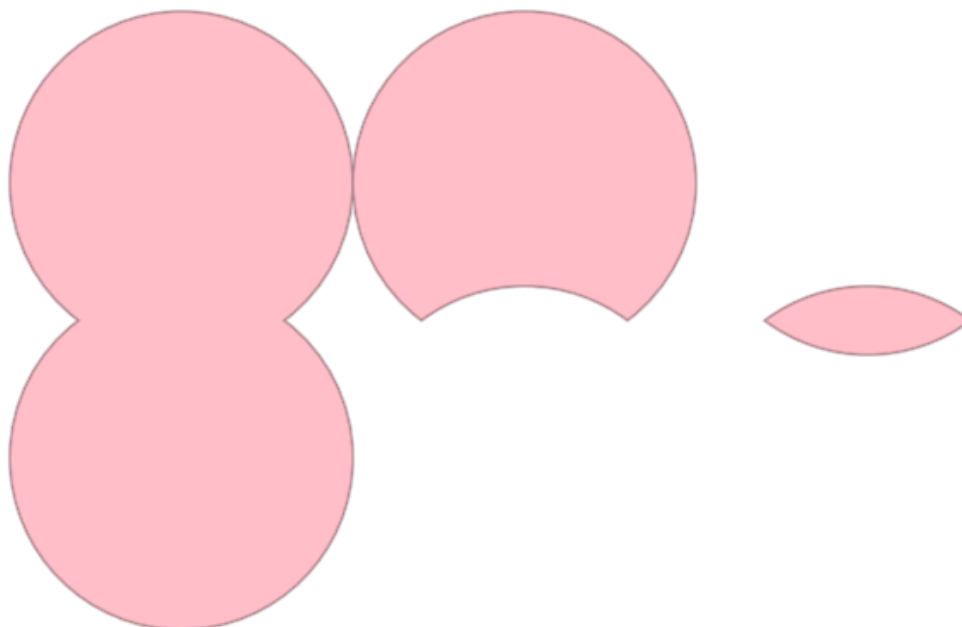

```

fun main() = application {
    program {
        extend {
            drawer.clear(ColorRGBa.WHITE)
            drawer.fill = ColorRGBa.PINK
            drawer.stroke = ColorRGBa.PINK.shade(0.7)

            // -- shape union
            val su = compound {

```

```

        union {
            shape(Circle(185.0, height / 2.0 - 80.0, 100.0).shape)
            shape(Circle(185.0, height / 2.0 + 80.0, 100.0).shape)
        }
    }
    drawer.shapes(su)

    // -- shape difference
    val sd = compound {
        difference {
            shape(Circle(385.0, height / 2.0 - 80.0, 100.0).shape)
            shape(Circle(385.0, height / 2.0 + 80.0, 100.0).shape)
        }
    }
    drawer.shapes(sd)

    // -- shape intersection
    val si = compound {
        intersection {
            shape(Circle(585.0, height / 2.0 - 80.0, 100.0).shape)
            shape(Circle(585.0, height / 2.0 + 80.0, 100.0).shape)
        }
    }
    drawer.shapes(si)
}
}
}

```

[Link to the full example](#)

The *compound builder* is actually a bit more clever than what the previous example demonstrated because it can actually work with an entire tree of compounds. Demonstrated below is the *union* of two *intersections*.



```

fun main() = application {
    program {
        extend {
            drawer.clear(ColorRGBa.WHITE)
            drawer.fill = ColorRGBa.PINK
            drawer.stroke = ColorRGBa.PINK.shade(0.7)
        }
    }
}

```

```


val cross = compound {
    union {
        intersection {
            shape(Circle(width / 2.0 - 160.0, height / 2.0, 200.0).shape)
            shape(Circle(width / 2.0 + 160.0, height / 2.0, 200.0).shape)
        }
        intersection {
            shape(Circle(width / 2.0, height / 2.0 - 160.0, 200.0).shape)
            shape(Circle(width / 2.0, height / 2.0 + 160.0, 200.0).shape)
        }
    }
}
drawer.shapes(cross)
}
}
}

```

[Link to the full example](#)

Intersections

Extension methods are provided to find intersections between Shape, ShapeContour and Segment instances.

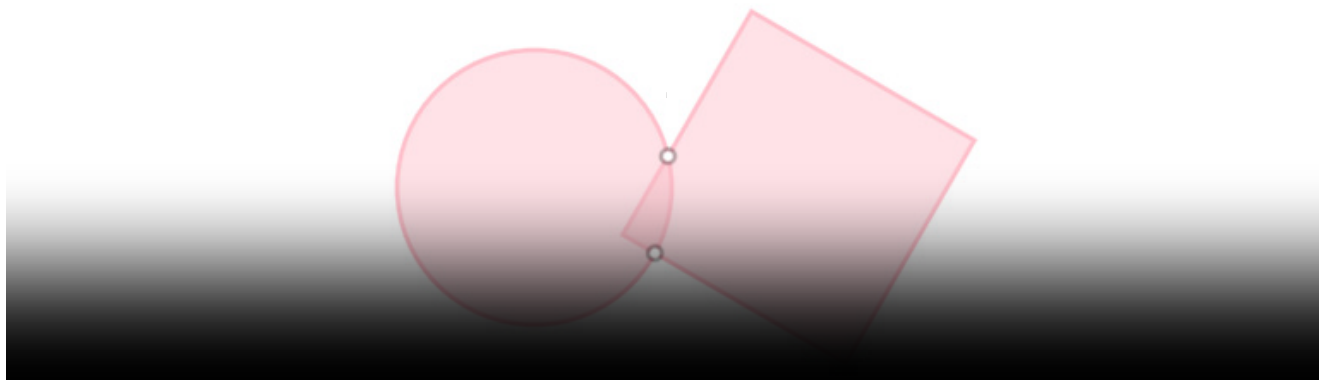

```

fun main() = application {
    program {
        extend {
            // A rotation transformation to apply to the rectangle
            val rotation = transform {
                translate(width * 0.6, height * 0.5)
                rotate(seconds * 18)
            }

            val circle = Circle(width * 0.4, height * 0.5, 80.0).contour
            val rotatingRect = Rectangle.fromCenter(Vector2.ZERO, 150.0).contour.transform(rotation)

            val intersections = circle.intersections(rotatingRect)

            drawer.clear(ColorRGBa.WHITE)
            drawer.strokeWeight = 2.0
            drawer.stroke = ColorRGBa.PINK
            drawer.fill = ColorRGBa.PINK.opacify(0.5)

```



```
        drawer.contour(circle)
        drawer.contour(rotatingRect)

        // Draw intersections as small circles
        drawer.fill = ColorRGBa.WHITE
        drawer.stroke = ColorRGBa.BLACK.opacify(0.5)
        drawer.circles(intersections.map { it.position }, 5.0)
    }
}
```

[Link to the full example](#)

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

[Drawing](#) / Text

Drawing text

OPENRNDR comes with support for rendering bitmap text. There are two modes of operation for writing text, a direct mode that simply writes a string of text at the requested position, and a more advanced mode that can place texts in a designated text area.

As an alternative to bitmap texts, which are stored as an image containing characters rendered at a specific size, it is also possible to obtain glyph contours to draw texts at any scale and to query curve properties.

Simple text rendering

To render simple texts we first make sure a font is loaded and assigned to `drawer.fontMap`, we then use [`drawer.text`](#) to draw the text.



HELLO WORLD

```
fun main() = application {  
    program {  
        val font = loadFont("data/fonts/default.otf", 48.0)  
        extend {  
            drawer.clear(ColorRGBa.PINK)  
            drawer.fontMap = font  
            drawer.fill = ColorRGBa.BLACK  
            drawer.text(  
                "HELLO WORLD",
```


```
        width / 2.0 - 100.0,  
        height / 2.0  
    )  
}  
}
```

[Link to the full example](#)

Advanced text rendering

OPENRNDR comes with a [Writer](#) class that allows for basic typesetting. The `Writer` tool is based on the concept of text box and a cursor.

Its use is easiest demonstrated through an example:

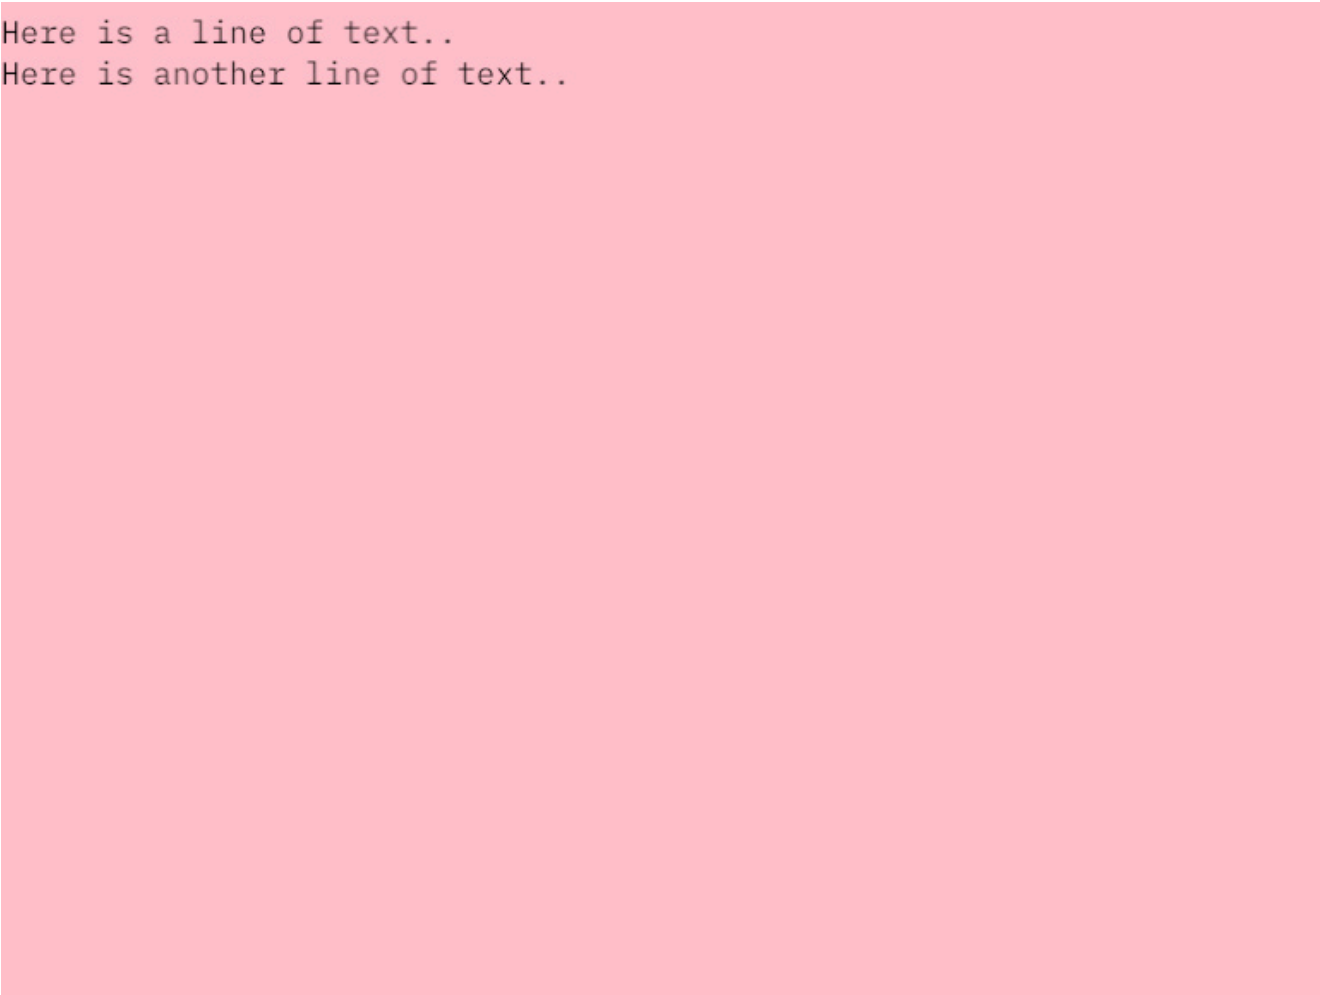

```
Here is a line of text..  
Here is another line of text..
```

```
fun main() = application {  
    configure {  
        width = 770  
        height = 578  
    }  
    program {  
        val font = loadFont("data/fonts/default.otf", 24.0)  
        extend {  
            drawer.clear(ColorRGBa.PINK)  
            drawer.fontMap = font  
            drawer.fill = ColorRGBa.BLACK
```

```

        writer {
            newLine()
            text("Here is a line of text..")
            newLine()
            text("Here is another line of text..")
        }
    }
}

```

[Link to the full example](#)

Specifying the text area

The `box` field of `Writer` is used to specify where text should be written. Let's set the text area 40 pixels smaller than the drawer bounds.

We see that the text is drawn with margins around it. A second copy of the text uses `horizontalAlign` and `verticalAlign` for bottom-right alignment. Use a value of 0.5 for centered text.

Here is a line of text..
Here is another line of text..

Here is a line of text..
Here is another line of text..

```

fun main() = application {
    configure {
        width = 770
        height = 578
    }
    program {

```

```

val font = loadFont("data/fonts/default.ott", 24.0)
extend {
    drawer.clear(ColorRGBa.PINK)
    drawer.fontMap = font
    drawer.fill = ColorRGBa.BLACK

    writer {
        box = drawer.bounds.offsetEdges(-40.0)
        text(
            listOf(
                "Here is a line of text..",
                "Here is another line of text.."
            )
        )
    }

    writer {
        box = drawer.bounds.offsetEdges(-40.0)
        horizontalAlign = 1.0
        verticalAlign = 1.0
        text(
            listOf(
                "Here is a line of text..",
                "Here is another line of text.."
            )
        )
    }
}
}
}

```

[Link to the full example](#)

Text properties

Text tracking -the horizontal space between characters- and leading -the vertical space between lines- can be set using `Writer.style.leading` and `Writer.style.tracking`.

H e r e i s a
l i n e o f
t e x t . .
H e r e i s
a n o t h e r l i n e
o f t e x t . .
L e t ' s e v e n
t h r o w a n o t h e r
l i n e o f t e x t
i n , f o r g o o d
m e a s u r e ! y a y

⋮


```
fun main() = application {  
  configure {  
    width = 770  
    height = 578  
  }  
  program {  
    val font = loadFont("data/fonts/default.otf", 24.0)  
    extend {  
      drawer.clear(ColorRGBA.PINK)  
      drawer.fontMap = font  
      drawer.fill = ColorRGBA.BLACK  
  
      writer {  
        // -- animate the text leading  
        leading = cos(seconds) * 20.0 + 24.0  
        // -- animate the text tracking  
        tracking = sin(seconds) * 20.0 + 24.0  
        box = Rectangle(40.0, 40.0, width - 80.0, height - 80.0)  
        newLine()  
        text("Here is a line of text..")  
        newLine()  
        text("Here is another line of text..")  
        newLine()  
        text("Let's even throw another line of text in, for good measure! yay")  
      }  
    }  
  }  
}
```

```
}  
}
```

[Link to the full example](#)

Working with text contours

To load the vector data of a font file use the `loadFace()` method, then call the `.glyphForCharacter()` method to obtain a Shape representing a character.

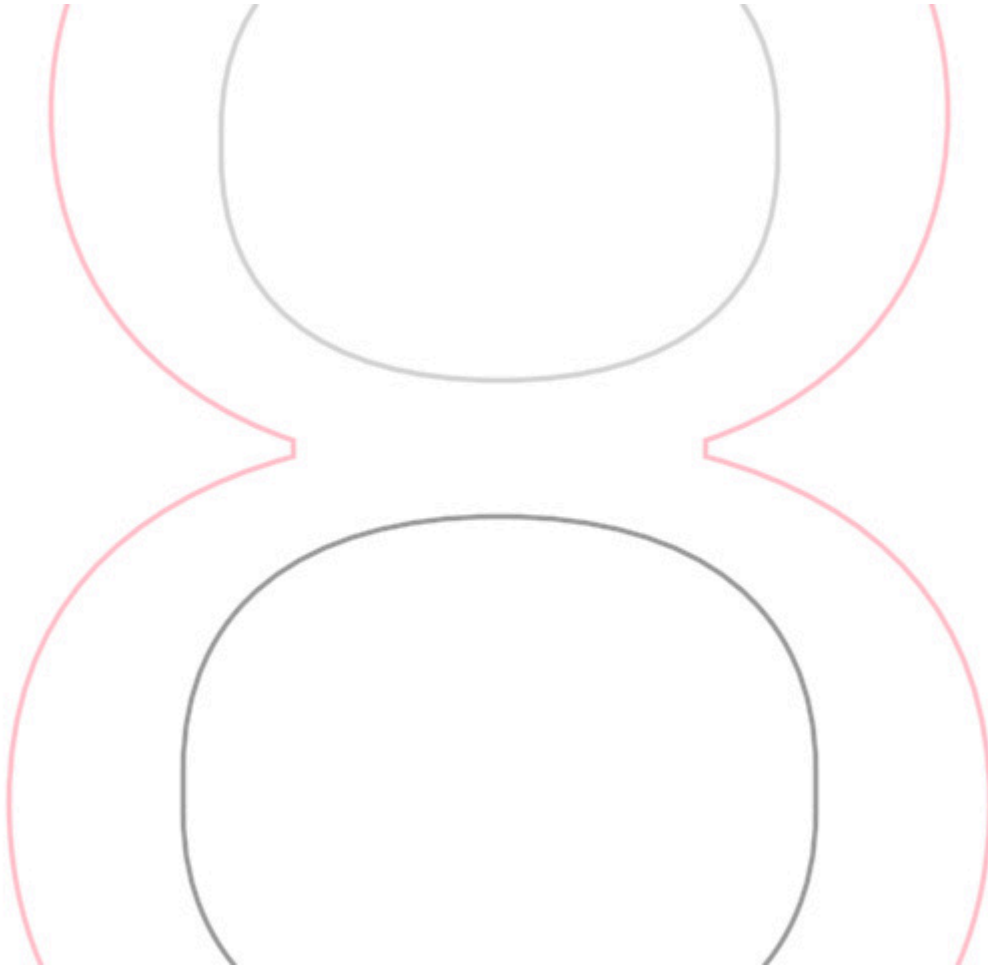


```
fun main() = application {  
    program {  
        val face = loadFace("data/fonts/default.otf")  
        val shape = face.glyphForCharacter(character = '8').shape(scale = 1.0)  
  
        extend {  
            drawer.clear(ColorRGBa.WHITE)  
            // Center the shape on the screen  
            drawer.translate(drawer.bounds.center - shape.bounds.center)  
  
            drawer.fill = null  
            drawer.strokeWeight = 2.0  
  
            // Draw each contour found in the character '8' with a different color  
            shape.contours.forEachIndexed { i, it ->  
                drawer.stroke = listOf(ColorRGBa.PINK, rgb(0.33), rgb(0.66))[i]  
                drawer.contour(it)  
            }  
        }  
    }  
}
```

```
}  
}  
}
```

[Link to the full example](#)

This example visualizes normal vectors around the contour of the character '8', evenly spaced every 10 pixels.

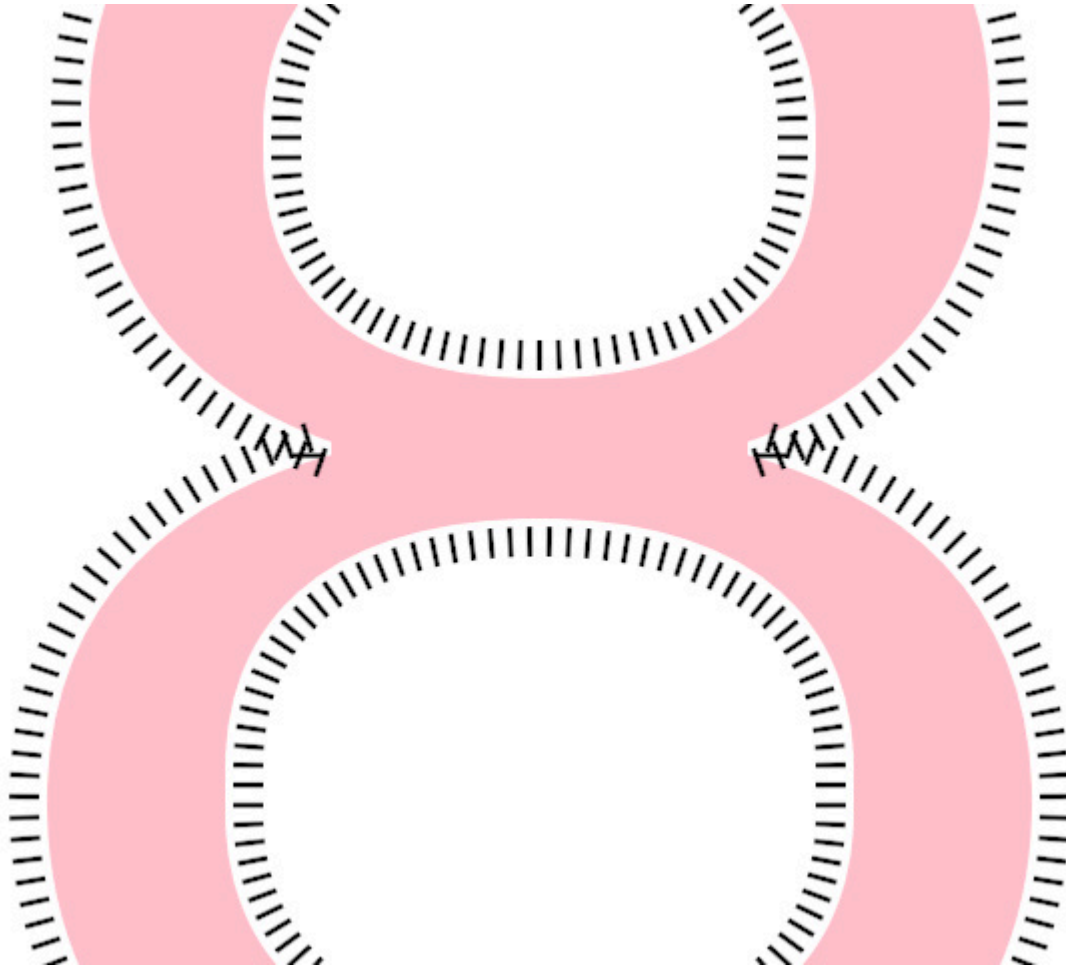

```
fun main() = application {  
    program {  
        val face = loadFace("data/fonts/default.otf")  
        val shape = face.glyphForCharacter('8').shape(1.0)  
  
        // Map each contour in the shape to a list of LineSegment,  
        // then combine the resulting lists by calling `.flatten()`.  
        val normals = shape.contours.map { c ->  
            // Work with rectified contours so `t` values are evenly spaced.  
            val rc = c.rectified()  
            val stepCount = (c.length / 10).toInt()  
            List(stepCount) {  
                val t = it / stepCount.toDouble()  
                LineSegment(  
                    rc.position(t) + rc.normal(t) * 5.0,  
                    rc.position(t) + rc.normal(t) * 20.0  
                )  
            }  
        }.flatten()  
    }  
}
```



```
    extend {  
        drawer.clear(ColorRGBa.WHITE)  
        drawer.translate(drawer.bounds.center - shape.bounds.center)  
  
        drawer.fill = ColorRGBa.PINK  
        drawer.stroke = null  
        drawer.shape(shape)  
  
        drawer.stroke = ColorRGBa.BLACK  
        drawer.strokeWeight = 2.0  
        drawer.lineSegments(normals)  
    }  
}  
}
```

[Link to the full example](#)

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

OPENRNDR GUIDE

[Drawing](#) / Drawing SVG

Drawing SVG

Loading a composition and drawing it can be done as follows:

```
fun main() = application {
    program {
        val composition = loadSVG("data/drawing.svg")
        extend {
            drawer.composition(composition)
        }
    }
}
```

Note that OPENRNDR's support for SVG files works best with SVG files that are saved in the Tiny SVG 1.x profile .

When drawing a composition from SVG you will notice that fill and stroke colors from the SVG file are used over the Drawer colors.

Compositions

Here a `Composition` is a tree structure with `Composition.root` as its root node.

CompositionNode types

Node Type	Function
GroupNode	Holds multiple child nodes in children
ShapeNode	Holds a single shape in shape
TextNode	Holds text (currently not implemented)
ImageNode	Holds an image (currently not implemented)
CompositionNode	The base class for composition node

CompositionNode properties

Property name	Property type	Description
transform	Matrix44	local transformation
fill	CompositionColor	fill color
stroke	CompositionColor	stroke color
id	String?	node id
parent	CompositionNode?	node parent
effectiveFill (read-only)	ColorRGBa?	the effective fill color, potentially inherited from ancestor
effectiveStroke(read-only)	ColorRGBa?	the effective stroke color, potentially inherited from ancestor

GroupNode properties

Property name	Property type	Description
children	MutableList<CompositionNode>	child nodes

ShapeNode properties

Property name	Property type	Description
shape	Shape	a single shape

Querying the composition

Finding all shapes in the composition

```
val shapeNodes = composition.findShapes()
```

Modifying the composition

Since a `Composition` contains many immutable parts it is easier to (partially) replace parts of the composition.

```
val m = translate(1.0, 0.0, 0.0);
composition.root.map {
    if (it is ShapeNode) {
        it.copy(shape=it.shape.transform(m))
    } else {
        it
    }
}
```

Creating compositions manually

Compositions are tree structures that can be constructed manually. Below you find an example of constructing a `Composition` in code.

```
val root = GroupNode()
val composition = Composition(root)
val shape = Circle(200.0, 200.0, 100.0).shape
val shapeNode = ShapeNode(shape)
shapeNode.fill = ColorRGBa.PINK
shapeNode.stroke = ColorRGBa.BLACK
// -- add shape node to root
root.children.add(shapeNode)
```

Composition Drawer

OPENRNDR has a much more convenient interface for creating `Compositions`. The idea behind this interface is that it works in a similar way to `Drawer`.

Below we use `drawComposition {}` to reproduce the same composition as in the previous example.

```
val composition = drawComposition {
    fill = ColorRGBa.PINK
```

```
stroke = ColorRGBa.BLACK
circle(Vector2(100.0, 100.0), 50.0)
}
```

Transforms

Transforms work in the same way as in `Drawer`

```
val composition = drawComposition {
    fill = ColorRGBa.PINK
    stroke = ColorRGBa.BLACK
    isolated {
        for (i in 0 until 100) {
            circle(Vector2(0.0, 0.0), 50.0)
            translate(50.0, 50.0)
        }
    }
}
```

Saving compositions to SVG

Compositions can be saved to SVG using the `saveToFile` function.

```
// -- load in a composition
val composition = loadSVG("data/example.svg")
composition.saveToFile(File("output.svg"))
```

[edit on GitHub](#)

[Drawing](#) / [Video](#)

Playing videos

OPENRNDR comes with FFMPEG-backed video support.

A simple video player

Relevant APIs

- [VideoPlayerFFMPEG.fromFile](#)
- [VideoPlayerFFMPEG.play](#)
- [VideoPlayerFFMPEG.draw](#)

```
fun main() = application {
    program {
        val videoPlayer = loadVideo("data/video.mp4")
        videoPlayer.play()
        extend {
            drawer.clear(ColorRGBA.BLACK)
            videoPlayer.draw(drawer)
        }
    }
}
```

Looping a video

```
// Loop: restart when reaching the end
videoPlayer.ended.listen {
    videoPlayer.restart()
}

extend {
    videoPlayer.draw(drawer)
}
```

Video from camera devices

The `VideoPlayerFFMPEG` class can be used to get and display video data from camera devices. To open a camera device you use the `fromDevice(null)` method. The first argument specifies the audio device to use, which we can set to `null` for video-only.

`VideoPlayerFFMPEG` has minimal device listing capabilities. The device names of available input devices can be listed using [VideoPlayerFFMPEG.listDeviceNames](#).

Relevant APIs

- [VideoPlayerFFMPEG.fromDevice](#)
- [VideoPlayerFFMPEG.defaultDevice](#)

Examples

```

fun main() = application {
    program {
        val videoPlayer = VideoPlayerFFMPEG.fromDevice(null)
        videoPlayer.play()
        extend {
            drawer.clear(ColorRGBa.BLACK)
            videoPlayer.draw(drawer)
        }
    }
}

```

Processing video

Video playback can be combined with render targets and filters.

In the following example the video player output is blurred before presenting it on the screen.

```

fun main() = application {
    program {
        val videoPlayer = loadVideo("data/video.mp4")
        val blur = BoxBlur()
        val renderTarget = renderTarget(width, height) {
            colorBuffer()
        }
        videoPlayer.play()

        extend {
            drawer.clear(ColorRGBa.BLACK)
            // -- draw the video on the render target
            drawer.withTarget(renderTarget) {
                videoPlayer.draw(drawer)
            }
            // -- apply a blur on the render target's color attachment
            blur.apply(renderTarget.colorBuffer(0), renderTarget.colorBuffer(0))
            // -- draw the blurred color attachment
            drawer.image(renderTarget.colorBuffer(0))
        }
    }
}

```

[edit on GitHub](#)

3D graphics

Draw a rotating 3D box with a minimal `shadeStyle` to simulate lighting. Lower level approach.

```
fun main() = application {
    configure {
        multisample = WindowMultisample.SampleCount(4)
    }
    program {
        val cube = boxMesh(140.0, 70.0, 10.0)

        extend {
            drawer.perspective(60.0, width * 1.0 / height, 0.01, 1000.0)
            drawer.depthWrite = true
            drawer.depthTestPass = DepthTestPass.LESS_OR_EQUAL

            drawer.fill = ColorRGBa.PINK
            drawer.shadeStyle = shadeStyle {
                fragmentTransform = """
                    vec3 lightDir = normalize(vec3(0.3, 1.0, 0.5));
                    float l = dot(va_normal, lightDir) * 0.4 + 0.5;
                    x_fill.rgb *= l;
                """.trimIndent()
            }
            drawer.translate(0.0, 0.0, -150.0)
            drawer.rotate(Vector3.UNIT_X, seconds * 15 + 30)
            drawer.rotate(Vector3.UNIT_Y, seconds * 5 + 60)
            drawer.vertexBuffer(cube, DrawPrimitive.TRIANGLES)
        }
    }
}
```

Draw a rotating 3D box with a minimal `shadeStyle` to simulate lighting. Uses `orbital` to simplify creating a 3D camera which can be controlled with the mouse and the keyboard.

```
fun main() = application {
    configure {
        multisample = WindowMultisample.SampleCount(4)
    }
    program {
        val cube = boxMesh(140.0, 70.0, 10.0)
        val cam = Orbital()
        cam.eye = -Vector3.UNIT_Z * 150.0

        extend(cam)
        extend {
            drawer.fill = ColorRGBa.PINK
            drawer.shadeStyle = shadeStyle {
```

```

        fragmentTransform = """
            vec3 lightDir = normalize(vec3(0.3, 1.0, 0.5));
            float l = dot(va_normal, lightDir) * 0.4 + 0.5;
            x_fill.rgb *= l;
            """.trimIndent()
    }
    drawer.vertexBuffer(cube, DrawPrimitive.TRIANGLES)
}
}
}

```

Draw ten 2D rectangles in 3D space.

```

fun main() = application {
    configure {
        multisample = WindowMultisample.SampleCount(4)
    }
    program {
        val cam = Orbital()
        cam.eye = Vector3.UNIT_Z * 150.0
        cam.camera.depthTest = false

        extend(cam)
        extend {
            drawer.fill = null
            drawer.stroke = ColorRGBA.PINK
            repeat(10) {
                drawer.rectangle(Rectangle.fromCenter(Vector2.ZERO, 150.0))
                drawer.translate(Vector3.UNIT_Z * 10.0)
            }
        }
    }
}

```

2D drawing operations like `drawer.rectangle`, `drawer.contour`, etc. can have depth related occlusion issues, as they are not designed for 3D usage. To avoid such issues you can create your own vertex buffers and meshes.

See also

- [orx-camera](#)
- [orx-dnk3](#)
- [orx-mesh-generators](#)

[edit on GitHub](#)

Drawing primitives batched


OPENRNDR provides special draw APIs for drawing many circles, rectangles or points at once by doing something called “batching”.

This technique performs much faster because the rendering time is tied to the number of calls we do on the GPU. It takes less time to send one large piece of data from CPU to GPU than sending many small pieces. Using this approach can be beneficial when drawing hundreds or thousands of elements.

Batched circles

This example makes use of `Circle` (a class with properties like `center` and `radius` and some useful methods), not to be confused with `drawer.circle()` (a method that draws pixels on the screen). It is possible to construct a `Circle` by providing a center position and a radius but also with two or three `Vector2` points that are used for deriving the circumference of a `Circle`.

Calling `drawer.circles()` to draw a list of `Circle` is much faster than calling `drawer.circle()` multiple times.

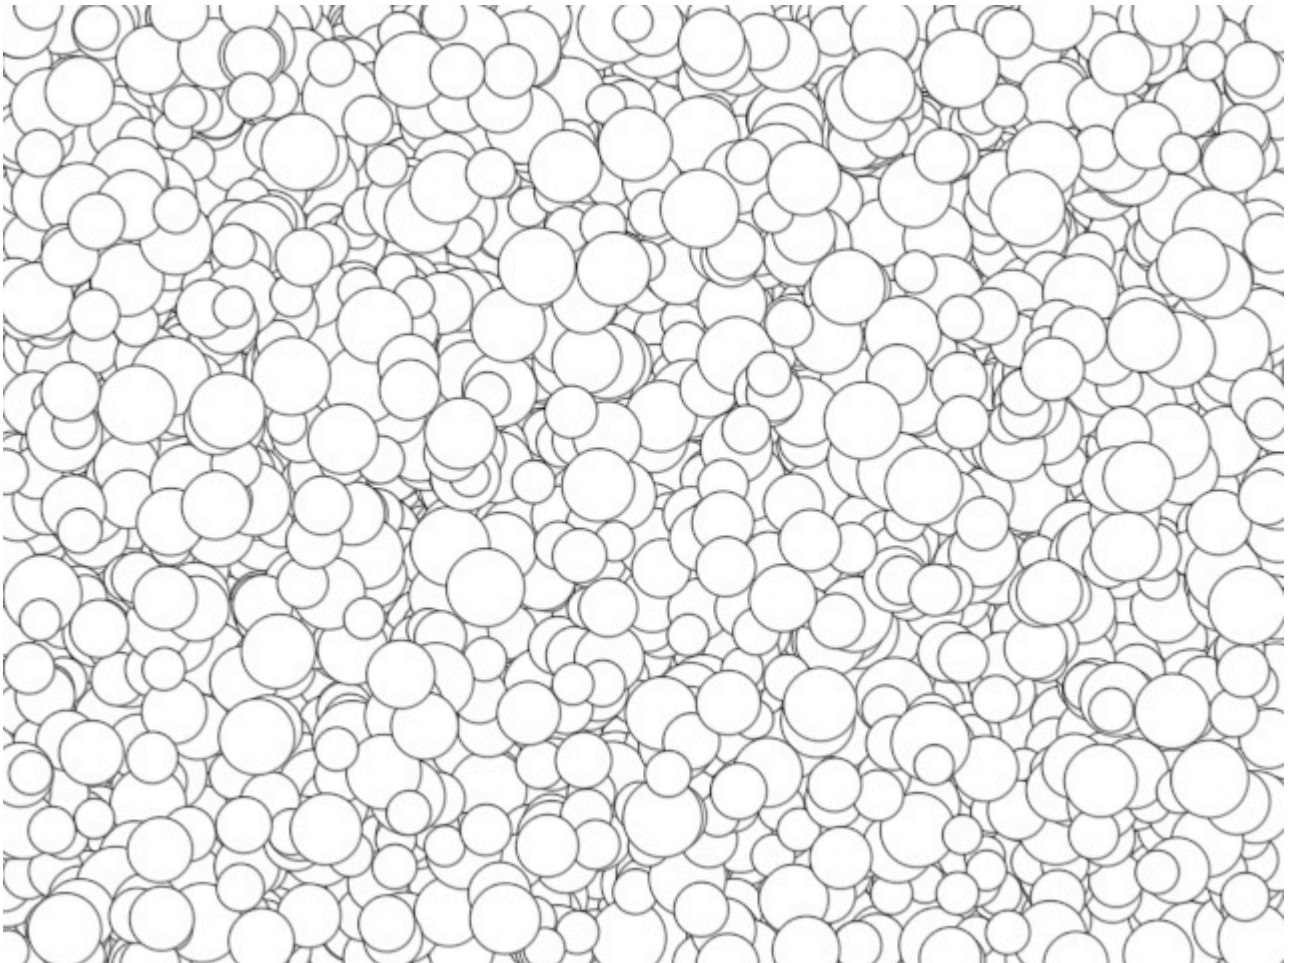

```
fun main() = application {  
    program {  
        extend {  
            drawer.clear(ColorRGBa.PINK)  
            drawer.fill = ColorRGBa.WHITE  
            drawer.stroke = ColorRGBa.BLACK
```

```

        drawer.strokeWeight = 1.0

        val circles = List(50000) {
            Circle(
                drawer.bounds.uniform(),
                Double.uniform(10.0, 20.0)
            )
        }
        drawer.circles(circles)
    }
}

```

[Link to the full example](#)


`drawer.circles` has several signatures. One of them accepts a list of `Vector2` for the circle centers and a `Double` to specify the radius for all circles. This example draws 5000 circles on the screen leaving a 100.0 pixel margin around the edges.

```

val area = drawer.bounds.offsetEdges(-100.0)
val positions = List(5000) { area.uniform() }
drawer.circles(positions, 20.0)

```

To have a unique radius per circle we can provide a list of `Double` as a second argument:

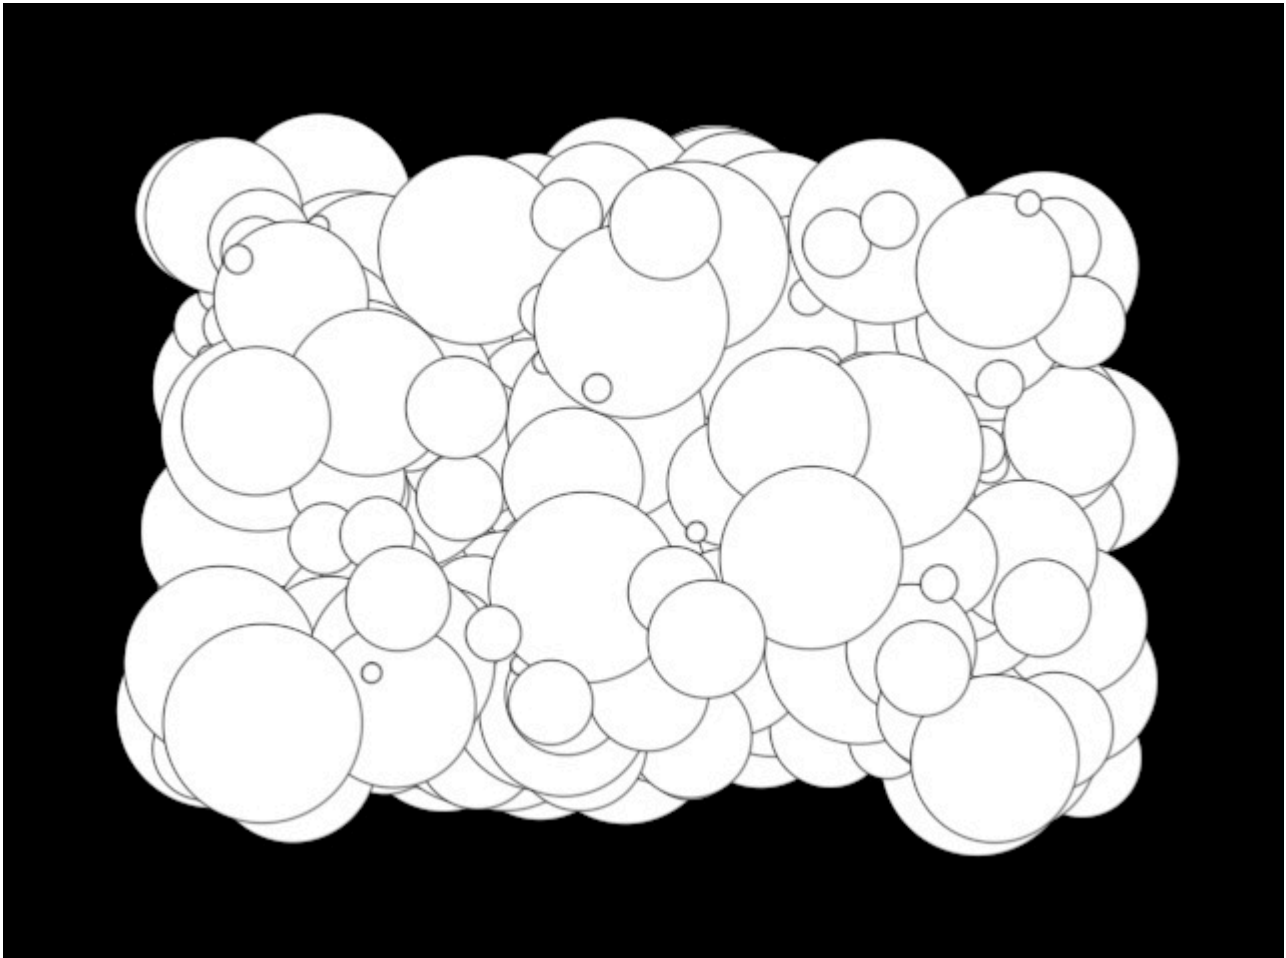

```

fun main() = application {
    program {

```

```

    extend {
        val area = drawer.bounds.offsetEdges(-100.0)
        val positions = List(400) { area.uniform() }
        val radii = List(400) { Double.uniform(5.0, 50.0) }
        drawer.circles(positions, radii)
    }
}

```

[Link to the full example](#)

What about unique colors and `strokeWeights` per circle? Creating static or dynamic batches makes it possible, both shown in the next example.



```

fun main() = application {
    program {
        val staticBatch = drawer.circleBatch {
            for (i in 0 until 2000) {
                fill = ColorRGBa.GRAY.shade(Double.uniform(0.0, 1.0))
                stroke = ColorRGBa.WHITE.shade(Double.uniform(0.0, 1.0))
                strokeWeight = Double.uniform(1.0, 6.0)
                val pos = Vector2.uniformRing(100.0, 200.0)
                circle(
                    pos + drawer.bounds.center,
                    5 + Double.uniform(0.0, 1.0) * 20
                )
            }
        }
    }
}

```

```

    }

    extend {
        drawer.clear(ColorRGBA.GRAY)
        drawer.circles(staticBatch)

        // dynamic batch
        drawer.circles {
            repeat(100) {
                fill = ColorRGBA.PINK.shade(Double.uniform(0.0, 1.0))
                stroke = null
                val pos = Vector2((it * 160.0) % width, height * 1.0)
                val radius = Double.uniform(2.5, 110.0 - it) * 2
                circle(pos, radius)
            }
        }
    }
}
}
}
}

```

[Link to the full example](#)

Batched rectangles

This example calls the `.rectangle()` method of `RectangleBatchBuilder` multiple times to construct a batch. It does so in two different ways: first, to construct a static batch of monochrome rectangles and second, to construct a dynamic batch of translucent pink rectangles in each animation frame.

The `.rectangle()` method takes two arguments: a `Rectangle` object and an optional rotation. Rectangles can be constructed in different ways: with position, width and optional height or by using `Rectangle.fromCenter()`.

Calling `drawer.rectangles()` to draw a rectangle batch is much faster than calling `drawer.rectangle()` multiple times.



```
fun main() = application {
    program {
        val staticBatch = drawer.rectangleBatch {
            for (i in 0 until 1000) {
                fill = ColorRGBa.GRAY.shade(Double.uniform(0.0, 1.0))
                stroke = ColorRGBa.WHITE.shade(Double.uniform(0.0, 1.0))
                strokeWidth = Double.uniform(1.0, 5.0)
                val angle = Int.uniform(0, 20) * 18.0
                val pos = drawer.bounds.center +
                    Polar(angle, Double.uniform(100.0, 200.0)).cartesian
                val rect = Rectangle.fromCenter(pos, width = 40.0, height = 20.0)
                rectangle(rect, angle) // add rect to the batch
            }
        }
    }

    extend {
        drawer.clear(ColorRGBa.GRAY)
        drawer.rectangles(staticBatch)

        // dynamic batch
        drawer.rectangles {
            repeat(100) {
                fill = ColorRGBa.PINK.opacify(0.05)
                stroke = null
                val pos = Vector2((it * 200.0) % width, 0.0)
                val size = 5 + Double.uniform(0.0, 1.0) * Double.uniform(0.0, 1.0) * height
            }
        }
    }
}
```

```


        rectangle(Rectangle(pos, size))
    }
}
}
}
}

```

[Link to the full example](#)

Batched points

Drawing batched points is similar to drawing batched circles and rectangles. In this case we use a `PointBatchBuilder` and its `.point()` method. Note that we can specify the color of each point by using `.fill`.

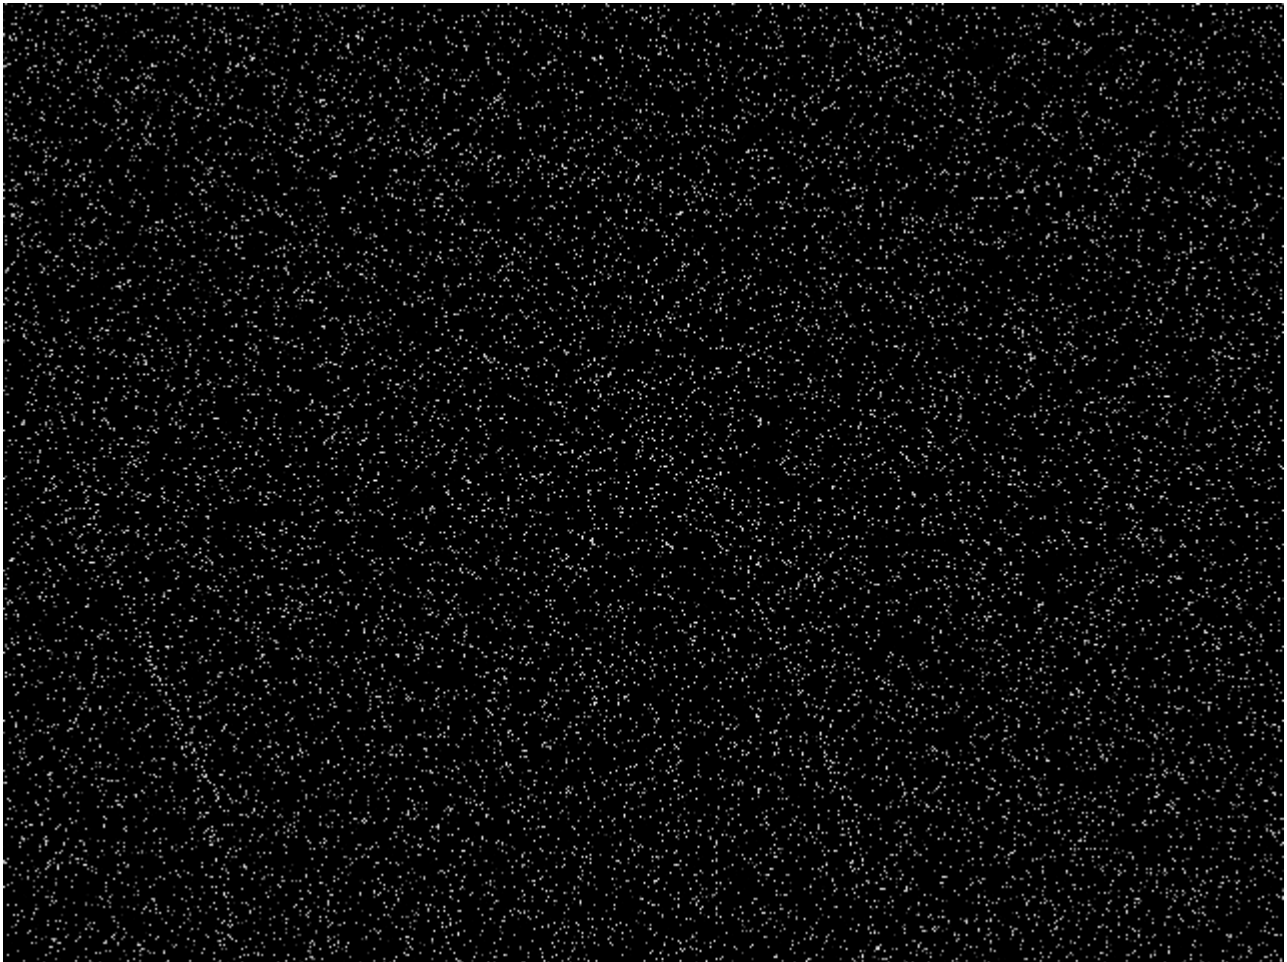

```

fun main() = application {
    program {
        extend {
            drawer.clear(ColorRGBA.BLACK)
            drawer.points {
                repeat(20000) {
                    fill = rgb((it * 0.01 - seconds) % 1)
                    point(
                        (it * it * 0.011) % width,
                        (it * 4.011) % height
                    )
                }
            }
        }
    }
}

```



```
}  
  }  
}
```

[Link to the full example](#)

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Transformations


This section covers the topic of placing items on the screen.

Basic transformation use

Translation

Translation moves points in space with an offset.

In the following example we use `Drawer.translate` to move a single rectangle over the screen.




```
fun main() = application {
    configure {
        width = 770
        height = 578
    }
    program {
        extend {
            drawer.fill = ColorRGBa.PINK
            drawer.stroke = null
            // set up translation
            drawer.translate(seconds * 100.0, height / 2.0)
```



```
        drawer.rectangle(-50.0, -50.0, 100.0, 100.0)
    }
}
}
```

[Link to the full example](#)

translations (and transformations in general) can be stacked on top of each-other. For example we can express a horizontal and a vertical motion as two separate translations



```
fun main() = application {
    configure {
        width = 770
        height = 578
    }
    program {
        extend {
            drawer.fill = ColorRGBA.PINK
            drawer.stroke = null
            // move the object to the vertical center of the screen
            drawer.translate(0.0, height / 2.0)
            // set up horizontal translation
            drawer.translate(seconds * 100.0, 0.0)
            // set up vertical translation
            drawer.translate(0.0, cos(seconds * Math.PI * 2.0) * 50.00)

            drawer.rectangle(-50.0, -50.0, 100.0, 100.00)
        }
    }
}
```


```
}  
}  
}
```

[Link to the full example](#)

Rotations

Rotating transformations are performed using `Drawer.rotate()`. The rotation is applied by rotating points around the origin of the coordinate system: (0, 0), which lies in the top-left corner of the window.

In the first rotation example we rotate a rectangle that is placed around the origin but later translated to the center of the screen. Here we notice something that may be counter-intuitive at first: the transformations are easiest read from bottom to top: first rotate is applied and only then `translate`.

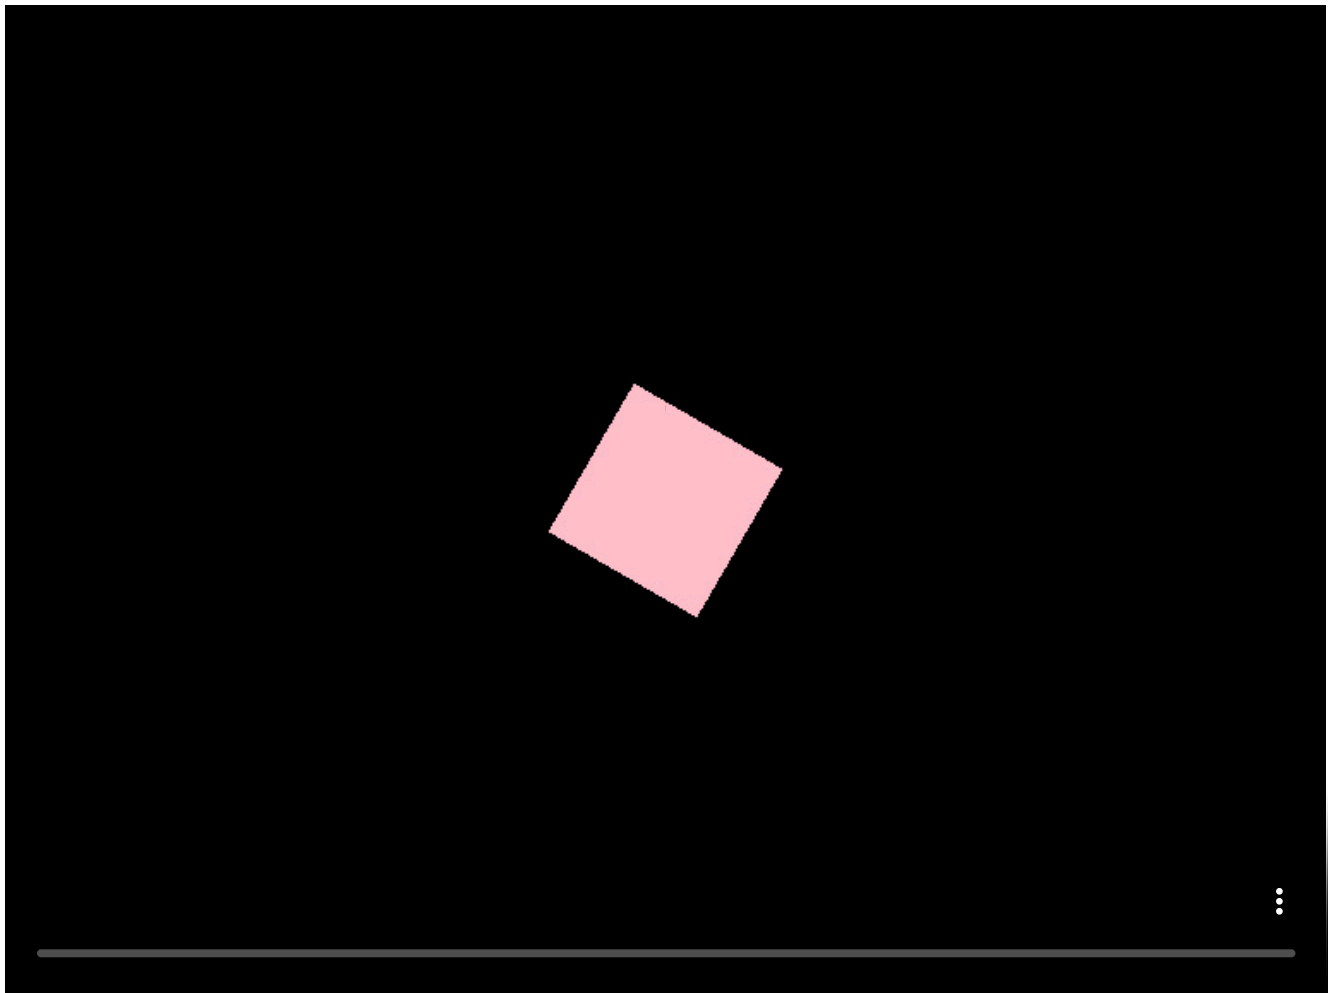


```
fun main() = application {  
    configure {  
        width = 770  
        height = 578  
    }  
    program {  
        extend {  
            drawer.fill = ColorRGBA.PINK  
            drawer.stroke = null  
  
            // -- translate  
            drawer.translate(width / 2.0, height / 2.0)  
  
            // -- rotate
```

```
        drawer.rotate(seconds * 30.0)
        // -- rectangle around the origin
        drawer.rectangle(-50.0, -50.0, 100.0, 100.0)
    }
}
}
```

[Link to the full example](#)

Scaling

Scaling transformations are performed using `Drawer.scale()`. Also scaling is applied around the origin of the coordinate system: (0, 0).



```
fun main() = application {
    configure {
        width = 770
        height = 578
    }
    program {
        extend {
            drawer.fill = ColorRGBa.PINK
            drawer.stroke = null

            // -- translate to the screen center
            drawer.translate(width / 2.0, height / 2.0)
            // -- scale around origin
        }
    }
}
```


```

        drawer.scale(cos(seconds) + 2.0)
        // -- rectangle around the origin
        drawer.rectangle(-50.0, -50.0, 100.0, 100.0)
    }
}

```

[Link to the full example](#)

Combining transformations

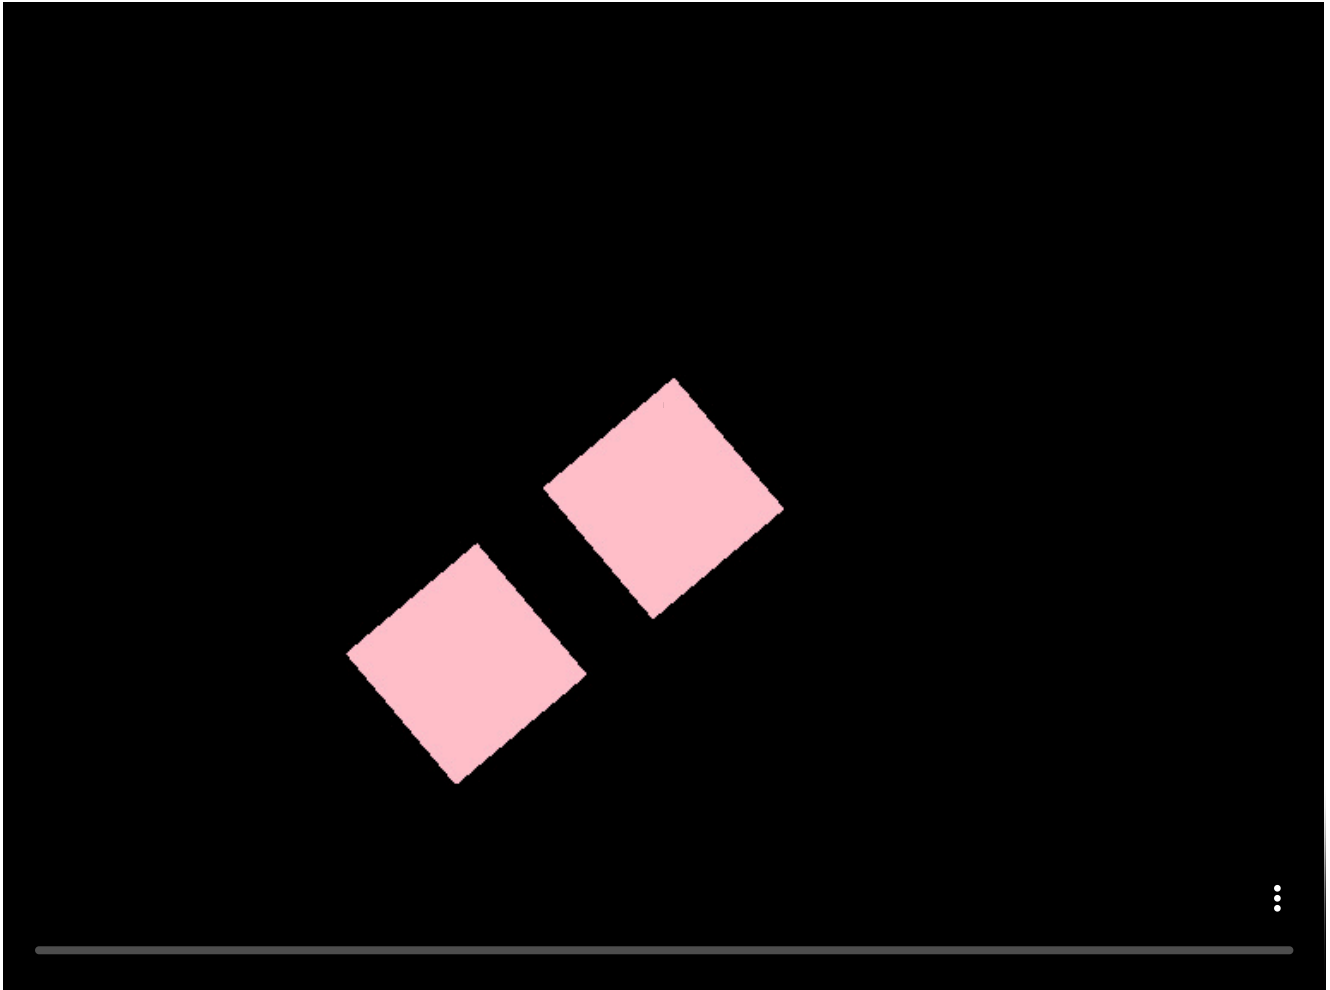

```

fun main() = application {
    configure {
        width = 770
        height = 578
    }
    program {
        extend {
            drawer.fill = ColorRGBA.PINK
            drawer.stroke = null

            // -- translate to the screen center
            drawer.translate(width / 2.0, height / 2.0)

            drawer.rotate(20.00 + seconds * 60.0)
            // -- rectangle around the origin
            drawer.rectangle(-50.0, -50.0, 100.0, 100.0)


```

```

        // -- draw a second rectangle, sharing the rotation of the first rectangle but with an offset
        drawer.translate(150.0, 0.0)
        drawer.rectangle(-50.0, -50.0, 100.0, 100.0)
    }
}

```

[Link to the full example](#)

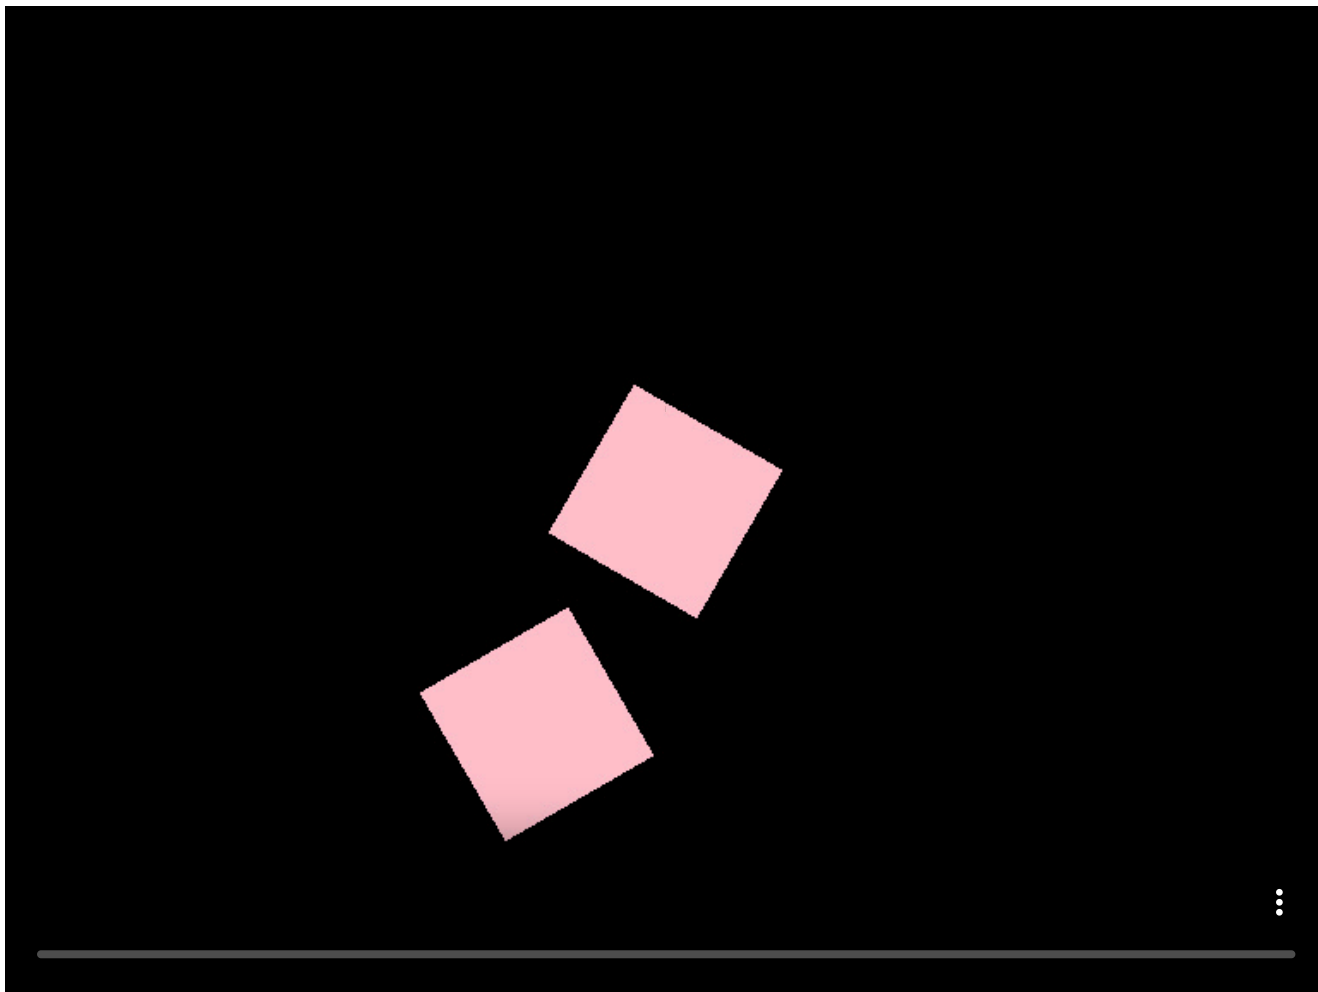

```

fun main() = application {
    configure {
        width = 770
        height = 578
    }
    program {
        extend {
            drawer.fill = ColorRGBA.PINK
            drawer.stroke = null

            // -- translate to the screen center
            drawer.translate(width / 2.0, height / 2.0)

            drawer.rotate(seconds * 60.0)
            // -- rectangle around the origin
            drawer.rectangle(-50.0, -50.0, 100.0, 100.0)
        }
    }
}

```

```

// -- draw a second rectangle, sharing the rotation of the first rectangle but with an offset
drawer.translate(150.0, 0.0)
drawer.rotate(seconds * 15.0)
drawer.rectangle(-50.0, -50.0, 100.0, 100.00)
}
}
}

```

[Link to the full example](#)

Transform pipeline

OPENRNDR's `Drawer` is build around model-view-projection transform pipeline. That means that three different transformations are applied to determine the screen position.

matrix property	pipeline stage
model	model transform
view	view transform
projection	projection transform

Which matrices are affected by which `Drawer` operations?

operation	matrix property
fun rotate(...)	model
fun translate(...)	model
fun scale(...)	model
fun lookAt(...)	view
fun ortho(...)	projection
fun perspective(...)	projection

Projection matrix

The default projection transformation is set to an orthographic projection using `ortho()`. The origin is in the upper-left corner; positive y points down, positive x points right on the screen.

Perspective projections

```

override fun draw() {
    drawer.perspective(90.0, width*1.0 / height, 0.1, 100.0)
}

```

Transforms

In OPENRNDR transforms are represented by `Matrix44` instances.

OPENRNDR offers tools to construct `Matrix44`

Transform builder

Relevant APIs

```
Matrix44  
transform {}
```

In the snippet below a `Matrix44` instance is constructed using the `transform {}` builder. Note that the application order is from bottom to top.

```
drawer.model *= transform {  
    rotate(32.0)  
    rotate(Vector3(1.0, 1.0, 0.0).normalized, 43.0)  
    translate(4.0, 2.0)  
    scale(2.0)  
}
```

This is equivalent to the following:

```
drawer.rotate(32.0)  
drawer.rotate(Vector3(1.0, 1.0, 0.0).normalized, 43.0)  
drawer.translate(4.0, 2.0)  
drawer.scale(2.0)
```

Applying transforms to vectors

```
val x = Vector4(1.0, 2.0, 3.0, 1.0)  
val m = transform {  
    rotate(Vector3.UNIT_Y, 42.0)  
}  
val transformed = m * x  
val transformedTwice = m * m * x
```

[edit on GitHub](#)

OPENRNDR GUIDE

[Drawing](#) / Vectors

Vectors

The `Vector2`, `Vector3` and `Vector4` classes are used for 2, 3 and 4 dimensional vector representations. Vector instances are immutable; once a Vector has been instantiated its values cannot be changed.

```
val v2 = Vector2(1.0, 10.0)
val v3 = Vector3(1.0, 1.0, 1.0)
val v4 = Vector4(1.0, 1.0, 1.0, 1.0)
```

Standard vectors

```
Vector2.ZERO    // (0, 0)
Vector2.UNIT_X  // (1, 0)
Vector2.UNIT_Y  // (0, 1)

Vector3.ZERO    // (0, 0, 0)
Vector3.UNIT_X  // (1, 0, 0)
Vector3.UNIT_Y  // (0, 1, 0)
Vector3.UNIT_Z  // (0, 0, 1)

Vector4.ZERO    // (0, 0, 0, 0)
Vector4.UNIT_X  // (1, 0, 0, 0)
Vector4.UNIT_Y  // (0, 1, 0, 0)
Vector4.UNIT_Z  // (0, 0, 1, 0)
Vector4.UNIT_W  // (0, 0, 0, 1)
```

Vector arithmetic

The vector classes have operator overloads for the most essential operations.

left operand	operator	right operand	result
VectorN	+	VectorN	addition of two vectors
VectorN	-	VectorN	subtraction of two vectors
VectorN	/	Double	scaled vector
VectorN	*	Double	scaled vector
VectorN	*	VectorN	component-wise multiplication (l.x * r.x, l.y * r.y)
VectorN	/	VectorN	component-wise division (l.x / r.x, l.y / r.y)

Some examples of vector arithmetic in practice

```
val a = Vector2(2.0, 4.0)
val b = Vector2(1.0, 3.0)
val sum = a + b
val diff = a - b
```



```
val scale = a * 2.0
val div = a / 2.0
val cdiv = a / b
```

Vector properties

property	description
length	the length of the vector
normalized	a normalized version of the vector

Swizzling and sizing

Vector2 swizzles allow reordering or sizing of vector fields. This is a common pattern in GLSL.

```
val v3a = Vector2(1.0, 2.0).vector3(z = 0.0)
val v3b = Vector2(1.0, 2.0).xy0
val v3c = Vector2(1.0, 2.0).xy1
val v4a = Vector2(1.0, 2.0).xy01
val v2a = Vector3(1.0, 2.0, 3.0).xy
val v2b = Vector3(1.0, 2.0, 3.0).yx
```

Let/copy pattern

Here we present two patterns that make working with immutable Vector classes a bit more convenient.

The copy pattern (which comes from Vectors being Kotlin data classes)

```
val v = Vector2(1.0, 2.0)
val w = v.copy(y = 5.0)    // (1.0, 5.0)
```

The let/copy pattern, which combines Kotlin's `let` with `copy`

```
val v = someFunctionReturningAVector().let { it.copy(x = it.x + it.y) }
```

Mixing

Linear interpolation of vectors using `mix()`

```
val m = mix(v0, v1, f)
```

which is short-hand for

```
val m = v0 * (1.0 - f) + v1 * f
```

Randomness

Generating random vectors with minimum and maximum values

```
val v2 = Vector2.uniform(min = -1.0, max = 1.0)

val v3 = Vector2.uniform(
  min = Vector2(50.0, 50.0),
  max = Vector2(200.0, 100.0)
)

// A list with 10 random points
val points = List(10) {
  Vector2.uniform(0.0, 1.0)
}
```

To generate other random distributions of vectors see [orx-noise](#).


Polar coordinates

Sometimes we may need to specify positions using angles and distances instead of x and y values. For such cases we can use `Polar` (2D) and `Spherical` (3D).

```
val p = Polar(theta = 45.0, radius = 100.0)
val s = Spherical(theta = 30.0, phi = 90.0, radius = 100.0)
```

Since drawing operations don't accept `Polar` or `Spherical` coordinates, we can use the `.cartesian` method to convert them back to something we can use for drawing.

Here an example drawing 150 small circles with increasing `theta` and `radius` to form a spiral.

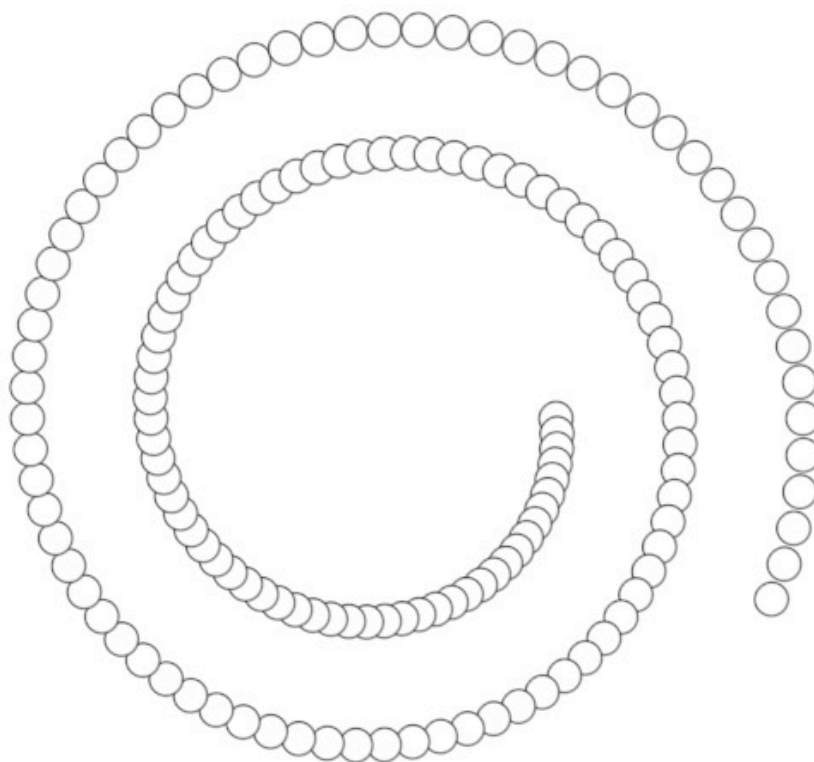

```
fun main() = application {
    program {
        val points = List(150) {
            drawer.bounds.center + Polar(it * 5.0, it + 100.0).cartesian
        }
        extend {
            drawer.clear(ColorRGBa.WHITE)
            drawer.circles(points, 10.0)
        }
    }
}
```

[Link to the full example](#)

The reverse operation of `.cartesian`, that is, to convert Cartesian coordinates to Polar or Spherical, use these methods:

```
// Polar(theta=45.0, radius=1.4142135623730951)
val p = Polar.fromVector(Vector2.ONE)

// Spherical(theta=90.0, phi=90.0, radius=1.0)
val s = Spherical.fromVector(Vector3.UNIT_X)
```

[edit on GitHub](#)

Quaternions

Quaternions represent rotation through an extension of complex numbers. A full explanation of quaternions and their intrinsics is out of this document's scope, in this section however enough information is provided to use quaternion's effectively as a tool.

In practice quaternions are rarely constructed directly as it is fairly difficult to get an intuition for its argument values.

```
val q = Quaternion(0.4, 0.3, 0.1, 0.1)
```

Instead quaternions are created from Euler-rotation angles and concatenated in quaternion space. Working in quaternion domains warrants consistent rotations and avoids gimbal locks.

```
val q0 = fromAngles(pitch0, yaw0, roll0)
val q1 = fromAngles(pitch1, yaw1, roll1)
val q = q0 * q1
```

Slerp

Spherical linear interpolation, or colloquially "slerping" solves the problem of interpolating or blending between rotations.

```
val q0 = fromAngles(pitch0, yaw0, roll0)
val q1 = fromAngles(pitch1, yaw1, roll1)
val q = slerp(q0, q1, 0.5)
```

Quaternion to matrix

Naturally quaternions can be converted to matrices. Quaternions have a `matrix` property that holds a `Matrix44` representation of the orientation represented by the Quaternion.

```
val q0 = fromAngles(pitch, yaw, roll)
drawer.model *= q0.matrix.matrix44
```

Color buffers

A color buffer is an image stored in GPU memory.

Creating a color buffer

Color buffers are created using the `colorBuffer()` function.

```
val cb = colorBuffer(640, 480)
```

Specifying buffer format

Color buffers can be created in different formats. The buffer format specifies the number and order of channels in the image. Color buffers can have 1 to 4 channels. The `format` argument can be any `ColorFormat` value.

```
val cb = colorBuffer(640, 480, format = ColorFormat.R)
```

Specifying buffer type

The buffer type specifies which data type is used for storing colors in the buffer. The `type` argument can be any `ColorType` value.

```
val cb = colorBuffer(640, 480, type = ColorType.FLOAT16)
```


Loading color buffers

Color buffers can be loaded from an image stored on disk. Supported file types are png, jpg, dds and exr (OpenEXR).

```
val cb = loadImage("data/images/pm5544.jpg")
```

Generating color buffers

Use `drawImage` to create a color buffer and draw into it.

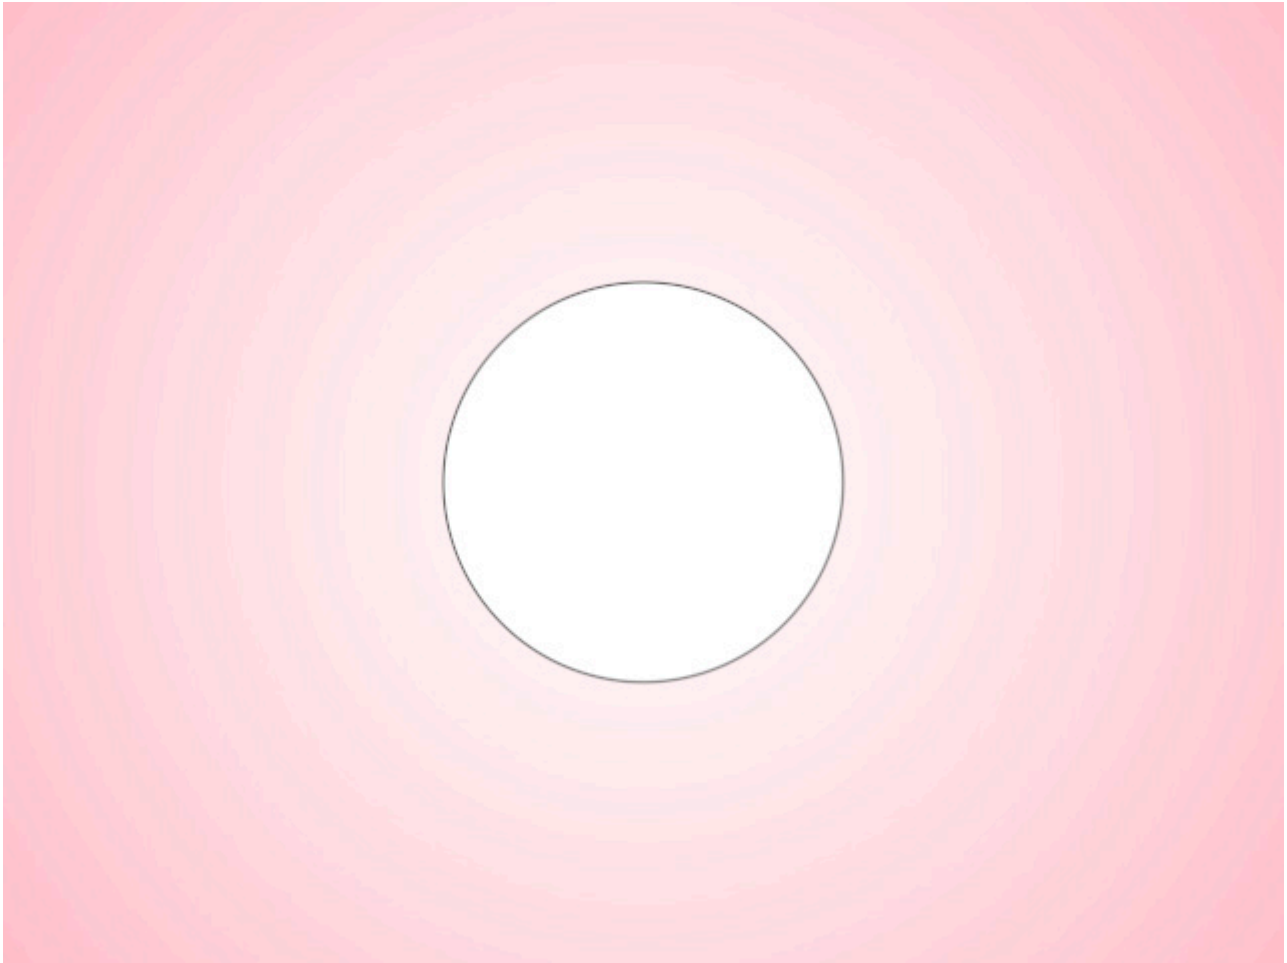

```
fun main() = application {
    program {
        val gradientBackground = drawImage(width, height) {
            // Draw anything here, for example, a radial gradient.
            drawer.shadeStyle = gradient<ColorRGBa> {
                stops[0.0] = ColorRGBa.WHITE
                stops[1.0] = ColorRGBa.PINK
                radial { }
            }
            val r = Rectangle.fromCenter(drawer.bounds.center, 800.0, 800.0)
            drawer.rectangle(r)
        }
        extend {
            drawer.image(gradientBackground)
            drawer.circle(drawer.bounds.center, sin(seconds) * 80 + 100)
        }
    }
}
```

[Link to the full example](#)

`drawImage` is convenient for creating static images. If a program requires redrawing a color buffer use a [render target](#) instead.

Freeing color buffers

If a program creates new buffers while it runs it is important to free those buffers when no longer needed to avoid running out of memory.

```
// -- When done using the buffer call destroy() to free its memory.
cb.destroy()
```

Saving color buffers

Color buffers can be saved to disk using the `saveToFile` member function. Supported file types are png, jpg, dds and exr (OpenEXR).

```
val cb = colorBuffer(640, 480)
cb.saveToFile(File("output.jpg"))
```

When repeatedly saving color buffers asynchronously (the default) it is possible to run out of memory. This can happen if the software can not save images at the requested frame rate. In such situations we can either set `async = false` in `saveToFile()` or avoid `saveToFile` and use the [VideoWriter](#) together with [pngSequence](#) or [tiffSequence](#) instead.

Note that some image file types take longer to save than others.

Copying between color buffers

Color buffer contents can be copied using the `copyTo` member function. Copying works between color buffers of different formats and types.

```
// -- create color buffers
val cb0 = colorBuffer(640, 480, type = ColorType.FLOAT16)
val cb1 = colorBuffer(640, 480, type = ColorType.FLOAT32)
//-- copy contents of cb0 to cb1
cb0.copyTo(cb1)
```

Writing into color buffers

To upload data into the color buffer one uses the `write` member function.

```
// -- create a color buffer that uses 8 bits per channel (the default)
val cb = colorBuffer(640, 480, type = ColorType.UINT8)

// -- create a buffer (on CPU) that matches the size and layout of the color buffer
val buffer = ByteBuffer.allocateDirect(cb.width * cb.height * cb.format.componentCount * cb.type.componentSize)

// -- fill buffer with random data
for (y in 0 until cb.height) {
    for (x in 0 until cb.width) {
        for (c in 0 until cb.format.componentCount) {
            buffer.put((Math.random() * 255).toInt().toByte())
        }
    }
}

// -- rewind the buffer, this is essential as upload will be from the position we left the buffer at
buffer.rewind()
```

```
// -- write into the color buffer
cb.write(buffer)
```

Reading from color buffers

To download data from a color buffer one uses the `read` member function.

```
// -- create a color buffer that uses 8 bits per channel (the default)
val cb = colorBuffer(640, 480, type = ColorType.UINT8)

// -- create a buffer (on CPU) that matches the size and layout of the color buffer
val buffer = ByteBuffer.allocateDirect(cb.width * cb.height * cb.format.componentCount * cb.type.componentSize)

// -- download data into buffer
cb.read(buffer)

// -- read the first UINT8 pixel's color
val r = buffer[0].toUByte().toDouble() / 255.0
val g = buffer[1].toUByte().toDouble() / 255.0
val b = buffer[2].toUByte().toDouble() / 255.0
val a = buffer[3].toUByte().toDouble() / 255.0
val c = rgb(r, g, b, a)
```

Color buffer shadows

To simplify the process of reading and writing from and to color buffers we added a shadow buffer to `ColorBuffer`. A shadow buffer offers a simple interface to access the color buffer's contents.

Note that shadow buffers have more overhead than using `read()` and `write()`.

```
// -- create a color buffer that uses 8 bits per channel (the default)
val cb = colorBuffer(640, 480, type = ColorType.UINT8)
val shadow = cb.shadow

// -- download cb's contents into shadow
shadow.download()

// -- place random data in the shadow buffer
for (y in 0 until cb.height) {
    for (x in 0 until cb.width) {
        shadow[x, y] = ColorRGBA(Math.random(), Math.random(), Math.random())
    }
}

// -- upload shadow to cb
shadow.upload()
```

[edit on GitHub](#)

Render targets and color buffers

A `RenderTarget` specifies a place to draw to. A `RenderTarget` has two kind of buffer attachments: `ColorBuffer` attachments and `DepthBuffer` attachments. At least a single `ColorBuffer` attachment is needed to be able to draw on a `RenderTarget`.

A `ColorBuffer` is a buffer that can hold up to 4 channel color. A `ColorBuffer` can hold 8 bit integer, 16 bit float or 32 bit float channels.

A `DepthBuffer` is a buffer that can hold depth and stencil values.

Creating a render target

The advised method of creating `RenderTarget` instances is to use the `renderTarget {}` builder.

```
val rt = renderTarget(640, 480) { }
```

This creates a render target, but the render target does not have attachments that can hold the actual image data. In the following snippet a render target with a single color buffer attachment is created using the builder.

```
val rt = renderTarget(640, 480) {  
    colorBuffer()  
}
```

Drawing on a render target

Use `drawer.isolatedWithTarget()` to draw into an off-screen buffer.

Once updated, we can either draw it onto the screen (as this example shows) or process its color buffer further using [filters](#) or custom shaders.

```
fun main() = application {  
    program {  
        // -- build a render target with a single color buffer attachment  
        val rt = renderTarget(width, height) {  
            colorBuffer()  
        }  
  
        extend {  
            drawer.isolatedWithTarget(rt) {  
                drawer.clear(ColorRGBa.BLACK)  
                drawer.fill = ColorRGBa.WHITE  
                drawer.stroke = null  
                drawer.rectangle(40.0, 40.0, 80.0, 80.0)  
            }  
  
            // draw the backing color buffer to the screen  
            drawer.image(rt.colorBuffer(0))  
        }  
    }  
}
```

```
}  
}
```

Drawing contours or shapes on a render target

When drawing `ShapeContour` or `Shape` instances, both a color buffer and a depth buffer are required.

```
fun main() = application {  
    program {  
        // -- build a render target with color and depth buffer attachments  
        val rt = renderTarget(width, height) {  
            colorBuffer()  
            depthBuffer() // <--  
        }  
  
        drawer.isolatedWithTarget(rt) {  
            drawer.clear(ColorRGBa.PINK)  
  
            // A closed contour with 12 random points defining 12 straight segments  
            drawer.contour(ShapeContour.fromPoints(List(12) {  
                drawer.bounds.offsetEdges(-50.0).uniform()  
            }, true))  
        }  
  
        extend {  
            drawer.image(rt.colorBuffer(0))  
        }  
    }  
}
```

If we forget to include a depth buffer we will be reminded with the following error message: drawing `org.openrndr.shape.contours` requires a render target with a stencil attachment

Render targets and projection transformations

Note that the projection matrix has to fit the render target. This becomes obvious **if the dimensions of the window and the dimensions of the render target differ**. In case of orthographic (2D) projections one can call `ortho(rt)`:

```
fun main() = application {  
    program {  
        // -- build a render target with a single color buffer attachment  
        val rt = renderTarget(400, 400) {  
            colorBuffer()  
        }  
  
        extend {  
            drawer.isolatedWithTarget(rt) {  
                drawer.clear(ColorRGBa.BLACK)  
  
                // -- set the orthographic transform that matches with the render target  
                ortho(rt)  
  
                drawer.fill = ColorRGBa.WHITE  
            }  
        }  
    }  
}
```

```

        drawer.stroke = null
        drawer.rectangle(40.0, 40.0, 80.0, 80.0)
    }

    // -- draw the backing color buffer to the screen
    drawer.image(rt.colorBuffer(0))
}
}
}

```

If we forget to do this the graphics rendered onto our render target may be displaced or have an unexpected scale.

Compositing using render targets and alpha channels

OPENRNDR allows for compositing using `RenderTarget`s through the use of transparency encoded in alpha channels. The following code snippet uses two `RenderTarget` instances and clears them using `ColorRGBA.TRANSPARENT`.

```

fun main() = application {
    program {
        val rt0 = renderTarget(width, height) { colorBuffer() }
        val rt1 = renderTarget(width, height) { colorBuffer() }

        extend {
            drawer.stroke = null

            // -- bind our first render target, clear it, draw on it, unbind it
            drawer.isolatedWithTarget(rt0) {
                drawer.clear(ColorRGBA.TRANSPARENT)
                drawer.fill = ColorRGBA.WHITE
                drawer.rectangle(40.0, 40.0, 80.0, 80.0)
            }

            // -- bind our second render target, clear it, draw on it, unbind it
            drawer.isolatedWithTarget(rt1) {
                drawer.clear(ColorRGBA.TRANSPARENT)
                drawer.fill = ColorRGBA.PINK
                drawer.rectangle(140.0, 140.0, 80.0, 80.0)
            }

            // -- draw the backing color buffer to the screen
            drawer.image(rt0.colorBuffer(0))
            drawer.image(rt1.colorBuffer(0))
        }
    }
}

```

Creating high precision floating point render targets

The default color buffer format is unsigned 8 bit RGBA. There is support for floating point render targets.

```

val rt = renderTarget(640, 480) {
    colorBuffer(ColorFormat.RGBA, ColorType.FLOAT16)
}

```

```
colorBuffer(ColorFormat.RGBa, ColorType.FLOAT32)
}
```

Multi-sample anti-aliasing

Render targets can be configured to use multi-sample anti-aliasing. All color and depth buffers that are added in the `renderTarget {}` builder will be created with the same multi sample configuration.

```
// -- here we create a multi-sampled render target
val rt = renderTarget(640, 480, multisample = BufferMultisample.SampleCount(8)) {
    colorBuffer(ColorFormat.RGBa, ColorType.FLOAT16)
    colorBuffer(ColorFormat.RGBa, ColorType.FLOAT32)
}
```

The color buffers that are attached to a multi-sampled render target cannot be drawn directly. In order to use the color buffer it has to be resolved first.

```
fun main() = application {
    program {
        // -- build a render target with color and depth buffer attachments
        val rt = renderTarget(width, height, multisample = BufferMultisample.SampleCount(8)) {
            colorBuffer()
            depthBuffer()
        }

        val resolved = colorBuffer(width, height)

        extend {
            drawer.isolatedWithTarget(rt) {
                drawer.clear(ColorRGBa.BLACK)
                drawer.fill = ColorRGBa.WHITE
                drawer.stroke = null
                drawer.circle(0.0, 0.0, 400.0)
            }

            // -- resolve the render target attachment to `resolved`
            rt.colorBuffer(0).copyTo(resolved)

            // draw the backing color buffer to the screen
            drawer.image(resolved)

            // draw a second circle with no multisampling to compare
            drawer.fill = ColorRGBa.WHITE
            drawer.stroke = null
            drawer.circle(width * 1.0, height * 1.0, 400.0)
        }
    }
}
```

Depth Buffer

A depth buffer is required to be able to draw `Shape` and `ShapeContour` elements on a render target. Without a depth buffer the program will fail to run and an error message will remind you of this requirement.

When drawing 3D graphics a depth buffer is required so elements near the camera are drawn in front of elements farther away from it.

Clearing buffers

```
// clear the color buffer
rt.clearColor(0, ColorRGBa.TRANSPARENT)

// clear the depth buffer
rt.clearDepth()
```

Named attachments

```
val rt = renderTarget(640, 480) {
    colorBuffer("albedo", ColorFormat.RGBa, ColorType.FLOAT16)
    colorBuffer("position", ColorFormat.RGBa, ColorType.FLOAT32)
}
```

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Filters and Post-processing

Since OPENRNDR has extensive support for rendering to off-screen buffers it is easy to apply effects and filters to the off-screen buffers.

Basic usage

To demonstrate the ease of using filters we show an example of applying a blur filter to a drawing on a render target.



```
fun main() = application {  
    configure {  
        width = 770  
        height = 578  
    }  
    program {  
        // -- create an offscreen render target  
        val offscreen = renderTarget(width, height) {  
            colorBuffer()  
            depthBuffer()  
        }  
        // -- create blur filter  
        val blur = BoxBlur()  
  
        // -- create a colorbuffer to hold the blur results
```

```

val blurred = colorBuffer(width, height)

extend {
    // -- draw to offscreen buffer
    drawer.isolatedWithTarget(offscreen) {
        clear(ColorRGBa.BLACK)
        fill = ColorRGBa.PINK
        stroke = null
        circle(
            cos(seconds) * 100.0 + width / 2,
            sin(seconds) * 100.0 + height / 2.0,
            100.0 + 100.0 * cos(seconds * 2.0)
        )
    }
    // -- set blur parameters
    blur.window = 30

    // -- blur offscreen's color buffer into blurred
    blur.apply(offscreen.colorBuffer(0), blurred)
    drawer.image(blurred)
}
}
}


```

[Link to the full example](#)

Writing your own filters

You may be wondering how to create your own filters. If so, good news, it is fairly easy to write your own filter if you are familiar with fragment shaders in GLSL. The easiest way to write your own filter is to use the `Filter` class by extending it. The `Filter` class takes care of setting up render state, geometry and projections so all you have to do is write a shader.

What follows is an example of how to create a `Filter` from a shader whose code is stored as a `String`. The filter we will be making is a simple noise filter.

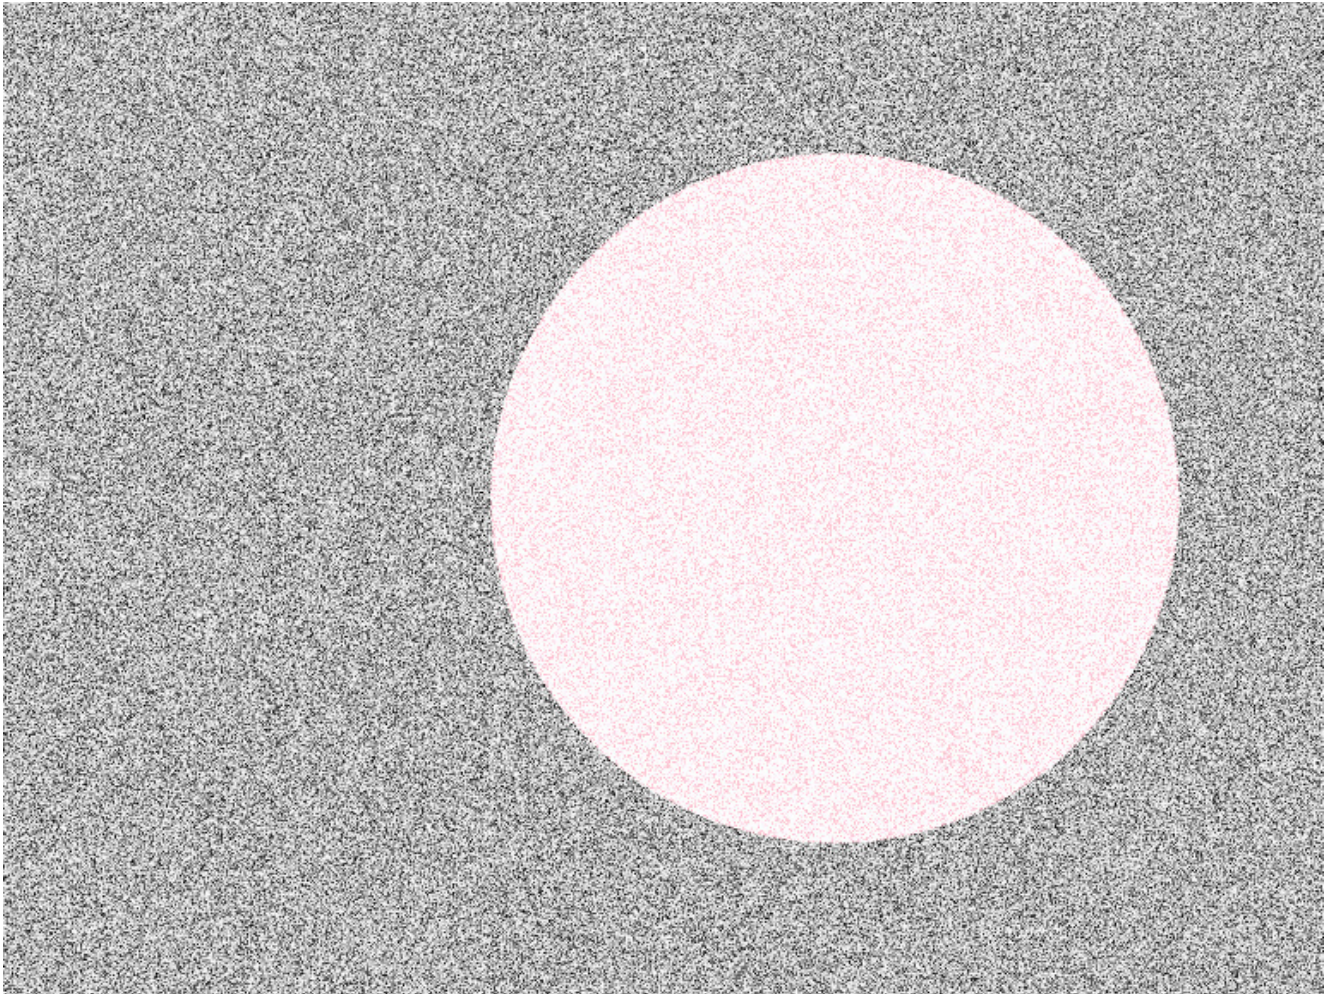

```
fun main() = application {
    val noiseShader = """
#version 330
// -- part of the filter interface, every filter has these
in vec2 v_texCoord0;
uniform sampler2D tex0;
out vec4 o_color;

// -- user parameters
uniform float gain;
uniform float time;

#define HASHSCALE 443.8975
vec2 hash22(vec2 p) {
    vec3 p3 = fract(vec3(p.xyx) * HASHSCALE);
    p3 += dot(p3, p3.yzx+19.19);
    return fract(vec2((p3.x + p3.y)*p3.z, (p3.x+p3.z)*p3.y));
}

void main() {
    float n = hash22(v_texCoord0+vec2(time)).x;
    // here we read from the input image and add noise
    vec4 color = texture(tex0, v_texCoord0) + vec4(vec3(n), 0.0) * gain;
    o_color = color;
}
"""
```



```

class Noise : Filter(filterShaderFromCode(noiseShader, "noise-shader")) {
    // -- note the 'by parameters' here; this is what wires the fields up to the uniforms
    var gain: Double by parameters
    var time: Double by parameters

    init {
        gain = 1.0
        time = 0.0
    }
}

program {
    // -- create the noise filter
    val noise = Noise()
    val offscreen = renderTarget(width, height) {
        colorBuffer()
        depthBuffer()
    }

    extend {
        // -- draw to offscreen buffer
        drawer.isolatedWithTarget(offscreen) {
            clear(ColorRGBa.BLACK)
            fill = ColorRGBa.PINK
            stroke = null
            circle(
                cos(seconds) * 100.0 + width / 2,
                sin(seconds) * 100.0 + height / 2.0,
                100.0 + 100.0 * cos(seconds * 2.0)
            )
        }

        // apply the noise on and to offscreen.colorBuffer(0),
        // this only works for filters that only read from
        // the current fragment.
        noise.time = seconds
        noise.gain = 1.0
        noise.apply(
            offscreen.colorBuffer(0),
            offscreen.colorBuffer(0)
        )

        drawer.image(offscreen.colorBuffer(0))
    }
}
}

```


[Link to the full example](#)

The orx-fx library

A repository of ready-to-use filters for OPENRNDR can be found in the [ORX repository](#), a partial index of the filters can be found in the [orx-fx chapter](#)

Clipping

OPENRNDR's drawer supports a single rectangular clip mask.

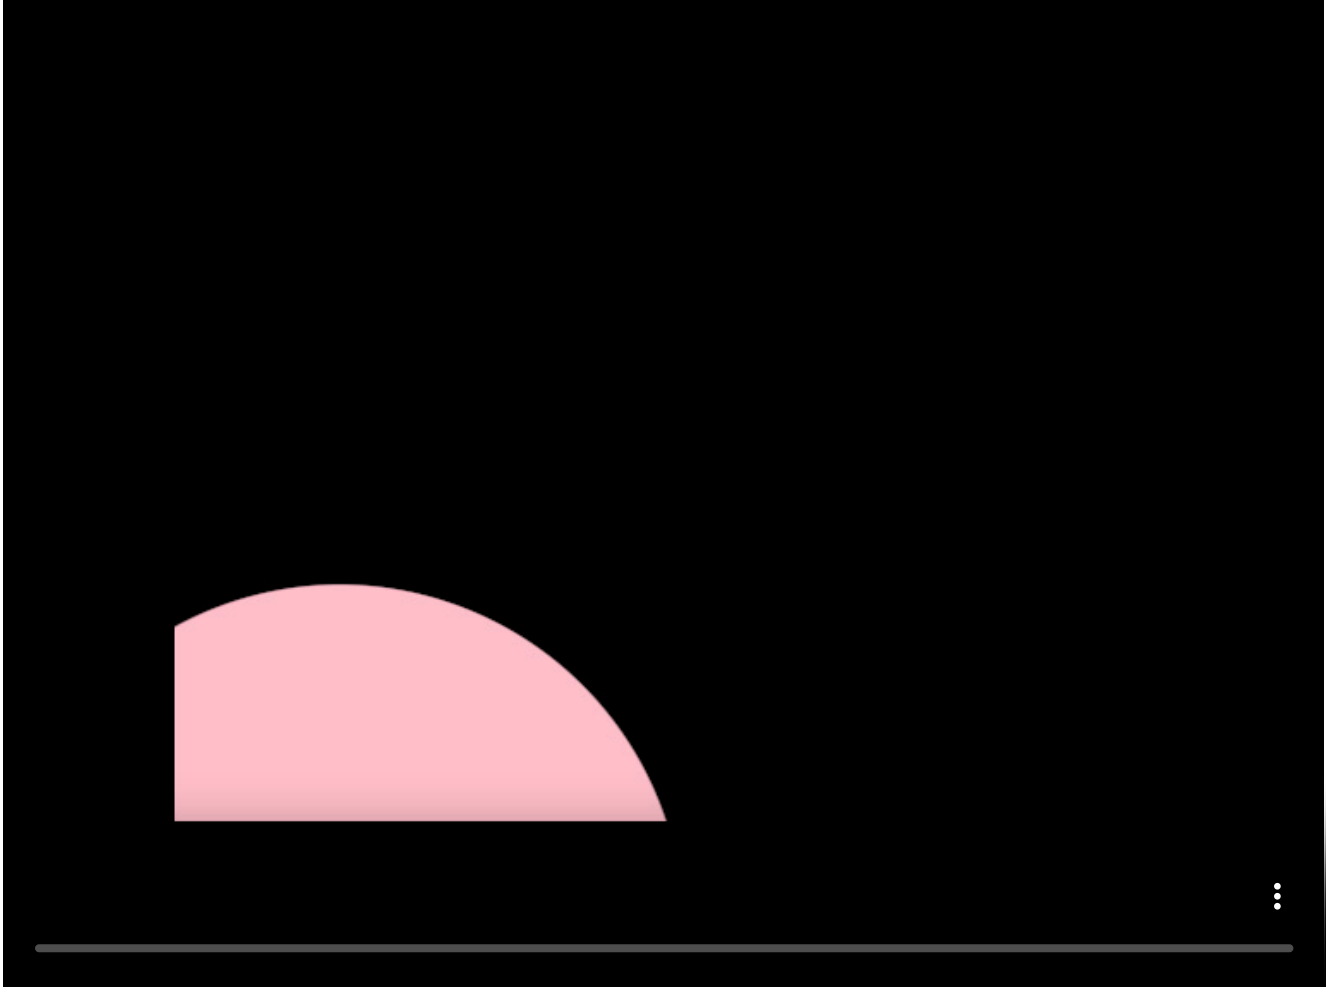

```
fun main() = application {
    program {
        extend {
            drawer.stroke = null
            drawer.fill = ColorRGBa.PINK

            // -- set the rectangular clipping mask
            drawer.drawStyle.clip = Rectangle(100.0, 100.0, width - 200.0, height - 200.00)

            drawer.circle(
                cos(seconds) * width / 2.0 + width / 2.0,
                sin(seconds) * height / 2.0 + height / 2.0,
                200.0
            )

            // -- restore clipping
            drawer.drawStyle.clip = null
        }
    }
}
```

```
}  
}
```

[Link to the full example](#)

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Asynchronous image loading

In scenarios in which images are required to be loaded without blocking the draw thread you can use `ColorBufferLoader`. This loader runs on its own thread and uses shared contexts of the underlying graphics API (OpenGL).

`ColorBufferLoader` maintains a prioritized loading queue, such that most recently touched images will be loaded first.

`ColorBufferLoader` maintains an unloading queue, such that image proxies that have not been touched for 5000ms will be unloaded automatically (unless the proxy is requested to be persistent).

The `ColorBufferLoader` loads URL strings, it supports loading from file and http/https.

```
fun main() = application {
    program {
        extend {
            val proxy = colorBufferLoader.loadFromUrl("https://avatars3.githubusercontent.com/u/31103334?s=200&v=4")
            proxy.colorBuffer?.let {
                drawer.image(it)
            }
        }
    }
}
```

Here we see that `fromUrl` can safely be called many times as `ColorBufferLoader` caches these requests. Accessing `proxy.colorBuffer` touches its internal timestamp and queues the image for loading if the proxy state is `NOT_LOADED`.

Handling errors

Sometimes loading fails; for example because the file was not found, or the http connection timed out.

`ColorBufferLoader` signals such errors by placing `ColorBufferProxy` in `RETRY` state. The proxy can be taken out of this state by calling its `.retry()` function.

Alternatively some errors cannot be retried; these will be signalled by setting the proxy state to `ERROR`. Such errors should only occur if the loading of the image causes a non-`IOException` to be thrown.

Cancelling a queued image

Cancelling an image which is queued (and is thus in `QUEUED` state) for loading is done by calling `.cancel()` on the `ColorBufferProxy`. This will set the proxy state back to `NOT_LOADED`.

[edit on GitHub](#)

Shade styles

Shade styles are used to change the drawing behaviour of the `Drawer` affecting the appearance of all drawing primitives.

Shade styles are composed of two types of transforms: vertex transforms and fragment transforms. The two transforms are applied in separate stages of the rendering process. In the vertex transform it is possible to change the geometry of what is drawn, and in the fragment transform it is possible to change the appearance of that geometry. A shade style can affect vertices, fragments or both.

A selection of preset ready-to-use shade styles is provided by [orx-shade-styles](#)

For those interested in authoring shade styles it is helpful to have some basic understanding of shaders and GLSL.

Basic usage

In essence shade styles are fragments of GLSL code that are inserted into OPENRNDRs templated shaders.

As a quick first step we override the output to red in the following snippet



```
fun main() = application {  
  program {  
    extend {  
      drawer.shadeStyle = shadeStyle {
```


```

        fragmentTransform = "x_fill.rgb = vec3(1.0, 0.0, 0.0);"
    }
    drawer.fill = ColorRGBa.PINK
    drawer.stroke = null
    drawer.rectangle(width / 2.0 - 200.0, height / 2.0 - 200.0, 400.0, 400.00)
}
}
}

```

[Link to the full example](#)

The idea of shade styles is to allow more complex changes in the appearance. In the next snippet we create a wavy pattern by using cosines and the screen position.

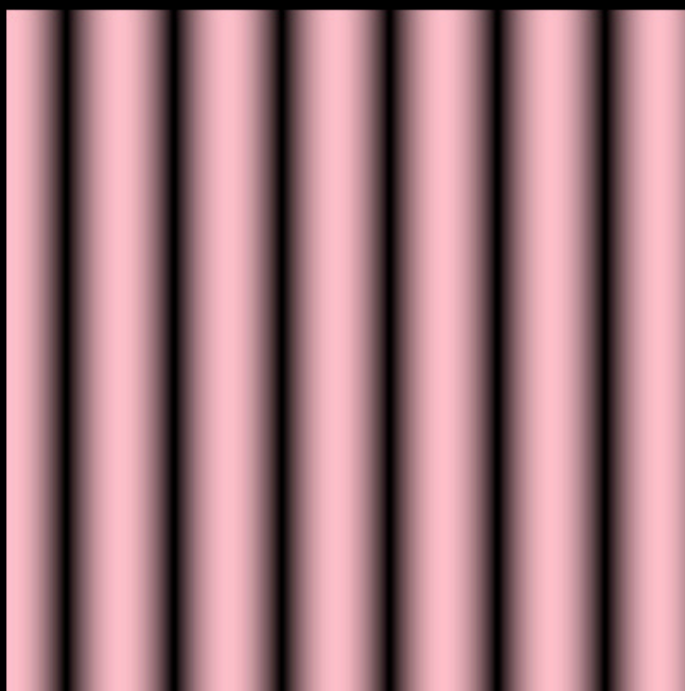

```

fun main() = application {
    program {
        extend {
            drawer.shadeStyle = shadeStyle {
                fragmentTransform = """
float c = cos(c_screenPosition.x * 0.1) * 0.5 + 0.5;
x_fill.rgb *= vec3(c, c, c);
""".trimMargin()
            }
            drawer.fill = ColorRGBa.PINK
            drawer.stroke = null
            drawer.rectangle(width / 2.0 - 200.0, height / 2.0 - 200.0, 400.0, 400.00)


```

```
    }  
  }  
}
```

[Link to the full example](#)

In the next step we introduce animation by adding an external clock signal to the shade style. Shade styles have *parameters* that can be used for this.

Notice how parameters like `time` receive a `p_` prefix in the GLSL world. This makes it easy to distinguish the uniforms we send into shaders from other variables declared by the framework.

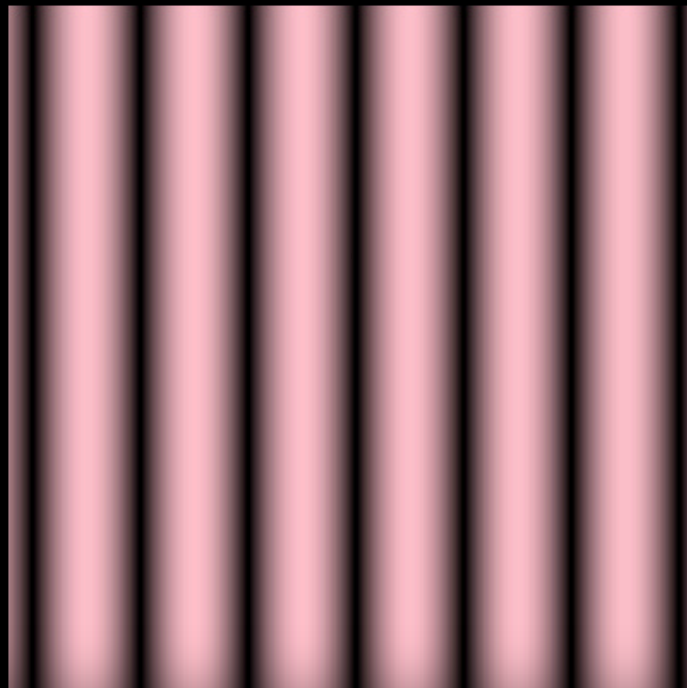

```
fun main() = application {  
  program {  
    extend {  
      drawer.shadeStyle = shadeStyle {  
        fragmentTransform = ""  
        float c = cos(c_screenPosition.x * 0.1 + p_time) * 0.5 + 0.5;  
        x_fill.rgb *= vec3(c, c, c);  
        """.trimMargin()  
        parameter("time", seconds)  
      }  
      drawer.fill = ColorRGBa.PINK  
      drawer.stroke = null  
      drawer.rectangle(width / 2.0 - 200.0, height / 2.0 - 200.0, 400.0, 400.0)  
    }  
  }  
}
```



```
}  
}
```

[Link to the full example](#)

Usage examples

Here follow some examples of common problems that are solved using shade styles.

Mapping images on shapes



```
fun main() = application {  
    program {  
        val image = loadImage("data/images/cheeta.jpg")  
        image.filter(MinifyingFilter.LINEAR_MIPMAP_NEAREST, MagnifyingFilter.LINEAR)  
        extend {  
            drawer.shadeStyle = shadeStyle {  
                fragmentTransform = ""  
                vec2 texCoord = c_boundsPosition.xy;  
                texCoord.y = 1.0 - texCoord.y;  
                vec2 size = textureSize(p_image, 0);  
                texCoord.x /= size.x/size.y;  
                x_fill = texture(p_image, texCoord);  
                ""  
                parameter("image", image)  
            }  
        }  
    }  
}
```


```

    val shape = Circle(width / 2.0, height / 2.0, 110.0).shape
    drawer.translate(cos(seconds) * 100.0, sin(seconds) * 100.0)
    drawer.shape(shape)
  }
}

```

[Link to the full example](#)

Mapping images on contours

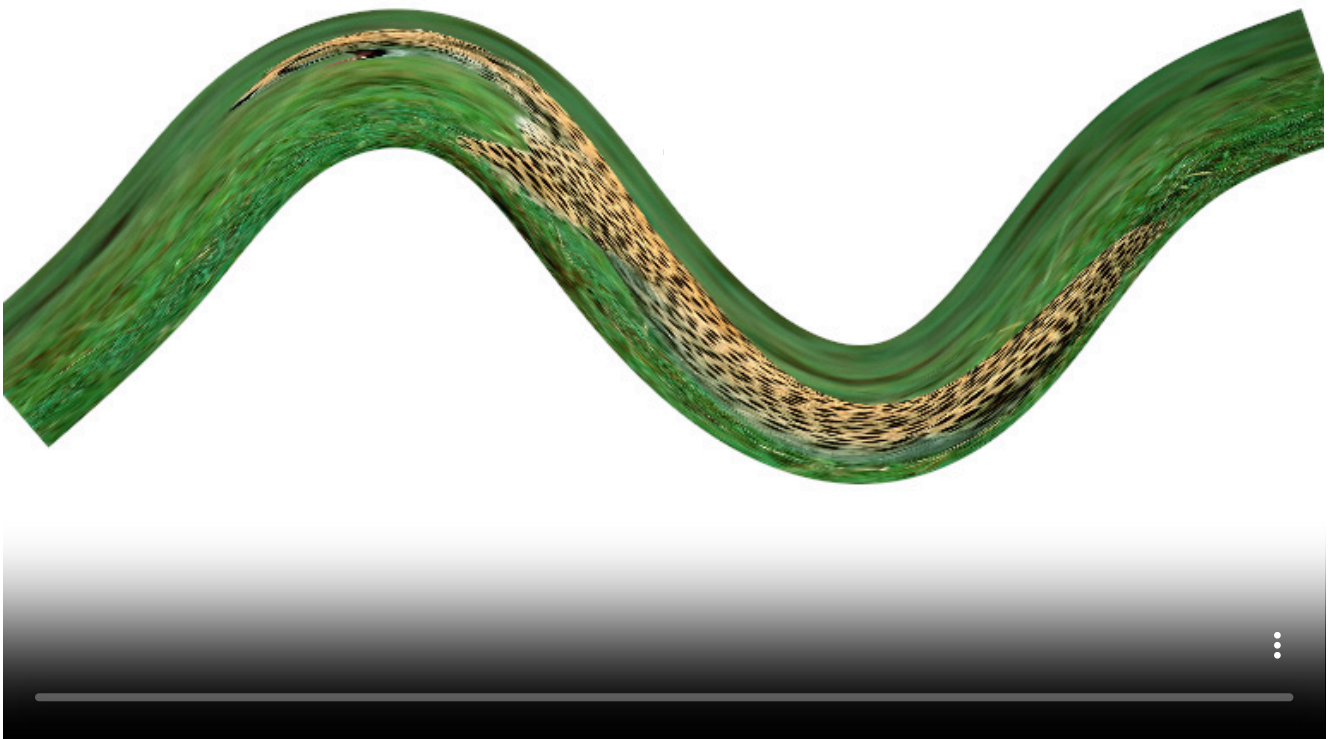

```

fun main() = application {
  program {
    val image = loadImage("data/images/cheeta.jpg")
    backgroundColor = ColorRGBA.WHITE
    extend {
      val c = hobbyCurve(List(10) {
        Vector2(it * width / 9.0, height * 0.5 + sin(seconds + it) * 100.0)
      }, false)
      drawer.shadeStyle = shadeStyle {
        fragmentTransform = ""
        x_stroke = texture(
          p_image, vec2(c_contourPosition / p_len, 1.0 - va_texCoord0.x)
        );
        """.trimIndent()
        parameter("image", image)
        parameter("len", c.length)
      }
    }
  }
}

```

```


    }
    drawer.strokeWeight = 80.0
    drawer.contour(c)
  }
}

```

[Link to the full example](#)

3D mesh distortion

This example shows that one can also modify the vertex shader, in this case to displace vertices using sine functions. The current time in seconds is passed into the shader to produce a wavy effect. The fragment shader uses sine functions to specify colors depending on the world position of each vertex.

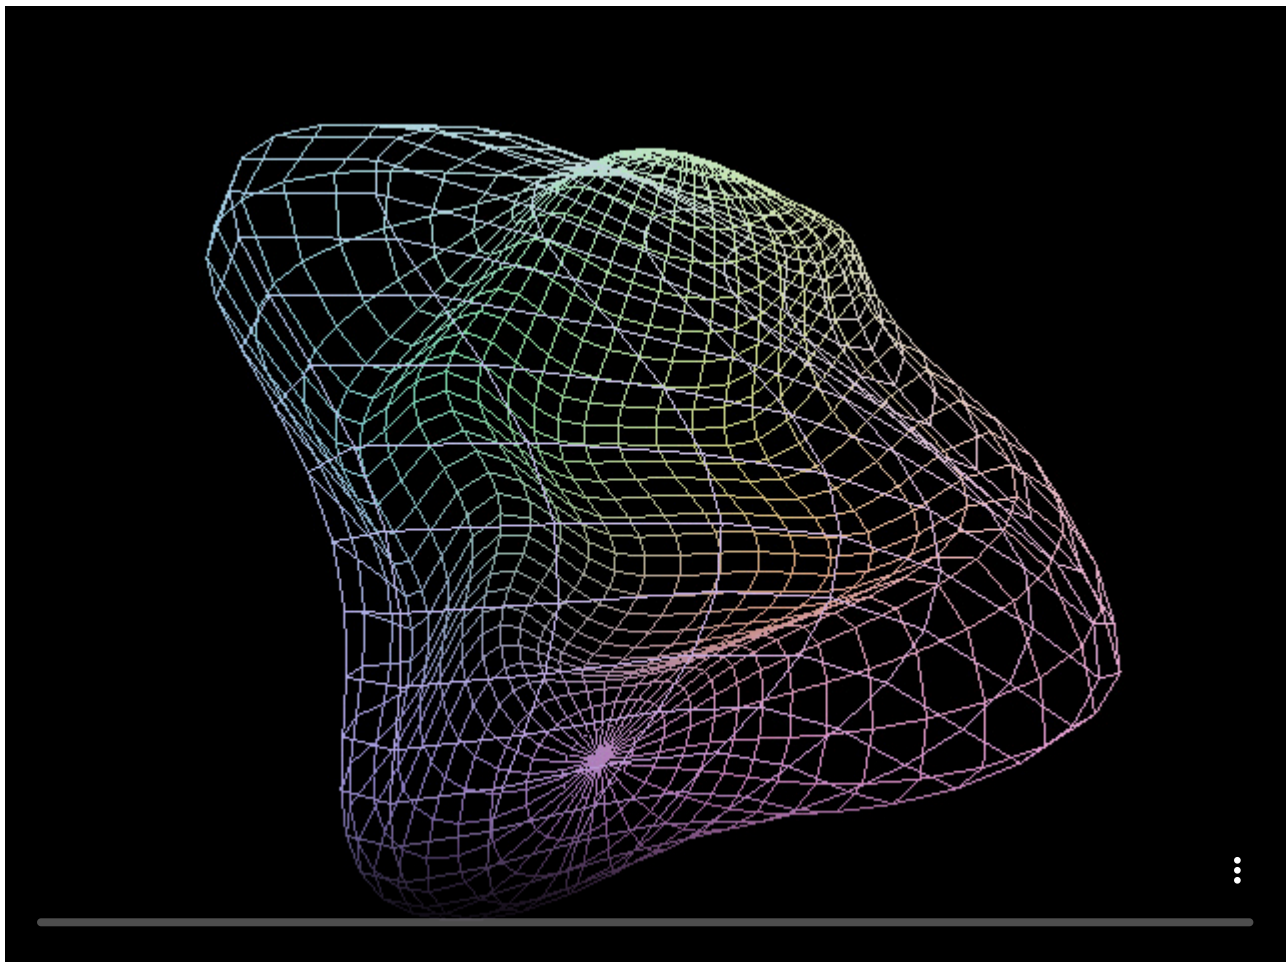

```

fun main() = application {
  program {
    val sphere = sphereMesh(32, 32, 0.6)
    val style = shadeStyle {
      vertexTransform = """
        vec3 p = x_position * 8.0 + p_seconds;
        // displace the vertices
        x_position.x += sin(p.y) * 0.1;
        x_position.y += sin(p.z) * 0.1;
        x_position.z += sin(p.x) * 0.1;
      """.trimIndent()

      fragmentTransform = """

```

```

        vec3 c = sin(v_worldPosition) * 0.5 + 0.5;
        x_fill = vec4(c, 1.0);
        """.trimIndent()
    }

    val camera = OrbitalCamera(Vector3.UNIT_Z, Vector3.ZERO)

    extend(camera)
    extend {
        camera.rotate(0.2, 0.0)
        style.parameter("seconds", seconds)
        drawer.shadeStyle = style
        drawer.vertexBuffer(sphere, DrawPrimitive.LINES)
    }
}
}

```

[Link to the full example](#)

The shade style language

Prefix overview

Listed below is an overview of all the prefixes used in the shade style language.

prefix	Scope	Description
u_	all	system uniforms passed in from Drawer
a_	vertex transform	vertex attribute
va_	fragment transform	varying attribute, interpolation passed from vertex to fragment shader
v_	fragment transform	varying values, interpolation passed from vertex to fragment shader
i_	vertex transform	instance attribute
vi_	fragment transform	varying instance attribute
x_	all	transformable value
p_	all	user provided value
o_	fragment transform	output value (always vec4)
d_	all	shader definitions

Standard uniforms

Listed below is an overview of all the prefixes used in the shade style language.

Uniform name	GLSL type	Description
u_modelNormalMatrix	mat4	matrix used to transform vertex normals from object to world space
u_modelMatrix	mat4	matrix used to transform vertices from object to world space
u_viewNormalMatrix	mat4	matrix used to transform vertex normals from world space to view space
u_viewMatrix	mat4	matrix used to transform vertices from world space to view space

Uniform name	GLSL type	Description
u_projectionMatrix	mat4	matrix used to transform vertices from view space to clip space
u_contentScale	float	the active content scale
u_viewDimensions	vec2	the dimensions of the target viewport
u_fill	vec4	the Drawer fill color
u_stroke	vec4	the Drawer stroke color
u_strokeWeight	float	the Drawer strokeWeight
u_colorMatrix	float[25]	the Drawer color matrix

Standard Attributes

Attributes are only directly accessible in the vertex transform. However interpolated forms of the the attributes are passed to the fragment transform.

Attribute name	GLSL type	Description
a_position	vec3	the position
a_normal	vec3	the normal
a_color	vec3	the color

The interpolated versions that are only accessible in the fragment transform.

Attribute name	GLSL type	Description
va_position	vec3	the interpolated position
va_normal	vec3	the interpolated normal
va_color	vec3	the interpolated color
va_texCoord0	vec2	the uv coordinate of the first texture

For contours `va_texCoord0.x` contains a normalized value that increases from 0.0 to 1.0 across its width.

Other interpolated values

These values are calculated in the vertex shader and only accessible in the fragment transform.

Value name	GLSL type	Description
v_worldNormal	vec3	interpolated normal in world coordinates
v_viewNormal	vec3	interpolated normal in view coordinates
v_worldPosition	vec3	interpolated position in world coordinates
v_viewPosition	vec3	interpolated position in view coordinates
v_clipPosition	vec4	interpolated position in clip coordinates
v_modelNormalMatrix	mat4	non-interpolated (flat) model normal matrix

Transformable values

These are values that can be transformed using shade styles.

VERTEX TRANSFORM

Variable name	GLSL type	Description
x_position	vec3	vertex position, initialized with value a_position
x_normal	vec3	vertex normal, initialized with value a_normal
x_viewMatrix	mat4	view matrix
x_normalMatrix	mat4	normal matrix, initialized with normalMatrix
x_projectionMatrix	mat4	projection matrix, initialized with projectionMatrix
x_modelMatrix	mat4	model matrix, initialized with modelMatrix
x_modelNormalMatrix	mat4	model normal matrix, initialized with modelNormalMatrix
x_viewNormalMatrix	mat4	view normal matrix, initialized with viewNormalMatrix

FRAGMENT TRANSFORM

Variable name	GLSL type	Description
x_fill	vec4	The fill color written to the fragment
x_stroke	vec4	The stroke color written to the fragment

Constants

Constant name	Scope	GLSL type	Description
c_element	all	int	the element index in batched rendering
c_instance	all	int	the instance index in instanced rendering
c_screenPosition	fragment transform	vec2	the position on screen in device coordinates
c_contourPosition	fragment transform	float	the position on the contour, between 0.0 and contour.length. Only non-zero when drawing line segments and contours
c_boundsPosition	fragment transform	vec3	the bounding box position of the current shape or contour stored in .xy
c_boundsSize	fragment transform	vec3	the bounding box size of the current shape or contour stored in .xy

Parameters

Parameters can be used to supply external data to transforms. Parameters are translated to shader uniforms and are exposed by uniforms with the p_ prefix.

COLORBUFFER PARAMETERS

Can be used to map images.

BUFFERTEXTURE PARAMETERS

Can be used to map custom values.

SUPPORTED PARAMETER TYPES:

JVM type	GLSL type
float	float
Vector2	vec2
Vector3	vec3
Vector4	vec4
ColorRGBa	vec4
Matrix44	mat4
DepthBuffer	sampler2D
ColorBuffer	sampler2D
BufferTexture	samplerBuffer

SOURCE CODE


One can explore the source code to find out how attributes and uniforms are used:

- [ShadeStyleGLSL.kt](#) (JVM)
- [ShadeStyleGLSL.kt](#) (WEBGL)
- [ShaderGeneratorsGLCommon.kt](#)

Vertex and fragment preambles

Since the code declared in `vertexTransform` and `fragmentTransform` end up inside the `main()` function of shader programs, you may be wondering how you could declare custom functions, for example, to calculate a noise value, a random value or to do matrix rotations (common functions used in shader programs).

To achieve this, we use two keywords: `vertexPreamble` and `fragmentPreamble`. The code found in these strings gets inserted into the shader programs *before* the `main()` function, allowing us to declare custom functions or even `varyings` (to pass values from the vertex shader into the fragment shader).

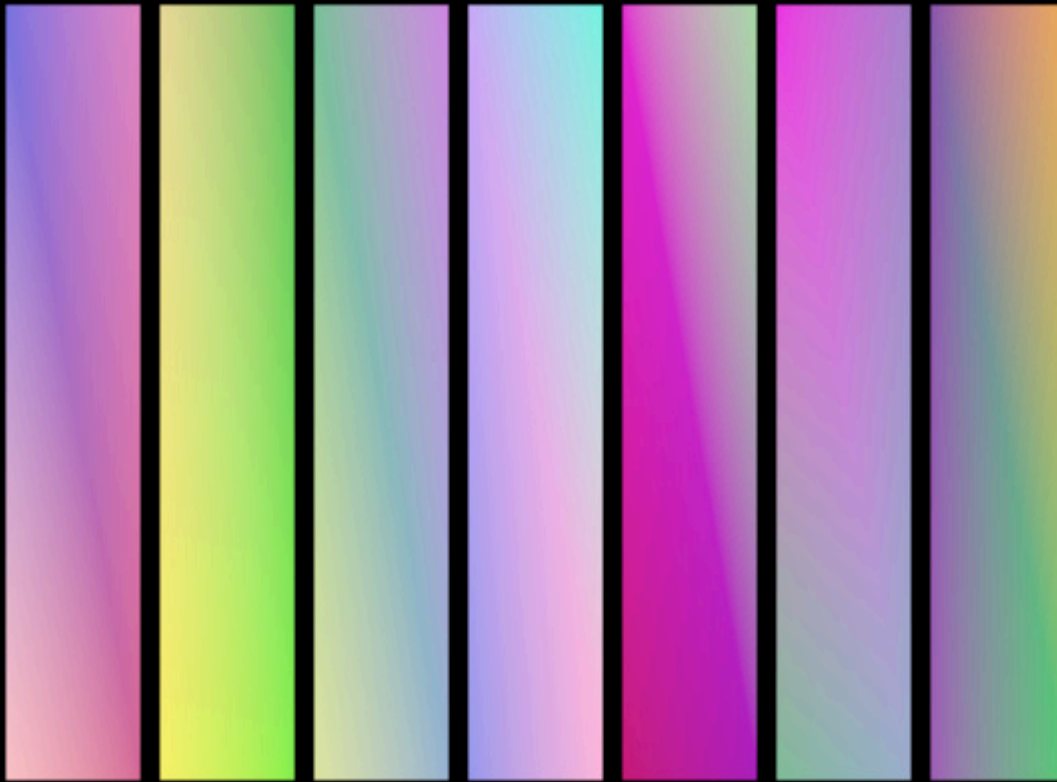

```
fun main() = application {
    program {
        val style = shadeStyle {
            // Define the `random` function and declare a `c`
            // variable to pass to the fragment shader.
            vertexPreamble = """
                float random(vec2 st) {
                    return fract(sin(dot(st.xy,
                        vec2(12.9898, 78.233))) * 43758.5453123);
                }
                out vec3 c;
            """.trimIndent()

            // Calculate the value of `c` per vertex.
            // It will get interpolated by the GPU.
            vertexTransform = """
                c.r = random(x_position.xy);
                c.g = random(x_position.yx);
                c.b = random(x_position.xy + 1.0);
            """.trimIndent()

            // Declare a `c` variable to receive from the vertex shader.
            fragmentPreamble = "in vec3 c;"
            // Use the value of `c` to set the color of a pixel.
            fragmentTransform = "x_fill.rgb = c;"
        }
    }
}
```



```
extend {
    drawer.shadeStyle = style
    repeat(7) {
        // Notice how we do not set `drawer.fill`.
        drawer.rectangle(
            50.0 + it * 77, 50.0, 70.0, 390.0
        )
    }
}
}
```

[Link to the full example](#)

Debugging tip

If you want to study the vertex or the fragment shader in their final form, a simple technique is to provoke an error. Throw in some incorrect syntax: for example, add an `x` character at the beginning of the vertex or the fragment shader.

When you try to run the program, it will fail, and a file called `ShaderError.glsl` will be written into the project's root. Study that file to understand what attributes and uniforms are available and to figure out why your program fails in case the syntax error was not intentional.

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Custom rendering

OPENRNDR is designed with the idea that users should be able to draw beyond the primitives offered by Drawer.

Vertex buffers

A vertex buffer is a (on the GPU residing) amount of memory in which vertices that describe geometry are stored. A single vertex consists of a number of customizable attributes such as position, normal and color. In OPENRNDR the attributes of a vertex are described using a VertexFormat.

Vertex buffers allow geometry to be prepared and stored in such a way that graphics hardware can draw it directly.

Declaring a vertex format

A vertex format declaration consists of a list of vertex attributes. Such a declaration is made using the *vertex format builder*: `vertexFormat {}`

To illustrate the declaration procedure let us give an example of a very simple vertex format. This vertex format consists solely of a three dimensional *position* attribute:

```
val vf = vertexFormat {  
    position(3)  
}
```

Listed below are the attributes that can be added to the vertex format.

name	type	description
position(dimensions: Int)	FLOAT32, VECTOR[2,3,4], FLOAT32	position attribute
normal(dimensions: Int)	FLOAT32, VECTOR[2,3,4], FLOAT32	normal attribute
textureCoordinate(dimensions: Int)	FLOAT32, VECTOR[2,3,4], FLOAT32	texture coordinate attribute
color(dimensions: Int)	FLOAT32, VECTOR[2,3,4], FLOAT32	color attribute
attribute(name: String, type: VertexElementType, arraySize: Int = 1)	type	custom attribute

A more complex vertex format declaration would then look like this:

```
val vf = vertexFormat {  
    position(3)  
    normal(3)  
    color(4)  
    attribute("objectID", VertexElementType.FLOAT32)  
}
```

Creating a vertex buffer

The `vertexBuffer()` function is used to create a `VertexBuffer` instance. For example to create a vertex buffer holding 1000 vertices in our previously defined vertex format `vf` we use the following:

```
val geometry = vertexBuffer(vf, 1000)
```

Placing data in the vertex buffer


Now that a vertex format has been defined and a vertex buffer has been created we can place data in the vertex buffer. The data placed in the vertex buffer must closely match the vertex format; any form of mismatch will lead to surprising and/or undefined behaviour.

The `VertexBuffer.put {}` function is the easiest and safest way of placing data in the vertex buffer.

In the following example we create a very simple vertex format that holds just a position attribute. After creation we fill the vertex buffer with random data.

```
val geometry = vertexBuffer(vertexFormat {  
    position(3)  
}, 1000)  
geometry.put {  
    for (i in 0 until 1000) {  
        write(Vector3(Math.random() - 0.5, Math.random() - 0.5, Math.random() - 0.5))  
    }  
}
```

Drawing vertex buffers

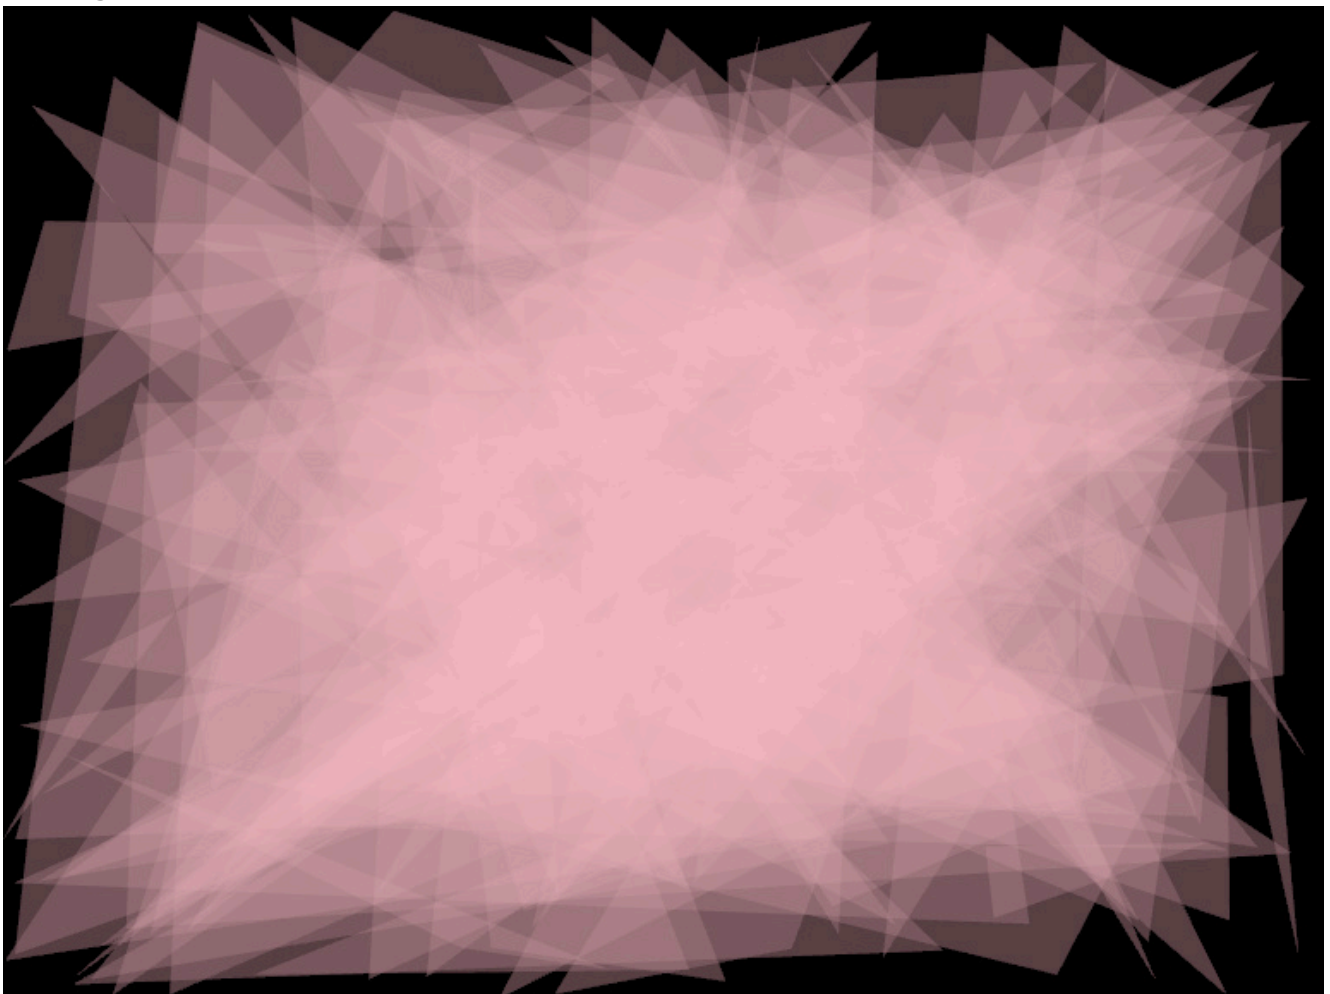

```
fun main() = application {  
    program {
```

```

val geometry = vertexBuffer(
    vertexFormat {
        position(3)
    }, 3 * 100
)

geometry.put {
    for (i in 0 until geometry.vertexCount) {
        write(Vector3(Math.random() * width, Math.random() * height, 0.0))
    }
}

extend {
    drawer.fill = ColorRGBA.PINK.opacify(0.1)
    drawer.vertexBuffer(geometry, DrawPrimitive.TRIANGLES)
}
}


```

[Link to the full example](#)

Shading geometry

Drawing using `Drawer.vertexBuffer` will be with respect to the set shade style. Using shade styles the appearance of the geometry in the vertex buffer can be fully customized.

The last snippet can be modified to include a simple shading over the geometry

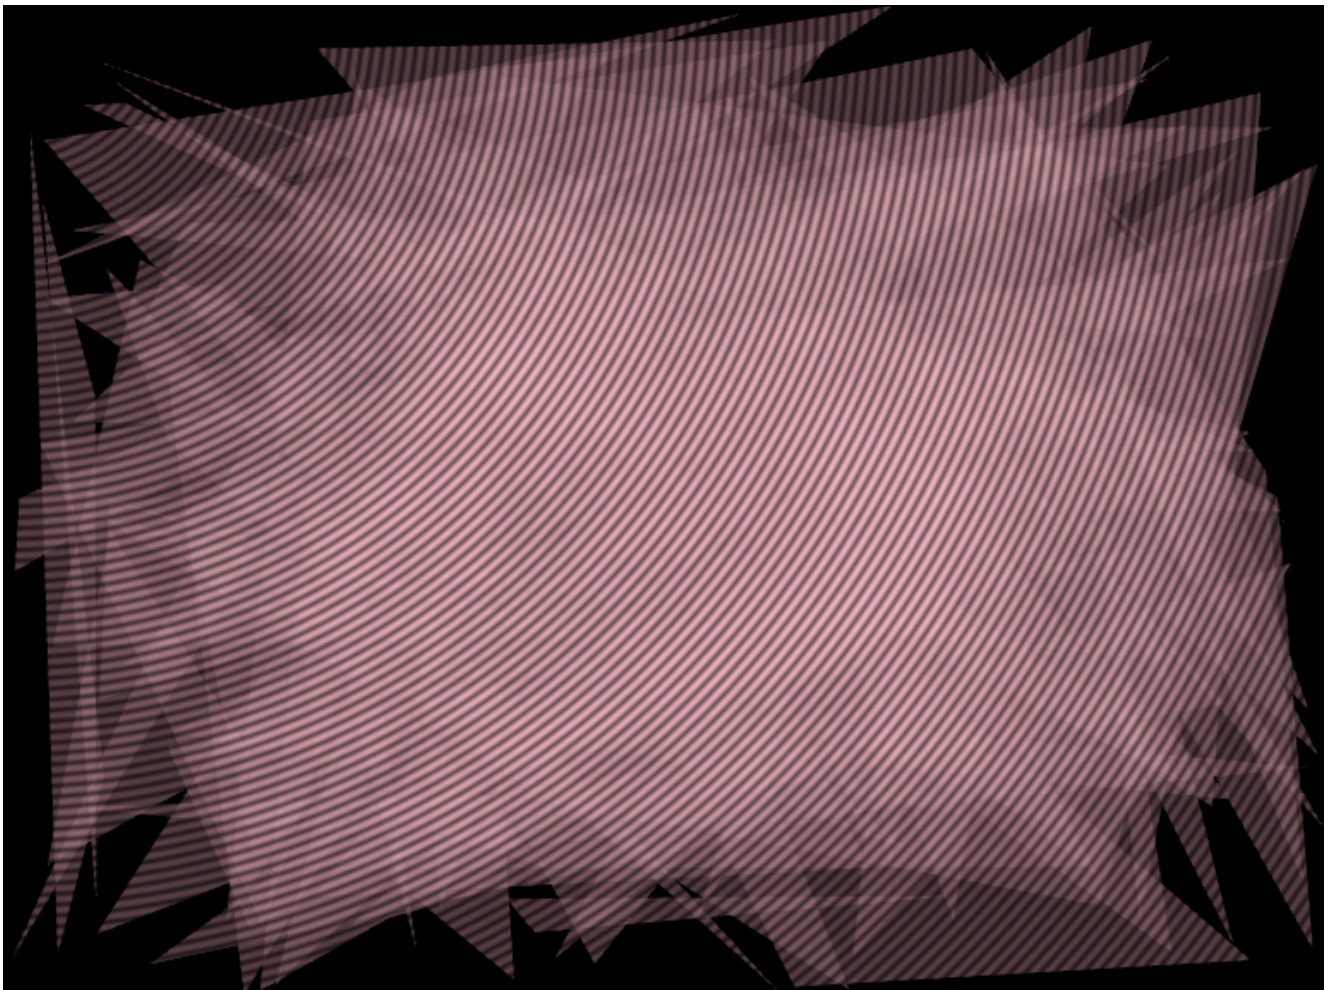

```

fun main() = application {
    program {
        val geometry = vertexBuffer(
            vertexFormat {
                position(3)
            }, 3 * 100
        )

        geometry.put {
            for (i in 0 until geometry.vertexCount) {
                write(Vector3(Math.random() * width, Math.random() * height, 0.00))
            }
        }

        extend {
            drawer.shadeStyle = shadeStyle {
                fragmentTransform = ""x_fill.rgb *= vec3(cos(length(v_viewPosition))*0.4+0.6);""
            }
            drawer.fill = ColorRGBa.PINK.opacify(0.1)
            drawer.vertexBuffer(geometry, DrawPrimitive.TRIANGLES)
        }
    }
}


```

[Link to the full example](#)

Drawing instances

The same geometry can be drawn more than once in a single draw call.

Per instance attributes can be stored in a vertex buffer. For example a transform per instance can be realized by creating a second vertex buffer which will contain matrix attributes.

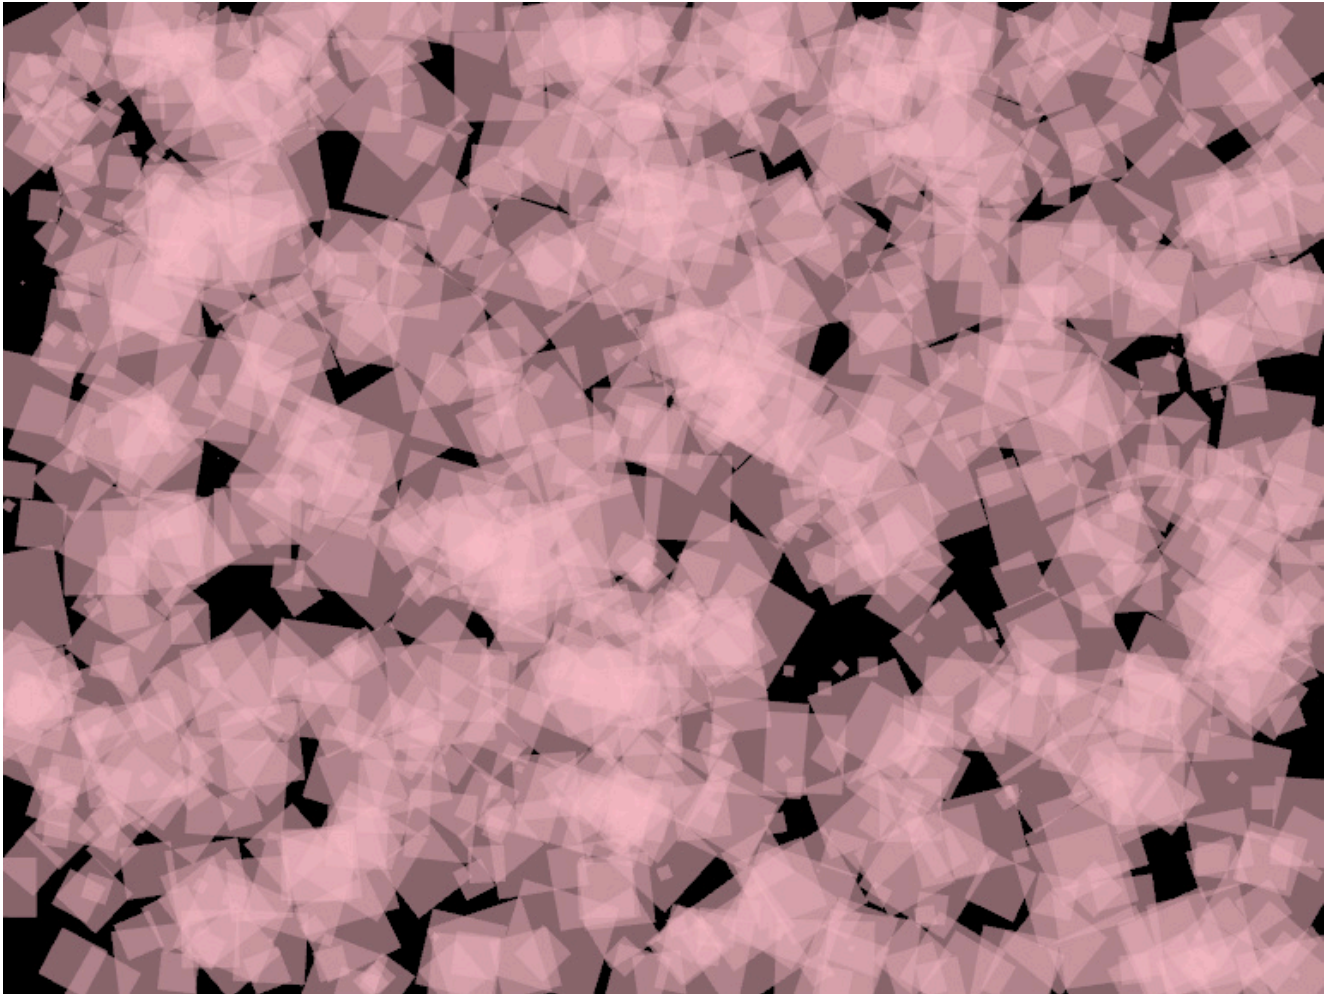

```
fun main() = application {
    configure {
        width = 770
        height = 578
    }
    program {
        // -- create the vertex buffer
        val geometry = vertexBuffer(vertexFormat {
            position(3)
        }, 4)

        // -- fill the vertex buffer with vertices for a unit quad
        geometry.put {
            write(Vector3(-1.0, -1.0, 0.0))
            write(Vector3(-1.0, 1.0, 0.0))
            write(Vector3(1.0, -1.0, 0.0))
            write(Vector3(1.0, 1.0, 0.0))
        }

        // -- create the secondary vertex buffer, which will hold transformations
        val transforms = vertexBuffer(vertexFormat {
            attribute("transform", VertexElementType.MATRIX44_FLOAT32)
        }, 1000)

        // -- fill the transform buffer
        transforms.put {
```

```

repeat(transforms.vertexCount) {
  write( transform {
    translate(Math.random() * width, Math.random() * height)
    rotate(Vector3.UNIT_Z,Math.random() * 360.0)
    scale(Math.random()*30.0)
  } )
}
}
extend {
  drawer.fill = ColorRGBA.PINK.opacity(0.25)
  drawer.shadeStyle = shadeStyle {
    vertexTransform = "x_viewMatrix = x_viewMatrix * i_transform;"
  }
  drawer.vertexBufferInstances(listOf(geometry), listOf(transforms), DrawPrimitive.TRIANGLE_STRIP, 1000)
}
}
}

```

[Link to the full example](#)

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Concurrency and multi-threading

Here we talk about OPENRNDR's primitives for concurrency.

The largest complication in multi-threading in OPENRNDR lies in how the underlying graphics API (OpenGL) can only be used from threads on which an OpenGL context is active. This means that any interactions with `Drawer`, `ColorBuffer`, `VertexBuffer`, `RenderTarget`, `Shader`, `BufferTexture`, `CubeMap`, `ArrayTexture` can only be performed on the primary draw thread or specially created draw threads.

Coroutines

Coroutines, as they are discussed here are a Kotlin specific framework for concurrency. Please read the [coroutines overview](#) in the Kotlin reference for an introduction to coroutines

`Program` comes with its own coroutine dispatcher, which guarantees that coroutines will be handled on the primary draw thread. This means that coroutines when executed or resumed by the program dispatcher will block the draw thread.

In the following example we launch a coroutine that slowly counts to 99. Note that the delay inside the coroutine does *not* block the primary draw thread.

```
fun main() = application {
    program {
        var once = true
        extend {
            if (once) {
                once = false
                launch {
                    for (i in 0 until 100) {
                        println("Hello from coroutine world ($i)")
                        delay(100.milliseconds)
                    }
                }
            }
        }
    }
}
```

You may be asking, what is the purpose of the `Program` dispatcher if running coroutines blocks the primary draw thread. The answer is, blocking coroutines are useful when the work performed is light. Light work includes waiting for (off-thread) coroutines to complete and using the results to write to graphics resources.

In the below example we nest coroutines; the outer one is launched on the `Program` dispatcher, the inner one is launched on the `GlobalScope` dispatcher. The `GlobalScope` dispatcher executes the coroutine on a thread (from a thread pool) such that it does not block the primary draw thread. By using `.join()` on the inner coroutine we wait for it to complete, waiting is non-blocking (thanks to coroutine magic!). Once the join operation completes we can write the results to a graphics resource on the primary draw thread.

```
fun main() = application {
    program {
```



```

val colorBuffer = colorBuffer(512, 512)
val data = ByteBuffer.allocateDirect(512 * 512 * 4)
var once = true
extend {
    if (once) {
        once = false
        launch {
            // -- launch on GlobalScope
            // -- this will cause the coroutine to be executed off-thread.
            GlobalScope.launch {
                // -- perform some faux-heavy calculations
                val r = Random(100)
                for (y in 0 until 512) {
                    for (x in 0 until 512) {
                        for (c in 0 until 4) {
                            data.put(r.nextBytes(1)[0])
                        }
                    }
                }
                }.join() // -- wait for coroutine to complete

                // -- write data to graphics resources
                data.rewind()
                colorBuffer.write(data)
            }
        }
    }
}
}
}

```

Secondary draw threads

In some scenarios you may want to have a separate thread on which all graphic resources can be used and drawing is allowed. In those cases you use `drawThread`.

Most graphic resources can be used and shared between threads, with the exception of the `RenderTarget`.

In the next example we create a secondary draw thread and a `ColorBuffer` that is shared between the threads. On the secondary draw thread we create a `RenderTarget` with the color buffer attachment. The image is made visible on the primary draw thread.

```

fun main() = application {
    program {
        val result = colorBuffer(512, 512)
        var once = true
        var done = false
        val secondary = drawThread()

        extend {
            if (once) {
                once = false
                // -- launch on the secondary draw thread (SDT)
                secondary.launch {

```

```

        // -- create a render target on the SDT.
        val rt = renderTarget(512,512) {
            colorBuffer(result)
        }

        // -- make sure we use the draw thread's drawer
        val drawer= secondary.drawer
        drawer.withTarget(rt) {
            drawer.ortho(rt)
            drawer.clear(ColorRGBa.PINK)
        }

        // -- destroy the render target
        rt.destroy()
        Driver.instance.finish()
        // -- tell the main thread the work is done
        done = true
    }
}

// -- draw the result when the work is done
if (done) {
    drawer.image(result)
}
}
}
}
}

```

[edit on GitHub](#)

Array textures

Array textures are a special type of texture that make it possible to access 2048 layers of texture data from a single texture sampler.

Array textures are encapsulated by the [ArrayTexture interface](#)

Creation

Array textures are created using the [arrayTexture](#) function.

```
fun main() = application {
    program {
        // -- create an array texture with 100 layers
        val at = arrayTexture(512, 512, 100)
    }
}
```

Writing to array textures

There are several ways to get texture data into array textures. Let's have a look at them.

One can copy from a ColorBuffer using `.copyTo()`

```
fun main() = application {
    program {
        val at = arrayTexture(512, 512, 100)
        val cb = colorBuffer(512, 512)
        // -- copy from the color buffer to the 4th layer of the array texture
        cb.copyTo(at, 4)
    }
}
```

or copy from an array texture layer to another layer

```
fun main() = application {
    program {
        val at = arrayTexture(512, 512, 100)
        // -- copy from the 2nd array texture layer to the 4th array texture layer
        at.copyTo(2, at, 4)
    }
}
```

or write to an array texture layer from a direct ByteBuffer

```
fun main() = application {
    program {
        val at = arrayTexture(512, 512, 100)
        val buffer = ByteBuffer.allocateDirect(512 * 512 * 4)
```

```

// fill the buffer with random data
for (y in 0 until 512) {
    for (x in 0 until 512) {
        for (c in 0 until 4) {
            buffer.put((Math.random() * 255).toInt().toByte())
        }
    }
}
buffer.rewind()
// -- write the buffer into the 0th layer
at.write(0, buffer)
}
}

```

Drawing array textures

Array textures can be drawn using the `Drawer.image` functions.

As example we show how to draw the 0th layer of an array texture

```

fun main() = application {
    program {
        val at = arrayTexture(512, 512, 100)

        extend {
            drawer.image(at, 0)
            // -- with position and size arguments
            drawer.image(at, 0, 100.0, 100.0, 256.0, 256.0)
        }
    }
}

```

We can also render batches of array textures by passing lists of layer indexes and source-target rectangle pairs.

```

fun main() = application {
    program {
        val at = arrayTexture(512, 512, 100)

        extend {
            drawer.image(at, 0)

            val layers = mutableListOf<Int>()
            val rectangles = mutableListOf<Pair<Rectangle, Rectangle>>()

            for (i in 0 until 100) {
                layers.add((Math.random() * 100).toInt())
                val source = Rectangle(
                    Math.random() * 512.0,
                    Math.random() * 512.0,
                    Math.random() * 512.0,
                    Math.random() * 512.0
                )
            }
        }
    }
}

```

```

        val target = Rectangle(
            Math.random() * 512.0,
            Math.random() * 512.0,
            Math.random() * 512.0,
            Math.random() * 512.0
        )
        rectangles.add(source to target)
    }
    drawer.image(at, layers, rectangles)
}
}
}

```

Drawing into array textures

Array textures can be used as attachment for render targets.

Here we show how to use a single layer from an array texture as an attachment for a render target.

```

fun main() = application {
    program {
        val at = arrayTexture(512, 512, 100)
        // -- create a render target
        val rt = renderTarget(512, 512) {
            // -- attach the 0th layer of the array texture
            arrayTexture(at, 0)
            depthBuffer()
        }

        extend {
            drawer.isolatedWithTarget(rt) {
                drawer.ortho(rt)
                drawer.clear(ColorRGBa.PINK)
            }
            drawer.image(at, 0)
        }
    }
}

```

Let's conclude this chapter by means of a small slit scanning demonstration. Here we use a single array texture and a list of render targets, all using different layers of the same array texture.



```
fun main() = application {

    program {
        val at = arrayTexture(770, 576, 116)
        val renderTargets = List(at.layers) {
            renderTarget(at.width, at.height) {
                arrayTexture(at, it)
            }
        }
        var index = 0
        extend {
            drawer.clear(ColorRGBA.BLACK)
            drawer.isolatedWithTarget(renderTargets[index % renderTargets.size]) {
                drawer.clear(ColorRGBA.BLACK)
                drawer.fill = ColorRGBA.PINK.opacify(0.5)
                drawer.stroke = null
                for (i in 0 until 20) {
                    drawer.circle(
                        cos(seconds * 5.0 + i) * 256 + width / 2.0,
                        sin(i + seconds * 6.32) * 256 + height / 2.0,
                        100.0
                    )
                }
            }
        }

        val layers = (0 until at.layers).map { (index - it).mod(at.layers) }
```

```
    val rectangles = (0 until at.layers).map {  
        val span = Rectangle(0.0, it * 5.0, at.width * 1.0, 5.0)  
        span to span  
    }  
  
    drawer.image(at, layers, rectangles)  
    index++  
}  
}
```

[Link to the full example](#)

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Interaction

[edit on GitHub](#)

TABLE OF CONTENTS

- [Events](#)
 - [Mouse And Keyboard Events](#)
 - [Program Windows](#)
 - [File Drops](#)
 - [Clipboard](#)
 - [User Interfaces](#)
-

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Events

Events are notifications sent by a sender to one or more subscribers indicating that an action has taken place.

Mouse and keyboard events are among the most commonly used events in OPENRNDR. Before we get to those in the next chapter, let's examine how to create our own custom events.

We will often use events in class instances, so let's create a simple class called `Thing`. This class will include an update method that will emit an event every 60 times it's called. Anyone listening to this event will receive it.

Sending an event

Notice how events carry a payload, in this case `Int`. This is convenient because it allows us to transmit information together with the event. Mouse and Keyboard events contain details about the mouse position or the key pressed. In this program we are free to choose any type, so let's just broadcast a message containing the approximate time in seconds.

Passing a name in the event constructor is not necessary, but can be useful for logging and debugging.

Another thing to observe is that `timeEvent` is a public variable. If it was private we couldn't listen to it from outside by calling `thing.timeEvent.listen { ... }`.

At some point in our program execution we need to call `.trigger()` to broadcast the event. We can call it as many times as needed.

Listening to an event

The following small program shows how to listen to an event emitted by a class.

First, let's create one instance of the class called `thing`.

Next, listen to the event `thing` can emit (`timeEvent`).

```
fun main() = application {
    program {
        val thing = Thing()
        extend {
            thing.update()
        }
        thing.timeEvent.listen {
            println("timeEvent triggered! $it")
        }
    }
}
```

We see a line appear every second:

```
timeEvent triggered! 1
timeEvent triggered! 2
timeEvent triggered! 3
...
```

Events in coroutines and threads

By default our OPENRNDR programs run in a single thread, which happens to be the “rendering thread”. But what would happen if we sent Events from different threads or coroutines? Lets find out.

The `Blob` class is a copy of `Thing` with three changes:

- 1 To be able to spawn coroutines, we pass a `Program` in the constructor.
- 2 We add a second event called `doneWaiting`. We use `Unit` as a type when we don’t want to pass any useful data.
- 3 When the class is constructed, we launch a coroutine to wait for 3 seconds, then trigger the new `doneWaiting` event.

Now lets use our `Blob` class in a new program that listens to its two events:

```
fun main() = application {
    program {
        val blob = Blob(this)
        extend {
            blob.update()
        }
        blob.timeEvent.listen {
            println("timeEvent triggered! $it")
        }
        blob.doneWaiting.listen {
            println("done waiting")
        }
    }
}
```

```
timeEvent triggered! 1
timeEvent triggered! 2
timeEvent triggered! 3
done waiting
timeEvent triggered! 4
...
```

Seems to work! right? There’s one issue though: the `doneWaiting.listen` function does not run on the rendering thread. This would be the case for events triggered due to external causes (loading a file from the Internet and waiting for its completion or an event coming from a hardware input device).

This will become apparent when we fail to draw on our window:

```
blob.doneWaiting.listen {
    drawer.clear(ColorRGBA.WHITE) // <-- will not work
    println("done waiting")
}
```

The solution is simple though: when constructing the `Event`, we set the `postpone` argument to `true`:

```
val doneWaiting = Event<Unit>("done-waiting", postpone = true)
```

Now triggering the event no longer sends it immediately, but queues it. The second part of the solution is to actually deliver the queued events by calling `deliver()`.

```
doneWaiting.deliver()
```

It is essential to call `deliver()` from the rendering thread. Since `extend { }` executes in the rendering thread, and `extend` calls `update()`, we can let `update()` call `deliver()` and everything will work nicely.

This is the full program:

```
class Blob(program: Program) {
    val timeEvent = Event<Int>("time-event")
    val doneWaiting = Event<Unit>("done-waiting", postpone = true)

    private var frame = 0

    fun update() {
        if (++frame % 60 == 0) {
            timeEvent.trigger(frame / 60)
        }
        // Deliver any queued events
        doneWaiting.deliver()
    }

    init {
        program.launch {
            delay(3000.milliseconds)
            // Queue event outside the rendering thread
            doneWaiting.trigger(Unit)
        }
    }
}
```

```
fun main() = application {
    program {
        val blob = Blob(this)
        extend {
            blob.update()
        }
        blob.timeEvent.listen {
            println("timeEvent triggered! $it")
        }
        blob.doneWaiting.listen {
            // White flash when this event is received
            drawer.clear(ColorRGBA.WHITE)
            println("done waiting")
        }
    }
}
```

[edit on GitHub](#)

Mouse and keyboard events

Most user-input interaction in OPENRNDR manifests through events.

Mouse events

A simple demonstration of a listening for mouse button clicks looks as follows:

```
fun main() = application {
    program {
        mouse.buttonDown.listen {
            // -- it refers to a MouseEvent instance here
            println(it.position)
        }
    }
}
```

Every program has a `mouse` object that exposes events and mouse properties. In the example above we attach a listener to the `clicked` event. The `{}` block after `listen` is a short-hand notation for passing a function into `listen`.

There are some limitations to what the listener function can (or should) do. As a rule-of-thumb: don't draw in events. The result of drawing in listener functions is that it does not work. You are encouraged to use listener functions to change the state of your program.

Let's provide a commonly used pattern to deal with this limitation. The idea here is that we introduce variables in our program that are used to communicate between the listener function and the draw function.

```
fun main() = application {
    program {
        // -- a variable to keep of where we clicked
        // -- this is an "optional type" that can be set to null
        var drawPosition : Vector2? = null

        mouse.buttonDown.listen {
            drawPosition = it.position
        }

        extend {
            // -- check if the drawPosition is not null
            drawPosition?.let {
                drawer.circle(it.x, it.y, 100.0)
                // -- reset the drawPosition to null
                drawPosition = null
            }
        }
    }
}
```

Overview of mouse events

event	description	relevant MouseEvent properties
moved	generated when mouse has been moved	position, modifiers
buttonDown	generated when a button is pressed	position, button, modifiers
buttonUp	generated when a button is released	position, button, modifiers
scrolled	generated when mouse wheel is used	position, rotation
clicked	generated when a button has been pressed and released	position, button, modifiers
dragged	generated when mouse has been moved while a button is pressed	position, button, modifiers

Keyboard events

OPENRNDR provides two classes of keyboard events. The first are *key* events, which should be used to respond to the user pressing or releasing buttons on the keyboard. The second class are *character* events, which should be used for handling text input as they also deal with composed characters.

To use the *key* events one listens to `keyboard.keyDown` events and compares the key value. For example:

```
fun main() = application {
    program {
        keyboard.keyDown.listen {
            // -- it refers to a KeyEvent instance here
            // -- compare the key value to a predefined key constant
            if (it.key == KEY_ARROW_LEFT) {
                // -- react to the keypress here
            }
        }
    }
}
```

```
fun main() = application {
    program {
        keyboard.keyDown.listen {
            // -- it refers to a KeyEvent instance here
            // -- compare the name value against "a"
            if (it.name == "a") {
                // -- react to the keypress here
            }
        }
    }
}
```

To use the *character* events one listens to `keyboard.character` events which provide character values. For example:

```
fun main() = application {
    var input = ""
    program {
        keyboard.character.listen {
```

```

        input += it.character
    }
    keyboard.keyDown.listen {
        // -- it refers to a KeyEvent instance here
        // -- compare the key value to a predefined key constant
        if (it.key == KEY_BACKSPACE) {
            if (input.isNotEmpty()) {
                input = input.substring(0, input.length - 1)
            }
        }
    }
}
}
}

```

Querying key modifiers

Checking for modifiers can be done by checking if the desired modifier key is active in `modifiers`. In the example below we check if both shift and the left arrow key are pressed.

```

fun main() = application {
    program {
        keyboard.keyDown.listen {
            if (it.key == KEY_ARROW_LEFT && KeyModifier.SHIFT in it.modifiers) {
                // -- react to the keypress here
            }
        }
    }
}
}

```

Note that also mouse events come with modifiers and can be queried in a similar way.

Overview of keyboard events

event	description	relevant <code>KeyboardEvent</code> properties
<code>keyDown</code>	generated when a key is pressed	<code>key</code> , <code>modifiers</code>
<code>keyUp</code>	generated when a key is released	<code>key</code> , <code>modifiers</code>
<code>keyRepeat</code>	generated when a key is pressed and held	<code>key</code> , <code>modifiers</code>
<code>character</code>	generated when an input character is generated	<code>character</code> , <code>modifiers</code>

Overview of key constants

We provide constants for most of the functional/navigational keys.

constant	description
<code>KEY_SPACEBAR</code>	the spacebar key
<code>KEY_ESCAPE</code>	the escape key
<code>KEY_ENTER</code>	the enter key
<code>KEY_TAB</code>	the tab key
<code>KEY_BACKSPACE</code>	the backspace key

constant	description
KEY_INSERT	the insert key
KEY_DELETE	the delete key
KEY_ARROW_RIGHT	the arrow right key
KEY_ARROW_LEFT	the arrow left key
KEY_ARROW_UP	the arrow up key
KEY_ARROW_DOWN	the arrow down key
KEY_CAPSLOCK	the capslock key
KEY_PRINT_SCREEN	the print screen or prtscrn key
KEY_F1 ... KEY_F12	the F1 ... F12 function keys
KEY_LEFT_SHIFT	the left shift key
KEY_RIGHT_SHIFT	the right shift key

Event processing order

Mouse and keyboard events are buffered and processed before `draw()` is called. It is possible but not advised to perform drawing on event.

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Program windows

An OPENRNDR program can listen to events generated by its window.

Window properties

Window title

The window title can be set and read using the `title` property.

```
fun main() = application {  
    configure {  
        title = "Lo and behold!"  
    }  
  
    program {  
        println(window.title)  
    }  
}
```

Window position

The window position can be read and set using the `position` property.

```
fun main() = application {  
    configure {  
        position = IntVector2(30, 30)  
    }  
}
```

Window events

Window move event

This event is generated when the window was moved.

```
fun main() = application {  
    program {  
        window.moved.listen {  
            println("the window was moved")  
        }  
    }  
}
```

Window size event

This event is generated when the window was sized.


```
fun main() = application {  
    program {  
        window.sized.listen {  
            println("the window was sized")  
        }  
    }  
}
```

Window focus event

This event is generated when the program window gains focus.

```
fun main() = application {  
    program {  
        window.focused.listen {  
            println("the window has gained focus")  
        }  
    }  
}
```

Window unfocus event

This event is generated when the program window loses focus.

```
fun main() = application {  
    program {  
        window.unfocused.listen {  
            println("the window has lost its focus")  
        }  
    }  
}
```

[edit on GitHub](#)

File drops

OPENRNDR programs can listen to file drop events. File drop events are generated by a user dragging and releasing one or more file icons onto the program window.

```
fun main() = application {
    program {
        window.drop.listen {
            println("${it.files.size} files dropped at ${it.position}")
        }
    }
}
```

The following program displays PNG, JPG or TIF images dropped onto its window. If several files are dropped at once, it displays the first of them that is an image.

```
fun main() = application {
    program {
        // Create a dummy image
        var img = drawImage(16, 16) { }

        window.drop.listen { dropped ->
            val firstImage = dropped.files.firstOrNull {
                File(it).extension.lowercase() in listOf("png", "jpg", "tif")
            }

            if(firstImage != null) {
                // Call .destroy() to avoid leaking memory
                img.destroy()

                // Then load a new image into img
                img = loadImage(firstImage)
            }
        }
        extend {
            drawer.imageFit(img, drawer.bounds, fitMethod = FitMethod.Contain)
        }
    }
}
```

By using `drawer.imageFit` the image is centered and made to fit the available window size.

[edit on GitHub](#)

Clipboard

OPENRNDR programs can access the clipboard. Currently only text snippets can be read from and written to the clipboard.

Setting the clipboard content

```
fun main() = application {  
  program {  
    clipboard.contents = "this is the new clipboard content"  
  }  
}
```

Getting the clipboard content

Note that `clipboard.contents` is optional and its value can be `null`. The clipboard contents are reported `null` in case the clipboard contents are non-text or the clipboard is empty.

```
fun main() = application {  
  program {  
    clipboard.contents?.let {  
      println("the clipboard contents: $it")  
    }  
  }  
}
```

[edit on GitHub](#)

User Interfaces

This topic discusses the creation of graphical user interfaces in OPENRNDR applications.

The Panel library

The Panel library provides an HTML/CSS like user interface toolkit and is written using OPENRNDR.

Basic Usage

The easiest way to use Panel is to use it as a Program extension. When used as an extension all mouse and keyboard events are automatically handled and drawing of the user interface will take place after your program's `draw()` has been invoked.

To create a very simple user interface that consists of just a single button one would do the following:



```
fun main() = application {  
  program {  
    var color = ColorRGBa.GRAY.shade(0.250)  
    extend(ControlManager()) {  
      layout {  
        button {  
          label = "click me"  
        }  
      }  
    }  
  }  
}
```

```

        // -- listen to the click event
        clicked {
            color = ColorRGBa(Math.random(), Math.random(), Math.random())
        }
    }
}
}
extend {
    drawer.clear(color)
}
}
}
}

```

[Link to the full example](#)

Style sheets

The Panel library borrows a lot of ideas from HTML/CSS based layout systems, one of those ideas is style sheets.

Style sheets can be used as shown in the following example in which a style sheet is used to color a button pink.



```

fun main() = application {
    program {
        extend(ControlManager()) {
            styleSheet(has type "button") {
                background = Color.RGBa(ColorRGBa.PINK)
                color = Color.RGBa(ColorRGBa.BLACK)
            }
        }
    }
}

```

```

        width = 120.px
    }

    layout {
        button {
            label = "click me"
        }
    }
}
}
}

```

[Link to the full example](#)

Selectors

The following example shows how to build and use complex selectors

```

fun main() = application {
    program {
        styleSheet(has class_ "control-bar") {
            descendant(has type "button") {
                width = 100.percent
            }

            child(has type "slider") {
                width = 100.percent

                and(has state "hover") {
                    background = Color.RGBa(Color.RGBa.RED)
                }
            }
        }
    }
}
}

```

Elements

The Panel library comes with a built-in set of elements with which user interfaces can be composed.

Element

`Element` is the base class from which all other elements derive. `Element` can be used directly but it is advised to use `Div` instead.

Div

The `Div` represents a rectangular area in which other elements can be placed. The `Div` element is the main ingredient in the creation of layouts. Divs are best created using the `div {}` builder.

```

fun main() = application {
    program {
        controlManager {
            layout {
                div("some-class-here", "another-class-here") {

```

```

        // -- children here
    }
}
}
}
}

```

Button

An ordinary labelled button. The default width of buttons is set to Auto such that the width is determined by the label contents.

```

fun main() = application {
    program {
        extend(ControlManager()) {
            layout {
                button {
                    label = "Click me "
                    events.clicked.listen {
                        // -- do something with the clicked event
                    }
                }
            }
        }
        extend {
            drawer.clear(ColorRGBA.GRAY.shade(0.250))
        }
    }
}

```

[Link to the full example](#)

Slider

A horizontal labelled slider control.

Properties

- label : String - the slider label
- precision : Int - the number of digits behind the point, set to 0 for an integer slider
- range: Range - the slider range, default is Range(0.0, 10.0)
- value : Double - the slider value

Events

- valueChanged - emitted when the slider value has changed

```

fun main() = application {
    program {
        extend(ControlManager()) {

```

```

        layout {
            slider {
                label = "Slide me"
                range = Range(0.0, 1.0)
                value = 0.50
                precision = 2
                events.valueChanged.listen {
                    println("the new value is ${it.newValue}")
                }
            }
        }
    }
}

```

[Link to the full example](#)

Since the `value` is clamped to the current `range`, it is better to set the `range` before the `value` to avoid unexpected results.

ColorPickerButton


A button like control that slides out a HSV color picker when clicked

Properties

- `label` : `String` - the label on the button
- `value` : `ColorRGBA` - the currently picked color

Events

- `valueChanged` - emitted when a color is picked



```

fun main() = application {
    program {
        extend(ControlManager()) {
            layout {
                colorpickerButton {
                    label = "Pick a color"
                    color = ColorRGBA.PINK
                    events.valueChanged.listen {
                        println("the new color is ${it.color}")
                    }
                }
            }
        }
    }
}

```

[Link to the full example](#)

DropDownButton

A button like control that slides out a list of items when clicked.

Properties

- `label` : `String` - the label on the button
- `value` : `Item` - the currently picked item

Events

- `valueChanged` - emitted when an option is picked



```
fun main() = application {
    program {
        extend(ControlManager()) {
            styleSheet(has id "b1") {
                width = 150.px
            }

            layout {
                dropdownButton {
                    id = "b1"
                    label = "Option"

                    item {
                        label = "Item 1"
                        events.picked.listen {
                            println("you picked item 1")
                        }
                    }

                    item {
                        label = "Item 2"
                        events.picked.listen {
                            println("you picked item 2")
                        }
                    }
                }
            }
        }
    }
}
```

[Link to the full example](#)

[edit on GitHub](#)

Extensions

[edit on GitHub](#)

TABLE OF CONTENTS

- [Extensions basics](#)
- [Screenshots](#)
- [ScreenRecorder](#)
- [Camera2D](#)
- [NoClear](#)
- [Writing extensions](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

OPENRNDR GUIDE

[Extensions](#) / Extensions basics

Extensions

Extensions add functionality to a Program. Extensions can be used to control how a program draws, setup keyboard and mouse bindings and much more.

Basic extension use

Here we demonstrate how to use an OPENRNDR extension. In the following example we use the `Screenshots` extension to capture the content of the application window and saves it to a timestamped file whenever the space bar key is pressed.

```
fun main() = application {
    program {
        // -- one time setup code goes here
        extend(Screenshots())
        extend {
            // -- drawing code goes here
        }
    }
}
```

Extension configuration

Some extensions have configurable options. They can be set using the configuring `extend` function as follows:

```
fun main() = application {
    program {
        extend(Screenshots()) {
            contentScale = 4.0
        }
    }
}
```

Built-in and contributed extensions

OPENRNDR provides a few built-in extensions to simplify common tasks. One is `Screenshots`, which is used to create screenshots of your programs. Another is `ScreenRecorder` which is used to write videos to files.

Next to the built-in extensions there is [ORX](#), an extensive repository of provided and contributed OPENRNDR extensions and add-ons. If you work from `openrndr-template` you can easily add and remove extensions from your project by editing the `orxFeatures` property in `build.gradle.kts`.

Extension order

The order of `extend(...)` calls in the code matters. In the following code, the `Screenshots` extension is placed after the `GUI` extension, and for that reason screenshots will not include the GUI.

```
extend(GUI())
```

```
extend(Screenshots())
```

If we change the order placing GUI *after* Screenshots, the GUI side bar will be visible in saved screenshots.

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

OPENRNDR GUIDE

[Extensions](#) / Screenshots

The screenshots extension

The Screenshots extension saves the current window as an image file under the `screenshots` folder in your project. The default key that triggers saving the image is the space bar key.

To setup the screenshots we only need to add one line to our program:

```
fun main() = application {
    program {
        extend(Screenshots())
        extend {
            // -- draw here
        }
    }
}
```

The extension provides many configurable options. This example demonstrates how to adjust some of them:

```
fun main() = application {
    program {
        extend(Screenshots()) {
            key = "s"
            folder = "work-in-progress"
            async = false
        }
        extend {
            // -- draw here
        }
    }
}
```

To discover other configurable options you can use the autocomplete feature (ctrl+space by default) in IntelliJ IDEA or explore [its source code](#).

[edit on GitHub](#)

Writing video files

The ScreenRecorder extension

A simple way of writing your program's output to video is offered by the `ScreenRecorder` extension. The extension creates video files named after your Program class name plus the date. For example: `MyProgram-2018-04-11-11.31.03.mp4`. The video files are located in the `video/` directory in your project.

To setup the screen recorder do the following:

```
fun main() = application {
    program {
        extend(ScreenRecorder())
        extend {
            // -- whatever you draw here ends up in the video
        }
    }
}
```

Note: the `ffmpeg` command-line program is used for video output. If `ffmpeg` is not found in your system OPENRNDR will attempt to use an embedded version of it.

Toggle the ScreenRecorder on and off

By default the screen recorder extension adds video frames as long as the program runs. If you keep running the program again and again you will end up with a folder full of video files.

We can make it more flexible by letting the user start and pause the recorder, for instance by pressing the `v` key on the keyboard.

```
fun main() = application {
    program {
        // keep a reference to the recorder so we can start it and stop it.
        val recorder = ScreenRecorder().apply {
            outputToVideo = false
        }
        extend(recorder)
        extend {
            // -- draw things here
        }
        keyboard.keyDown.listen {
            when {
                it.key == KEY_ESCAPE -> program.application.exit()
                it.name == "v" -> {
                    recorder.outputToVideo = !recorder.outputToVideo
                    println(if (recorder.outputToVideo) "Recording" else "Paused")
                }
            }
        }
    }
}
```

```
}  
}
```

Video formats

By default videos are recorded in h264 format with a .mp4 file extension, but animated gif or webp, png or tif sequences, prores and h265 are also available by enabling the [orx-video-profiles](#) extension.

Writing to video using render targets

It is also possible to produce video files without using the `ScreenRecorder` extension. This is needed for more advanced uses, for example when the content we want in the video file is not visible but actually exists as a render target.

```
fun main() = application {  
    program {  
        val videoWriter = VideoWriter()  
        videoWriter.size(width, height)  
        videoWriter.output("output.mp4")  
        videoWriter.start()  
  
        val videoTarget = renderTarget(width, height) {  
            colorBuffer()  
            depthBuffer()  
        }  
  
        var frame = 0  
        extend {  
            drawer.isolatedWithTarget(videoTarget) {  
                clear(ColorRGBA.BLACK)  
                rectangle(40.0 + frame, 40.0, 100.0, 100.0)  
            }  
  
            videoWriter.frame(videoTarget.colorBuffer(0))  
            drawer.image(videoTarget.colorBuffer(0))  
            frame++  
            if (frame == 100) {  
                videoWriter.stop()  
                application.exit()  
            }  
        }  
    }  
}
```

[edit on GitHub](#)

OPENRNDR GUIDE

[Extensions](#) / Camera2D

The Camera2D extension

This extension allows the user to easily pan, rotate and scale the view using a mouse.

- For panning, click and drag with the left mouse button.
- For scaling, use the mouse wheel.
- For rotating, click and drag with the right mouse button.
- To reset the camera to its default state you can click the middle mouse button.

Using the `Camera2D` extension can be useful to find the right framing for a design before taking a screenshot.

You see, sometimes generative design involve randomness, and by using this extension you can choose what is up and what is down, and how much space you want between your creation and the edges of the window after the design has been created.

```
fun main() = application {
    program {
        backgroundColor = ColorRGBa.PINK
        extend(Camera2D())
        extend {
            drawer.rectangle(drawer.bounds.center, 200.0, 50.0)
            drawer.circle(drawer.bounds.position(0.3, 0.3), 100.0)
        }
    }
}
```

For more advanced use cases, you can keep a reference to the camera to be able access its properties and methods. In the following example, we draw a pentagon that is affected by the camera. We also listen to the keyboard to reset the camera by pressing the `r` key and let the user enable and disable the camera by pressing the `c` key on the keyboard. Another thing we could do is to call the `camera.pan()`, `camera.rotate()` and `camera.zoom()` methods to control the camera programatically.

```
fun main() = application {
    program {
        val camera = Camera2D()
        extend(camera)
        extend {
            drawer.clear(ColorRGBa.WHITE)
            drawer.contour(regularPolygon(5, drawer.bounds.center, 100.0))
        }
        keyboard.keyDown.listen {
            when (it.name) {
                "c" -> camera.userInteraction = !camera.userInteraction
                "r" -> camera.defaults()
            }
        }
    }
}
```


Camera2DManual

In some cases we may want to let the camera control some elements while others should remain static.

`Camera2DManual()` makes that simple. In the following example we draw two hexagons: a smaller one that is affected by the camera, and a larger one that isn't.

```
fun main() = application {
    program {
        val camera = Camera2DManual()
        extend {
            drawer.clear(ColorRGBa.WHITE)
            drawer.contour(regularPolygon(6, drawer.bounds.center, 100.0))
            camera.isolated {
                fill = ColorRGBa.WHITE
                drawer.contour(regularPolygon(6, drawer.bounds.center, 50.0))
            }
        }
    }
}
```

[Find more Camera2D demos here.](#)

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

OPENRNDR GUIDE

[Extensions](#) / NoClear

The NoClear extension

Creative coding frameworks have two different defaults: either they clear the screen before each animation frame or they don't. OPENRNDR belongs to the first group.


Switching to “draw-without-clearing-the-screen” can be useful to produce complex designs with simple programs.

It is also how pen and paper seems to work: we add ink to the paper and the previous ink does not disappear.

Such behavior can easily be enabled by adding `extend(NoClear())` to our programs.

Here an example that draws circles at the current mouse position:

```
fun main() = application {  
  program {  
    backgroundColor = ColorRGBa.PINK  
    extend(NoClear())  
    extend {  
      drawer.circle(mouse.position, 20.0)  
    }  
  }  
}
```

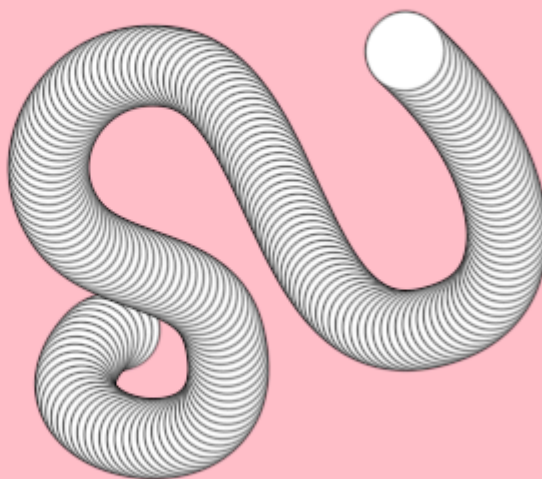

Without `NoClear` only one circle would be visible at the current mouse location.

Configurable properties

`orx-no-clear` provides configurable properties:

- A `multisample` value can be passed in the constructor. The default value is `BufferMultisample.Disabled`. For smoother rendering we can construct it like this: `NoClear(BufferMultisample.SampleCount(8))`. Different graphic cards may accept higher or lower values.
- Use `backdrop` to specify the initial state of the buffer. You could clear the background to a specific color, display a loaded image, or draw anything else.
- Use `colorType` to change the default `UINT8` color type to something else, for instance `FLOAT32` for finer color precision.

Find [the orx-no-clear source code and examples featuring the available properties](#) in GitHub.

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Writing Program extensions

The extension interface

OPENRNDR provides a simple `Extension` interface with which default `Program` behaviour can be changed.

```
interface Extension {  
    var enabled: Boolean  
    fun setup(program: Program) {}  
    fun beforeDraw(drawer: Drawer, program: Program) {}  
    fun afterDraw(drawer: Drawer, program: Program) {}  
}
```

In the `setup()` function the extension can setup itself and hook into program events.

The `beforeDraw()` function is called right before the program's `draw()` is executed.

The `afterDraw()` is called after the program's `draw()` is executed.

You can enable and disable an extension by setting the `enabled` boolean on the extension.

A simple extension

Presented here is the outline of a simple extension that overlays the frames per second on top of the program output.

Using the `FPSDisplay` extension from your main program would then look like this:

```
fun main() = application {  
    program {  
        extend(FPSDisplay())  
    }  
}
```

Extension application order

In the scenario in which a program has 3 extensions installed like in the snippet below.

```
fun setup() {  
    extend(ExtensionA())  
    extend(ExtensionB())  
    extend(ExtensionC())  
}
```

This resulting application order of `beforeDraw` and `afterDraw` is then as follows:

```
extensionA.beforeDraw()  
extensionB.beforeDraw()  
extensionC.beforeDraw()
```

```
program.draw()  
  
extensionC.afterDraw()  
extensionB.afterDraw()  
extensionA.afterDraw()
```

As you can see, the `afterDraw()` calls are applied in reverse order, this order was decided on to help with push/pop order of transforms and styles.

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Animation

[edit on GitHub](#)

TABLE OF CONTENTS

- [Basic animation](#)
 - [Interactive animations](#)
-

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Basic animation

From a programmer's perspective, animation works by continuously drawing shapes or images creating the illusion of movement. This is achieved through a draw loop, which is a function that runs repeatedly multiple times per second. Each iteration of the draw loop involves clearing the screen and redrawing all elements in their new positions. By making small changes to the positions, rotations or sizes of shapes in each frame, we can create complex animations and movements.

In this example we draw a circle moving horizontally. The `x` variable increases from 0 up to `width` in a loop, thanks to the `%` modulo operation. `width` is 640 by default.

```
fun main() = application {
  program {
    extend {
      val pixelsPerSecond = 100.0
      val x = (seconds * pixelsPerSecond) % width
      val y = height * 0.5
      drawer.circle(x, y, 100.0)
    }
  }
}
```

By modifying the speed while the animation progresses we can enhance the animation, making it feel more natural and fluid and mimicking the way objects in the real world accelerate or decelerate as they move.

Let's start with a one second long animation loop:

```
fun main() = application {
  program {
    extend {
      val x = (seconds % 1.0) * width
      val y = height * 0.5
      drawer.circle(x, y, 100.0)
    }
  }
}
```

Note that the expression `(seconds % 1.0)` is always a value between 0.0 and 1.0. What happens if we change that expression to `(seconds % 1.0).pow(3.0)` instead? The result is still a value between 0.0 and 1.0, but by raising the expression to the power of 3.0 we obtain more values closer to 0.0 than to 1.0. We no longer have a linear animation, but an `ease in` effect: start slowly and accelerate.

To simplify calculating acceleration and deceleration curves for animations we can use easing functions to specify the rate of change of a parameter over time.


Fortunately OPENRNDR provides [orx-easing](#) to help with this task.

Interactive animations

Animatable

The OPENRNDR [Animatable](#) class provides animation logic.

Displayed below is a very simple animation setup in which we animate a circle from left to right. We do this by animating the `x` property of our animation object.

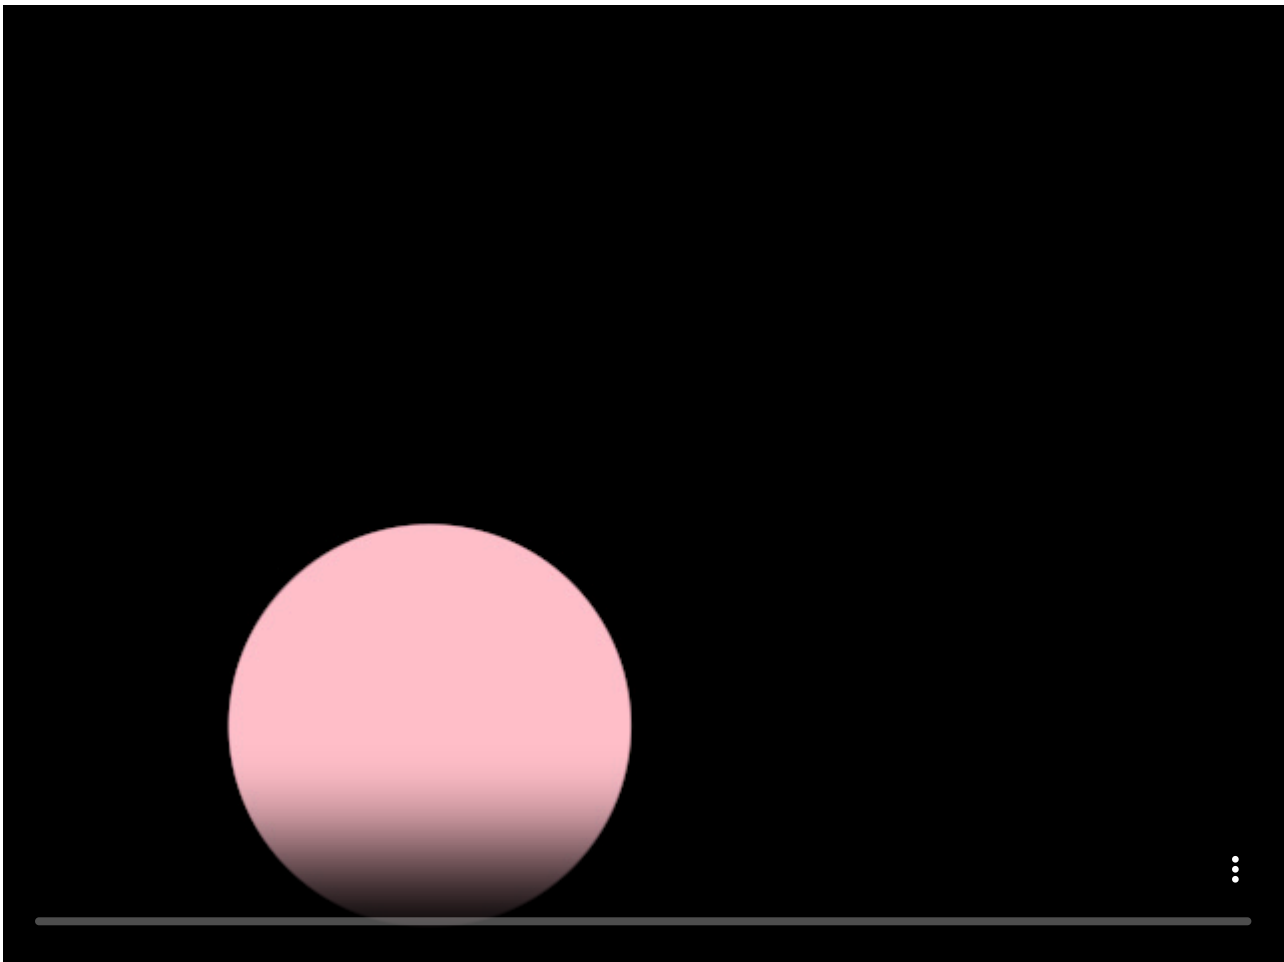

```
fun main() = application {  
    program {  
        // -- create an animation object  
        val animation = object : Animatable() {  
            var x = 0.0  
            var y = 360.0  
        }  
  
        animation.apply {  
            ::x.animate(width.toDouble(), 5000)  
        }  
  
        extend {  
            animation.updateAnimation()  
        }  
    }  
}
```




```

        drawer.fill = ColorRGBA.PINK
        drawer.stroke = null
        drawer.circle(animation.x, animation.y, 100.0)
    }
}

```

[Link to the full example](#)

By using `.complete()` we can create sequences of property animations.

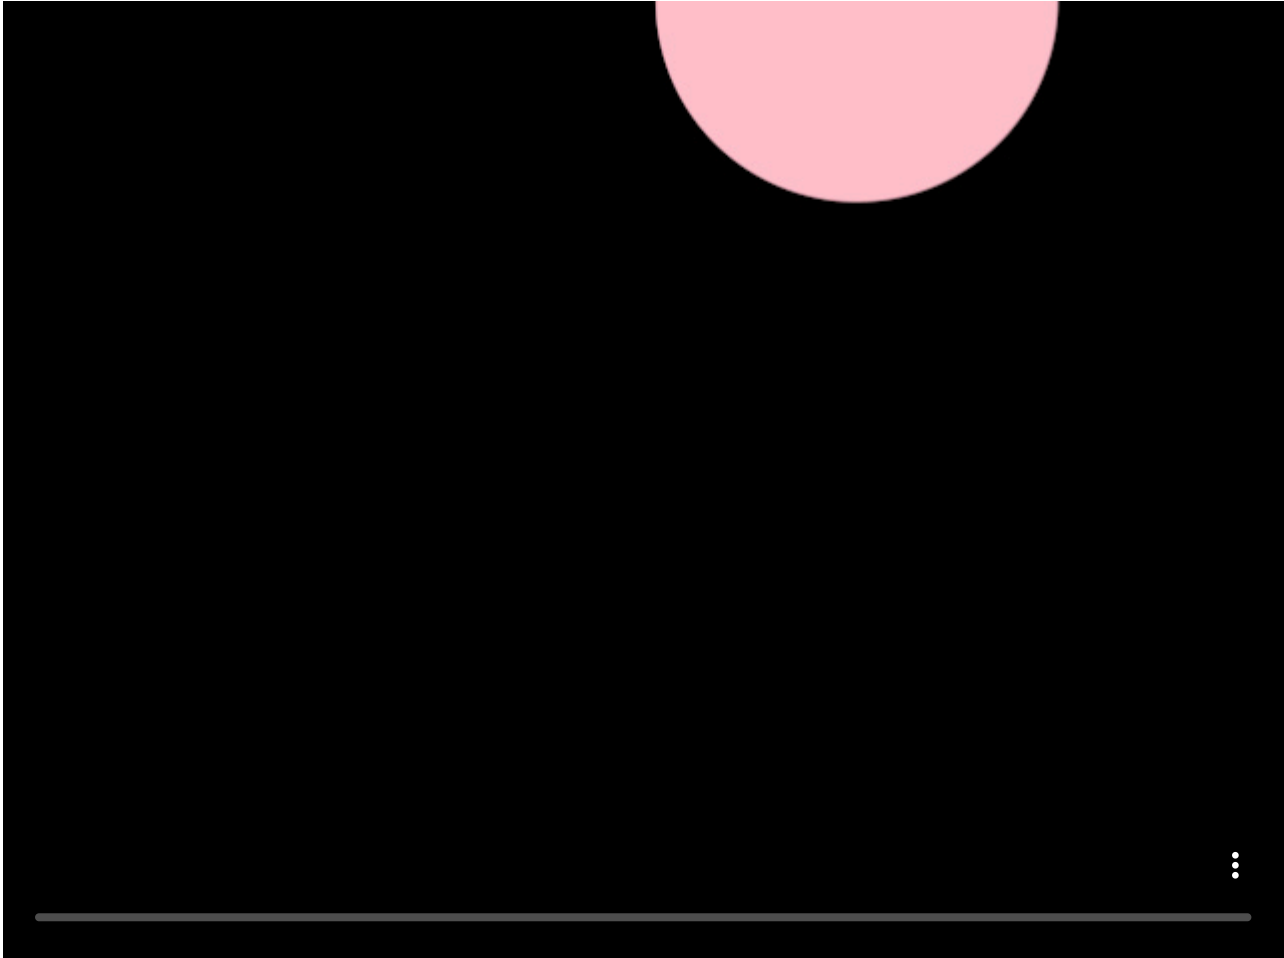

```

fun main() = application {
    program {
        val animation = object : Animatable() {
            var x = 0.0
            var y = 0.0
        }

        animation.apply {
            ::x.animate(width.toDouble(), 5000)
            ::x.complete()
            ::y.animate(height.toDouble(), 5000)
        }

        extend {
            animation.updateAnimation()
            drawer.fill = ColorRGBA.PINK
            drawer.stroke = null
        }
    }
}

```


```

        drawer.circle(animation.x, animation.y, 100.0)
    }
}

```

[Link to the full example](#)

If we leave out that `::x.complete()` line we will see that animations for x and y run simultaneously.

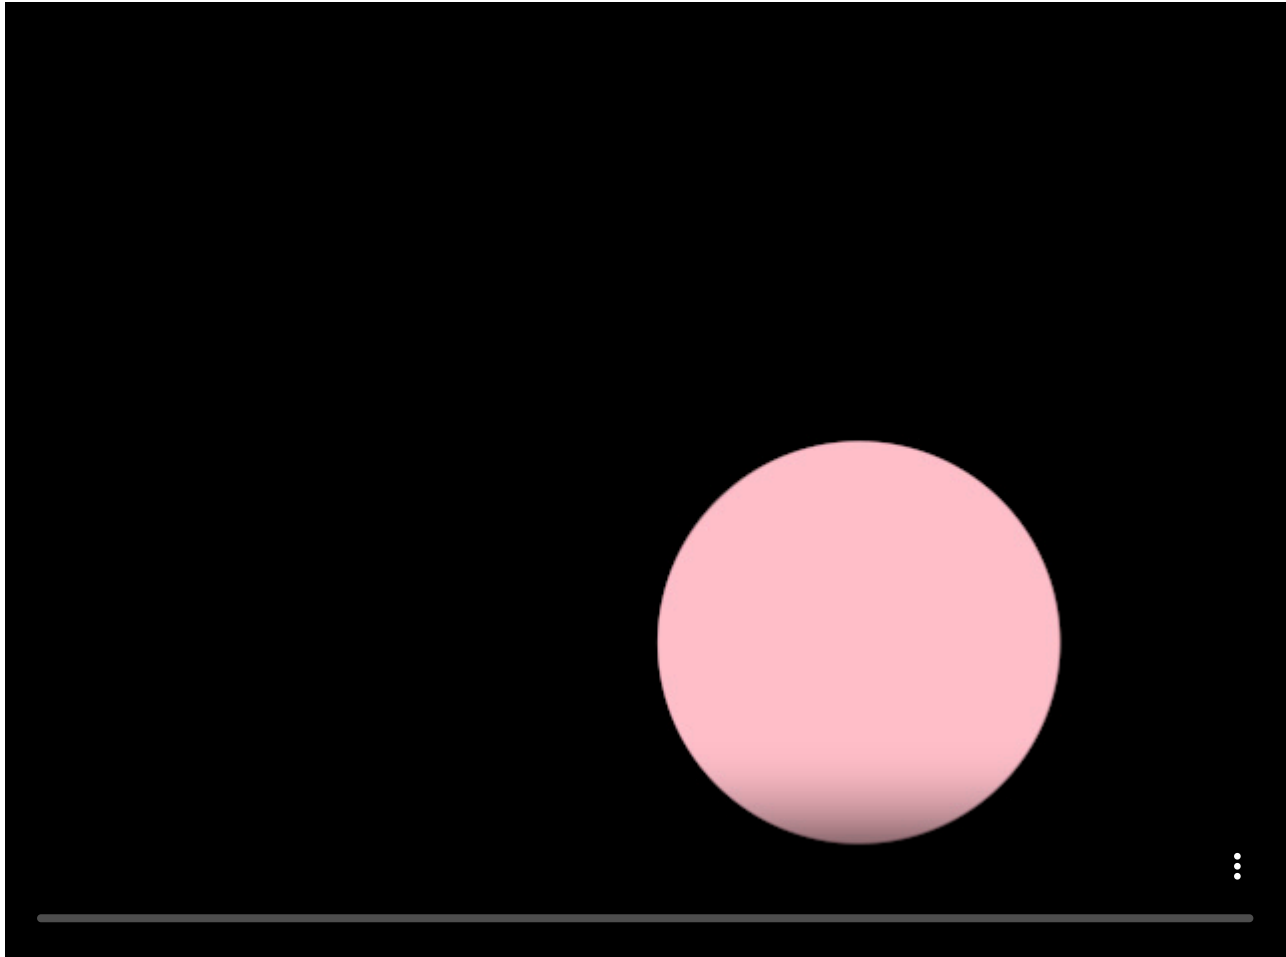

```

fun main() = application {
    program {
        val animation = object : Animatable() {
            var x = 0.0
            var y = 0.0
        }

        animation.apply {
            ::x.animate(width.toDouble(), 5000)
            ::y.animate(height.toDouble(), 5000)
        }

        extend {
            animation.updateAnimation()
            drawer.fill = ColorRGBa.PINK
            drawer.stroke = null
            drawer.circle(animation.x, animation.y, 100.0)
        }
    }
}

```

```
}  
}
```

[Link to the full example](#)


For those wondering where that `::x.animate()` notation comes from, those are Kotlin's [property references](#).

Easing

A simple trick for making animations less stiff is to specify an easing.

To demonstrate we take one of the previously shown animations and add easings.

Available [Easings](#)

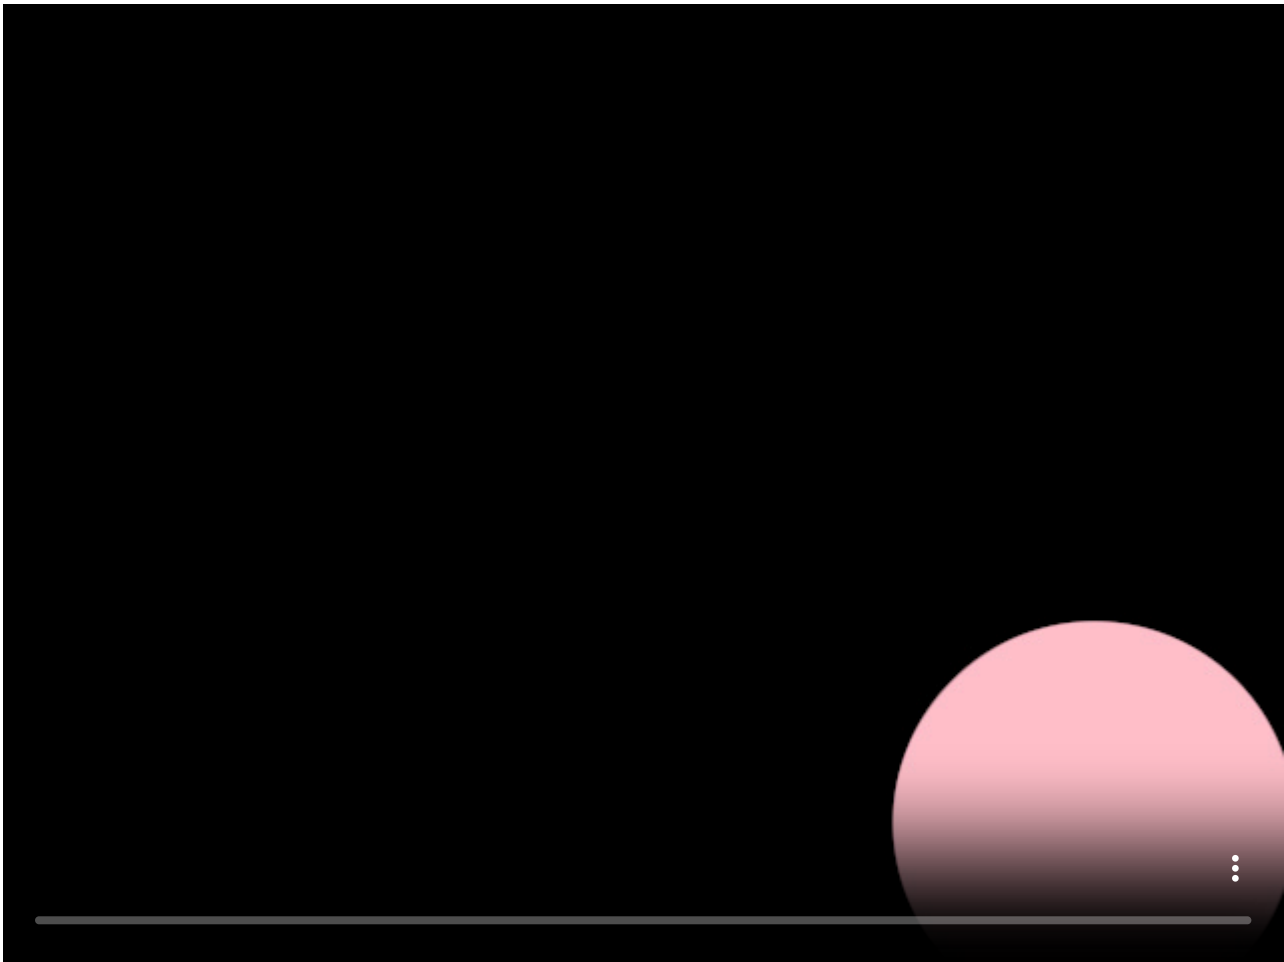

```
fun main() = application {  
    program {  
        val animation = object : Animatable() {  
            var x = 0.0  
            var y = 0.0  
        }  
  
        animation.apply {  
            ::x.animate(width.toDouble(), 5000, Easing.CubicInOut)  
            ::y.animate(height.toDouble(), 5000, Easing.CubicInOut)  
        }  
  
        extend {  
            animation.updateAnimation()  
        }  
    }  
}
```


```

        drawer.fill = ColorRGBA.PINK
        drawer.stroke = null
        drawer.circle(animation.x, animation.y, 100.0)
    }
}

```

[Link to the full example](#)

Behavioral animation

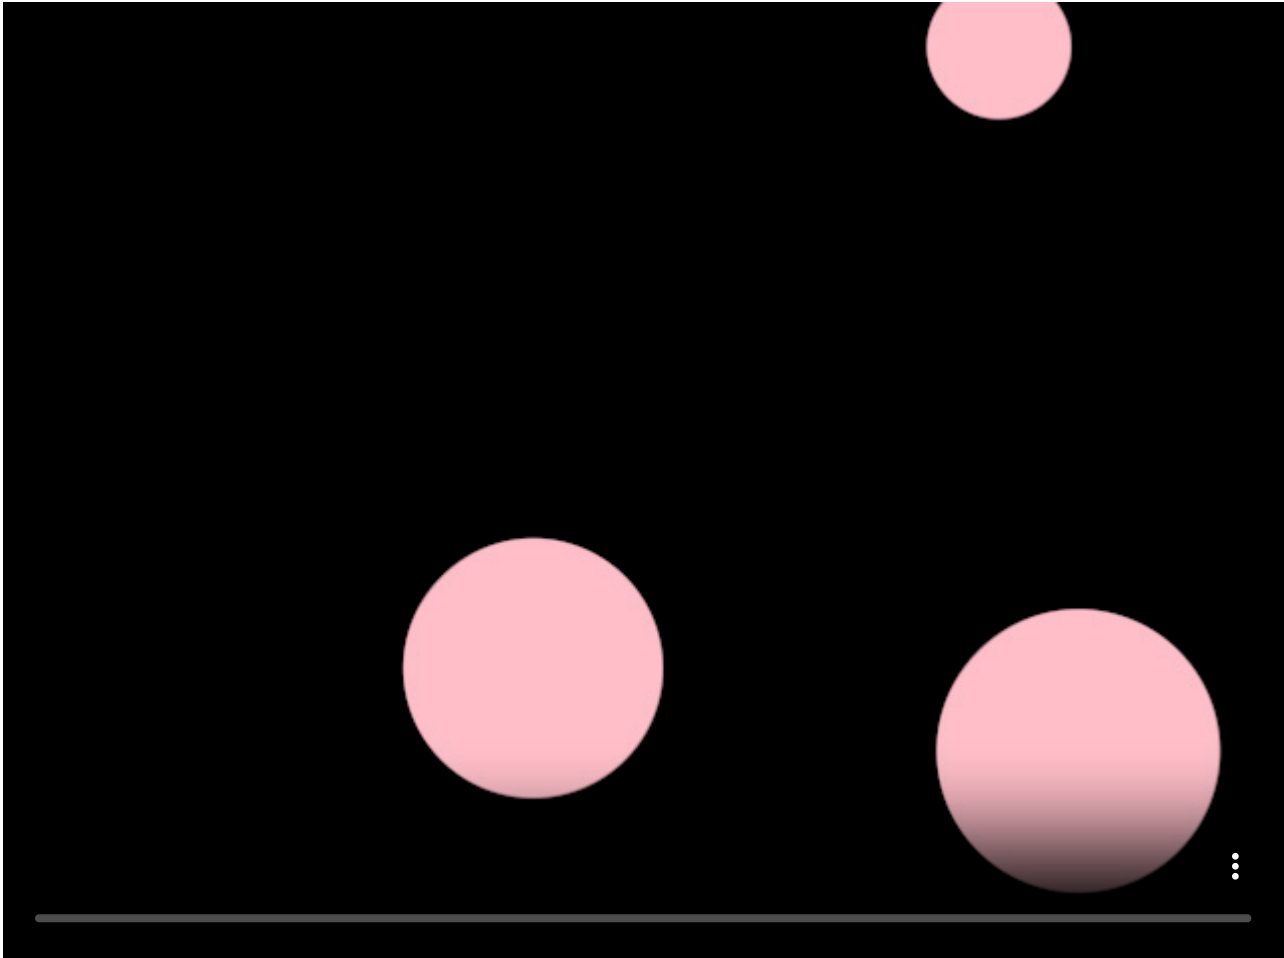

```

fun main() = application {
    program {
        class AnimatedCircle : Animatable() {
            var x = 0.0
            var y = 0.0
            var radius = 100.0
            var latch = 0.0

            fun shrink() {
                // -- first stop any running animations for the radius property
                ::radius.cancel()
                ::radius.animate(10.0, 200, Easing.CubicInOut)
            }

            fun grow() {
                ::radius.cancel()
            }
        }
    }
}

```

```

        ::radius.animate(Double.uniform(60.0, 90.0), 200, Easing.CubicInOut)
    }

    fun jump() {
        ::x.cancel()
        ::y.cancel()
        ::x.animate(Double.uniform(0.0, width.toDouble()), 400, Easing.CubicInOut)
        ::y.animate(Double.uniform(0.0, height.toDouble()), 400, Easing.CubicInOut)
    }

    fun update() {
        updateAnimation()
        if (!::latch.hasAnimations) {
            val duration = Double.uniform(100.0, 700.0).toLong()
            ::latch.animate(1.0, duration).completed.listen {
                val action = listOf(::shrink, ::grow, ::jump).random()
                action()
            }
        }
    }
}


val animatedCircles = List(5) { AnimatedCircle() }
extend {
    drawer.fill = ColorRGBa.PINK
    drawer.stroke = null
    for (ac in animatedCircles) {
        ac.update()
        drawer.circle(ac.x, ac.y, ac.radius)
    }
}
}

```

[Link to the full example](#)

Looping animations

While `Animatable` doesn't provide explicit support for looping animations. They can be achieved through the following pattern:

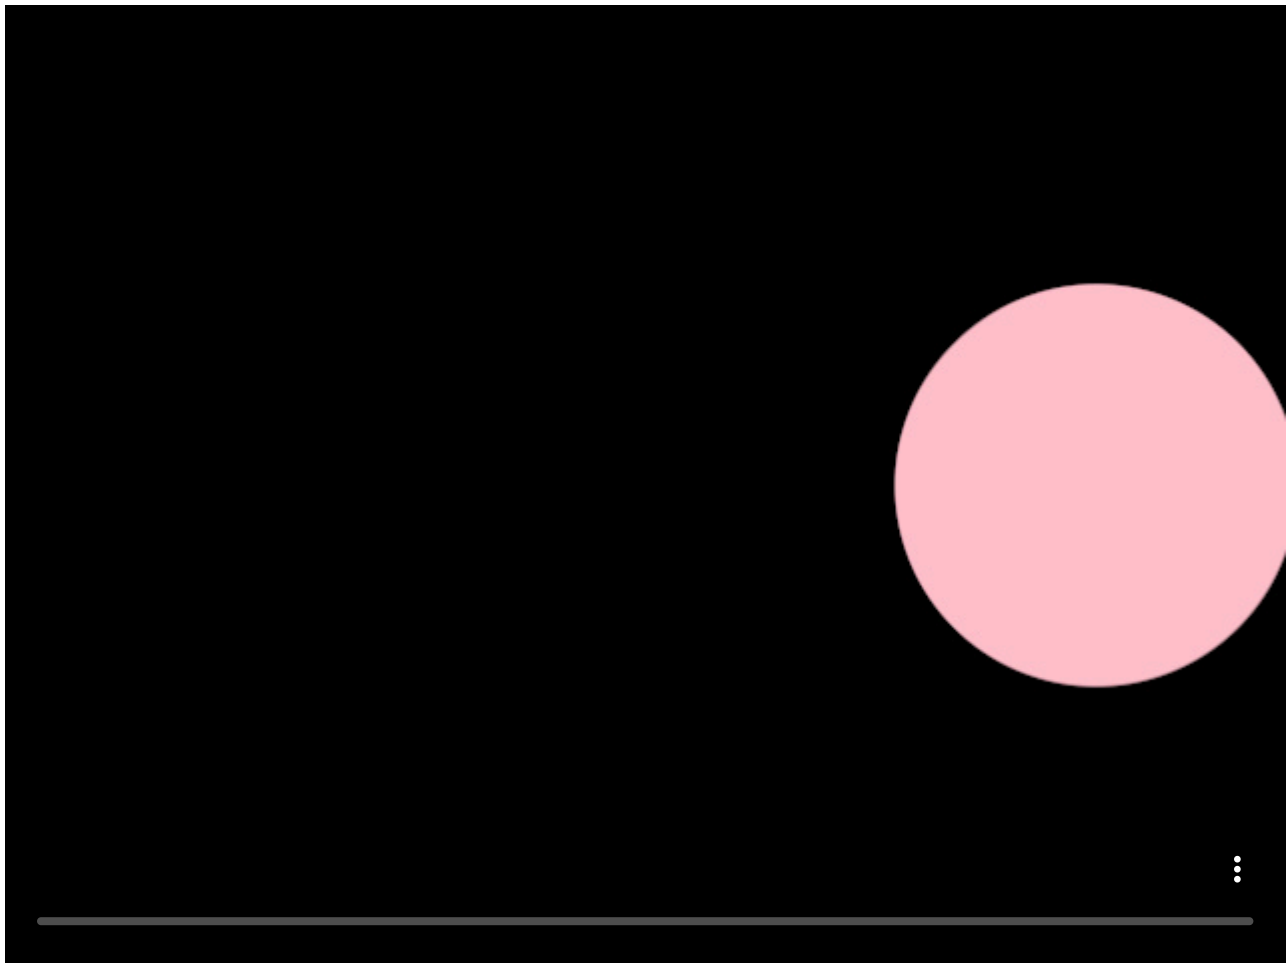

```
fun main() = application {
    val animation = object : Animatable() {
        var x: Double = 0.0
    }

    program {
        extend {
            animation.updateAnimation()
            if (!animation.hasAnimations()) {
                animation.apply {
                    ::x.animate(width.toDouble(), 1000, Easing.CubicInOut)
                    ::x.complete()
                    ::x.animate(0.0, 1000, Easing.CubicInOut)
                    ::x.complete()
                }
            }
            drawer.fill = ColorRGBA.PINK
            drawer.stroke = null
            drawer.circle(animation.x, height / 2.0, 100.0)
        }
    }
}
```

[Link to the full example](#)

Animatable properties

Thus far we have only worked with `Double` properties in our animations. However, animation is not limited to Doubles.

Any property that is a `LinearType` can be animated through `Animatable`.

```
fun main() = application {
    program {
        val animation = object : Animatable() {
            var color = ColorRGBA.WHITE
            var position = Vector2.ZERO
        }
        animation.apply {
            ::color.animate(ColorRGBA.PINK, 5000)
            ::position.animate(Vector2(width.toDouble(), height.toDouble()), 5000)
        }
    }
}
```

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

File Input / Output

Loading files

Load a text file into a `String`

```
val fileContent = File("/path/to/file.txt").readText()
```

Load a text file into a `List<String>`

```
val lines = File("/path/to/file.txt").readLines()
```

Load binary content into a `ByteArray`

```
val bytes = File("/path/to/file.txt").readBytes()
```

For loading large text files one can use `File.bufferedReader()`.

Saving files

Save a `String`

```
File("/path/to/file.txt").writeText("Hello")
```

Save a `ByteArray`

```
File("/path/to/file.txt").writeBytes(myByteArray)
```

For saving large text files one can use `File.bufferedWriter()`.

JSON

The `kotlinx-serialization` library makes it possible to convert JSON files to Kotlin objects and back. The library is enabled by default in recent versions of the `openrndr-template`.

Loading / converting JSON to an object

```
// An object matching the JSON file.
// Notice how optional properties are nullable.
@Serializable
data class Entry(
    var time: Double,
    var easing: String,
    var rotx: Double?,
    var roty: Double?,
    var x: Double?,
```



```

    var y: Double?,
    var scale: Double?,
    var jitter: Double?
)

// from disk
// val json = File("/path/to/a/file.json").readText()

// from a string
val json = """
[
    {
        "time": 0.0,
        "easing": "cubic-in-out",
        "rotx": 0.0,
        "roty": 30.0,
        "x": 0.0,
        "y": 0.0,
        "scale": 1.0,
        "jitter": 0.0
    },
    {
        "time": 1.0,
        "easing": "cubic-in-out",
        "rotx": 0.0,
        "x": 20.0,
        "y": 0.0,
        "scale": 1.0
    },
    {
        "time": 1.3,
        "easing": "cubic-in-out"
    }
]
""".trimIndent()

fun main() = application {
    program {
        val entries = Json.decodeFromString<List<Entry>>>(json)

        entries.forEachIndexed { i, entry ->
            println(i)
            println(entry)
        }
    }
}

```

Saving an object as a JSON file

```

fun main() = application {
    program {
        val points = List(20) { Vector2.uniform(drawer.bounds) }
    }
}

```

```

    val json = Json.encodeToString(points)
    File("data/points.json").writeText(json)
}
}

```

If you want to make the resulting JSON more readable, use `prettyPrint`:

```

val pretty = Json { prettyPrint = true }
val json = pretty.encodeToString(points)

```

CSV

The [kotlin-csv](#) library enables loading and saving [CSV](#) files. To enable the library:

- 1 Find the `build.gradle.kts` file in your `openrndr-template`.
- 2 Add the line `implementation(libs.csv)` to your dependencies `{ ... }` block.
- 3 Reload Gradle.

Load a CSV file

```

fun main() = application {
    program {
        // read from `String`
        val csvData = "a,b,c\nd,e,f"
        val rowsA = csvReader().readAll(csvData)

        // read from `java.io.File`
        val file = File("test.csv")
        val rowsB = csvReader().readAll(file)
    }
}

```

Save a CSV file

```

fun main() = application {
    program {
        val rows = listOf(listOf("a", "b", "c"), listOf("d", "e", "f"))
        csvWriter().writeAll(rows, "data/test.csv")
    }
}

```

XML / HTML

The [jsoup](#) library enables loading and parsing XML and HTML files. To enable the library:

- 1 Find the `build.gradle.kts` file in your `openrndr-template`.
- 2 Add the line `implementation(libs.jsoup)` to your dependencies `{ ... }` block.
- 3 Reload Gradle.

Get Wikipedia home page and parse news headlines

```
fun main() = application {  
    program {  
        val doc = Jsoup.connect("https://en.wikipedia.org/").get()  
        println(doc.title())  
  
        val newsHeadlines = doc.select("#mp-itn b a")  
        newsHeadlines.forEach {  
            println(it.attr("title"))  
            println(it.absUrl("href"))  
        }  
    }  
}
```

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

ORX (OPENRNDR Extras)

The ORX project is a library of tools that can be used in OPENRNDR based programs. ORX contains implementations of datastructures, algorithms and utilities for (mostly) computational graphics. You can find the ORX source code and additional documentation in the [ORX repository](#).

Using ORX

Using the OPENRNDR extras is a matter of adding a Maven repository and selected dependencies to your Gradle project.

The [openrndr-template](#) project makes this simple as the repositories are already set up and one only has to

- 1 Open the `build.gradle.kts` file.
- 2 Find the `dependencies { ... }` block.
- 3 Add one line per desired dependency, in this format: `implementation(orx.marching.squares)`. Notice how the dashes from `orx-marching-squares` are converted to periods. Tip: once you type `orx.` the IDE autocomplete should show you the available extensions.
- 4 Save `build.gradle.kts`.
- 5 Reimport Gradle projects: if using IDEA choose  *Sync All Gradle Projects* from the Gradle panel.

Bundles

The `build.gradle.kts` makes use of dependency bundles, for instance `orx.bundles.basic`. These bundles are defined under `orx-module-catalog` in `orx` and `openrndr`. At the time of writing, the basic `orx` bundle includes the following: `orx-camera`, `orx-color`, `orx-composition`, `orx-compositor`, `orx-fx`, `orx-image-fit`, `orx-panel`, `orx-video-profiles`, `orx-math`, `orx-mesh-generators`, `orx-no-clear`, `orx-noise`, `orx-shade-styles`, `orx-shader-phrases`, `orx-shapes`, `orx-svg`, `orx-text-on-contour`, `orx-text-writer`

[edit on GitHub](#)

TABLE OF CONTENTS

- [Noise](#)
- [Kinect](#)
- [MIDI controllers](#)
- [OSC](#)
- [Image post-processing with filters](#)
- [Compositor](#)
- [Quick UIs](#)
- [Shade style presets](#)
- [Image fit](#)
- [Poisson fills](#)
- [Distance fields](#)

orx-noise

A collection of noise generator functions. Source and extra documentation can be found in the [orx-noise sourcetree](#).

Prerequisites

If you are working on an [openrndr-template](#) based project, orx-noise should be ready to use because it is part of the basic orx bundle, as described in [ORX](#).

Uniformly distributed random values

The library provides extension methods for `Double`, `Vector2`, `Vector3`, `Vector4` to create random vectors easily. To create scalars and vectors with uniformly distributed noise you use the `uniform` extension function.

```
val d1 = Double.uniform(0.0, 640.0)
val v2 = Vector2.uniform(0.0, 640.0)
val v3 = Vector3.uniform(0.0, 640.0)
val v4 = Vector4.uniform(0.0, 640.0)
```

To create multiple samples of noise one uses the `uniforms` function.

```
val v2 = Vector2.uniforms(100, Vector2(0.0), Vector2(640.0))
val v3 = Vector3.uniforms(100, Vector3(0.0), Vector3(640.0))
```

The `Random` class can also be used to generate `Double` numbers and vector, but also booleans and integers.

```
// Boolean
val b = Boolean.random(probability = 0.2)

// Int
val i1 = Int.uniform(0, 640)

// Double
val d2 = Double.uniform(0.0, 640.0)

// Vectors
val v2 = Vector2.uniform(0.0, 640.0)
val v3 = Vector3.uniform(0.0, 640.0)
val v4 = Vector4.uniform(0.0, 640.0)
```

Perlin, Value and Simplex noise

`perlin()` and `value()` accept 2D and 3D arguments, `simplex()` up to 4D.

All three methods take an integer seed as first argument and return a `Double`.


Some examples:

```
// Test vectors to use
val v2 = Vector2(0.1, 0.2)
val v4 = Vector4(0.1, 0.2, 0.3, 0.4)

// Now generate random values
val d1 = perlin(1234, 0.1, 0.2)
val d2 = perlin(1248, v2)
val d3 = value(1234, 0.1, 0.2, 0.3)
val d4 = simplex(1234, v4)
```

Uniform ring noise

```
val v2 = Vector2.uniformRing(innerRadius = 0.0, outerRadius = 300.0)
val v3 = Vector3.uniformRing(0.0, 300.0)
val v4 = Vector4.uniformRing(0.0, 300.0)
```

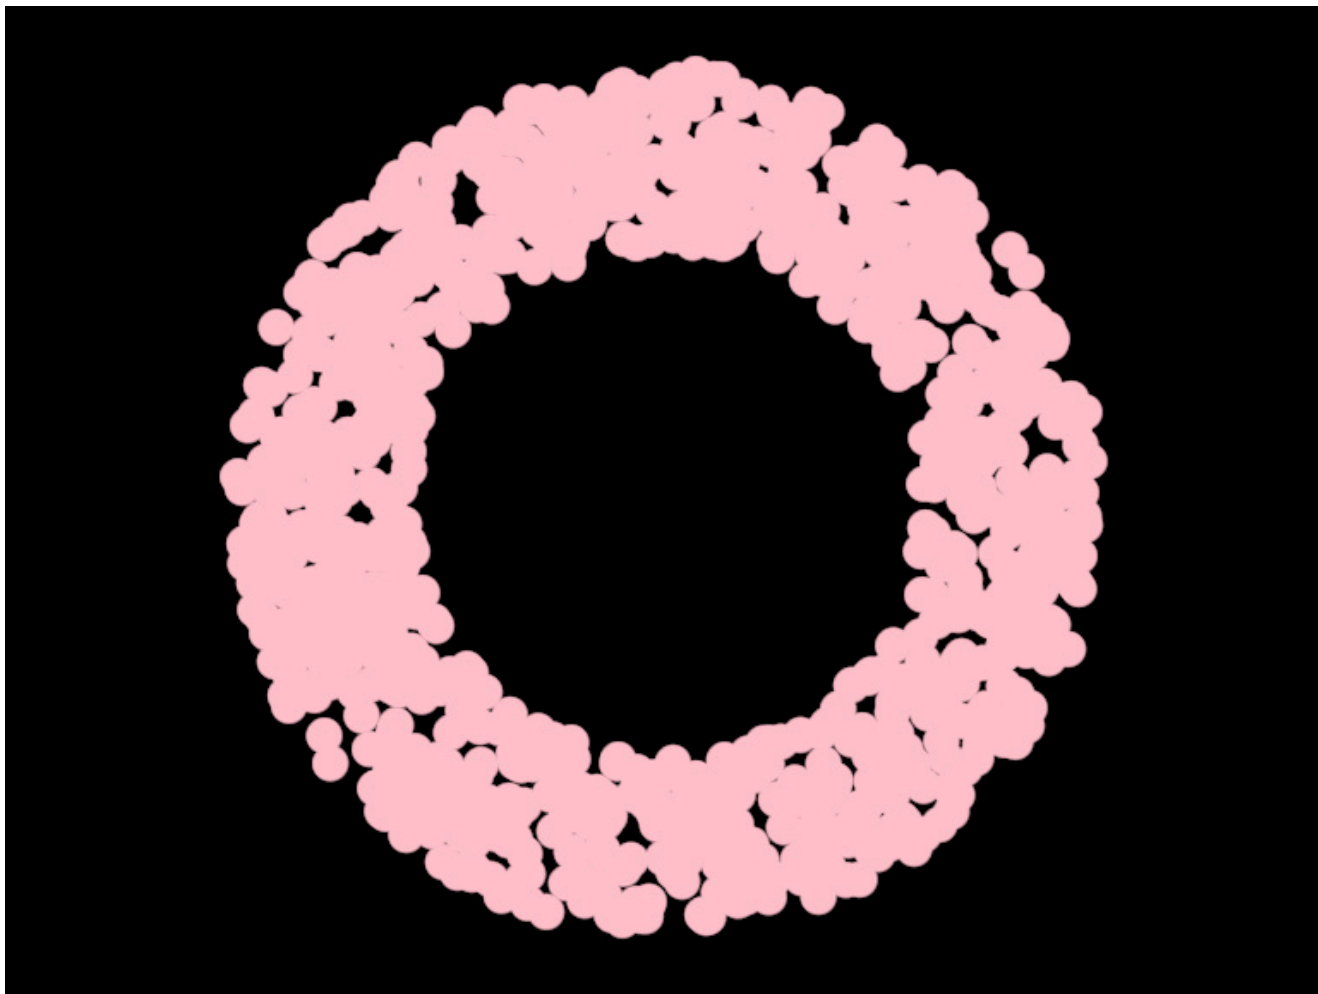


```
fun main() = application {
    program {
        extend {
            drawer.fill = ColorRGBa.PINK
            drawer.stroke = null
            drawer.translate(width / 2.0, height / 2.00)
            for (i in 0 until 1000) {
                drawer.circle(Vector2.uniformRing(150.0, 250.0), 10.0)
            }
        }
    }
}
```

```
}  
}  
}  
}
```

[Link to the full example](#)


Perlin noise

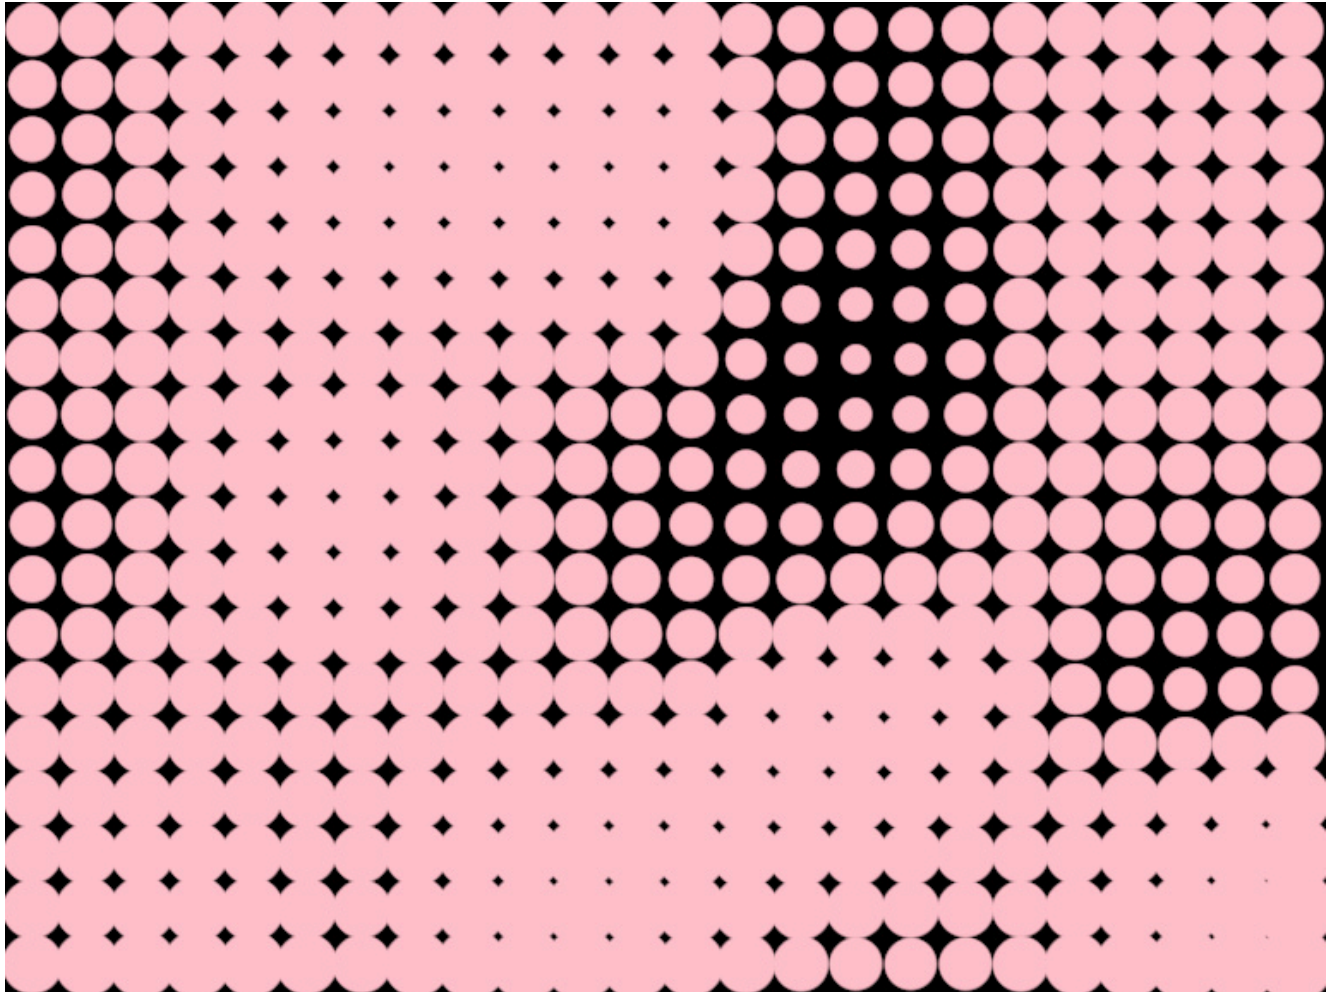

```
fun main() = application {  
    program {  
        extend {  
            drawer.fill = ColorRGBa.PINK  
            drawer.stroke = null  
            val scale = 0.005  
            for (y in 16 until height step 32) {  
                for (x in 16 until width step 32) {  
                    val radius = perlinLinear(123, x * scale, y * scale) * 16.0 + 16.0  
                    drawer.circle(x * 1.0, y * 1.0, radius)  
                }  
            }  
        }  
    }  
}
```

[Link to the full example](#)


Value noise

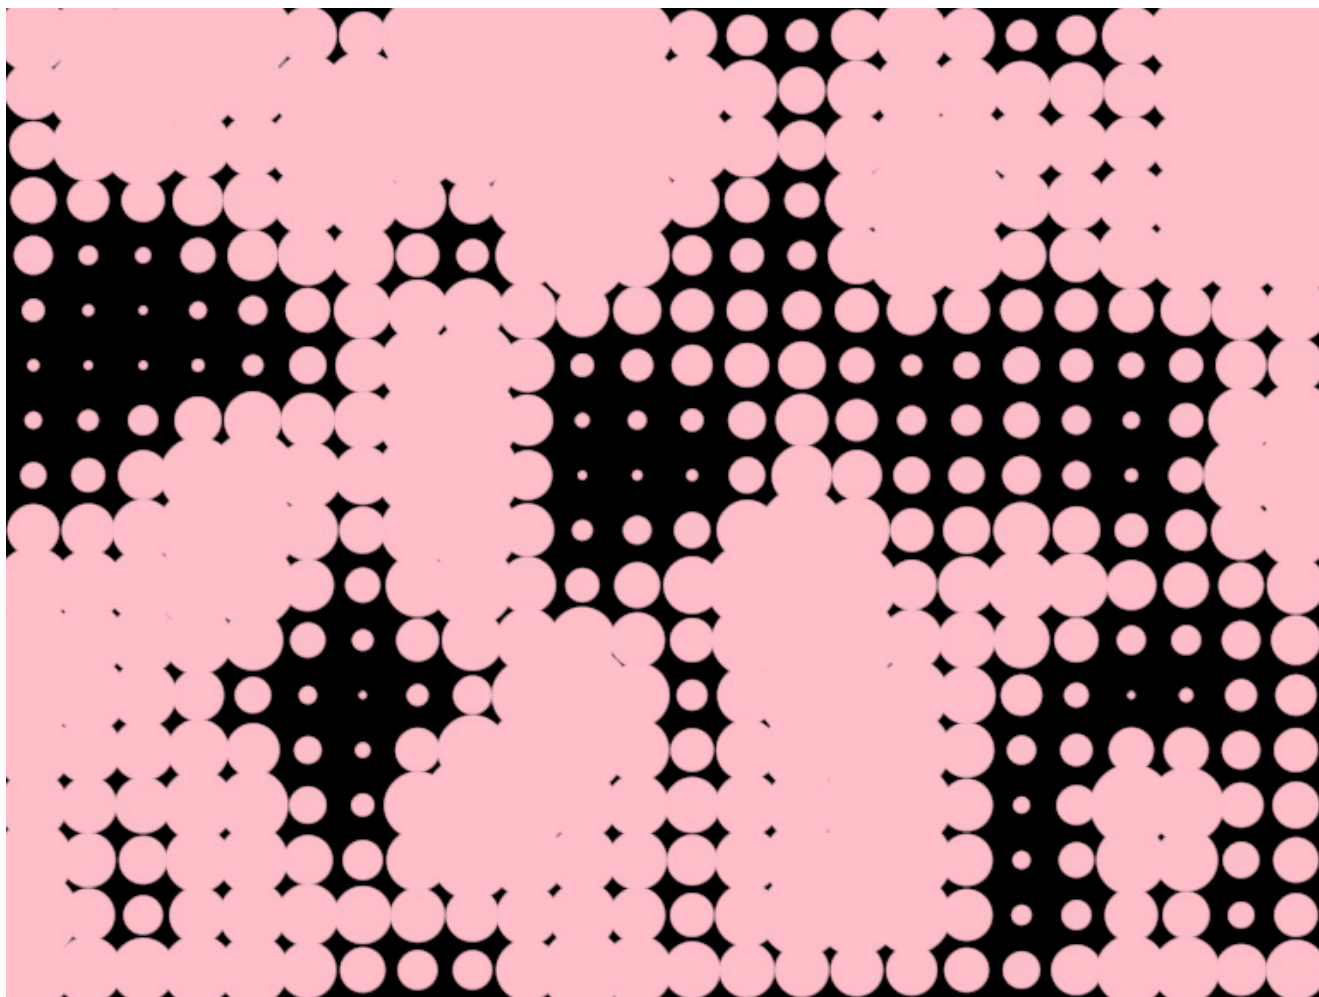

```
fun main() = application {
  program {
    extend {
      drawer.fill = ColorRGBa.PINK
      drawer.stroke = null
      val scale = 0.0150
      for (y in 16 until height step 32) {
        for (x in 16 until width step 32) {
          val radius = valueLinear(123, x * scale, y * scale) * 16.0 + 16.0
          drawer.circle(x * 1.0, y * 1.0, radius)
        }
      }
    }
  }
}
```

[Link to the full example](#)


Simplex noise

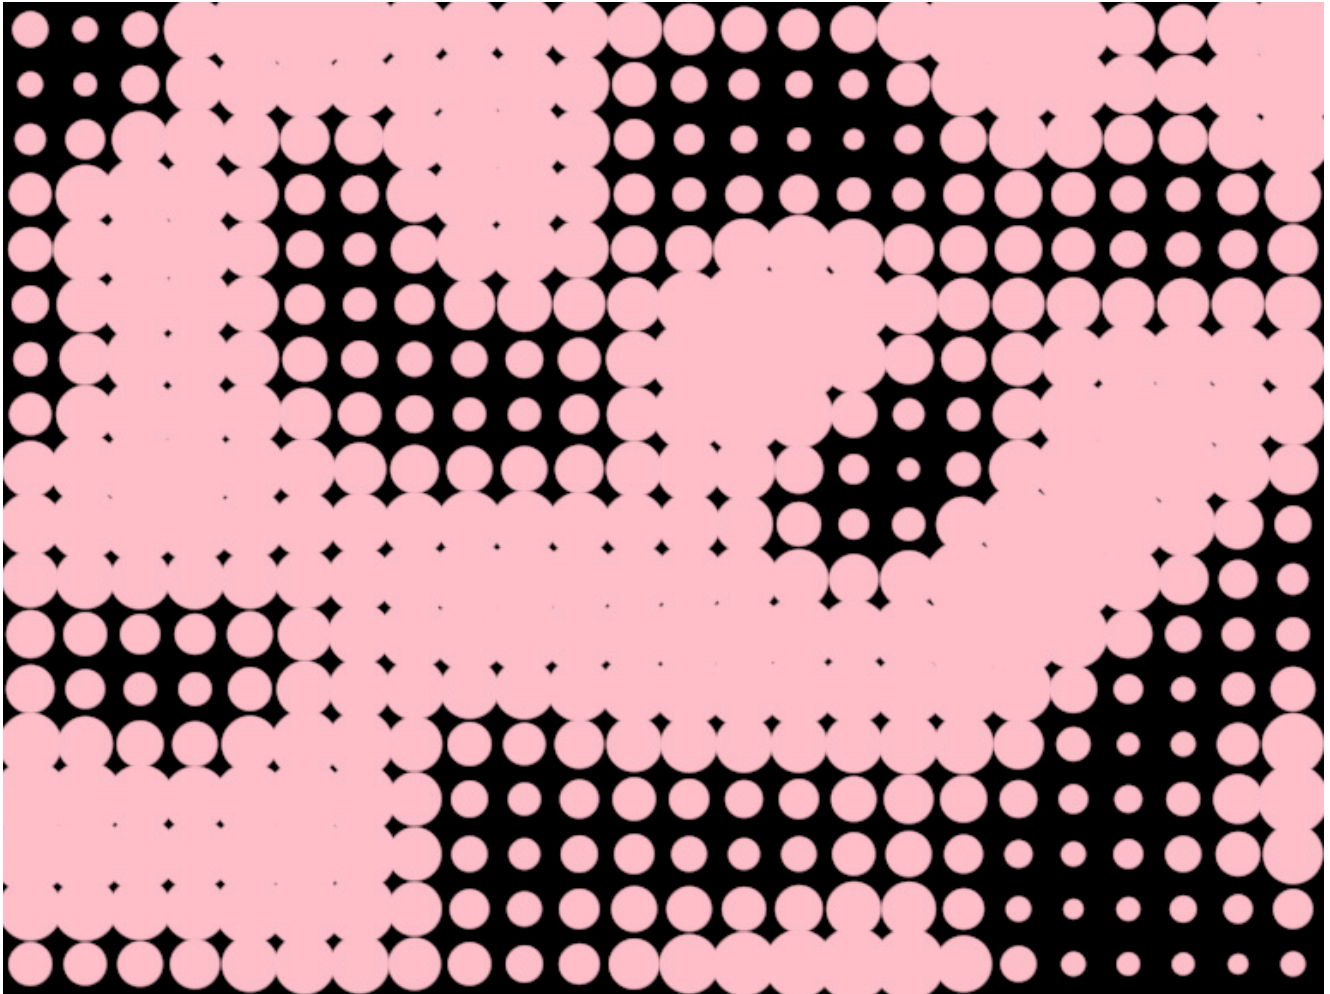

```
fun main() = application {  
    program {  
        extend {  
            drawer.fill = ColorRGBA.PINK  
            drawer.stroke = null  
            val scale = 0.004  
            for (y in 16 until height step 32) {  
                for (x in 16 until width step 32) {  
                    val radius =  
                        simplex(123, x * scale, y * scale) * 16.0 + 16.0  
                    drawer.circle(x * 1.0, y * 1.0, radius)  
                }  
            }  
        }  
    }  
}
```

[Link to the full example](#)

Fractal/FBM noise

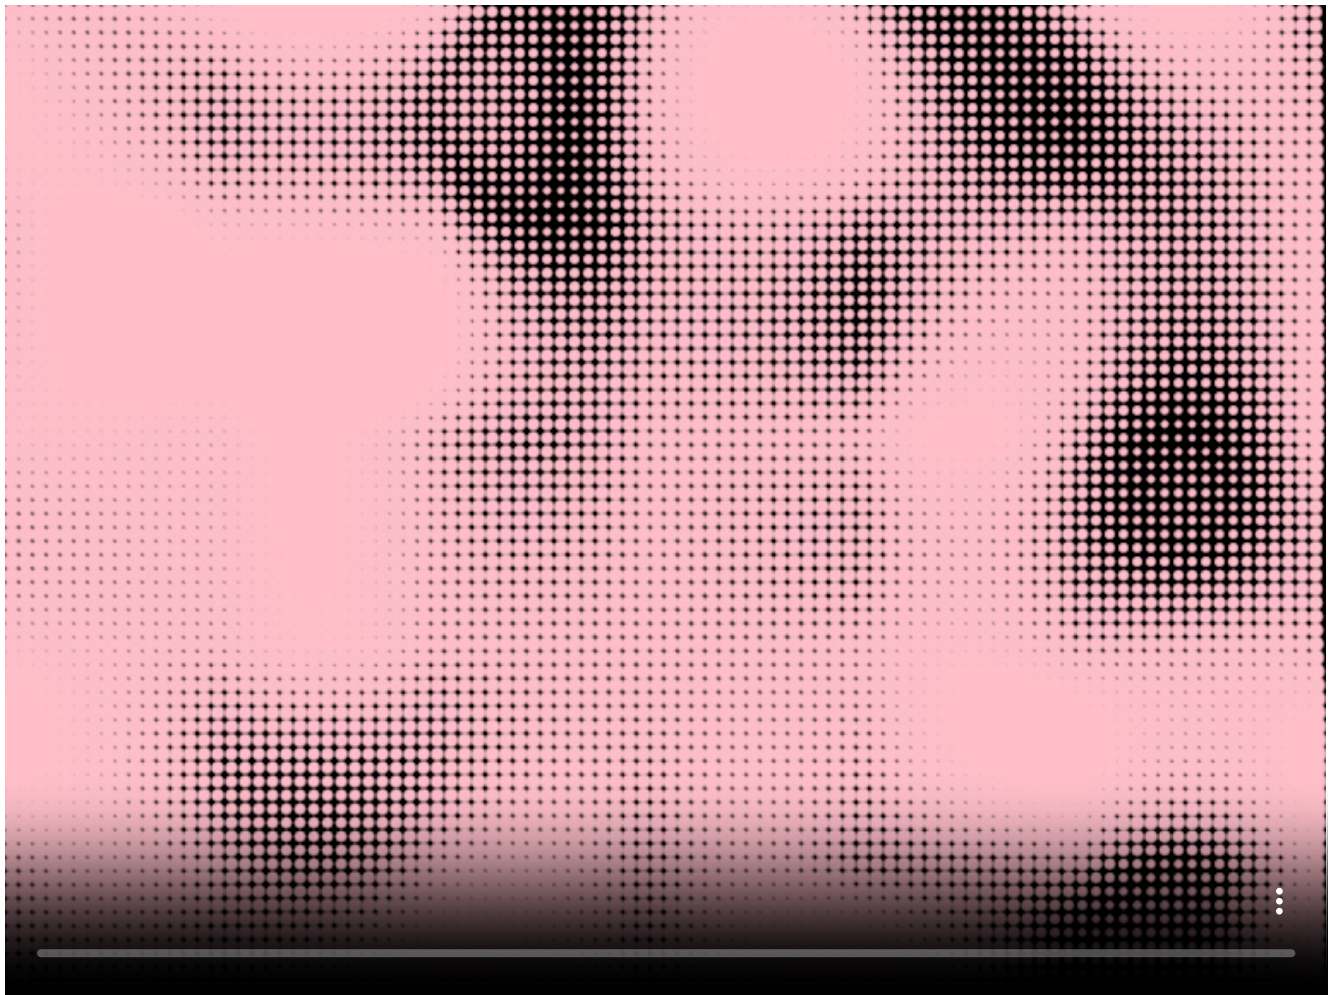


```
fun main() = application {
  program {
    extend {
      drawer.fill = ColorRGBa.PINK
      drawer.stroke = null
      val s = 0.0080
      val t = seconds
      for (y in 4 until height step 8) {
        for (x in 4 until width step 8) {
          val radius = when {
            t < 3.0 -> fbm(135, x * s, y * s, t, ::perlinLinear).absoluteValue * 16.0
            t < 6.0 -> billow(471, x * s, y * s, t, ::perlinLinear) * 2.0
            else -> rigid(193, x * s, y * s, t, ::perlinLinear) * 16.0
          }
          drawer.circle(x * 1.0, y * 1.0, radius)
        }
      }
    }
  }
}
```

[Link to the full example](#)

Noise gradients

Noise functions have evaluable gradients, a direction to where the value of the function increases the fastest. The `gradient1D`, `gradient2D`, `gradient3D` and `gradient4D` functions can be used to estimate gradients for noise functions.

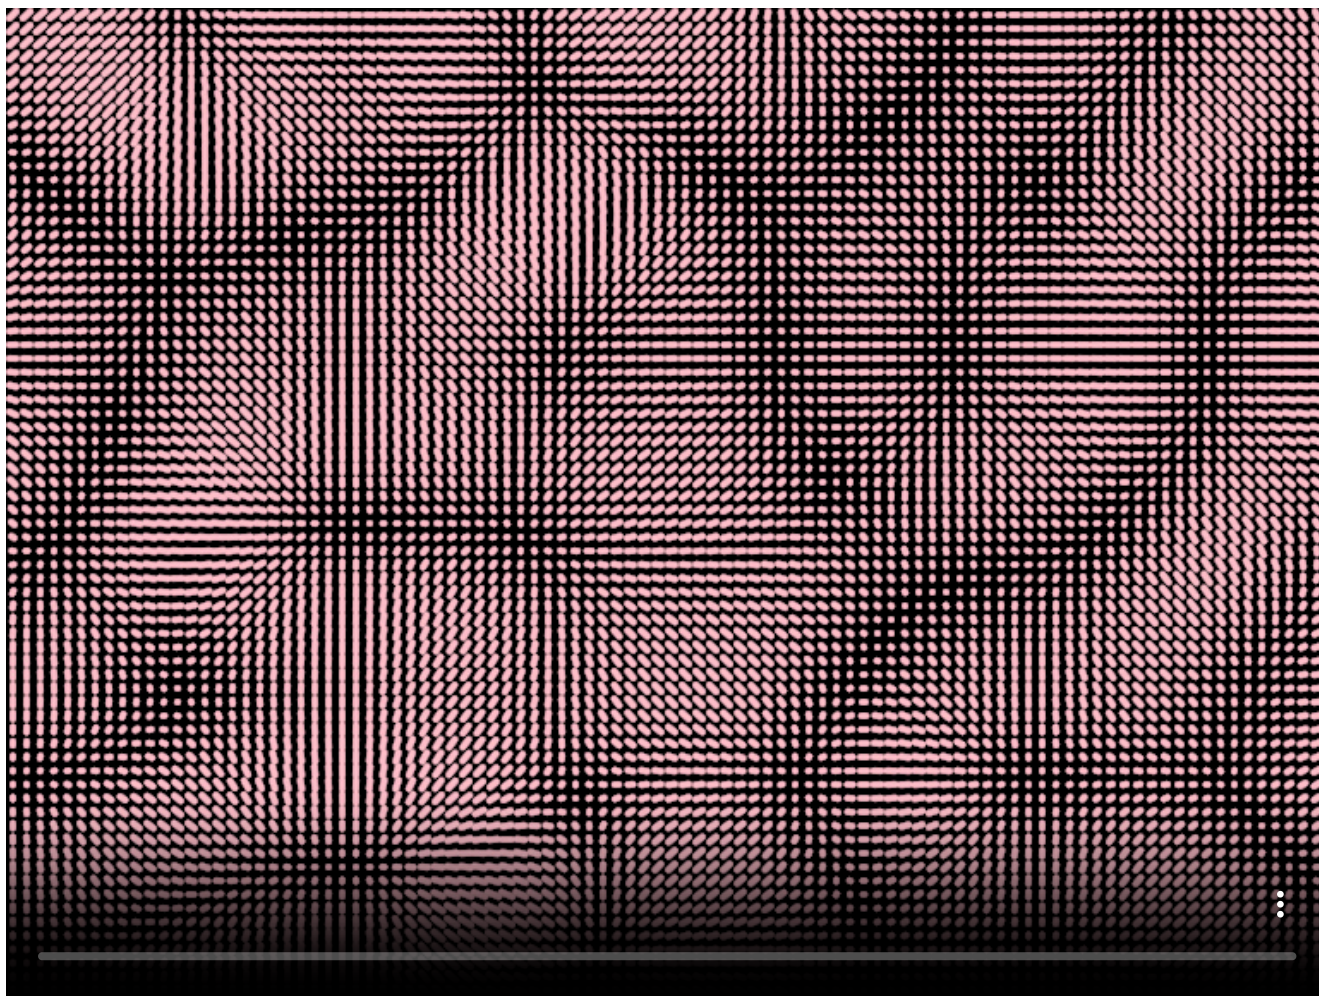


```
fun main() = application {
    program {
        extend {
            drawer.fill = null
            drawer.stroke = ColorRGBA.PINK
            drawer.lineCap = LineCap.ROUND
            drawer.strokeWeight = 3.0
            val t = seconds
            for (y in 4 until height step 8) {
                for (x in 4 until width step 8) {
                    val g = gradient3D(
                        ::perlinQuintic, 100,
                        x * 0.005, y * 0.005, t, 0.0005
                    ).xy
                    drawer.lineSegment(
                        Vector2(x * 1.0, y * 1.0) - g * 2.0,
                        Vector2(x * 1.0, y * 1.0) + g * 2.0
                    )
                }
            }
        }
    }
}
```



```
}  
}
```

[Link to the full example](#)

Gradients can also be calculated for the fbm, rigid and billow versions of the noise functions. However, we first have to create a function that can be used by the gradient estimator. For this `.fbm()`, `.billow()`, and `.rigid()` can be used (which works through [partial application](#)).

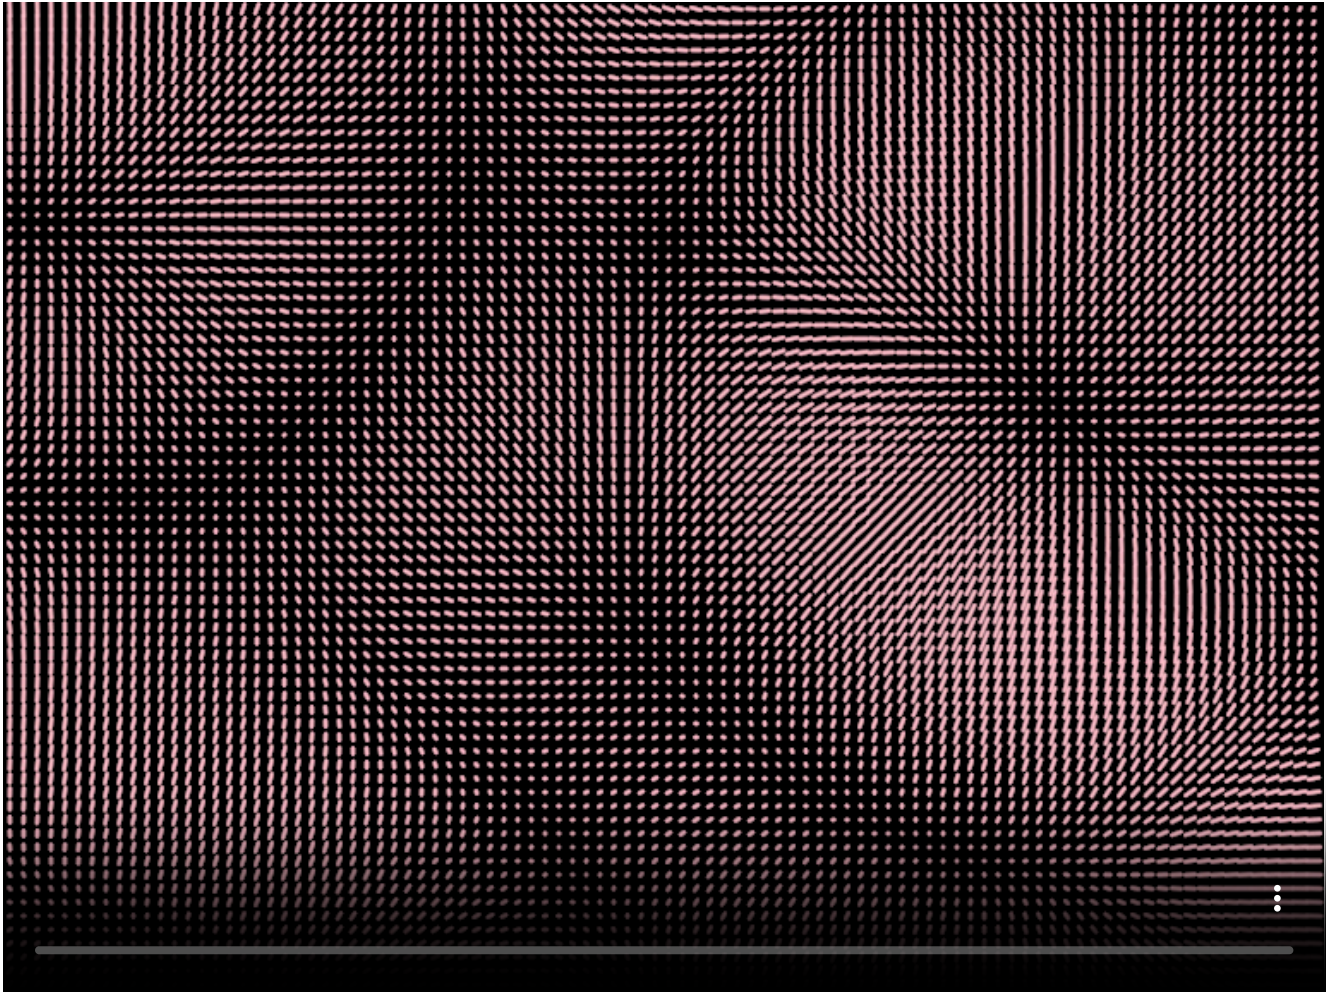

```
fun main() = application {  
    program {  
        val noise = simplex3D.fbm(octaves = 3)  
        extend {  
            drawer.fill = null  
            drawer.stroke = ColorRGBA.PINK  
            drawer.lineCap = LineCap.ROUND  
            drawer.strokeWeight = 1.5  
            val t = seconds  
            for (y in 4 until height step 8) {  
                for (x in 4 until width step 8) {  
                    val g = gradient3D(  
                        noise, 100, x * 0.002, y * 0.002, t, 0.002  
                    ).xy  
                    drawer.lineSegment(  
                        Vector2(x * 1.0, y * 1.0) - g * 1.0,  
                        Vector2(x * 1.0, y * 1.0) + g * 1.0  
                    )  
                }  
            }  
        }  
    }  
}
```



```
    }
  }
}
}
```

[Link to the full example](#)


Noise filters

The library contains a number of Filters with which noise image can be generated efficiently on the GPU.

Hash noise

A white-noise-like noise generator.

Parameter	Default value	Description
seed	0.0	Noise seed
gain	Vector4(1.0, 1.0, 1.0, 0.0)	Noise gain per channel
bias	Vector4(0.0, 0.0, 0.0, 1.0)	Value to add to the generated noise
monochrome	true	Outputs monochrome noise if true
premultipliedAlpha	true	Outputs premultiplied alpha if true

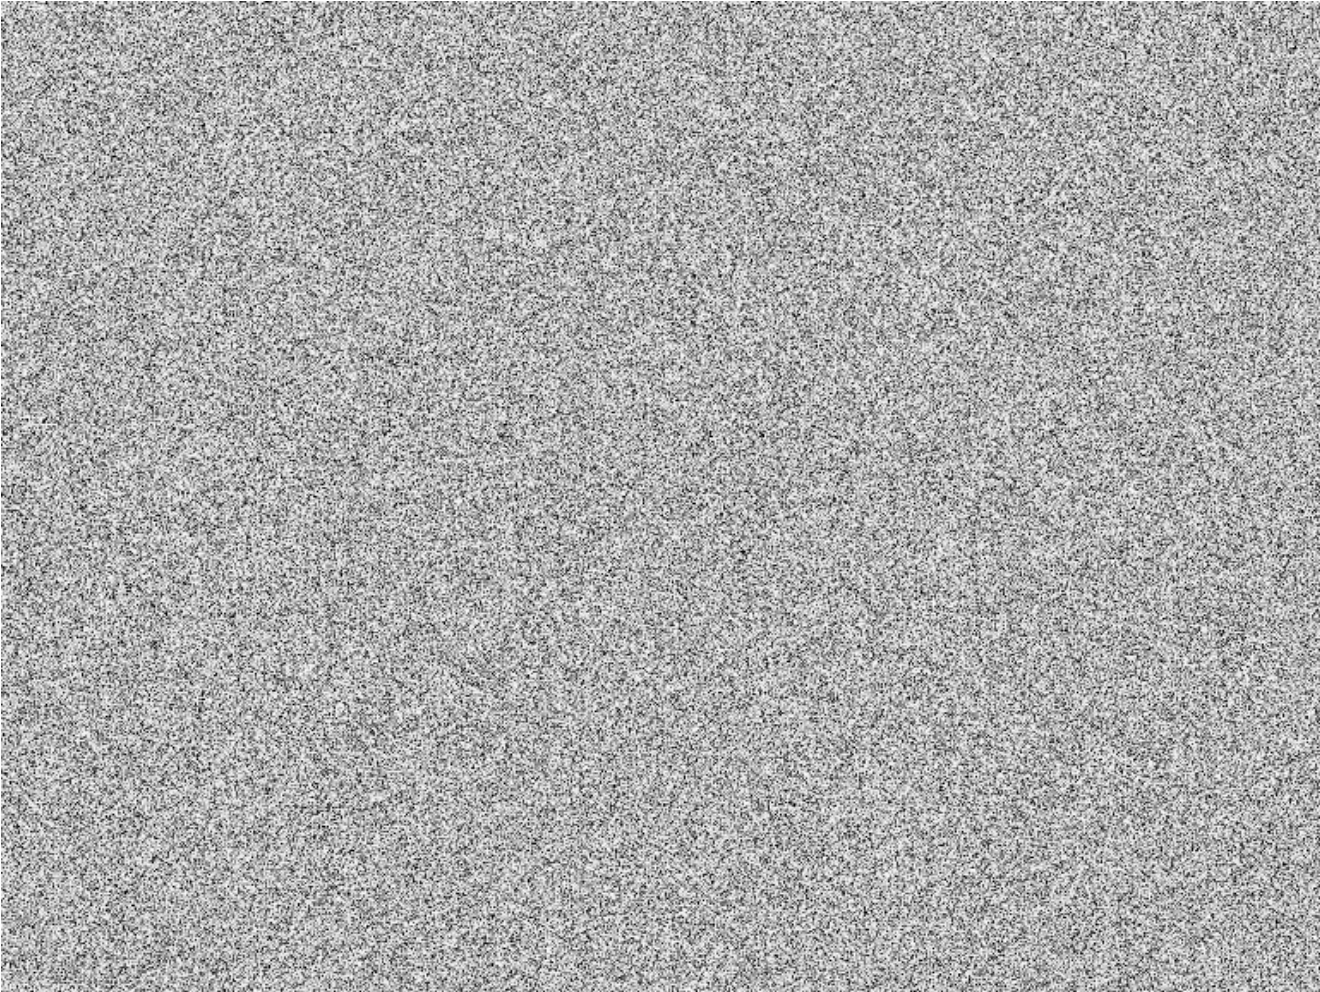

```

fun main() = application {
    program {
        val cb = colorBuffer(width, height)
        val hn = HashNoise()
        extend {
            hn.seed = seconds
            hn.apply(emptyArray(), cb)
            drawer.image(cb)
        }
    }
}


```

[Link to the full example](#)

3D Simplex noise filter

The `SimplexNoise3D` filter is based on Ken Perlin's improvement over Perlin noise, but with fewer directional artifacts and, in higher dimensions, a lower computational overhead.

Parameter	Default value	Description
seed	<code>Vector3(0.0, 0.0, 0.0)</code>	Noise seed / offset
scale	<code>Vector3(1.0, 1.0, 1.0)</code>	The noise scale at the first octave
octaves	4	The number of octaves
gain	<code>Vector4(0.5, 0.5, 0.5, 0.5)</code>	Noise gain per channel per octave
decay	<code>Vector4(0.5, 0.5, 0.5, 0.5)</code>	Noise decay per channel per octave
bias	<code>Vector4(0.5, 0.5, 0.5, 0.5)</code>	Value to add to the generated noise
lacunarity	<code>Vector4(2.0, 2.0, 2.0, 2.0)</code>	Multiplication of noise scale per octave
premultipliedAlpha	true	Outputs premultiplied alpha if true

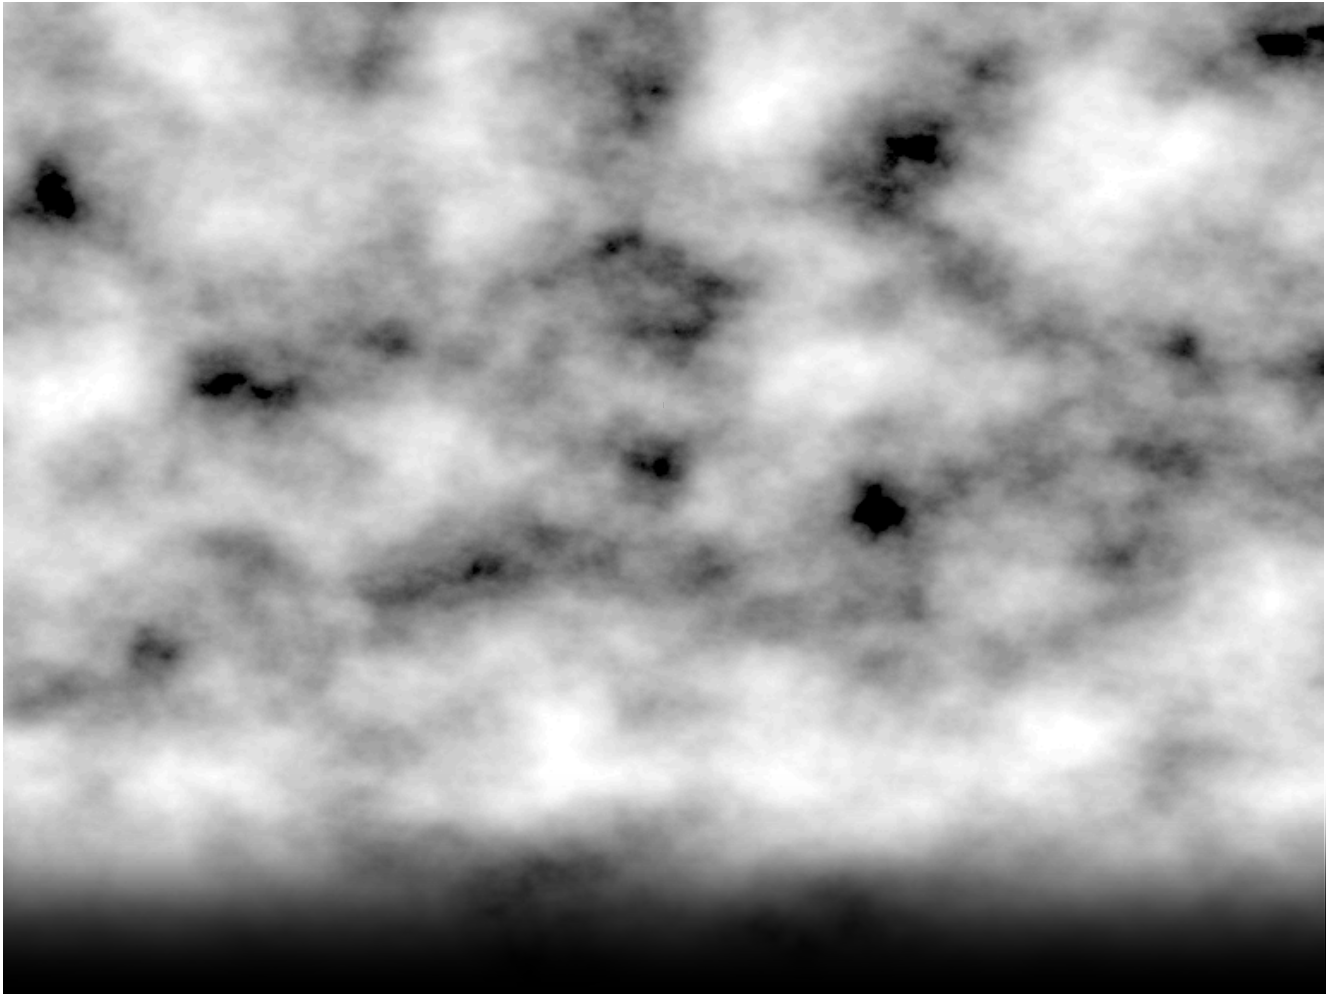

```
fun main() = application {
    program {
        val cb = colorBuffer(width, height)
        val sn = SimplexNoise3D()
        extend {
            sn.seed = Vector3(0.0, 0.0, seconds * 0.1)
            sn.scale = Vector3.ONE * 2.0
            sn.octaves = 8
            sn.premultipliedAlpha = false
            sn.apply(emptyArray(), cb)
            drawer.image(cb)
        }
    }
}
```


[Link to the full example](#)

Cell noise

A cell, Worley or Voronoi noise generator

Parameter	Default value	Description
seed	Vector2(0.0, 0.0)	Noise seed / offset
scale	Vector2(1.0, 1.0)	The noise scale at the first octave
octaves	4	The number of octaves

Parameter	Default value	Description
gain	Vector4(1.0, 1.0, 1.0, 0.0)	Noise gain per channel per octave
decay	Vector4(0.5, 0.5, 0.5, 0.5)	Noise decay per channel per octave
bias	Vector4(0.0, 0.0, 0.0, 1.0)	Value to add to the generated noise
lacunarity	Vector4(2.0, 2.0, 2.0, 2.0)	Multiplication of noise scale per octave
premultipliedAlpha	true	Outputs premultiplied alpha if true

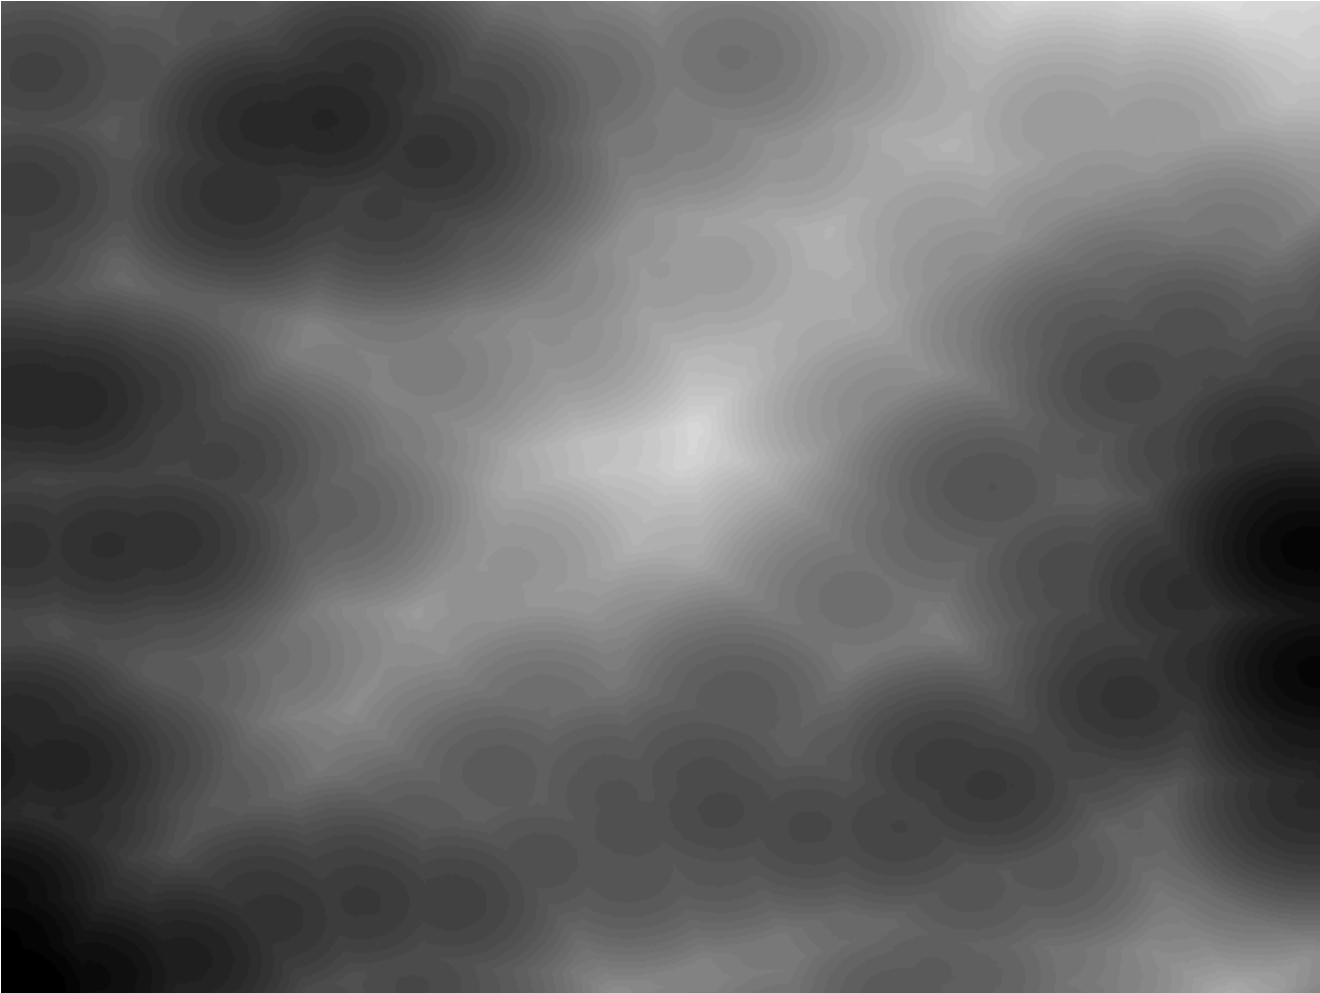


```
fun main() = application {
    program {
        val cb = colorBuffer(width, height)
        val cn = CellNoise()
        extend {
            cn.octaves = 4
            cn.apply(emptyArray(), cb)
            drawer.image(cb)
        }
    }
}
```

[Link to the full example](#)

Speckle noise

A speckle noise generator.

Parameter	Default value	Description
color	ColorRGBA.WHITE	Speckle color
density	1.0	Speckle density
seed	0.0	Noise seed
noise	0.0	Speckle noisiness
premultipliedAlpha	true	Outputs premultiplied alpha if true

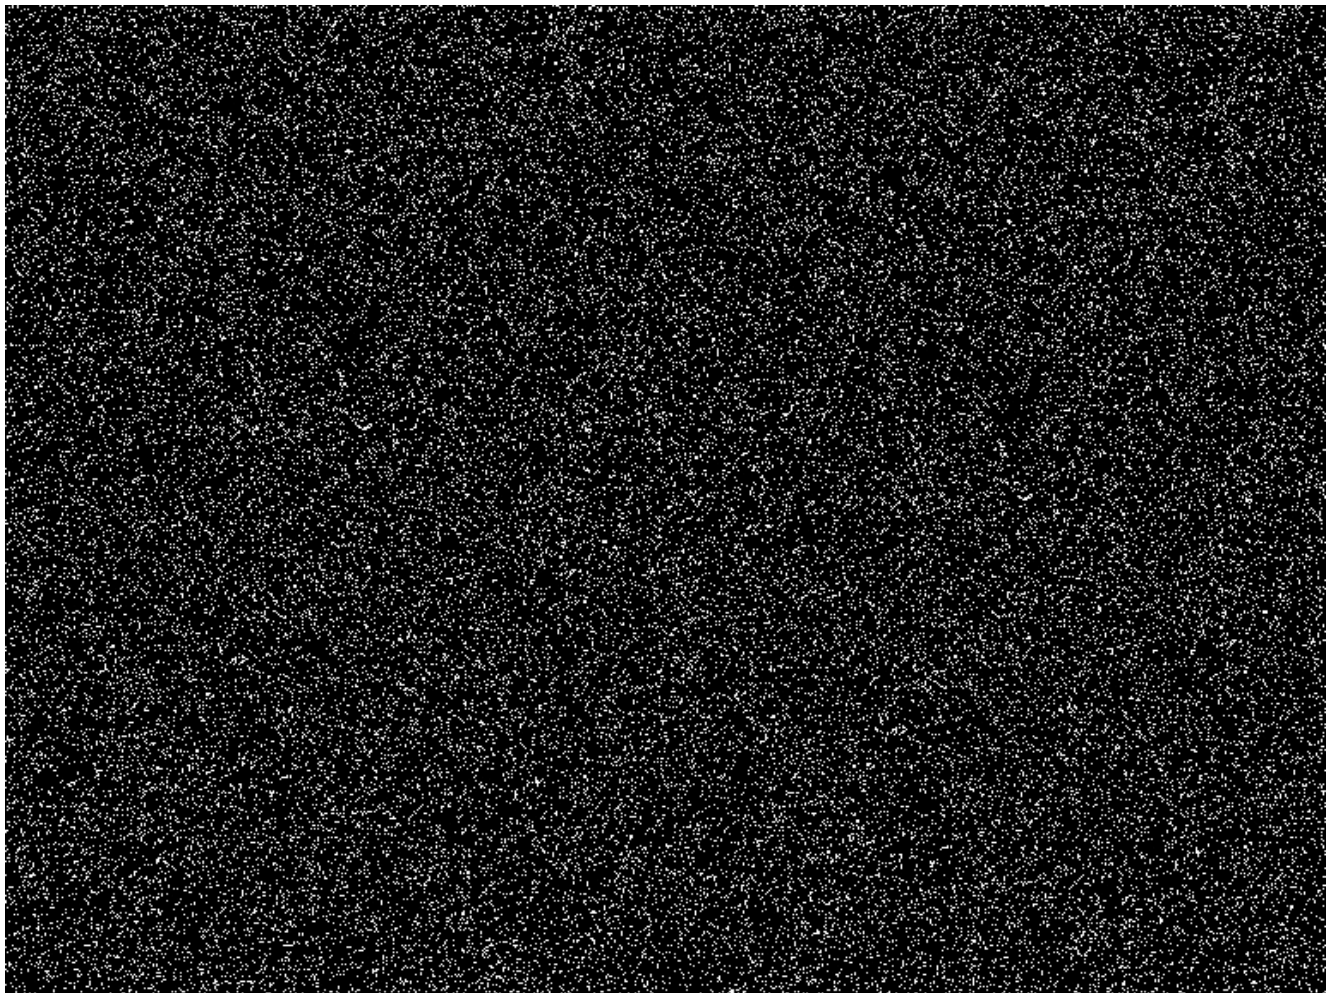

```
fun main() = application {  
  program {  
    val cb = colorBuffer(width, height)  
    val sn = SpeckleNoise()  
    extend {  
      sn.seed = seconds  
      sn.apply(emptyArray(), cb)  
      drawer.image(cb)  
    }  
  }  
}
```

[Link to the full example](#)

Value noise

The `ValueNoise` filter generates a simple fractal noise. Value noise is a computationally cheap form of creating ‘smooth noise’ by interpolating random values on a lattice.

Parameter	Default value	Description
seed	<code>Vector2(0.0, 0.0)</code>	Noise seed / offset
scale	<code>Vector2(1.0, 1.0)</code>	The noise scale at the first octave
octaves	4	The number of octaves
gain	<code>Vector4(1.0, 1.0, 1.0, 0.0)</code>	Noise gain per channel per octave
decay	<code>Vector4(0.5, 0.5, 0.5, 0.5)</code>	Noise decay per channel per octave
bias	<code>Vector4(0.0, 0.0, 0.0, 1.0)</code>	Value to add to the generated noise
lacunarity	<code>Vector4(2.0, 2.0, 2.0, 2.0)</code>	Multiplication of noise scale per octave
premultipliedAlpha	true	Outputs premultiplied alpha if true



```
fun main() = application {
  program {
    val cb = colorBuffer(width, height)
    val vn = ValueNoise()
    extend {
      vn.scale = Vector2.ONE * 4.0
      vn.gain = Vector4.ONE * 0.5
    }
  }
}
```

```
        vn.octaves = 8
        vn.apply(emptyArray(), cb)
        drawer.image(cb)
    }
}
```

[Link to the full example](#)

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

orx-kinect

Provides Kinect support (only Kinect version 1 at the moment and only depth camera). Source and extra documentation can be found in the [orx sourcetree](#)

Note: the support is split into several modules:

- orx-kinect-common
- orx-kinect-v1
- [orx-kinect-v1-demo](#)
- orx-kinect-v1-natives-linux-x64
- orx-kinect-v1-natives-macos
- orx-kinect-v1-natives-windows

Prerequisites

Assuming you are working on an [openrndr-template](#) based project, all you have to do is to add `implementation(orx.kinect.v1)` to the dependencies block in `build.gradle.kts` and reload Gradle, as described in [ORX](#).

Using the Kinect depth camera

```
fun main() = application {
    configure {
        // default resolution of the Kinect v1 depth camera
        width = 640
        height = 480
    }
    program {
        val kinect = Kinect1()
        val device = kinect.openDevice()
        device.depthCamera.flipH = true // to make a mirror
        device.depthCamera.enabled = true
        extend(kinect)
        extend {
            drawer.image(device.depthCamera.currentFrame)
        }
    }
}
```

Note: depth values are mapped into 0-1 range and stored on a `ColorBuffer` containing only RED color channel.

Mirroring depth camera image

```
kinect.depthCamera.mirror = true
```

Using multiple Kinects

The `kinects.startDevice()` can be supplied with device number (0 by default):

```

fun main() = application {
    configure {
        width = 640 * 2
        height = 480
    }
    program {
        val kinect = Kinect1()
        val depthCamera1 = kinect.openDevice(0).depthCamera
        val depthCamera2 = kinect.openDevice(1).depthCamera
        depthCamera1.enabled = true
        depthCamera1.flipH = true
        depthCamera2.enabled = true
        depthCamera2.flipH = true
        extend(kinect)
        extend {
            drawer.image(depthCamera1.currentFrame)
            drawer.image(depthCamera2.currentFrame, depthCamera1.resolution.x.toDouble(), 0.0)
        }
    }
}

```

Reacting only to the latest frame from the Kinect camera

Kinect is producing 30 frames per second, while screen refresh rates are usually higher. Usually, if the data from the depth camera is processed, it is desired to react to the latest Kinect frame only once:

```

kinect.depthCamera.getLatestFrame()?.let { frame ->
    myFilter.apply(frame, outputColorBuffer)
}

```

Using color map filters

Raw kinect depth data might be visualized in several ways, the following filters are included:

- DepthToGrayscaleMapper
- DepthToColorsZucconi6Mapper - [Colors of natural light dispersion](#) by Alan Zucconi
- DepthToColorsTurboMapper - [Turbo, An Improved Rainbow Colormap for Visualization](#) by Google

[Find a runnable example here.](#)

Executing native freenect commands

This kinect support is built on top of the [freenect](#) library. Even though the access to freenect is abstracted, it is still possible to execute [low level freenect commands](#) in the native API.

[edit on GitHub](#)

Midi controllers with orx-midi

The [orx-midi](#) library provides a simple interface to interact with MIDI controllers.

Prerequisites

Assuming you are working on an [openrndr-template](#) based project, all you have to do is to add `implementation(orx.midi)` to the dependencies block in `build.gradle.kts` and reload Gradle, as described in [ORX](#).

Listing MIDI controllers

To connect to a MIDI controller you will need its device name which can be discovered by calling the `listMidiDevices()` function.

```
fun main() = application {
    program {
        listMidiDevices().forEach {
            println("name: '${it.name}', vendor: '${it.vendor}', receiver:${it.receive}, transmitter:${it.transmit}")
        }
    }
}
```

Connecting to a MIDI controller

Once you have the controller name you can use `openMidiDevice` to connect to the MIDI controller. For example to use a Behringer BCR2000 controller on a Ubuntu system we can use the following.

```
fun main() = application {
    program {
        val controller = openMidiDevice("BCR2000")
    }
}
```

Tip: request BCR2000 instead of BCR2000 [hw:2,0,0] so your program continues to work after plugging your controller into a different USB port. Caveat: do specify the full name if connecting multiple controllers of the same brand and model.

Listening to the controller

Once connected to a controller we can start listening to the MIDI events it sends out. The `orx-midi` library supports six types of MIDI events.

```
fun main() = application {
    program {
        val controller = openMidiDevice("BCR2000 [hw:2,0,0]")

        controller.controlChanged.listen {
            println("[control change] channel: ${it.channel}, control: ${it.control}, value: ${it.value}")
        }
    }
}
```

```

controller.noteOn.listen {
    println("[note on] channel: ${it.channel}, key: ${it.note}, velocity: ${it.velocity}")
}
controller.noteOff.listen {
    println("[note off] channel: ${it.channel}, key: ${it.note},")
}
controller.channelPressure.listen {
    println("[channel pressure] channel: ${it.channel}, pressure: ${it.pressure}")
}
controller.pitchBend.listen {
    println("[pitch bend] channel: ${it.channel}, pitch: ${it.pitchBend}")
}
controller.programChanged.listen {
    println("[program change] channel: ${it.channel}, program: ${it.program}")
}
}
}

```

Talking to the controller

MIDI controllers can often react to data received from software. A common use case with MIDI controllers with endless rotary encoders is setting up initial values for the encoders when the program launches. Those values are then reflected in LED lights or in a display in the controller.

```

fun main() = application {
    program {
        val controller = openMidiDevice("BCR2000")

        // send a control change
        controller.controlChange(channel = 1, control = 3, value = 42)

        // send a program change
        controller.programChange(channel = 2, program = 5)

        // send a note on event
        controller.noteOn(channel = 3, key = 60, velocity = 100)

        // send a note off event
        controller.noteOn(channel = 3, key = 60, velocity = 0)

        // send a pitch bend event
        controller.pitchBend(channel = 4, 50)

        // send a channel pressure event
        controller.channelPressure(channel = 4, 100)
    }
}

```

MIDI console

For debugging purposes one can visualize all the MIDI events by using the `MidiConsole`.

```

fun main() = application {
    program {
        val controller = openMidiDevice("Launchpad [hw:4,0,0]")

        extend(MidiConsole()) {
            register(controller)
        }
    }
}

```

Variable binding

One can easily bind MIDI controller inputs like knobs and sliders to program variables. In the following example 7 inputs control the radius, position and color of a circle.

Note that `ColorParameter` binds four consecutive inputs (red, green, blue and alpha).

[More about Parameter Annotations.](#)

```

fun main() = application {
    program {
        val controller = openMidiDevice("Launchpad [hw:4,0,0]")

        val settings = object {
            @DoubleParameter("radius", 0.0, 100.0)
            var radius = 0.0

            @DoubleParameter("x", -100.0, 100.0)
            var x = 0.0

            @DoubleParameter("y", -100.0, 100.0)
            var y = 0.0

            @ColorParameter("fill")
            var color = ColorRGBa.WHITE
        }

        bindMidiControl(settings::radius, controller, channel = 0, control = 1)
        bindMidiControl(settings::x, controller, 0, 2)
        bindMidiControl(settings::y, controller, 0, 3)
        bindMidiControl(settings::color, controller, 0, 4)

        extend {
            drawer.fill = settings.color
            drawer.circle(drawer.bounds.center + Vector2(settings.x, settings.y), settings.radius)
        }
    }
}

```

[edit on GitHub](#)

Handling OSC messages with orx-osc

The [orx-osc](#) osc provides a simple interface to interact with OSC hosts and clients.

Prerequisites

Assuming you are working on an [openrndr-template](#) based project, all you have to do is to add `implementation(orx.osc)` to the dependencies block in `build.gradle.kts` and reload Gradle, as described in [ORX](#).

Listening to OSC messages

To listen to OSC messages we need to start an OSC server and use `listen` function to install listeners

```
fun main() = application {
    program {
        val osc = OSC()
        osc.listen("/live/track/2") { addr, it ->
            // -- get the first value
            val firstValue = it[0] as Float
        }
        extend {
        }
    }
}
```

Note that `.listen()` accepts wildcard characters like `*` and `?`. For instance to listen to addresses containing two words we can use `osc.listen("/*/*")`. Find out more about **Pattern Matching** in the [OSC specification](#).

Sending OSC messages

```
fun main() = application {
    program {
        val osc = OSC()

        extend {
            osc.send("/some/address", listOf(1.0f, 2.0f))
        }
    }
}
```

Specifying IP address and ports

The default IP address for OSC is `localhost` and the in and out ports are both set to 57110 by default. One can specify different values like this:

```
val osc = OSC(
    InetAddress.getByName("192.168.0.105"),
```

```
portIn = 10000,  
portOut = 12000  
)
```

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

[ORX](#) / Image post-processing with filters

orx-fx Filters

The [orx-fx](#) library contains many filters that can be readily used. See the chapter [Filters and post-processing](#) for instructions on using them.

A (more-or-less) complete listing of the effects in orx-fx is maintained in the repository's [README.md](#)

Prerequisites

If you are working on an [openrndr-template](#) based project, orx-fx should be ready to use because it is part of the basic orx bundle, as described in [ORX](#).

Effect Index

In this index we demonstrate selected filters, this is in no way a complete overview of what orx-fx offers.

Blur effects

BOXBLUR



```
fun main() = application {  
    program {  
        // -- load a source image  
        val image = loadImage("data/images/cheeta.jpg")  
    }  
}
```

```

// -- create a filter
val blur = BoxBlur()

// -- create a colorBuffer where to store the result
val blurred = colorBuffer(image.width, image.height)

extend {
    // -- configure the filter
    blur.window = (cos(seconds * 2) * 4.0 + 5.0).toInt()


    // -- filter.apply(source, target)
    blur.apply(image, blurred)

    // -- draw the result
    drawer.image(blurred)
}
}
}

```

[Link to the full example](#)

APPROXIMATEGAUSSIANBLUR

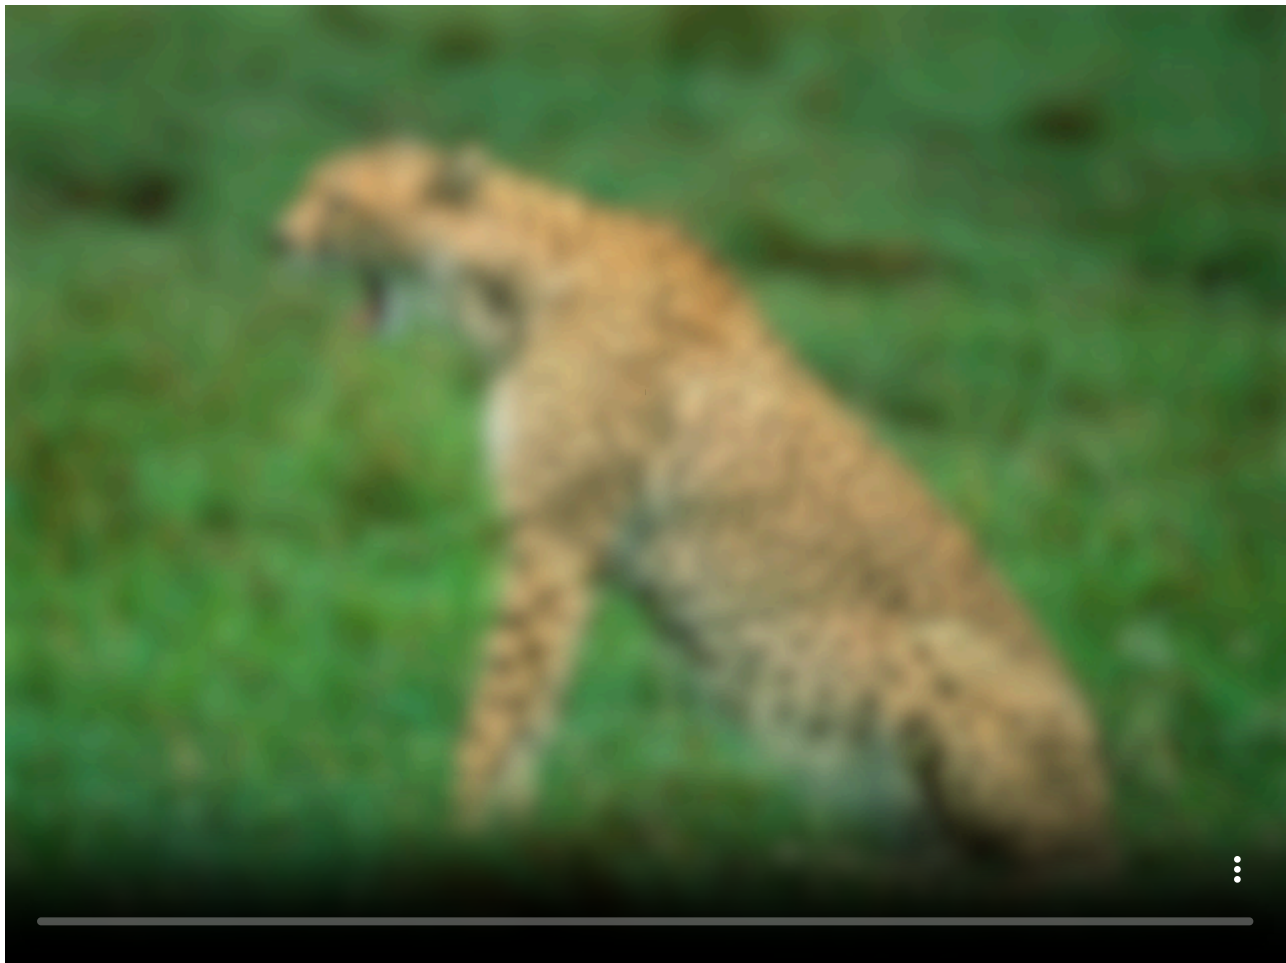

```

fun main() = application {
    program {
        val image = loadImage("data/images/cheeta.jpg")
        val blurred = colorBuffer(image.width, image.height)
        val blur = ApproximateGaussianBlur()
        extend {

```

```

        blur.window = 25
        blur.sigma = cos(seconds * 2) * 10.0 + 10.1
        blur.apply(image, blurred)
        drawer.image(blurred)
    }
}

```

[Link to the full example](#)

GAUSSIANBLOOM




```

fun main() = application {
    program {
        val image = loadImage("data/images/cheeta.jpg")
        val blurred = colorBuffer(image.width, image.height)
        val bloom = GaussianBloom()
        extend {
            bloom.window = 5
            bloom.sigma = 3.0
            bloom.gain = cos(seconds * 2) * 2.0 + 2.0
            bloom.apply(image, blurred)
            drawer.image(blurred)
        }
    }
}

```

[Link to the full example](#)

HASHBLUR

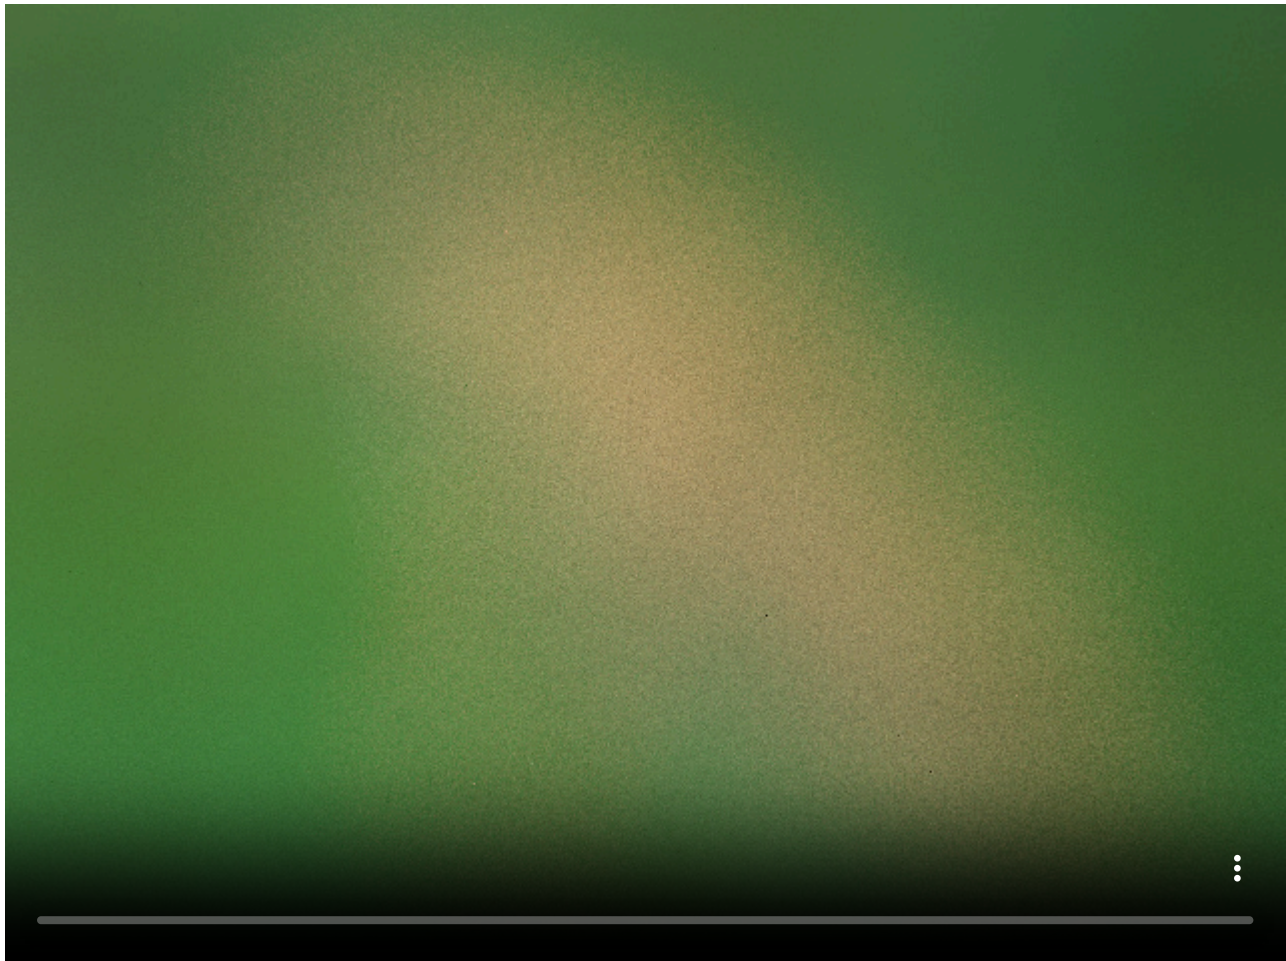

```
fun main() = application {
    program {
        val image = loadImage("data/images/cheeta.jpg")
        val blurred = colorBuffer(image.width, image.height)
        val blur = HashBlur()
        extend {
            blur.samples = 50
            blur.radius = cos(seconds * 2) * 25.0 + 25.0
            blur.apply(image, blurred)
            drawer.image(blurred)
        }
    }
}
```

[Link to the full example](#)

FRAMEBLUR




```
fun main() = application {
    program {
        val image = loadImage("data/images/cheeta.jpg")
        val blurred = colorBuffer(image.width, image.height)
        val blur = FrameBlur()
        val rt = renderTarget(width, height) {
            colorBuffer()
        }

        extend {
            drawer.isolatedWithTarget(rt) {
                drawer.clear(ColorRGBA.BLACK)
                drawer.image(image, cos(seconds * 2) * 40.0, sin(seconds * 2) * 40.0)
            }

            blur.blend = 0.01
            blur.apply(rt.colorBuffer(0), blurred)
            drawer.image(blurred)
        }
    }
}
```

[Link to the full example](#)

ZOOMBLUR

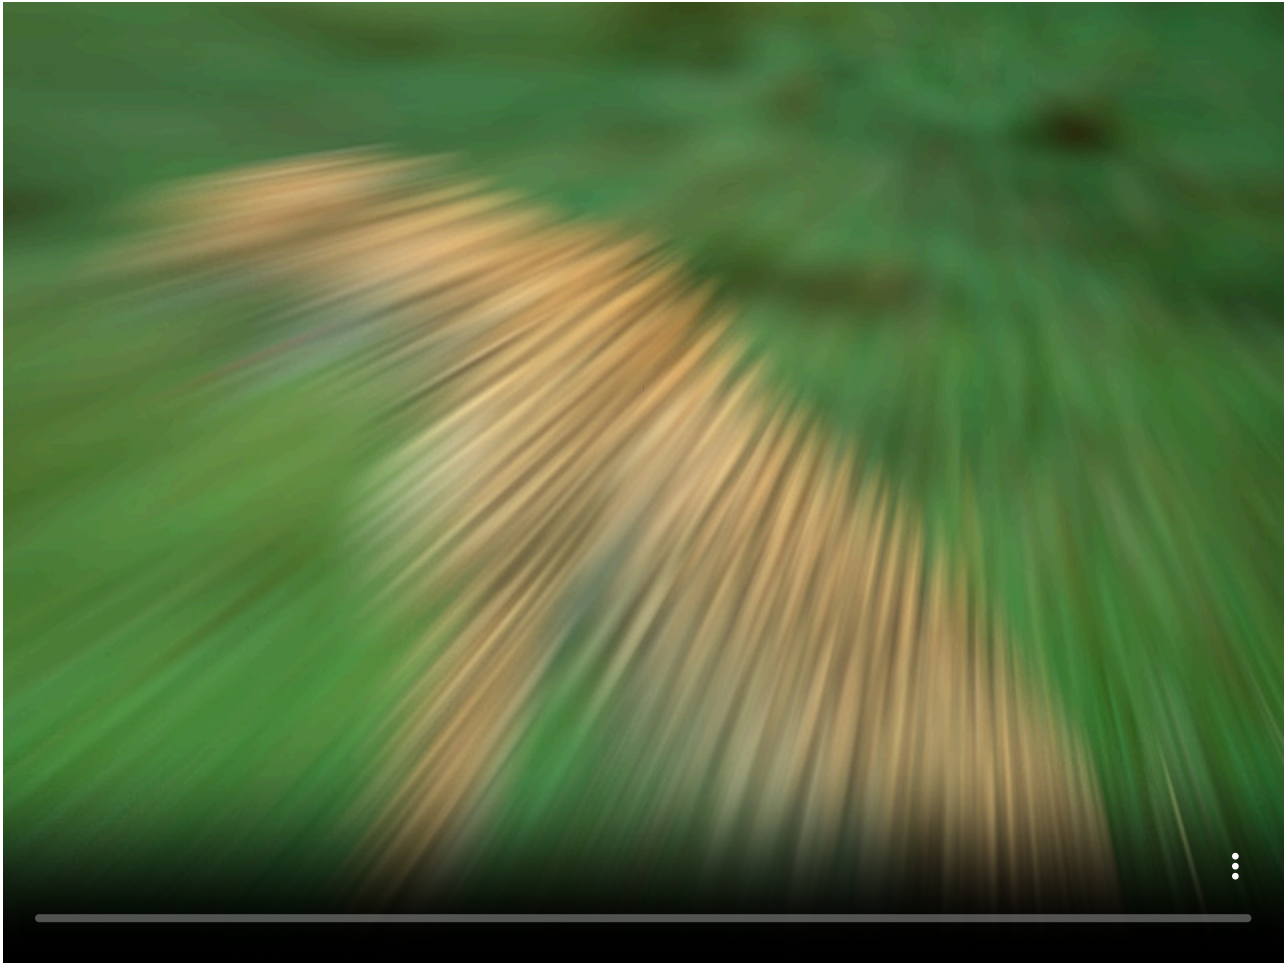


```
fun main() = application {
    program {
        val image = loadImage("data/images/cheeta.jpg")
        val blurred = colorBuffer(image.width, image.height)
        val blur = ZoomBlur()

        extend {
            blur.center = Vector2(
                cos(seconds) * 0.5 + 0.5,
                sin(seconds * 2) * 0.5 + 0.5
            )
            blur.strength = cos(seconds * 2) * 0.5 + 0.5
            blur.apply(image, blurred)
            drawer.image(blurred)
        }
    }
}
```

[Link to the full example](#)

Color filters

CHROMATICABERRATION

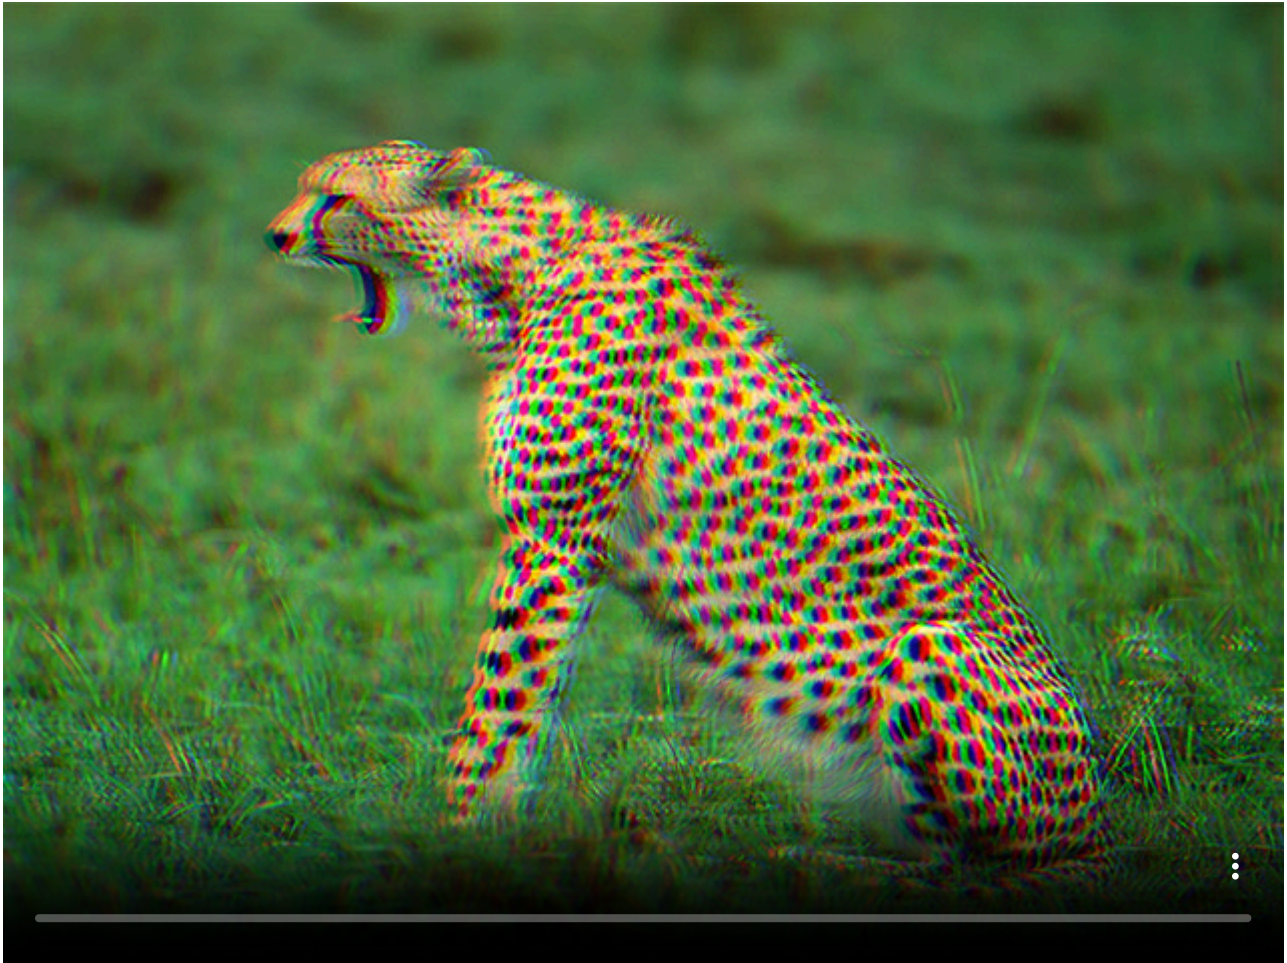

```
fun main() = application {  
    program {  
        val image = loadImage("data/images/cheeta.jpg")  
        val filter = ChromaticAberration()  
        val filtered = colorBuffer(image.width, image.height)  
  
        extend {  
            filter.aberrationFactor = cos(seconds * 2) * 10.0  
            filter.apply(image, filtered)  
            drawer.image(filtered)  
        }  
    }  
}
```

[Link to the full example](#)


COLORCORRECTION



```
fun main() = application {  
    program {  
        val image = loadImage("data/images/cheeta.jpg")  
        val filter = ColorCorrection()  
        val filtered = colorBuffer(image.width, image.height)  
  
        extend {  
            filter.hueShift = cos(seconds * 1) * 180.0  
            filter.saturation = cos(seconds * 2)  
            filter.brightness = sin(seconds * 3) * 0.1  
            filter.apply(image, filtered)  
            drawer.image(filtered)  
        }  
    }  
}
```

[Link to the full example](#)


SEPIA

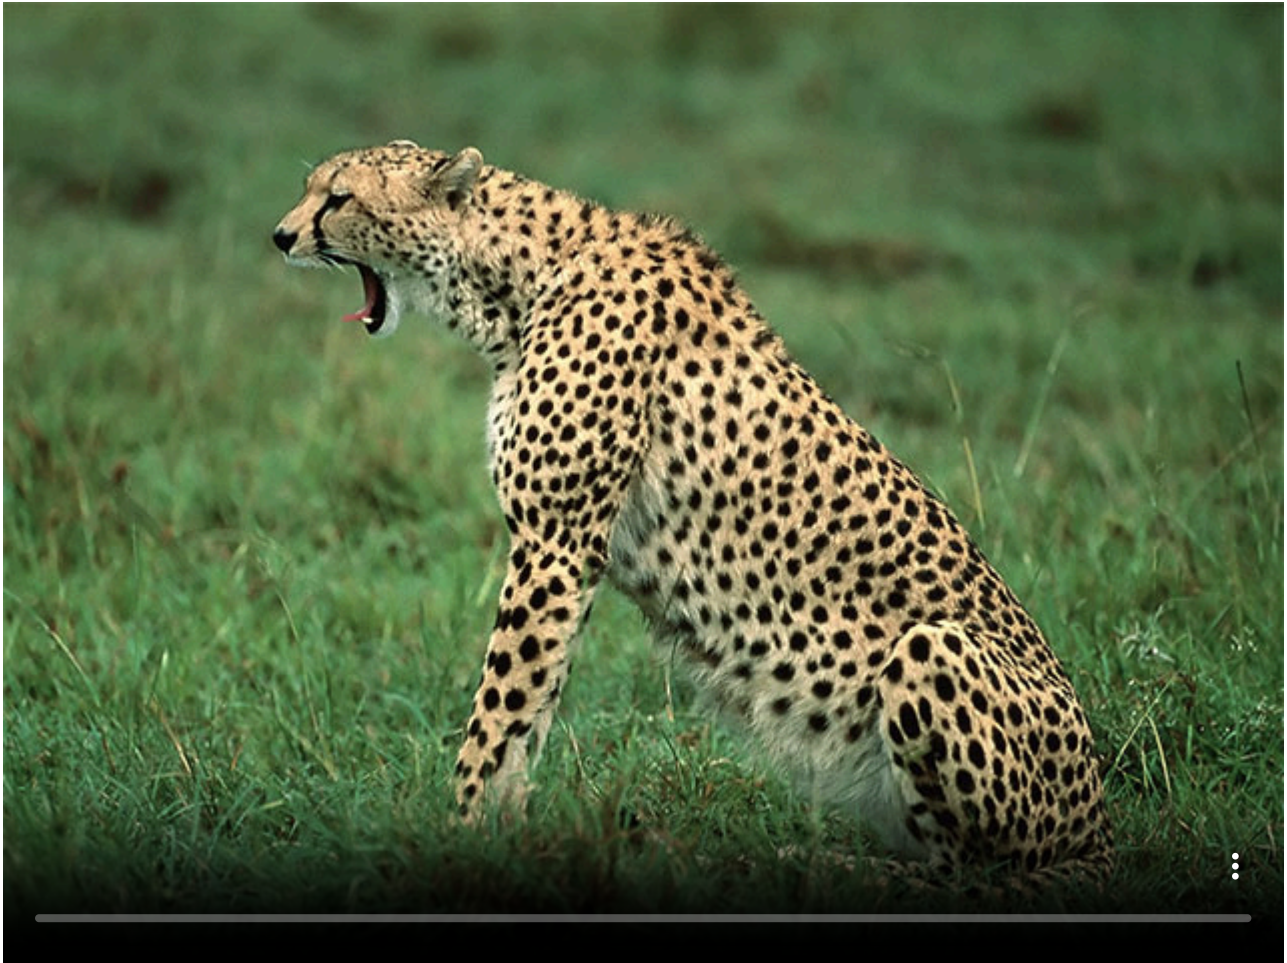

```
fun main() = application {  
    program {  
        val image = loadImage("data/images/cheeta.jpg")  
        val filter = Sepia()  
        val filtered = colorBuffer(image.width, image.height)  
  
        extend {  
            filter.amount = cos(seconds * 2) * 0.5 + 0.5  
            filter.apply(image, filtered)  
            drawer.image(filtered)  
        }  
    }  
}
```

[Link to the full example](#)

LUMAOPACITY

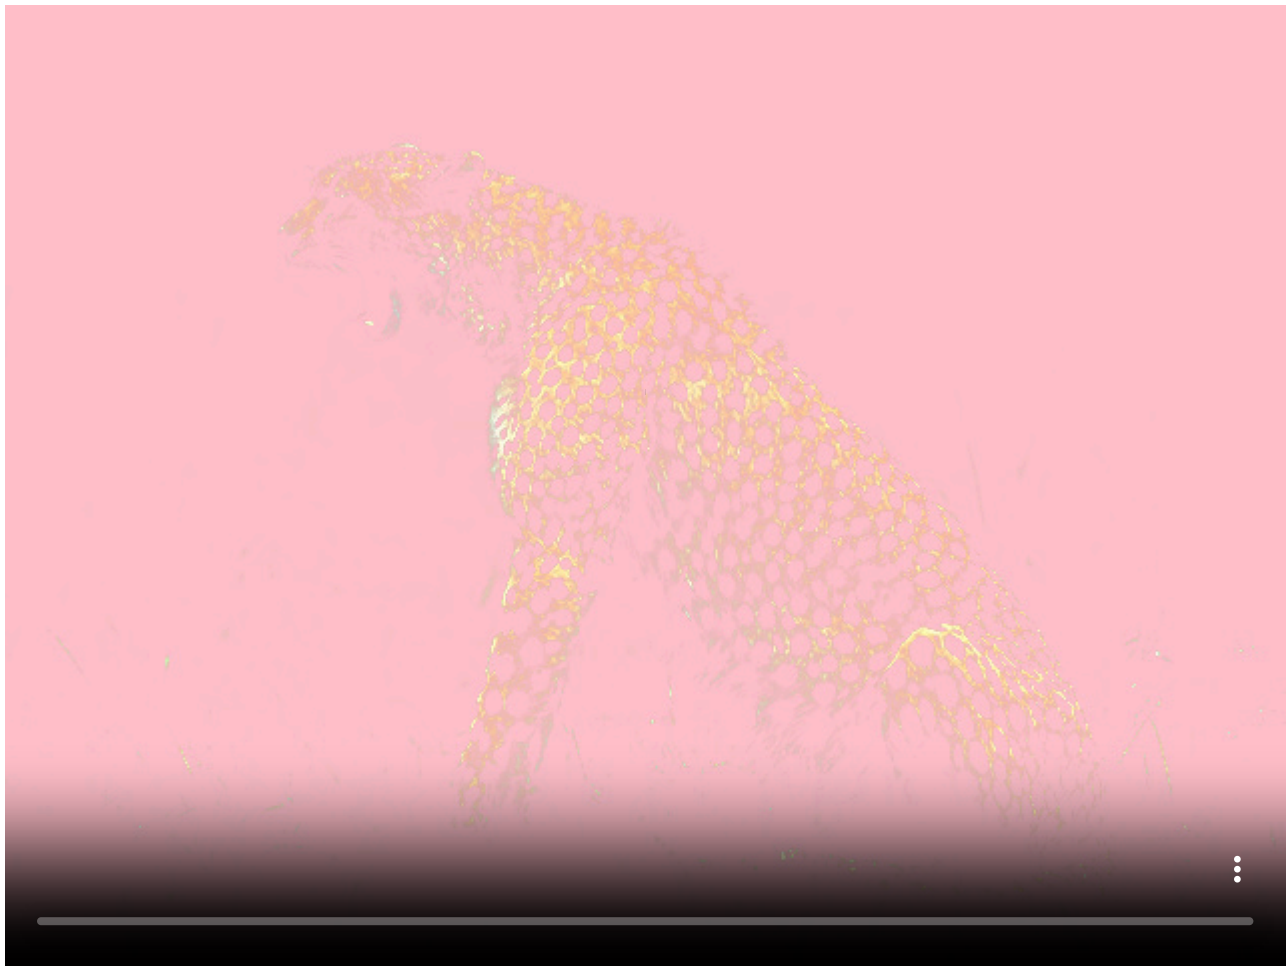

```
fun main() = application {
    program {
        val image = loadImage("data/images/cheeta.jpg")
        val filter = LumaOpacity()
        val filtered = colorBuffer(image.width, image.height)

        extend {
            // -- a pink background to demonstrate the introduced transparencies
            drawer.clear(ColorRGBa.PINK)
            filter.backgroundOpacity = 0.0
            filter.foregroundOpacity = 1.0
            filter.backgroundLuma = cos(seconds) * 0.25 + 0.25
            filter.foregroundLuma = 1.0 - (cos(seconds) * 0.25 + 0.25)

            filter.apply(image, filtered)
            drawer.image(filtered)
        }
    }
}
```

[Link to the full example](#)

Edge-detection filters


LUMASOBEL



```
fun main() = application {  
  program {  
    val image = loadImage("data/images/cheeta.jpg")  
    val filter = LumaSobel()  
    val filtered = colorBuffer(image.width, image.height)  
  
    extend {  
      filter.backgroundColor = ColorRGBa.PINK.toHSV()  
        .shiftHue(cos(seconds) * 180).toRGBa()  
        .shade(0.25)  
      filter.edgeColor = ColorRGBa.PINK  
      filter.apply(image, filtered)  
      drawer.image(filtered)  
    }  
  }  
}
```

[Link to the full example](#)


CONTOUR

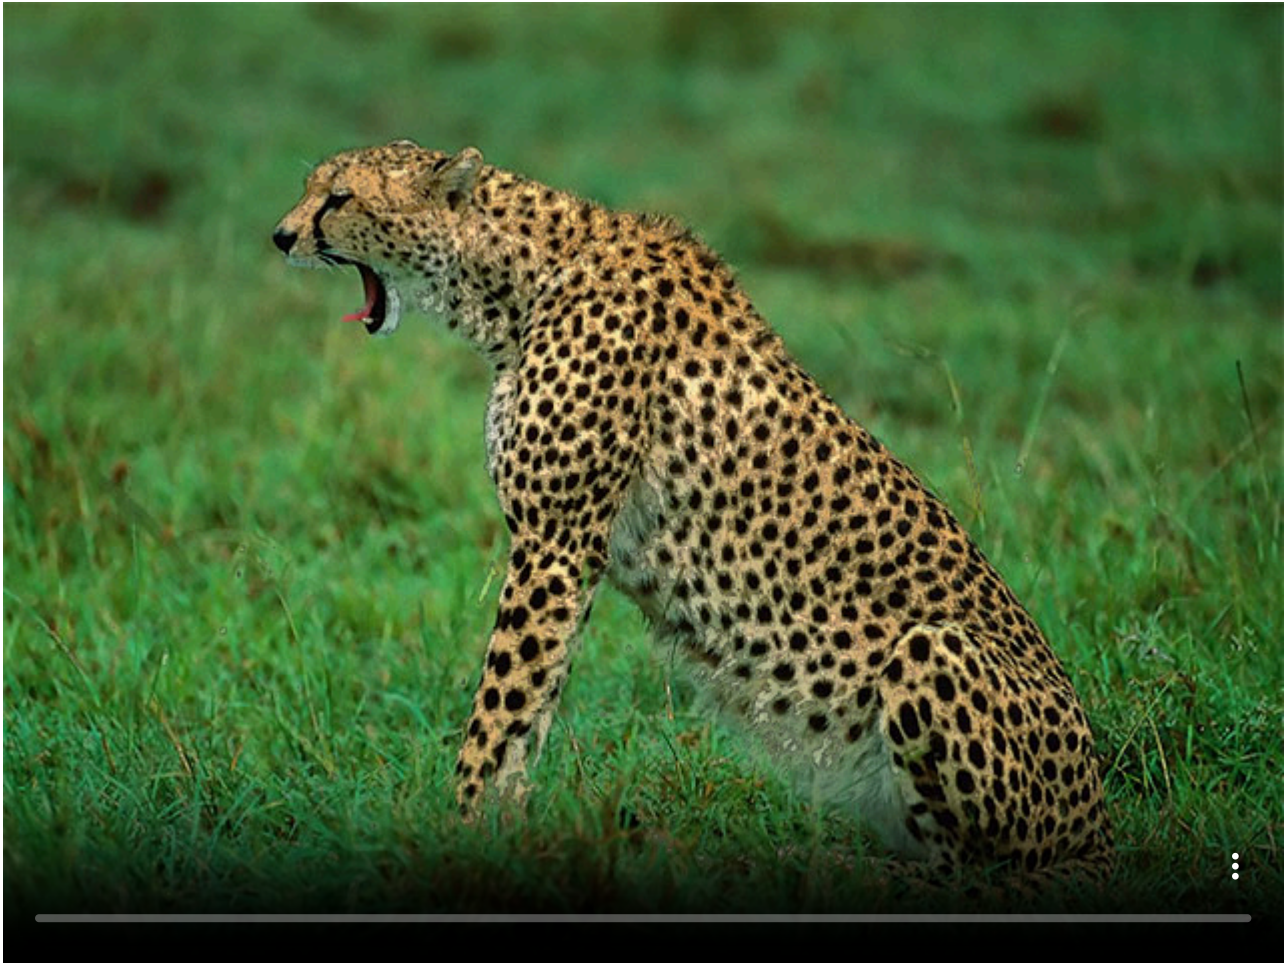

```
fun main() = application {  
    program {  
        val image = loadImage("data/images/cheeta.jpg")  
        val filter = Contour()  
        val filtered = colorBuffer(image.width, image.height)  
  
        extend {  
            filter.backgroundOpacity = 1.0  
            filter.contourColor = ColorRGBA.BLACK  
            filter.contourWidth = 0.4  
            filter.levels = cos(seconds) * 3.0 + 5.1  
            filter.apply(image, filtered)  
            drawer.image(filtered)  
        }  
    }  
}
```

[Link to the full example](#)

EDGESWORK

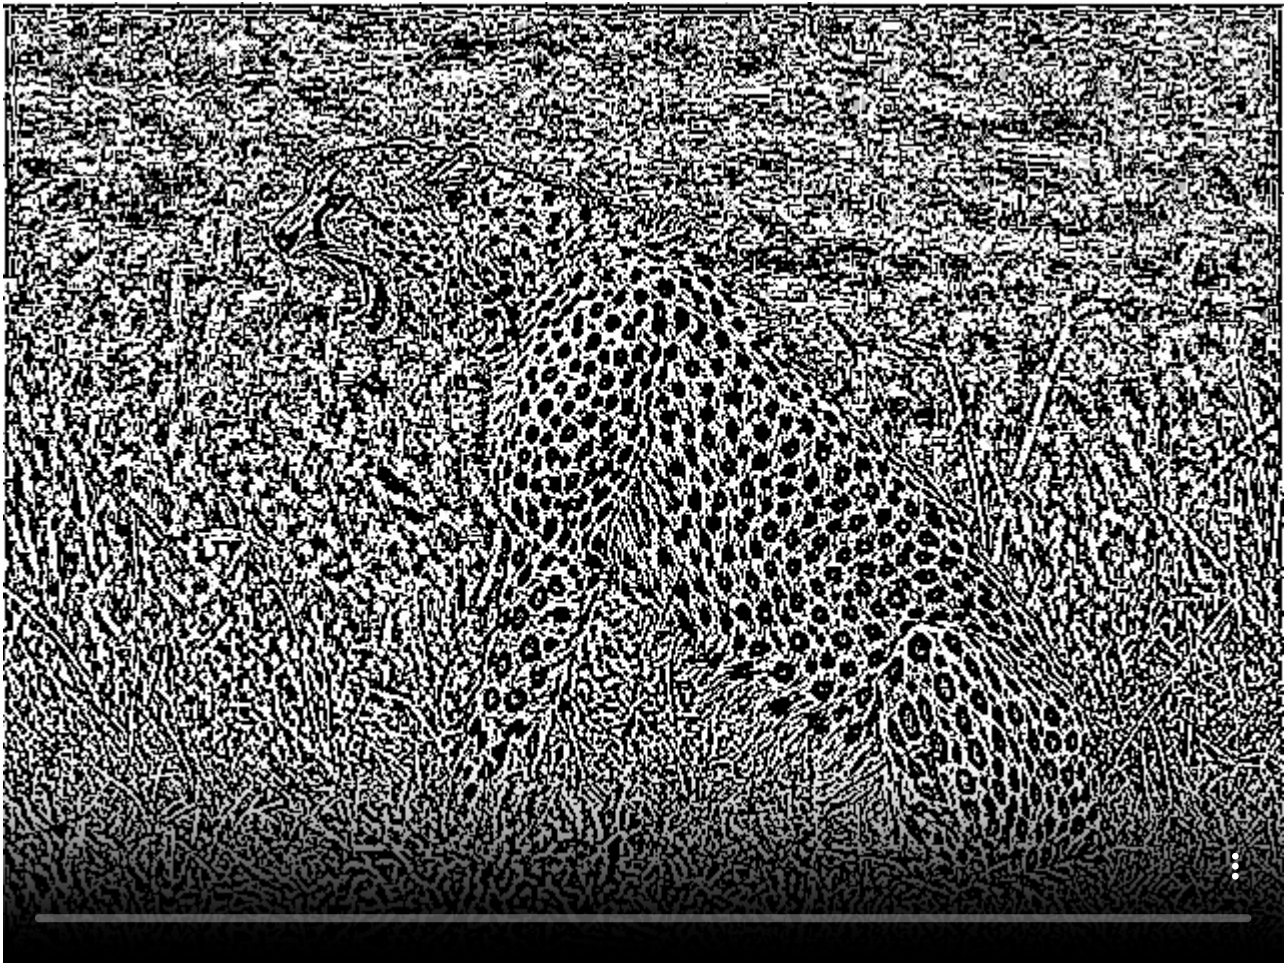

```
fun main() = application {  
    program {  
        val image = loadImage("data/images/cheeta.jpg")  
        val filter = EdgesWork()  
        val filtered = colorBuffer(image.width, image.height)  
  
        extend {  
            filter.radius = (cos(seconds) * 5 + 5).toInt()  
            filter.apply(image, filtered)  
            drawer.image(filtered)  
        }  
    }  
}
```

[Link to the full example](#)

Distortion filters


BLOCKREPEAT



```
fun main() = application {  
    program {  
        val image = loadImage("data/images/cheeta.jpg")  
        val filter = BlockRepeat()  
        val filtered = colorBuffer(image.width, image.height)  
  
        extend {  
            filter.sourceScale = seconds / 5.0  
            filter.blockWidth = cos(seconds) * 0.3 + 0.4  
            filter.blockHeight = sin(seconds) * 0.3 + 0.4  
  
            filter.apply(image, filtered)  
            drawer.image(filtered)  
        }  
    }  
}
```

[Link to the full example](#)


STACKREPEAT

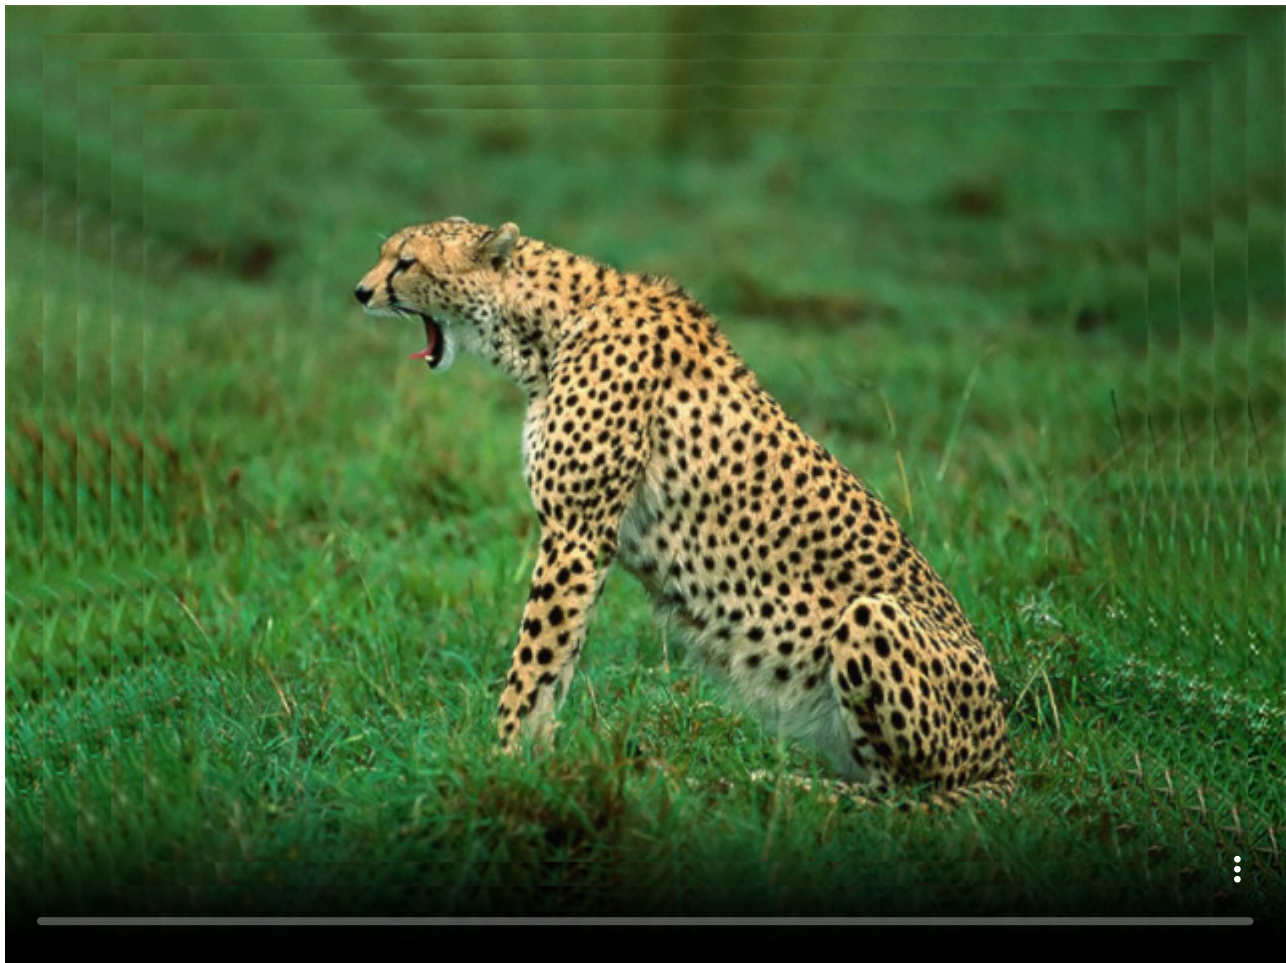

```
fun main() = application {  
    program {  
        val image = loadImage("data/images/cheeta.jpg")  
        val filter = StackRepeat()  
        val filtered = colorBuffer(image.width, image.height)  
  
        extend {  
            filter.repeats = 4  
            filter.zoom = (cos(seconds) * 0.1 + 0.11)  
  
            filter.apply(image, filtered)  
            drawer.image(filtered)  
        }  
    }  
}
```

[Link to the full example](#)


HORIZONTALWAVE

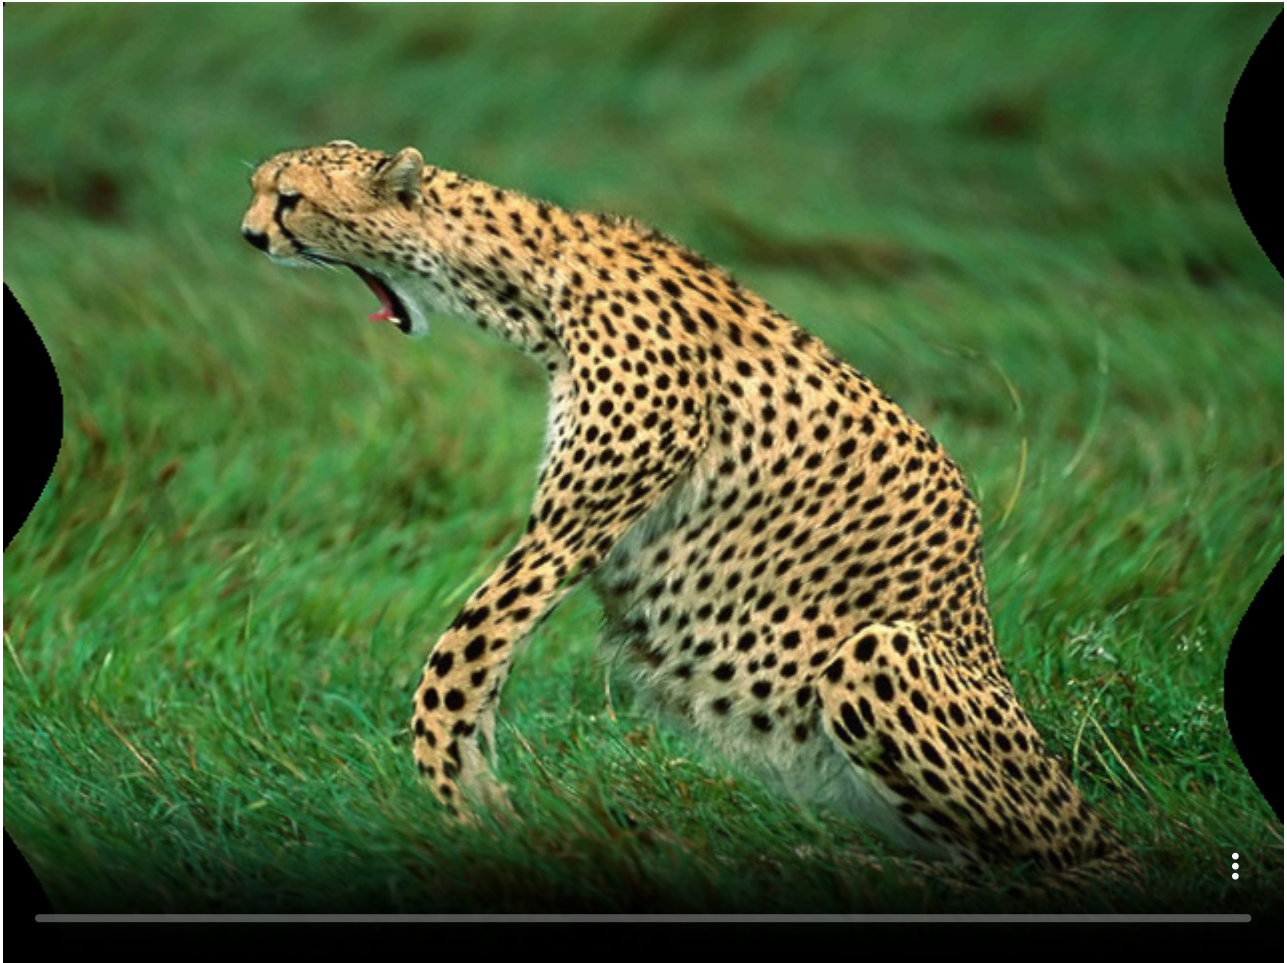

```
fun main() = application {  
    program {  
        val image = loadImage("data/images/cheeta.jpg")  
        val filter = HorizontalWave()  
        val filtered = colorBuffer(image.width, image.height)  
  
        extend {  
            filter.amplitude = cos(seconds) * 0.1  
            filter.frequency = sin(seconds) * 4.0  
            if (seconds > 2.5) {  
                filter.segments = 10  
            }  
  
            filter.apply(image, filtered)  
            drawer.image(filtered)  
        }  
    }  
}
```

[Link to the full example](#)


VERTICALWAVE

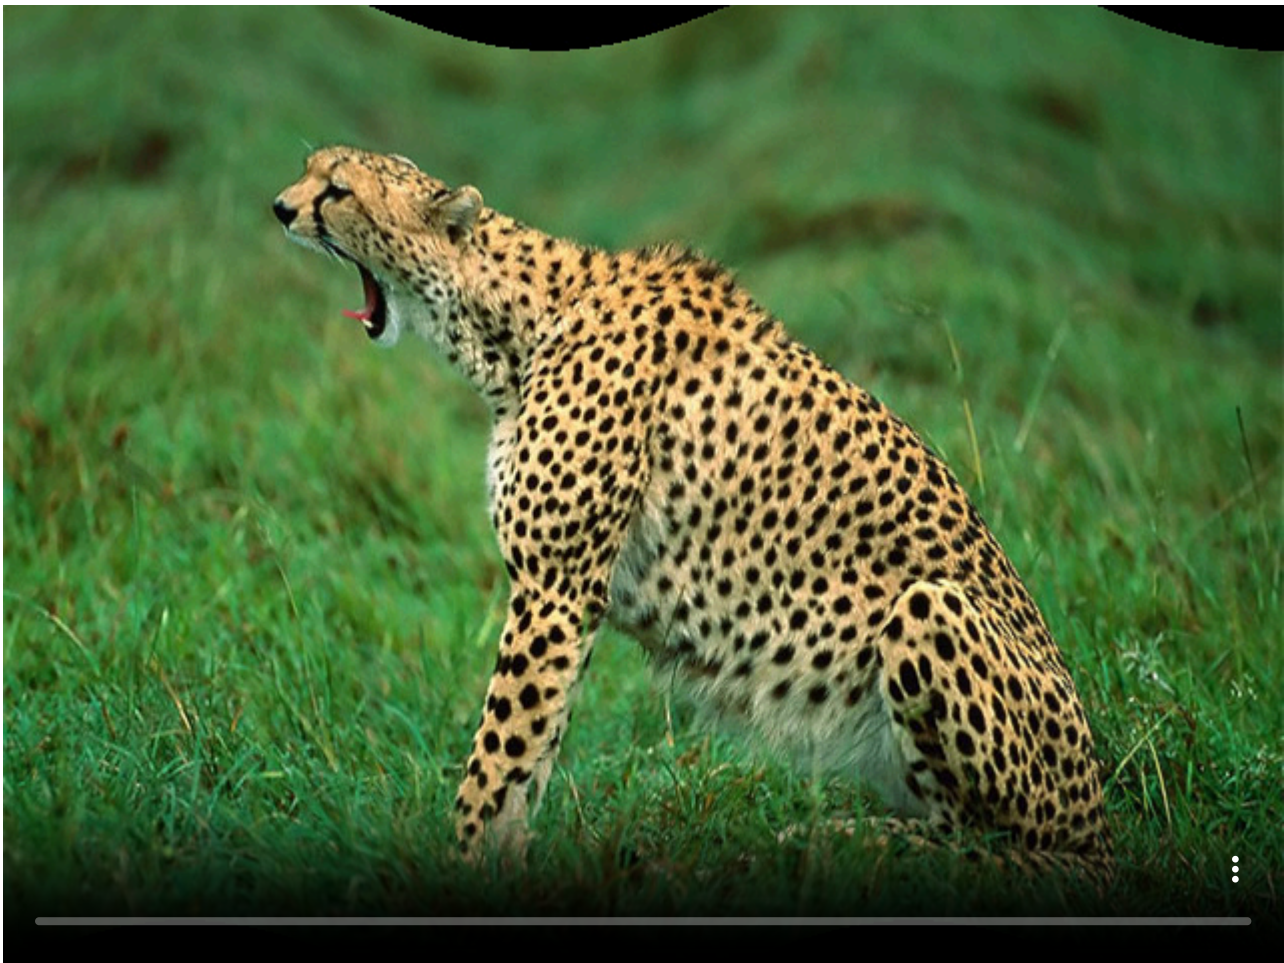

```
fun main() = application {  
    program {  
        val image = loadImage("data/images/cheeta.jpg")  
        val filter = VerticalWave()  
        val filtered = colorBuffer(image.width, image.height)  
  
        extend {  
            filter.amplitude = cos(seconds) * 0.1  
            filter.frequency = sin(seconds) * 4.0  
            if (seconds > 2.5) {  
                filter.segments = 10  
            }  
  
            filter.apply(image, filtered)  
            drawer.image(filtered)  
        }  
    }  
}
```

[Link to the full example](#)

PERTURB

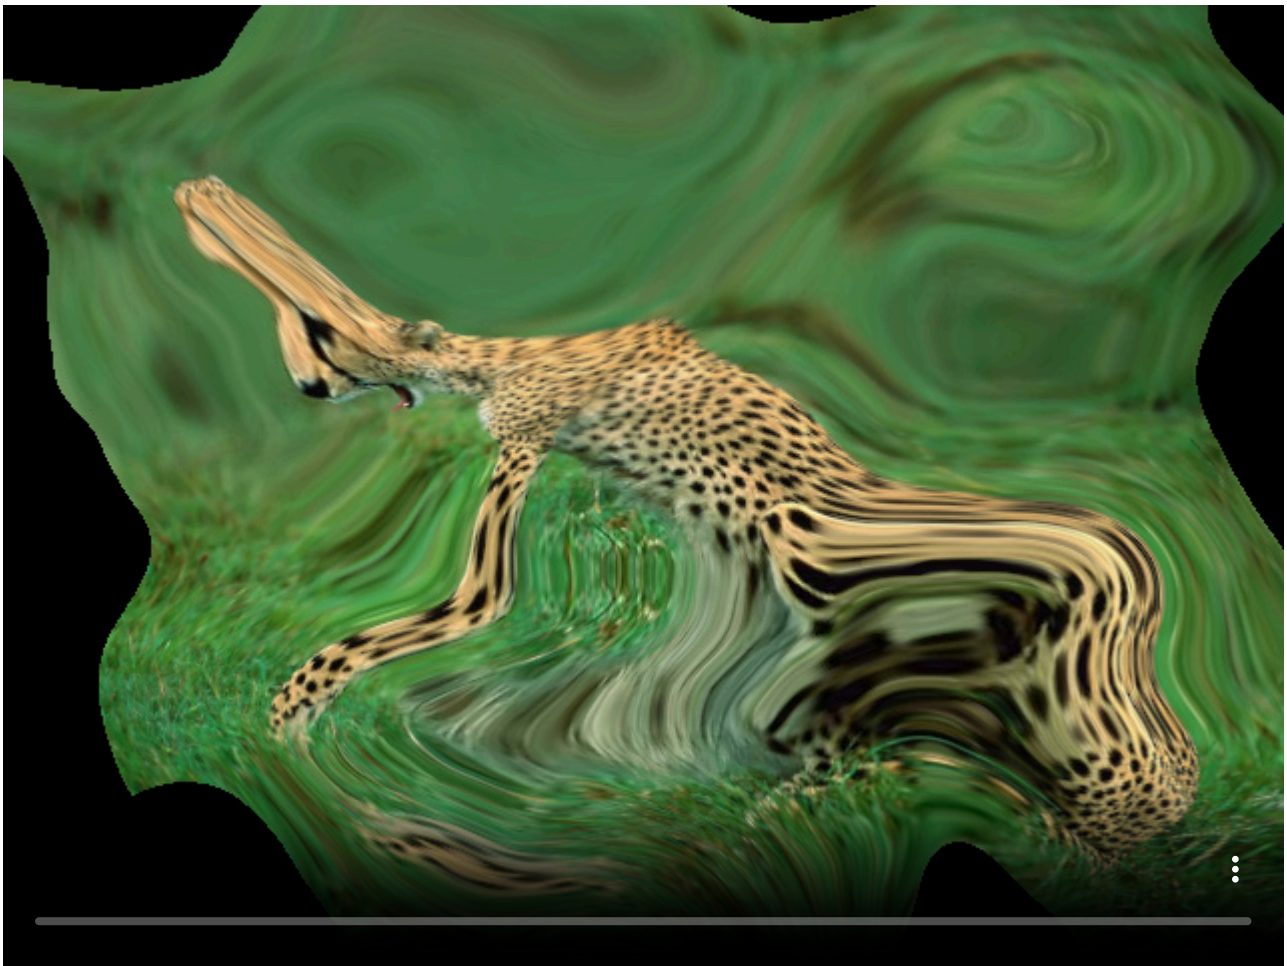

```
fun main() = application {  
    program {  
        val image = loadImage("data/images/cheeta.jpg")  
        val filter = Perturb()  
        val filtered = colorBuffer(image.width, image.height)  
  
        extend {  
            filter.phase = seconds * 0.1  
            filter.decay = 0.168  
            filter.gain = cos(seconds) * 0.5 + 0.5  
  
            filter.apply(image, filtered)  
            drawer.image(filtered)  
        }  
    }  
}
```

[Link to the full example](#)

TILES



```
fun main() = application {
    program {
        val image = loadImage("data/images/cheeta.jpg")
        val filter = Tiles()
        val filtered = colorBuffer(image.width, image.height)

        extend {
            filter.rotation = seconds * 60.0
            filter.xSegments = (10 + cos(seconds * PI / 3) * 5.0).toInt()
            filter.ySegments = 30
            filter.apply(image, filtered)
            drawer.image(filtered)
        }
    }
}
```

[Link to the full example](#)


FISHEYE



```
fun main() = application {  
    program {  
        val image = loadImage("data/images/cheeta.jpg")  
        val filter = Fisheye()  
        val filtered = colorBuffer(image.width, image.height)  
  
        extend {  
            filter.strength = cos(seconds) * 0.125  
            filter.scale = 1.1  
            filter.apply(image, filtered)  
            drawer.image(filtered)  
        }  
    }  
}
```

[Link to the full example](#)

DISPLACEBLEND

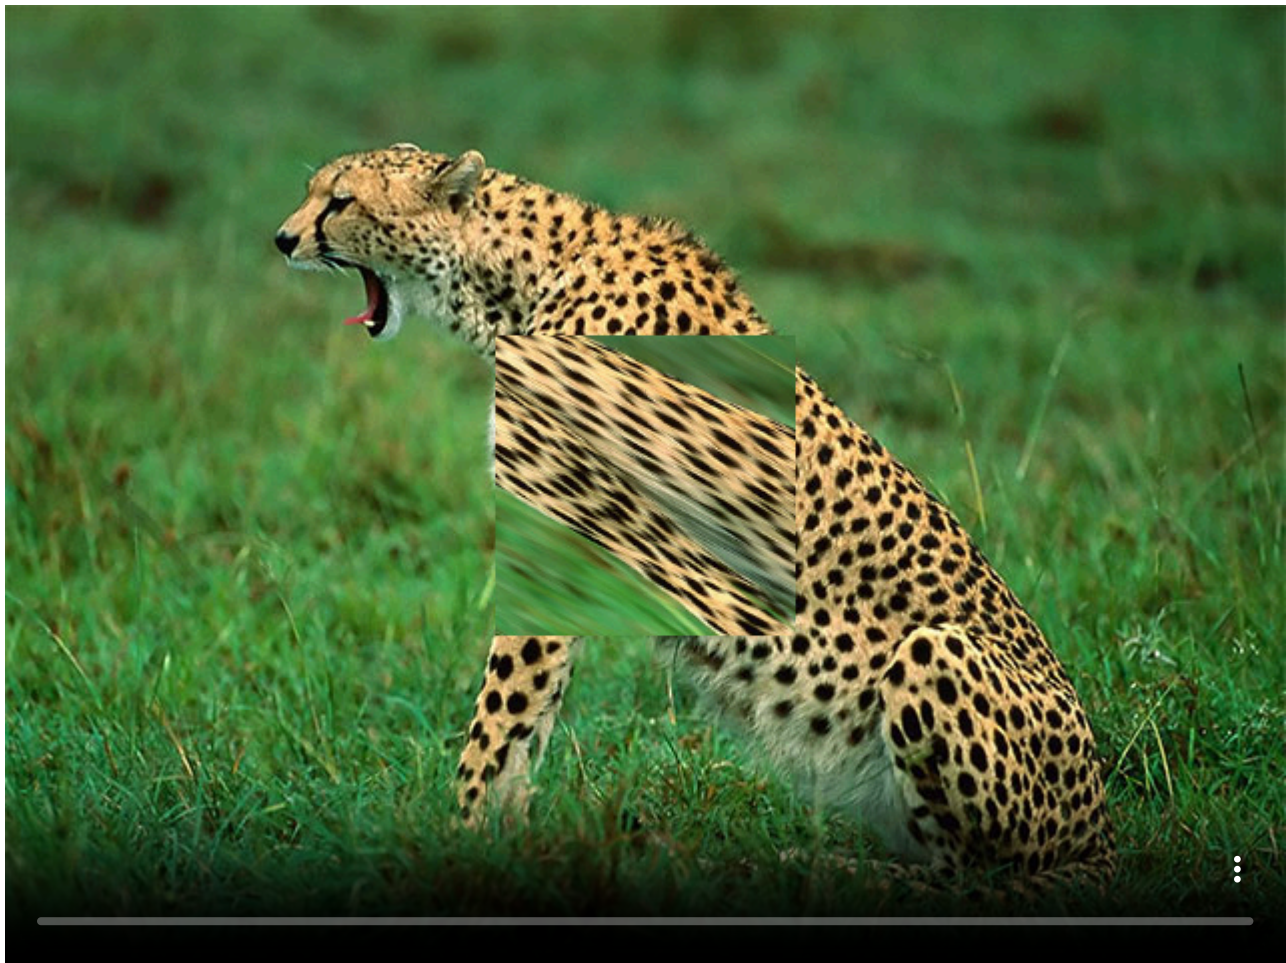

```
fun main() = application {
    program {
        val composite = compose {
            colorType = ColorType.FLOAT16
            layer {
                val image = loadImage("data/images/cheeta.jpg")
                draw {
                    drawer.imageFit(image, 0.0, 0.0, width * 1.0, height * 1.0)
                }
            }
            layer {
                draw {
                    drawer.shadeStyle = linearGradient(ColorRGBa.BLACK, ColorRGBa.WHITE)
                    drawer.stroke = null
                    val size = cos(seconds * PI / 3) * 100.0 + 200.0
                    drawer.rectangle(width / 2.0 - size / 2, height / 2.0 - size / 2, size, size)
                }
                blend(DisplaceBlend()) {
                    gain = cos(seconds * PI / 3) * 0.5 + 0.5
                    rotation = seconds * 60.0
                }
            }
        }
    }


    extend {
        composite.draw(drawer)
    }
}
```



```
}  
}
```

[Link to the full example](#)

STRETCHWAVES

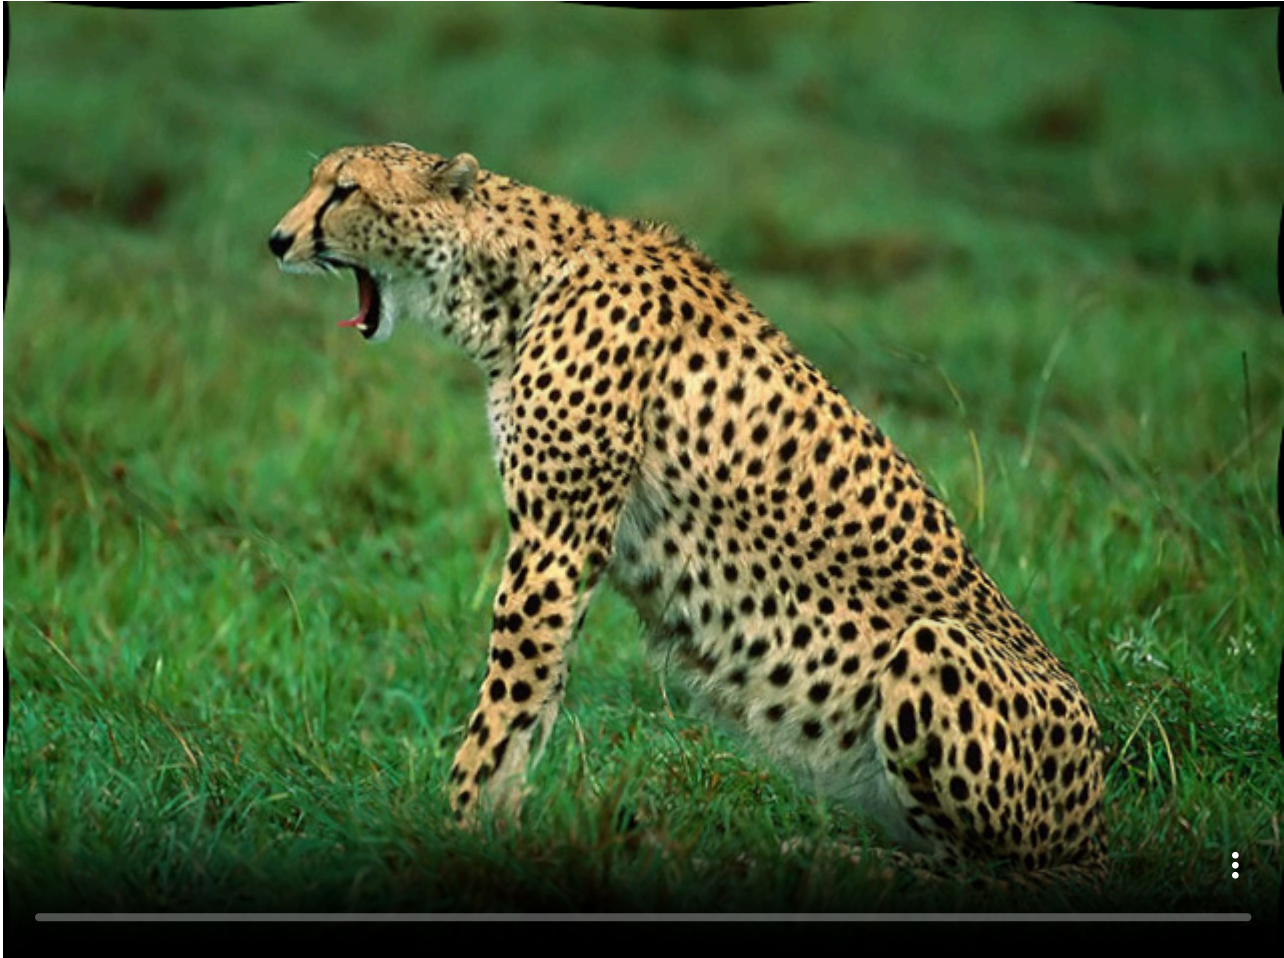


```
fun main() = application {  
    program {  
        val composite = compose {  
            colorType = ColorType.FLOAT16  
            layer {  
                val image = loadImage("data/images/cheeta.jpg")  
                draw {  
                    drawer.imageFit(image, 0.0, 0.0, width * 1.0, height * 1.0)  
                }  
                post(StretchWaves()) {  
                    distortion = 0.25  
                    rotation = seconds * 60.0  
                    phase = seconds * 0.25  
                    frequency = 5.0  
                }  
            }  
        }  
    }  
    extend {  
        composite.draw(drawer)  
    }  
}
```



```
}  
}
```

[Link to the full example](#)

PERSPECTIVEPLANE

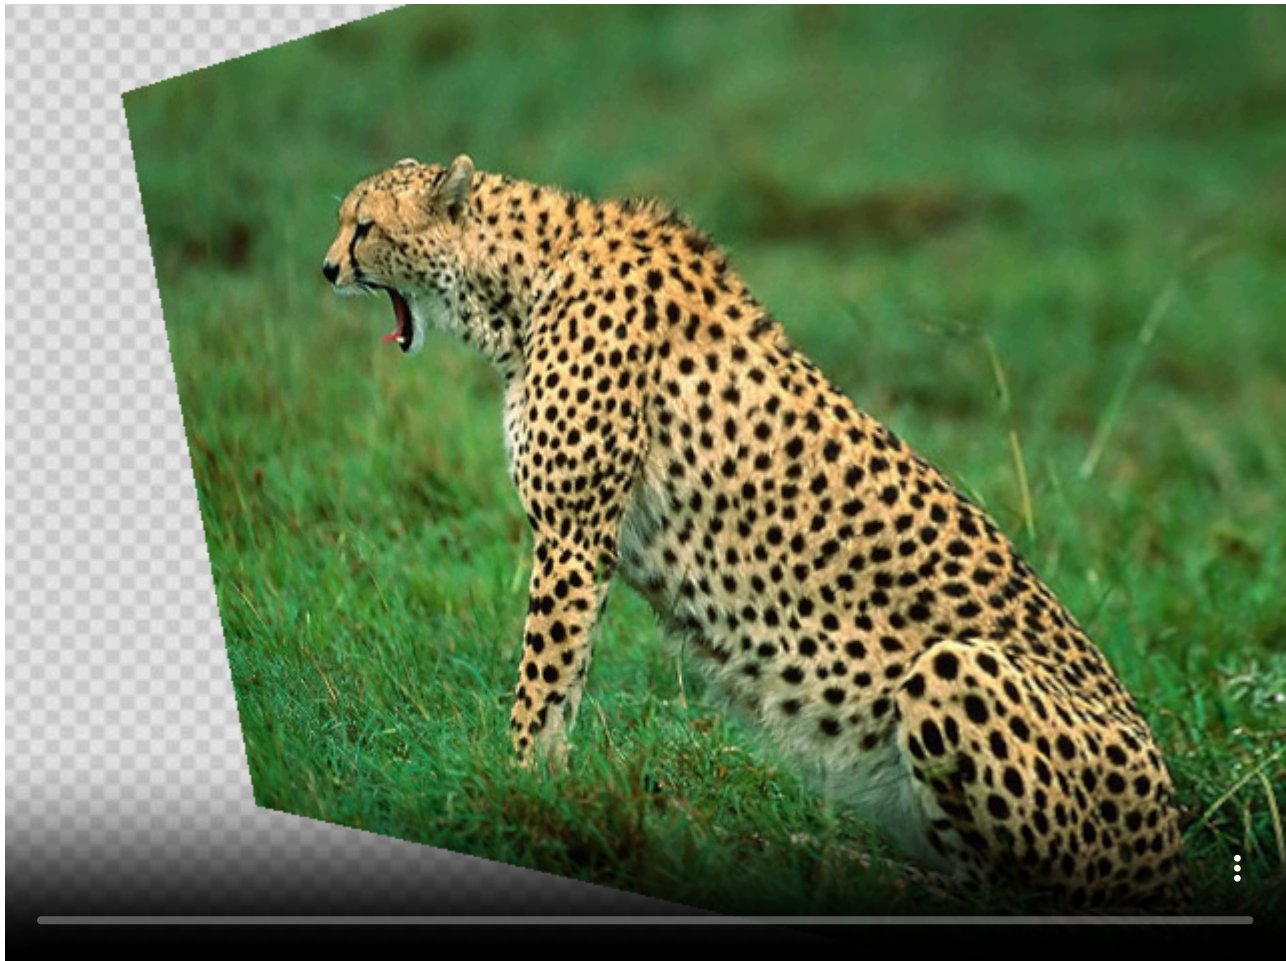


```
fun main() = application {  
    program {  
        val composite = compose {  
            layer {  
                post(Checkers())  
            }  
  
            layer {  
                val image = loadImage("data/images/cheeta.jpg")  
                draw {  
                    drawer.imageFit(image, 0.0, 0.0, width * 1.0, height * 1.0)  
                }  
                post(PerspectivePlane()) {  
                    planePitch = cos(seconds) * 22.5  
                    planeYaw = sin(seconds) * 22.5  
                }  
            }  
        }  
    }  
    extend {  
        composite.draw(drawer)  
    }  
}
```

```
}  
}
```

[Link to the full example](#)

Dithering filters


ADITHER

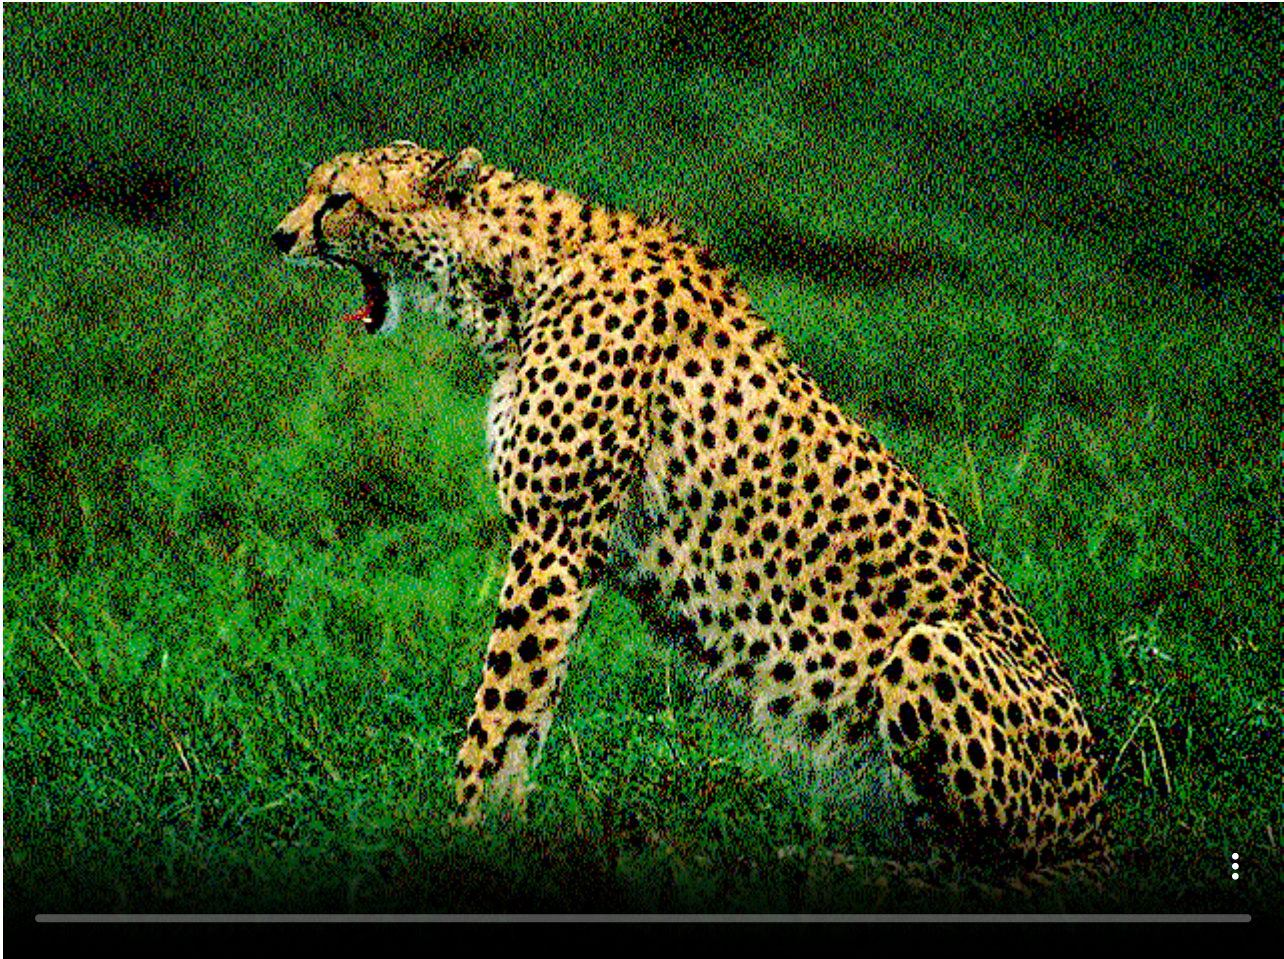

```
fun main() = application {  
    program {  
        val image = loadImage("data/images/cheeta.jpg")  
        val filter = ADither()  
        val filtered = colorBuffer(image.width, image.height)  
  
        extend {  
            filter.pattern = ((seconds / 5.0) * 4).toInt().coerceAtMost(3)  
            filter.levels = ((seconds % 1.0) * 3).toInt() + 1  
            filter.apply(image, filtered)  
            drawer.image(filtered)  
        }  
    }  
}
```

[Link to the full example](#)

CMYKHALFTONE

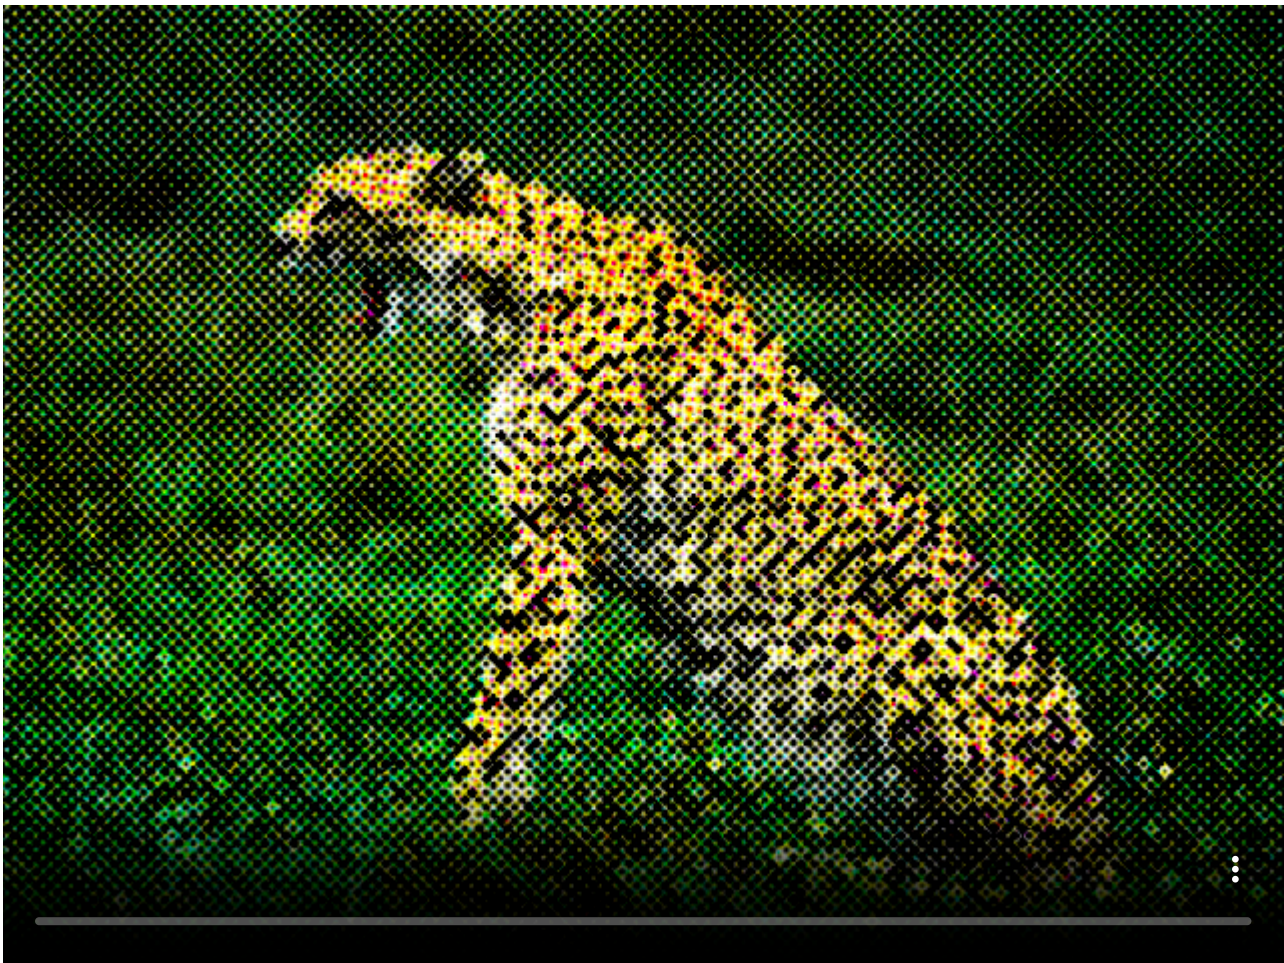


```
fun main() = application {
    program {
        val image = loadImage("data/images/cheeta.jpg")
        val filter = CMYKHalftone()
        val filtered = colorBuffer(image.width, image.height)

        extend {
            // -- need a white background because the filter introduces transparent areas
            drawer.clear(ColorRGBA.WHITE)
            filter.dotSize = 1.2
            filter.scale = cos(seconds) * 2.0 + 6.0
            filter.apply(image, filtered)

            drawer.image(filtered)
        }
    }
}
```

[Link to the full example](#)

CROSSHATCH

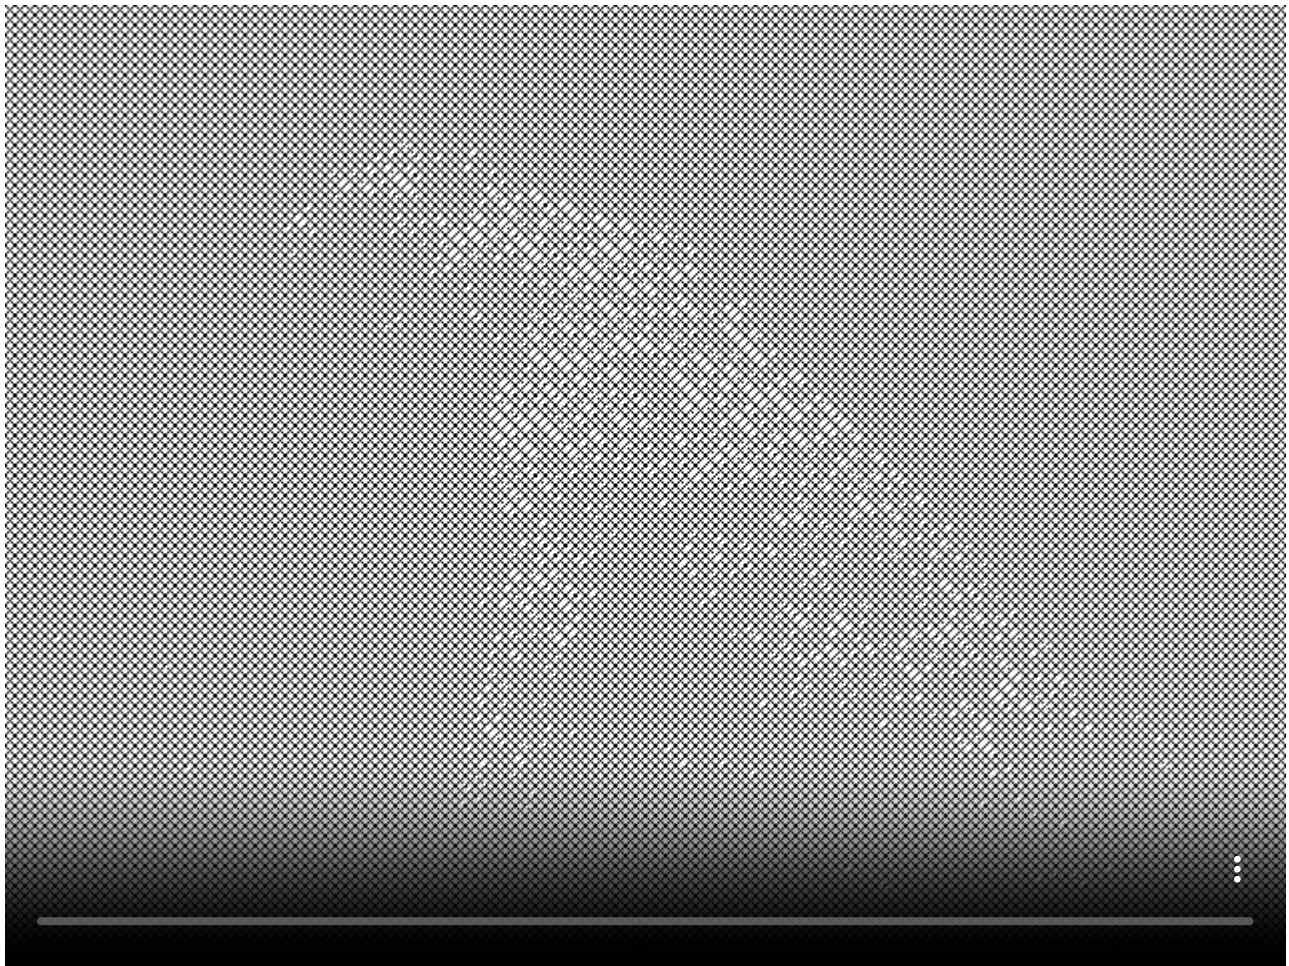

```
fun main() = application {
    program {
        val image = loadImage("data/images/cheeta.jpg")
        val filter = Crosshatch()
        val filtered = colorBuffer(image.width, image.height)

        extend {
            // -- need a white background because the filter introduces transparent areas
            drawer.clear(ColorRGBA.WHITE)
            filter.t1 = cos(seconds * PI) * 0.25 + 0.25
            filter.t2 = filter.t1 + cos(seconds * 3) * 0.25 + 0.25
            filter.t3 = filter.t2 + cos(seconds * 2) * 0.25 + 0.25
            filter.t4 = filter.t3 + cos(seconds * 1) * 0.25 + 0.25

            filter.apply(image, filtered)

            drawer.image(filtered)
        }
    }
}
```

[Link to the full example](#)

Shadow filters

DROPSHADOW



```
fun main() = application {
    program {
        val image = loadImage("data/images/cheeta.jpg")
        val filter = DropShadow()
        val filtered = colorBuffer(image.width, image.height)

        val rt = renderTarget(width, height) {
            colorBuffer()
        }


        extend {
            drawer.isolatedWithTarget(rt) {
                drawer.clear(ColorRGBA.TRANSPARENT)
                drawer.image(image, (image.width - image.width * 0.8) / 2, (image.height - image.height * 0.8) / 2,
image.width * 0.8, image.height * 0.8)
            }
            // -- need a pink background because the filter introduces transparent areas
            drawer.clear(ColorRGBA.PINK)
            filter.window = (cos(seconds) * 16 + 16).toInt()
            filter.xShift = cos(seconds * 2) * 16.0
            filter.yShift = sin(seconds * 2) * 16.0
            filter.apply(rt.colorBuffer(0), filtered)
            drawer.image(filtered)
        }
    }
}
```

[Link to the full example](#)

Pattern filters

CHECKERS

Checkers is a simple checker generator filter.

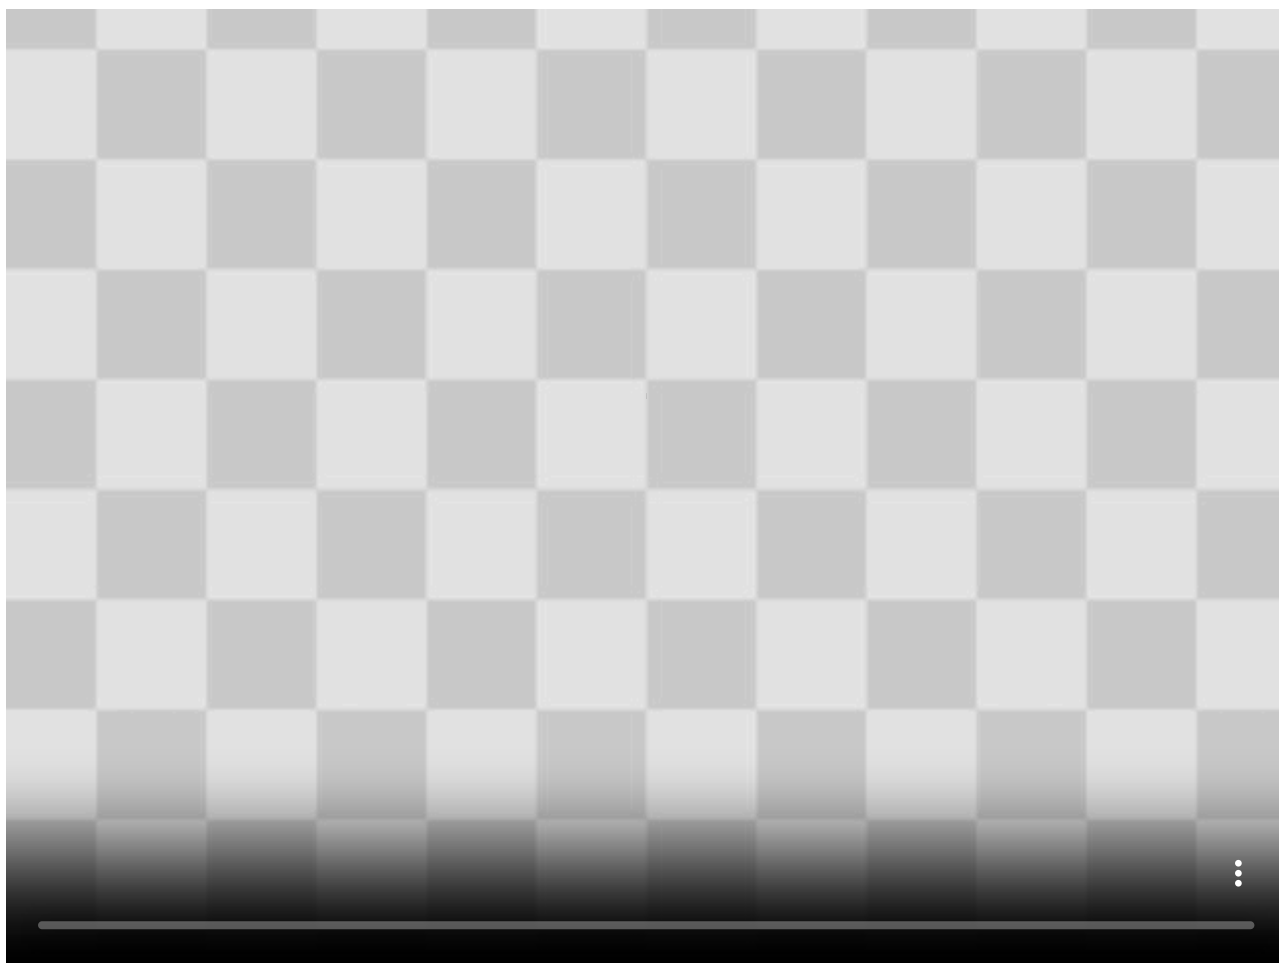

```
fun main() = application {
    program {
        val composite = compose {
            layer {
                post(Checkers()) {
                    size = cos(seconds) * 0.6 + 0.4
                }
            }
        }
        extend {
            composite.draw(drawer)
        }
    }
}
```

[Link to the full example](#)

[edit on GitHub](#)

Compositing using orx-compositor

orx-compositor offers a simple DSL for the creation of layered graphics. The compositor manages blending and post-processing of layers for you.

orx-compositor works well together with orx-fx, orx-gui, and orx-olive, although they are not a required combination it is worth checking out what the combination has to offer.

Prerequisites

If you are working on an [openrndr-template](#) based project, orx-compositor should be ready to use because it is part of the basic orx bundle, as described in [ORX](#).

Workflow

Let us now work through the workflow of orx-compositor. One usually starts with an OPENRNDR skeleton program:

```
fun main() = application {
    program {
        extend {

        }
    }
}
```

Which by itself, of course, does nothing. Let's extend this skeleton a bit and add the basics for layered graphics. We add a composite using `compose {}` and we make sure that our OPENRNDR program draws it on refresh.

Note, if this fails you can fix it by adding `import org.openrndr.extra.compositor.draw`.

```
fun main() = application {
    program {
        val composite = compose {

        }

        extend {
            composite.draw(drawer)
        }
    }
}
```

Now let's draw something. We do this by adding a `draw {}` inside the `compose {}`. Here we see we use `drawer` like we would use it normally (it is captured in the closure). We also added a `println` to demonstrate that the code inside `compose {}` is executed once, however, code inside `draw {}` is executed every time the composite is drawn.

```
fun main() = application {
    program {
        val composite = compose {
```

```

        println("this is only executed once")

        draw {
            drawer.fill = ColorRGBa.PINK
            drawer.stroke = null
            drawer.circle(width / 2.0, height / 2.0, 175.0)
        }
    }

    extend {
        composite.draw(drawer)
    }
}

```

Let's get to what `orx-compositor` promises: layered graphics. We do this by adding a `layer {}` inside our `composite`, and inside this `layer` we add another `draw`.

Every `layer` has an isolated draw state to prevent users from leaking draw state.

```

fun main() = application {
    program {
        val composite = compose {
            draw {
                drawer.fill = ColorRGBa.PINK
                drawer.stroke = null
                drawer.circle(width / 2.0, height / 2.0, 175.00)
            }


            layer {
                draw {
                    drawer.fill = ColorRGBa.PINK
                    drawer.stroke = null
                    drawer.circle(width / 2.0, height / 2.0 + 100.0, 100.0)
                }
            }
        }

        extend {
            composite.draw(drawer)
        }
    }
}

```

[Link to the full example](#)

This produces:

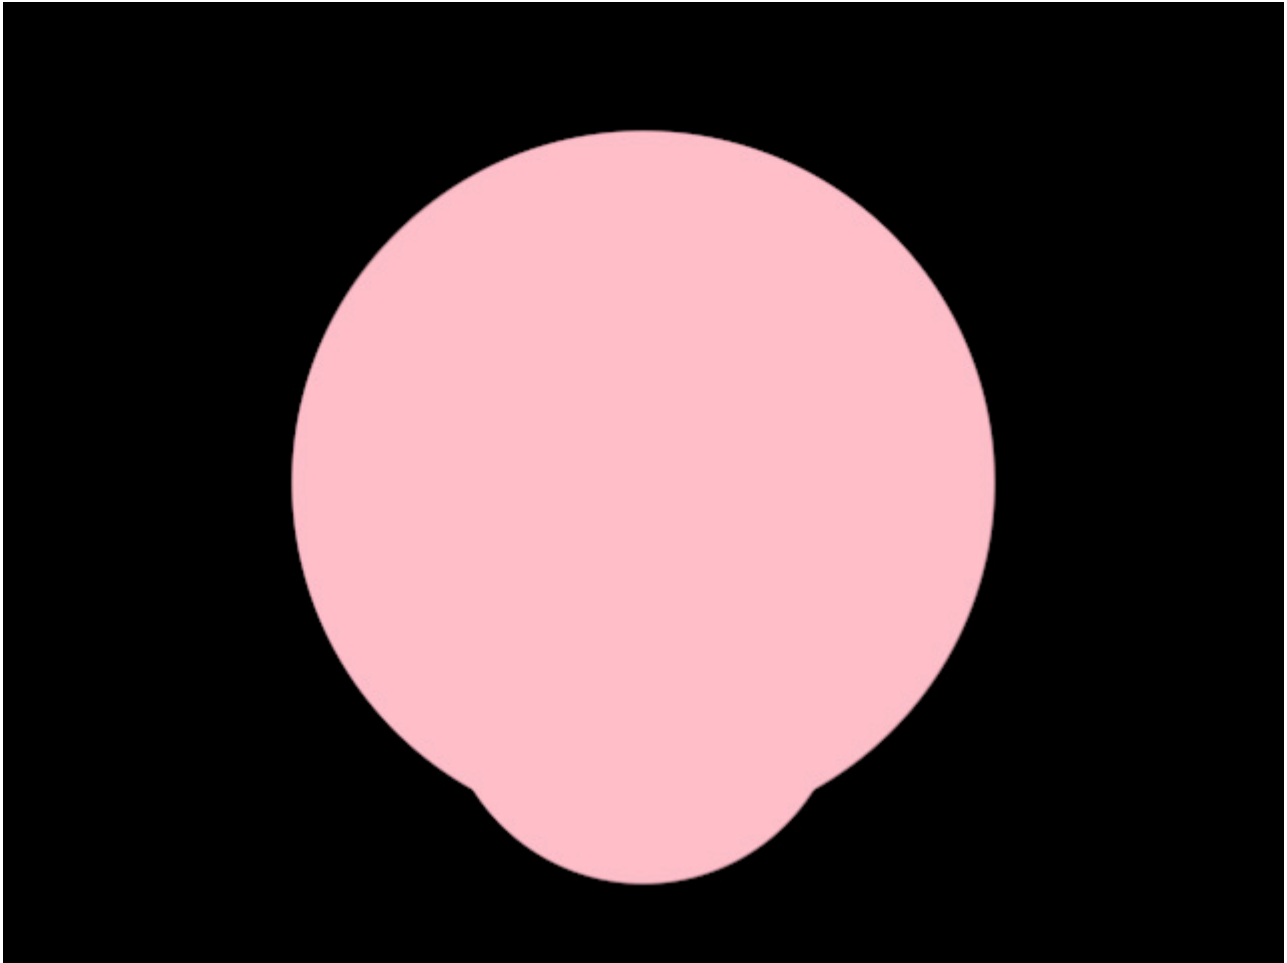

You may be thinking: “yeah great, we added all that extra structure to the code, but it doesn’t do a single thing that could not be achieved by drawing two circles consecutively”. And you’re right. However, there are now two things we can add with ease: *blends* and *posts*. Here a *blend* describes how a layer’s contents should be combined with the layer it covers, and a *post* a filter that is applied after the contents have been drawn.

Let’s add a blend and a post to our layer and see what it does:

```
fun main() = application {
    program {
        val composite = compose {
            draw {
                drawer.fill = ColorRGBA.PINK
                drawer.stroke = null
                drawer.circle(width / 2.0, height / 2.0, 175.0)
            }

            layer {
                blend(Add()) {
                    clip = true
                }
                draw {
                    drawer.fill = ColorRGBA.PINK
                    drawer.stroke = null
                    drawer.circle(width / 2.0, height / 2.0 + 100.0, 100.0)
                }
            }
            post(ApproximateGaussianBlur()) {
                window = 25
            }
        }
    }
}
```


```

        sigma = 10.00
    }
}
}
extend {
    composite.draw(drawer)
}
}
}
}

```

[Link to the full example](#)

The output:

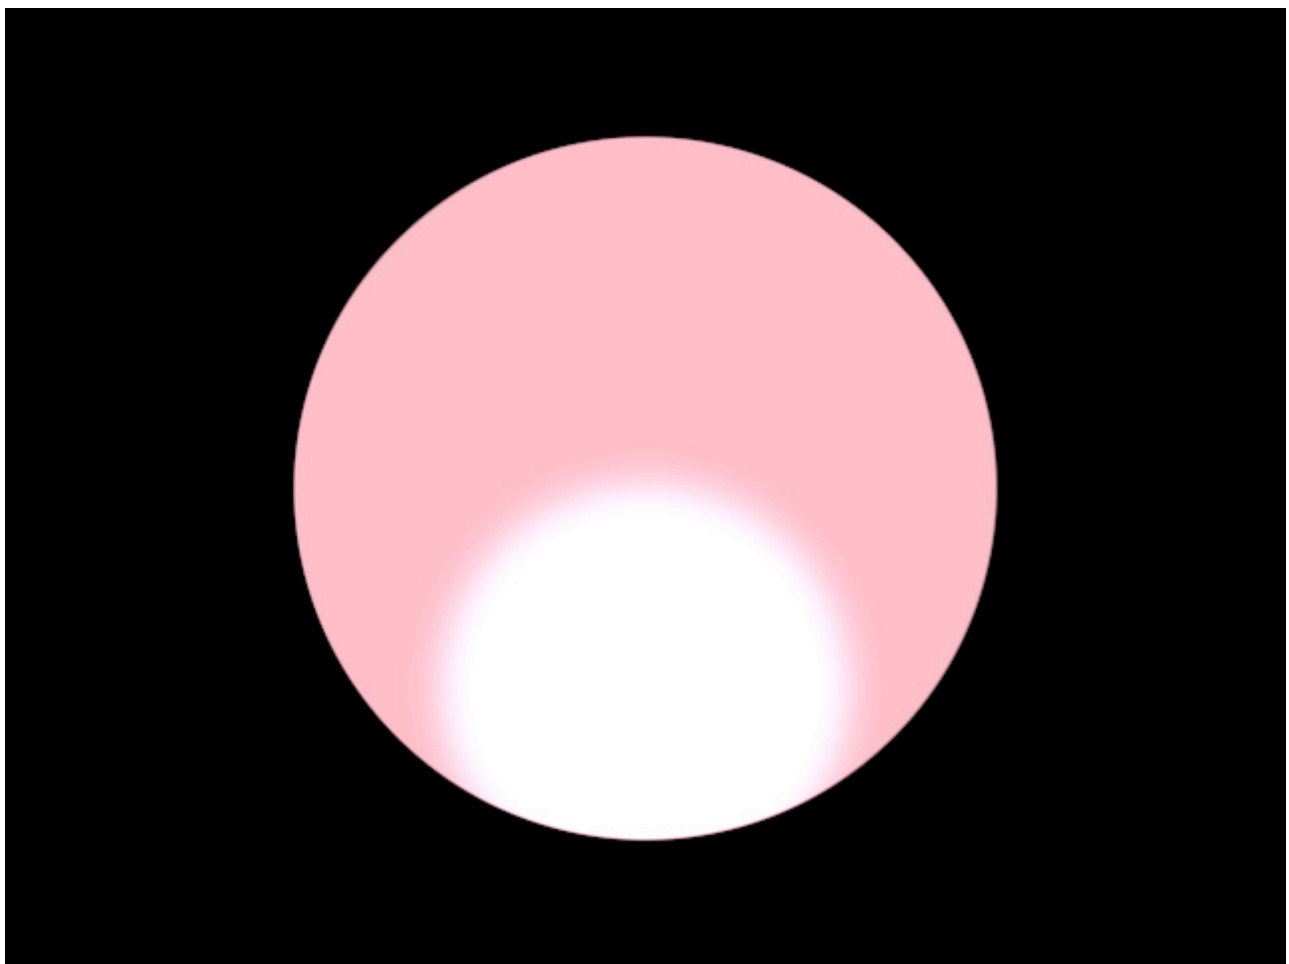

We now see a couple of differences. The smaller circle is blurred while the larger circle is not; The area where the two circles overlap is brighter; The smaller circle is clipped against the larger circle.

These are a results that are not as easily replicated without `orx-compositor`.

Note that the parameters for the *post* filters (and *blend*) can be animated, just as the layers contents can be animated:

```

fun main() = application {
    program {
        val composite = compose {
            draw {
                drawer.fill = ColorRGBa.PINK
                drawer.stroke = null
            }
        }
    }
}

```

```


        drawer.circle(
            width / 2.0 + sin(seconds * 2) * 100.0,
            height / 2.0,
            175.0
        )
    }

    layer {
        blend(Add()) {
            clip = true
        }
        draw {
            drawer.fill = ColorRGBa.PINK
            drawer.stroke = null
            drawer.circle(
                width / 2.0,
                height / 2.0 + cos(seconds * 2) * 100.0,
                100.0
            )
        }
        post(ApproximateGaussianBlur()) {
            // -- this is actually a function called for every draw
            window = 25
            sigma = cos(seconds) * 10.0 + 10.01
        }
    }
}

extend {
    composite.draw(drawer)
}
}

```

[Link to the full example](#)

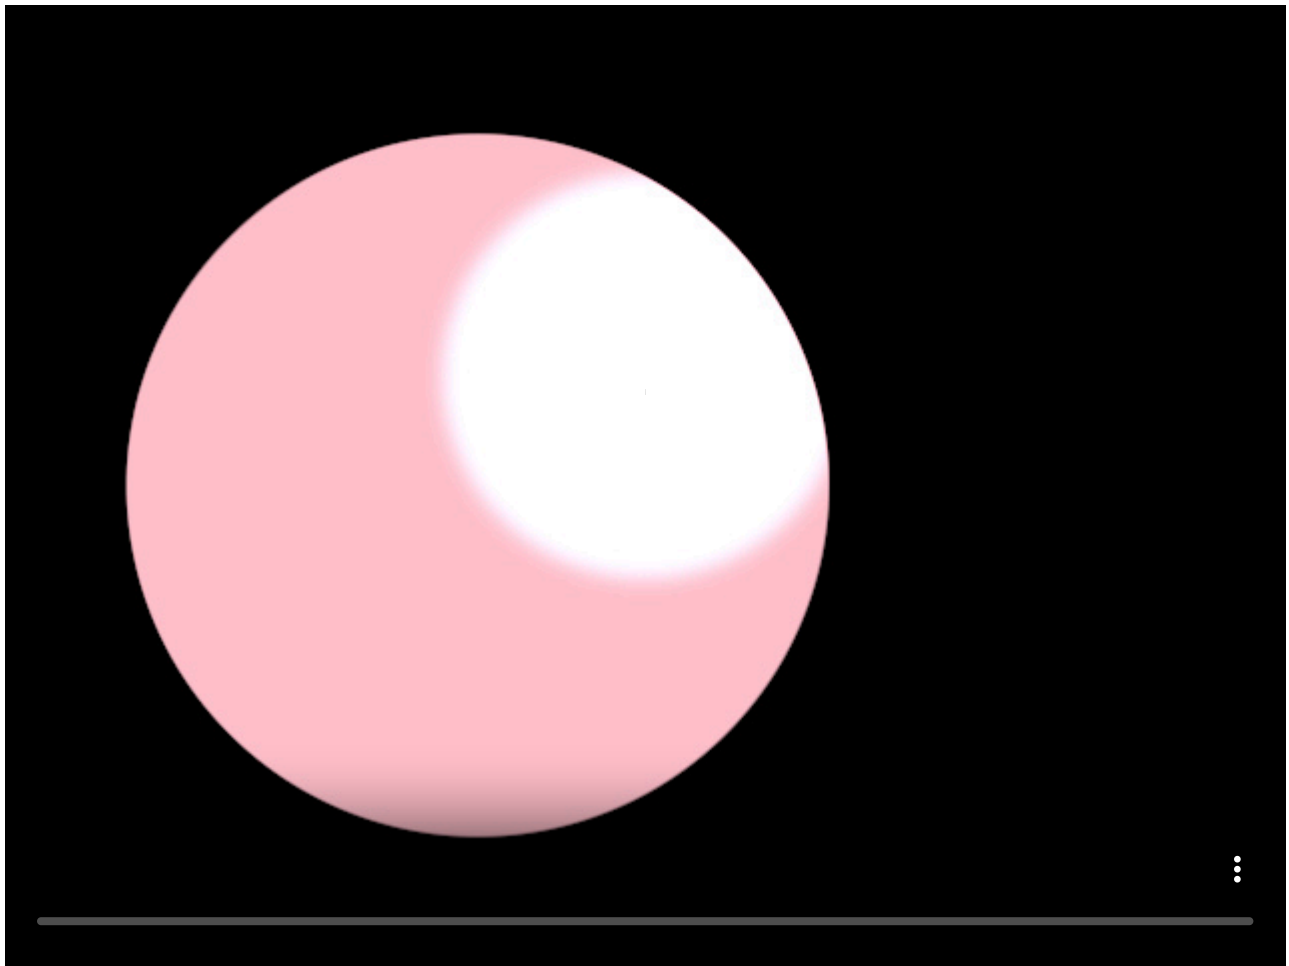

Common use-cases

Masking


In this case we have a text and an image that we only want to draw where there is text. This can be achieved by using nested layers and a `Normal` blend with `clip` enabled.

HELLO WORLD

```
fun main() = application {
    program {
        val composite = compose {
            draw {
                drawer.clear(ColorRGBa.PINK)
            }
            layer {
                // -- we nest layers to prevent the text layer to be blended with the background
                // -- before it is blended with the image layer
                layer {
                    // -- notice how we load the font inside the layer
                    // -- this only happens once
                    val font = loadFont("data/fonts/default.otf", 112.0)
                    draw {
                        drawer.fill = ColorRGBa.WHITE
                        drawer.fontMap = font
                        val message = "HELLO WORLD"
                        writer {
                            val w = textWidth(message)
                            cursor = Cursor((width - w) / 2.0, height / 2.0 + cos(seconds) * 200.0)
                            text(message)
                        }
                    }
                }
            }
        }
        layer {
            // -- again, loading resources inside the layer is perfectly fine
            // -- it is also a good way to keep code free of clutter
        }
    }
}
```

[Link to the full example](#)

In case you want to place text over an image and want to guarantee the text is readable. You can use a drop shadow *post* effect to draw the text with a bit of a shadow that sets the text apart from the image.

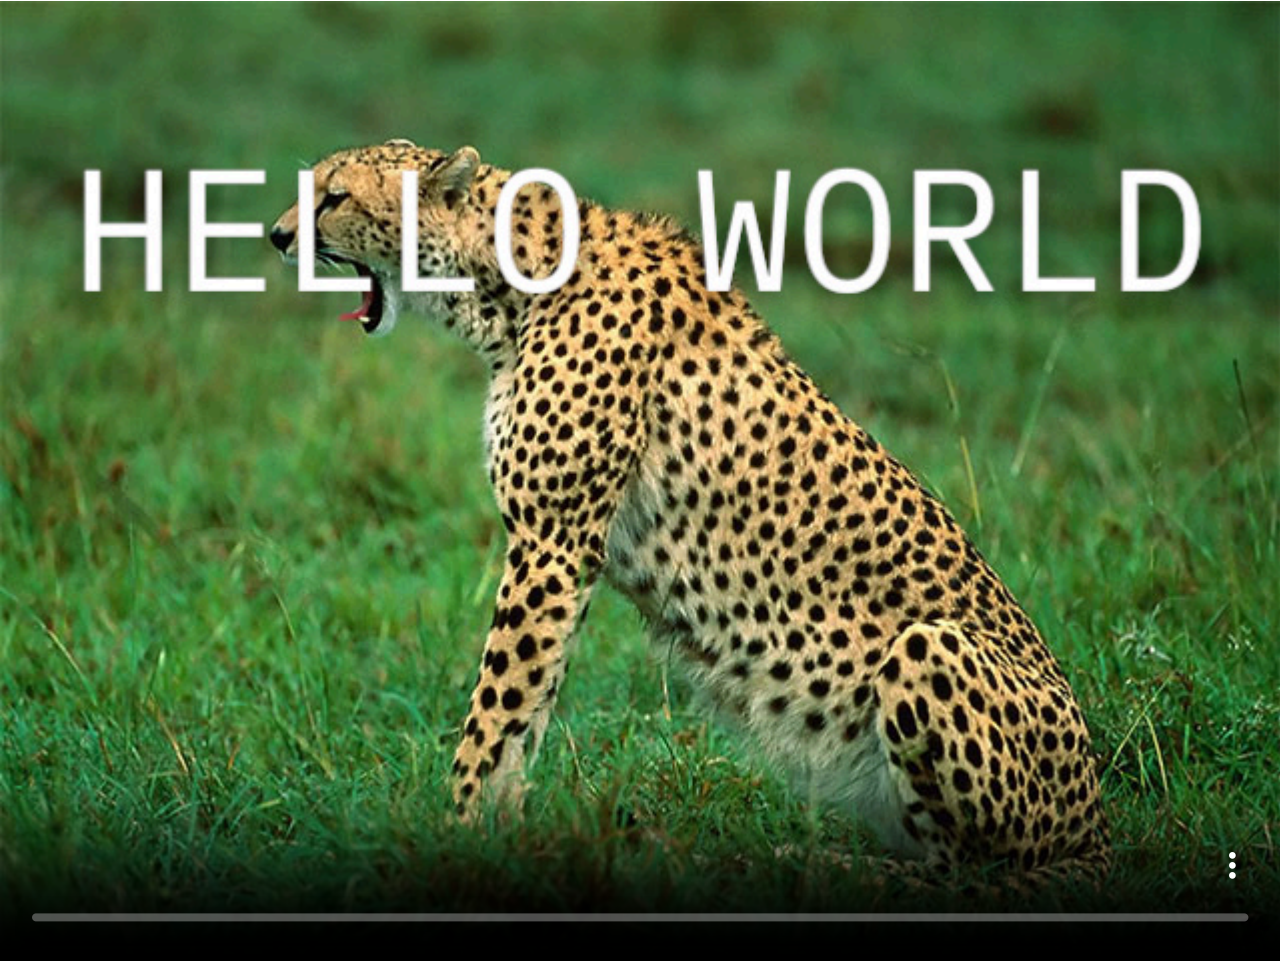

```

fun main() = application {
    program {
        val composite = compose {
            draw {
                drawer.clear(ColorRGBa.PINK)
            }
            layer {
                // -- load the image inside the layer
                val image = loadImage("data/images/cheeta.jpg")
                draw {
                    drawer.image(image)
                }
            }
            // -- add a second layer with text and a drop shadow
            layer {
                // -- notice how we load the font inside the layer
                // -- this only happens once
                val font = loadFont("data/fonts/default.otf", 112.0)

                draw {
                    drawer.fill = ColorRGBa.WHITE
                    drawer.fontMap = font
                    val message = "HELLO WORLD"
                    writer {
                        box = Rectangle(0.0, 0.0, width * 1.0, height * 1.0)
                        val w = textWidth(message)
                        cursor = Cursor((width - w) / 2.0, height / 2.0 + cos(seconds) * 200.0)
                        text(message)
                    }
                }
                post(DropShadow()) {
                    window = 10
                    gain = 1.0
                    yShift = -sin(seconds) * 8.0
                }
            }
        }


        extend {
            composite.draw(drawer)
        }
    }
}

```

[Link to the full example](#)

Multiple effects per layer

Post effects are not limited to one per layer. One can create a chain of post-processing filters by just calling `post() {}` multiple times per layer. In the following example we create a text layer that uses 3 post effects: two distortion effects followed by a blur filter.

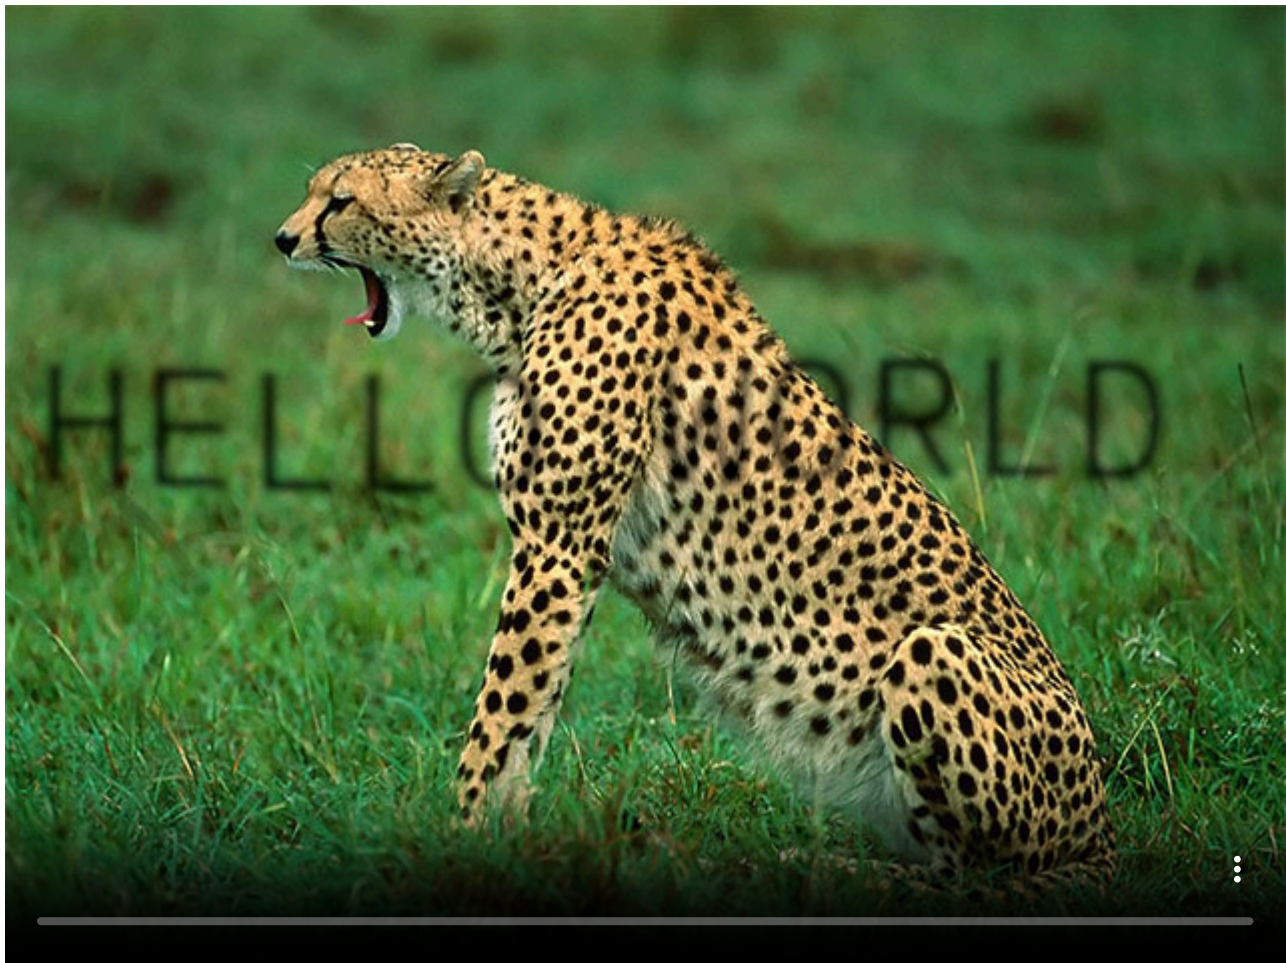

```
fun main() = application {
    program {
        val composite = compose {
            layer {
                // -- load the image inside the layer
                val image = loadImage("data/images/cheeta.jpg")
                draw {
                    drawer.image(image)
                }
            }

            // -- add a second layer with text and a drop shadow
            layer {
                // -- notice how we load the font inside the layer
                // -- this only happens once
                val font = loadFont("data/fonts/default.otf", 112.0)
                draw {
                    drawer.fill = ColorRGBa.BLACK
                    drawer.fontMap = font
                    val message = "HELLO WORLD"
                    writer {
                        box = Rectangle(0.0, 0.0, width * 1.0, height * 1.0)
                        val w = textWidth(message)
                        cursor = Cursor((width - w) / 2.0, height / 2.0)
                        text(message)
                    }
                }
            }
        }
    }
}
```



```

        // -- this effect is processed first
        post(HorizontalWave()) {
            amplitude = cos(seconds * 3) * 0.1
            frequency = sin(seconds * 2) * 4
            segments = (1 + Math.random() * 20).toInt()
            phase = seconds
        }
        // -- this is the second effect
        post(VerticalWave()) {
            amplitude = sin(seconds * 3) * 0.1
            frequency = cos(seconds * 2) * 4
            segments = (1 + Math.random() * 20).toInt()
            phase = seconds
        }
        // -- and this effect is processed last
        post(ApproximateGaussianBlur()) {
            sigma = cos(seconds * 2) * 5.0 + 5.01
            window = 25
        }
    }
    extend {
        composite.draw(drawer)
    }
}
}

```

[Link to the full example](#)

Opacity

`orx-fx` is made with opacity as a first-class citizen. By default a layer is set to be fully transparent, most blending and post operations are using and preserving opacity.

Blending

Blending describes how the contents of two layers are combined in a composite. The blend functionality `orx-compositor` can be used with any [filter](#) that performs a blend operation. The `orx-fx` filter collection provides [a selection of ready-made blend filters](#).

The following (`orx-fx`) blend filters work well with opacity and have a configurable `clip` option with which the destination layer can be clipped against the source input's opacity:

- `ColorBurn`
- `ColorDodge`
- `Darken`
- `HardLight`
- `Lighten`
- `Multiply`
- `Normal`
- `Overlay`
- `Screen`
- `Add`

- [Subtract](#)

Reusing a layer

It is possible to use the color buffer of a previously declared layer by using `aside`.

```
fun main() = application {
    program {

        val composite = compose {
            // -- keep a reference to the layer for later use
            val first = aside {
                draw {
                    // -- draw something
                }
                // post(...) { ... }
            }

            layer {
                draw {
                    drawer.image(first) // <-- reuse a previous layer
                }
                post(ApproximateGaussianBlur())
                blend(Add())
            }
        }
        extend {
            composite.draw(drawer)
        }
    }
}
```

[demo](#)

Multisampling

Edges on rotated or curved contours can look pixelated in some cases. We can control the smoothness / anti-aliasing of each layer by specifying its multisampling level like this:

```
layer(multisample = BufferMultisample.SampleCount(8)) {
```

where 8 is the desired level. Values between 0 (the default) and 16 are typically used.

[edit on GitHub](#)

OPENRNDR GUIDE

[ORX](#) / Quick UIs

Quick UIs

[orx-gui](#) provides a simple mechanism to create near zero-effort user interfaces. [orx-gui](#) is a tool written on top of [OPENRNDR's UI library](#) with the intention of taking away most mental and work overhead involved in creating simple user interfaces intended for prototyping and hacking purposes. The core principle of [orx-gui](#) is to generate user interfaces only from annotated classes and properties.

[orx-gui](#) relies on annotated classes and properties using the annotations in [orx-parameters](#)

[orx-gui](#) is incredibly powerful in combination with the live coding environment [orx-olive](#), the guide covers that in the [live coding section](#). That said, it is not a required combination.

Prerequisites


Assuming you are working on an [openrndr-template](#) based project, all you have to do is to add `implementation(orx.gui)` to the dependencies block in `build.gradle.kts` and reload Gradle, as described in [ORX](#).

Basic workflow

Using [orx-gui](#) starts with the OPENRNDR program skeleton and extension through `Gui`. It is somewhat uncommon, but this time we want to keep a reference to the extension.

```
fun main() = application {  
  
    program {  
        val gui = GUI()  
        extend(gui)  
    }  
}
```

[Link to the full example](#)

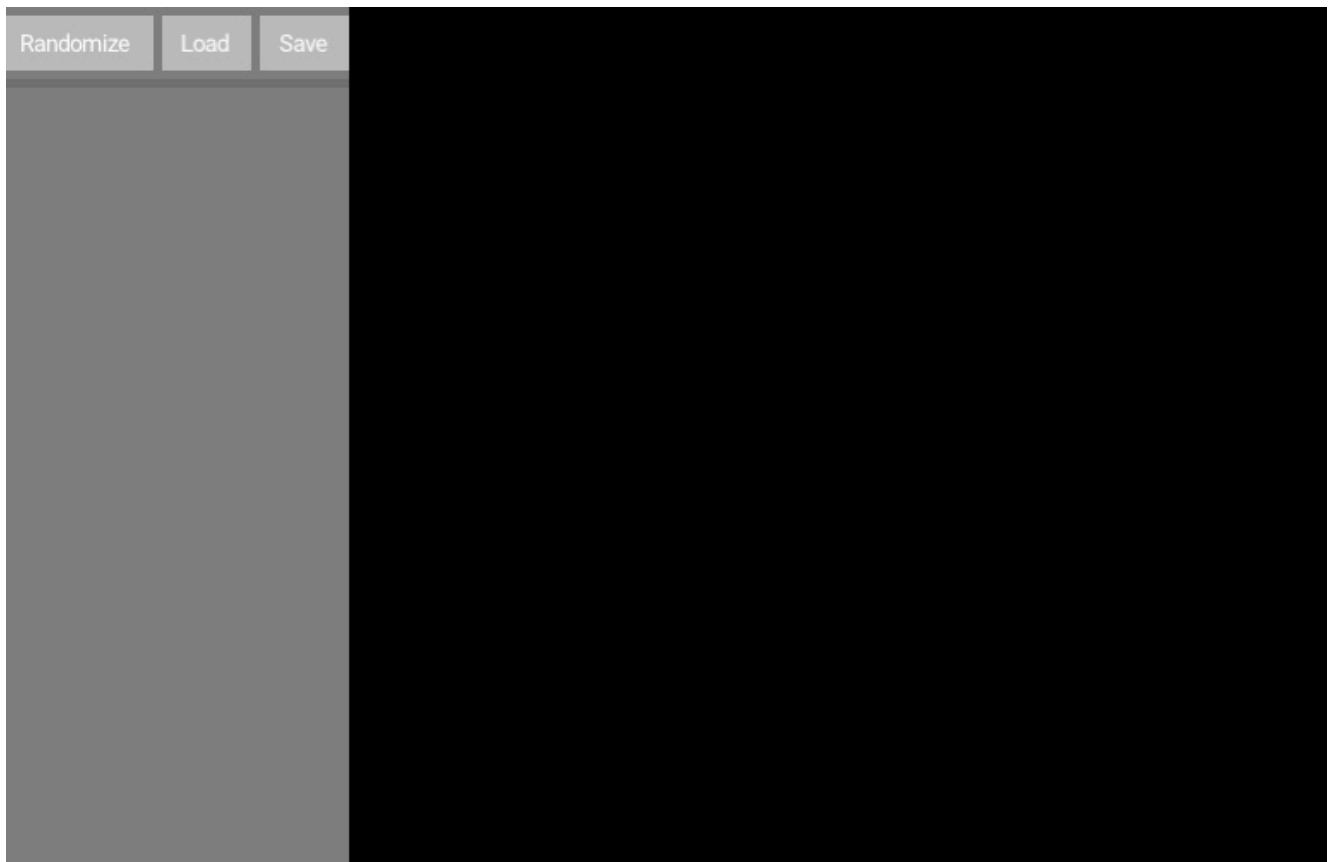

This shows a side panel with 3 buttons: The randomize button can be pressed to randomize the parameters in the sidebar. The load and save button can be used to save the parameter settings to a .json file. Note that the sidebar can be hidden by pressing the F11 button. Compartments can be collapsed by clicking on the compartment header.

Now we want the sidebar put to good use. We can populate the sidebar by adding orx-parameters annotated objects. In the following example we create such an annotated object and add it.

```
fun main() = application {

    program {
        val gui = GUI()

        val settings = object {
            @DoubleParameter("x", 0.0, 770.0)
            var x: Double = 385.0

            @DoubleParameter("y", 0.0, 500.0)
            var y: Double = 250.0

            // Use `var` for your annotated variables.
            // `val` will produce no UI element!
            @DoubleParameter("z", -10.0, 10.0)
            val z: Double = 0.0
        }

        // -- this is why we wanted to keep a reference to gui
        gui.add(settings, "Settings")

        // -- pitfall: the `extend` has to take place after gui is populated
        extend(gui)
    }
}
```

```


    extend {

        // -- use our settings
        drawer.circle(settings.x, settings.y, 100.0)

    }
}

```

[Link to the full example](#)

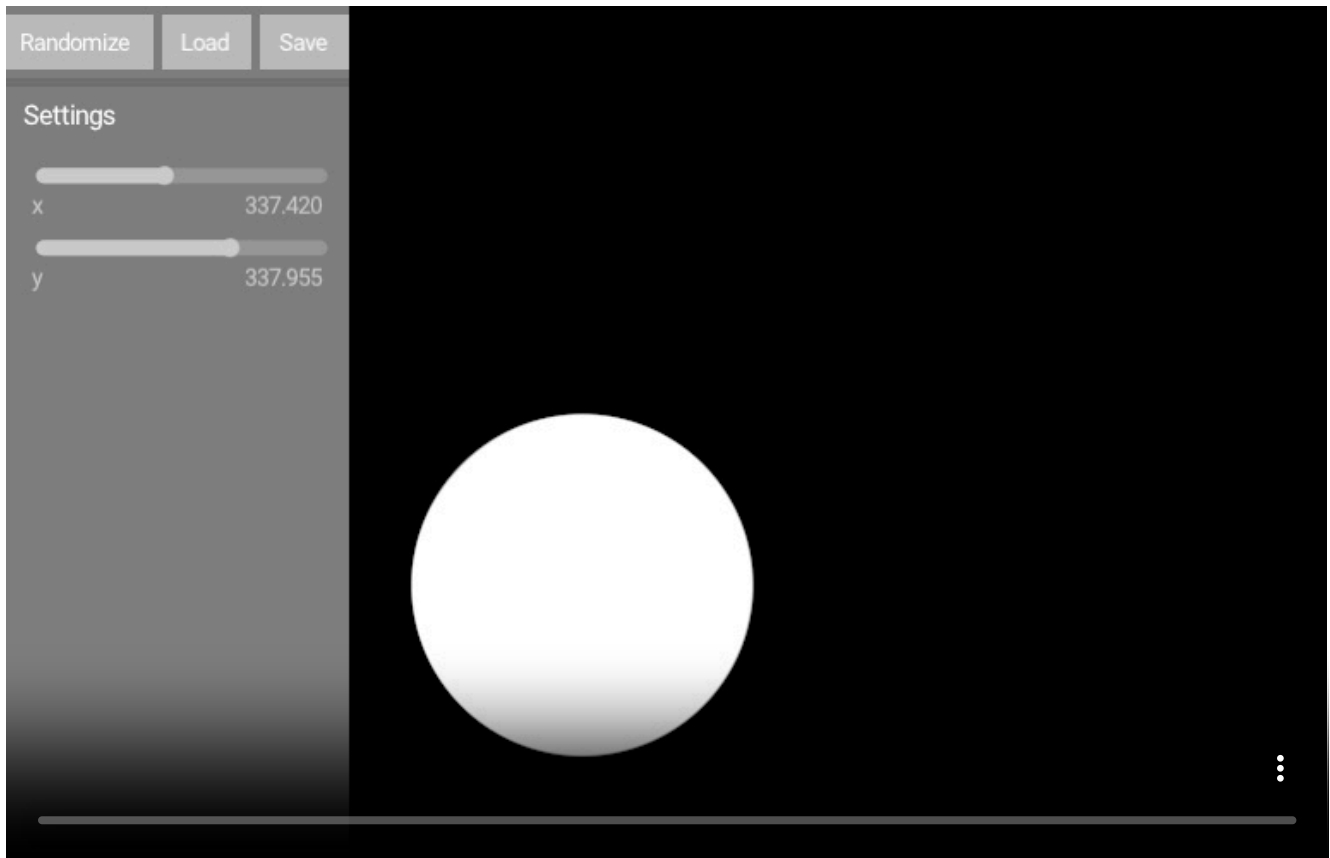

We now see that the sidebar is populated with a *settings* compartment that contains the *x* and *y* parameters. Now whenever we move one of the sliders we will also move our circle that we draw using `settings.x` and `settings.y`

Filter workflow

Not only can user objects added to the sidebar, also most of the Filters in `orx-fx` have `orx-parameters` annotations. That means that we can generate quick user interfaces for any of the filters that `orx-fx` provides.

The guide covers filters in the [Filter and Post-processing chapter](#) and an index of provided filters can be found in [orx-filter index](#)

```

fun main() = application {

    program {
        val gui = GUI()
        val settings = object {
            @DoubleParameter("x", 0.0, 770.0)

```

```

    var x: Double = 385.0

    @DoubleParameter("y", 0.0, 500.0)
    var y: Double = 250.0
}
val rt = renderTarget(width, height) {
    colorBuffer()
}


val filtered = colorBuffer(width, height)
val blur = ApproximateGaussianBlur()

gui.add(blur)
gui.add(settings, "Settings")
// -- pitfall: the `extend` has to take place after gui is populated
extend(gui)
extend {
    drawer.isolatedWithTarget(rt) {
        drawer.clear(ColorRGBa.BLACK)

        // -- use our settings
        drawer.circle(settings.x, settings.y, 100.0)
    }
    blur.apply(rt.colorBuffer(0), filtered)
    drawer.image(filtered)
}
}
}

```

[Link to the full example](#)

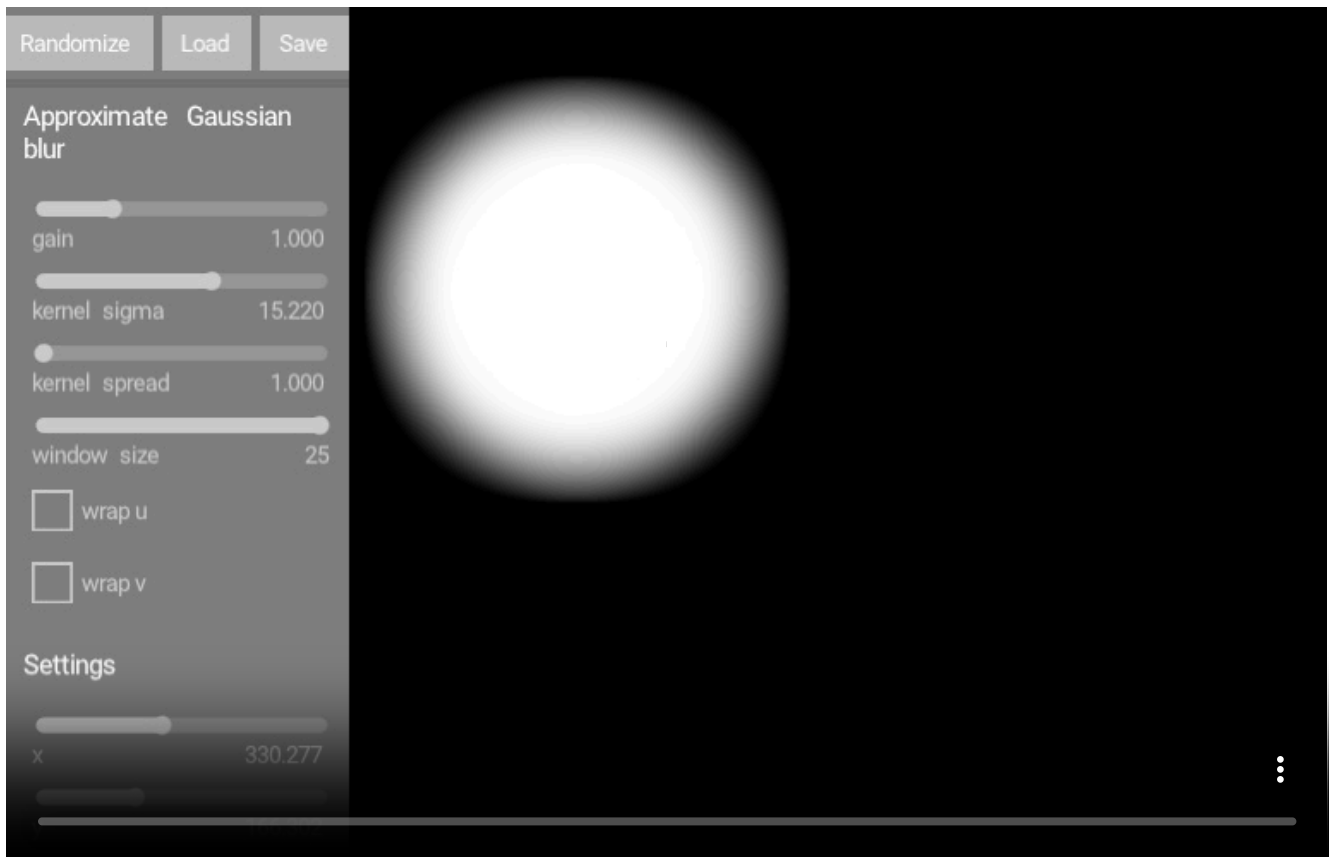

We now see that the sidebar is populated with a *settings* and an *Approximate Gaussian blur* compartment, which contains parameters for the blur filter that we are using.

Compositor workflow

orx-gui and orx-compositor work nicely together. We still need one or more objects for our settings and we can insert any of the blend and post filters in the sidebar as we please. The guide covers orx-compositor in the [Compositor chapter](#)

```
fun main() = application {
    program {
        val gui = GUI()
        val settings = object {
            @DoubleParameter("x", 0.0, 770.0)
            var x: Double = 385.0

            @DoubleParameter("y", 0.0, 500.0)
            var y: Double = 385.0

            @DoubleParameter("separation", -150.0, 150.0)
            var separation: Double = 0.0

            @ColorParameter("background")
            var background = ColorRGBa.PINK
        }
        gui.add(settings, "Settings")


        // -- create a composite
        val composite = compose {
            layer {
                draw {
                    drawer.clear(settings.background)
                }
            }
            layer {
                layer {
                    draw {
                        drawer.fill = ColorRGBa.RED
                        drawer.circle(
                            settings.x - settings.separation,
                            settings.y,
                            200.0
                        )
                    }
                }
                layer {
                    draw {
                        drawer.fill = ColorRGBa.BLUE
                        drawer.circle(
                            settings.x + settings.separation,
                            settings.y,
                            200.0
                        )
                    }
                }
            }
        }
    }
}
```

```

        }
        // -- add blend to layer and sidebar
        blend(gui.add(Multiply(), "Multiply blend"))
        // -- add a layer to the sidebar to toggle it on / off
    }.addTo(gui, "Blue layer")
    // -- add post to layer and sidebar
    post(gui.add(ApproximateGaussianBlur())) {
        sigma = sin(seconds) * 10.0 + 10.01
        window = 25
    }
}
}
extend(gui)
extend {
    composite.draw(drawer)
}
}
}

```

[Link to the full example](#)

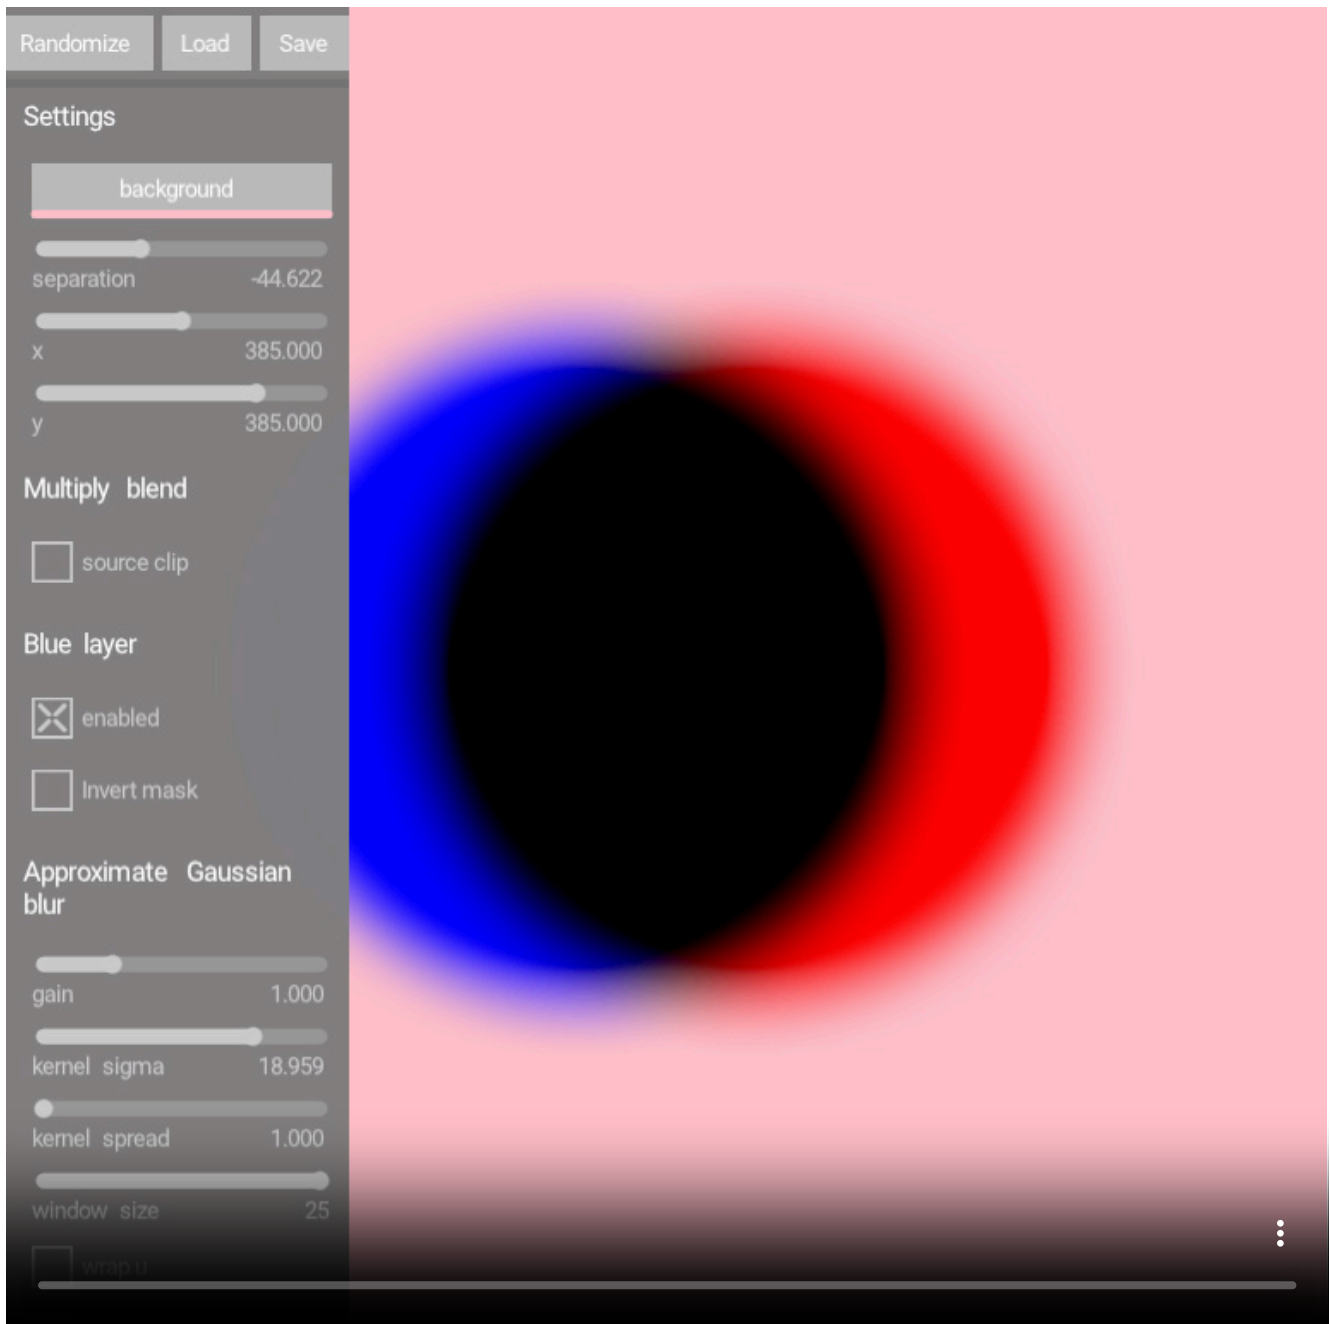

We now see that the sidebar is populated with a *settings*, *Multiply blend*, *Blue layer*, and an *Approximate gaussian blur* compartment. This creates composites that are easy to tweak.

Parameter annotations

We have seen some of the annotations in the workflow descriptions and we have linked to the [orx-parameters code](#) before. But we haven't really spent time explaining the annotations until now. Annotations are a Kotlin language feature that is used to attach metadata to code, if you are unfamiliar with them you are encouraged to read the [annotations chapter](#) in the Kotlin Language Guide. However, to effectively use the `orx-parameters` annotations basically all you have to know is where and when to apply the annotations. The annotations are used in front of mutable class/object properties.

Currently `orx-parameters` has a small set of parameter annotations:

`@DoubleParameter`

`@DoubleParameter` is used in combination with `Double` types. It takes a label, minimum-value, maximum value, and optional precision and order arguments. `orx-gui` will generate a slider control for annotated properties.

```
val settings = object {
    @DoubleParameter("x", 0.0, 100.0, precision = 3, order = 0)
    var x = 0.0
}
```

@IntParameter

@IntParameter is used in combination with Int types. It takes a label, minimum-value, maximum value, and an optional order argument. orx-gui will generate a slider control for annotated properties.

```
val settings = object {
    @IntParameter("x", 0, 100, order = 0)
    var x = 0
}
```

@ColorParameter

@ColorParameter is used in combination with Color types. It takes an optional order argument. orx-gui will generate a color picker control for annotated properties.

```
val settings = object {
    @ColorParameter("color", order = 0)
    var color = ColorRGBa.PINK
}
```

@TextParameter

@TextParameter is used in combination with String types. It takes an optional order argument. orx-gui will generate a text field control for annotated properties.

```
val settings = object {
    @TextParameter("text", order = 0)
    var text = "default text value"
}
```

@BooleanParameter

@BooleanParameter is used in combination with Boolean types. It takes an optional order argument. orx-gui will generate a checkbox or toggle control for annotated properties.

```
val settings = object {
    @BooleanParameter("option", order = 0)
    var b = false
}
```

@XYParameter

@XYParameter is used in combination with Vector2 types. It takes an optional order argument. orx-gui will generate a two dimensional pad control for annotated properties.

```
val settings = object {
    @XYParameter("xy", order = 0)
    var xy = Vector2.ZERO
}
```

@Vector2Parameter

`@Vector2Parameter` is used in combination with `Vector2` types. It takes an optional order argument. `orx-gui` will generate a vertical slider for annotated properties.

```
val settings = object {  
    @Vector2Parameter("vector2", order = 0)  
    var v2 = Vector2.ZERO  
}
```

`@Vector3Parameter`

`@Vector3Parameter` is used in combination with `Vector3` types. It takes an optional order argument. `orx-gui` will generate a vertical slider for annotated properties.

```
val settings = object {  
    @Vector3Parameter("vector3", order = 0)  
    var v3 = Vector3.ZERO  
}
```

`@Vector4Parameter`

`@Vector4Parameter` is used in combination with `Vector4` types. It takes an optional order argument. `orx-gui` will generate a vertical slider for annotated properties.

```
val settings = object {  
    @Vector4Parameter("vector4", order = 0)  
    var v4 = Vector4.ZERO  
}
```

`@DoubleListParameter`

`@DoubleListParameter` is used in combination with a list of `Double`. It takes an optional order argument. `orx-gui` will generate a set of vertical sliders.

```
val settings = object {  
    @DoubleListParameter("Mixer", order = 0)  
    var mixer = MutableList(5) { 0.5 }  
}
```

`@OptionParameter`

`@OptionParameter` is used in combination with an `enum`. It takes an optional order argument. `orx-gui` will generate a dropdown including all options in the `enum`.

```
val settings = object {  
    @OptionParameter("Blend mode", order = 0)  
    var blendMode = BlendMode.ADD  
}
```

`@ListParameter`

`@ListParameter` is used in combination with a `SelectableList` instance: an immutable `List` that keeps track of a selected item. In the following example, we could access `settings.fruits.selected` to get the selected element, or update `settings.fruits.selectedIndex` to change the selected element. All `List` methods are available, for instance `settings.fruits.size` OR `settings.fruits.first()`.

```
val settings = object {  
    @ListParameter("Fruit", order = 0)
```

```
var fruits = SelectableList(listOf("apple", "orange"), selectedIndex = 0)
}
```

@MutableListParameter

@MutableListParameter is used in combination with a SelectableMutableList instance: a MutableList that keeps track of a selected item. In the following example, we could access settings.amounts.selected to get the selected element, or update settings.amounts.selectedIndex to change its the selected element. All MutableList methods can be used, for instance settings.amounts.add(40) or settings.amounts.clear().

```
val settings = object {
    @MutableListParameter("Amount", order = 0)
    var amounts = SelectableMutableList(listOf(10, 20, 30), selectedIndex = 1)
}
```

@ActionParameter

@ActionParameter is a bit of an odd-one-out, it is not used to annotate properties but to annotate 0-argument functions. orx-gui will generate a button control that will call the function when clicked.

```
val settings = object {
    @ActionParameter("Save", order = 0)
    fun doSave() {
        println("file saved!")
    }
}
```

Appearance

The following example demonstrates how to set the base color of a GUI, its width, its colors and the font size. All the arguments are optional.

```
fun main() = application {
    program {
        val gui = GUI(
            GUIAppearance(
                baseColor = ColorRGBa.DARK_BLUE.opacify(0.7),
                barWidth = 250
            ),
            defaultStyles(
                controlBackground = ColorRGBa.DARK_ORCHID.shade(0.7),
                controlHoverBackground = ColorRGBa.DARK_ORCHID,
                controlTextColor = Color.RGBa(ColorRGBa.YELLOW),
                controlActiveColor = Color.RGBa(ColorRGBa.CYAN),
                controlFontSize = 20.0
            )
        )
        val settings = @Description("Compartment 1") object {
            @DoubleParameter("x", 0.0, 200.0)
            var x: Double = 100.0
        }


        gui.compartmentsCollapsedByDefault = false
        gui.add(settings, "Settings")
    }
}
```

```

    extend(gui)
    extend {
        drawer.clear(ColorRGBa.PINK)
        drawer.circle(drawer.bounds.center, 200.0)
    }
}
}

```

[Link to the full example](#)

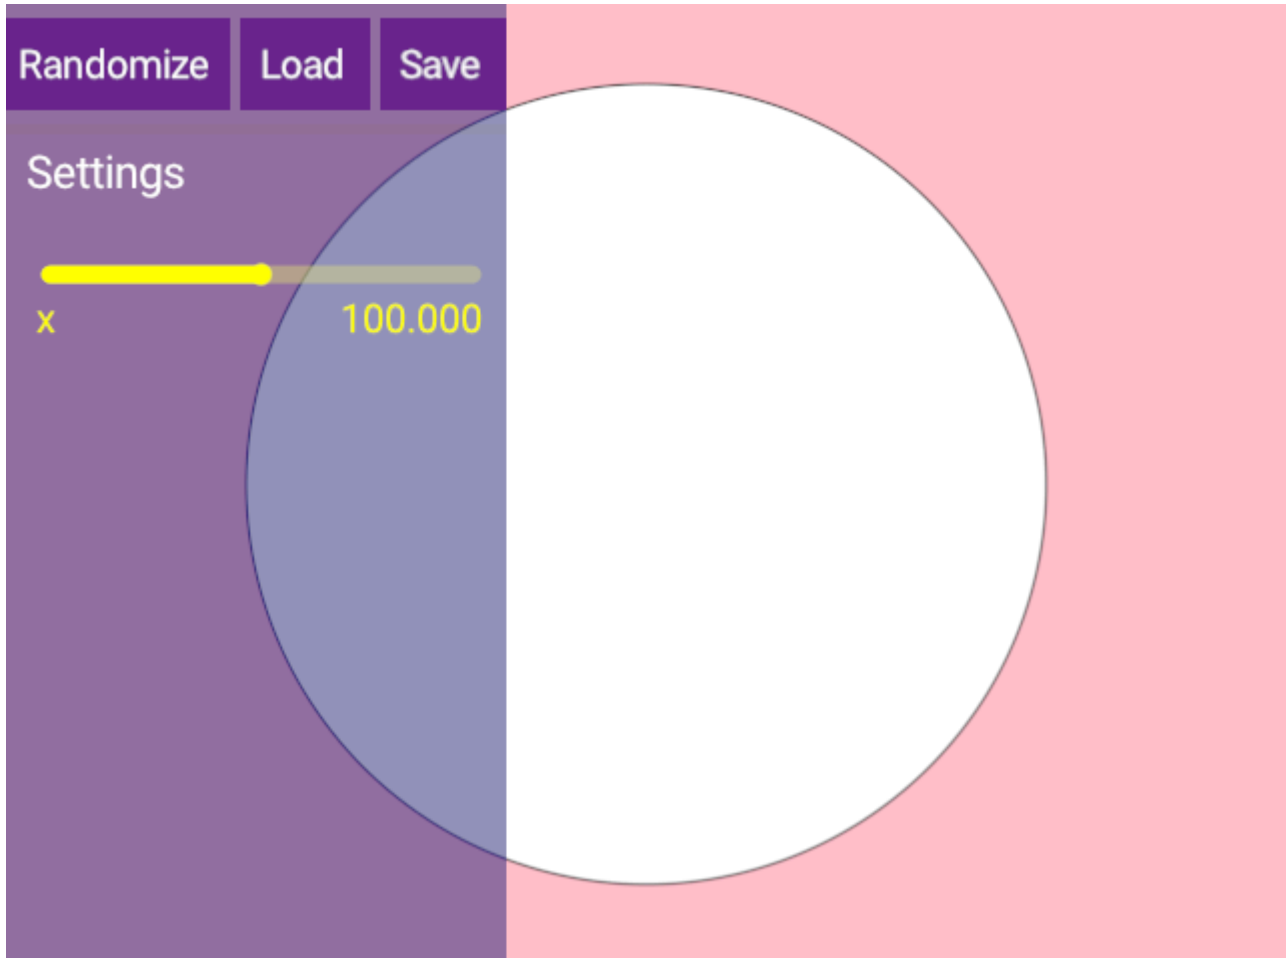

WindowedGUI

If you prefer the GUI to be displayed in a separate window independent from your main rendering window, replace `GUI()` by `WindowedGUI()`.

```

fun main() = application {
    program {
        val gui = WindowedGUI()
        extend(gui)
    }
}

```

GUI defaults and events

Collapsed compartments

By default, GUI compartments are collapsed by default. To invert the default and expand all compartments, call `gui.compartmentsCollapsedByDefault = false` after constructing the GUI.

Persistent state

Another default GUI behavior is to save a JSON file with the state of the GUI when closing the program, and loading that saved state when the program starts. This behavior can be switched off via `gui.persistState = false`.

Change events

To be notified of GUI changes, maybe to update graphics or perform calculations based on the data kept by the GUI, add a listener like this:

```
gui.onChange { name, value -> println("$name: $value") }
```

Note: `WindowedGUI` is a wrapper around `GUI`. To adjust its defaults, use `gui.gui` instead of `gui`. For instance `gui.gui.compartmentsCollapsedByDefault = false`.

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Shade style presets


The `orx-shade-styles` library provides a number of preset [shade styles](#)

Prerequisites

If you are working on an [openrndr-template](#) based project, `orx-shade-styles` should be ready to use because it is part of the basic orx bundle, as described in [ORX](#).

Linear gradient

The `gradient` shade style constructor is a powerful generator for gradients. In the background it produces GLSL code that runs in the GPU. It accepts an arbitrary number of colors between `stops[0.0]` and `stops[1.0]`.

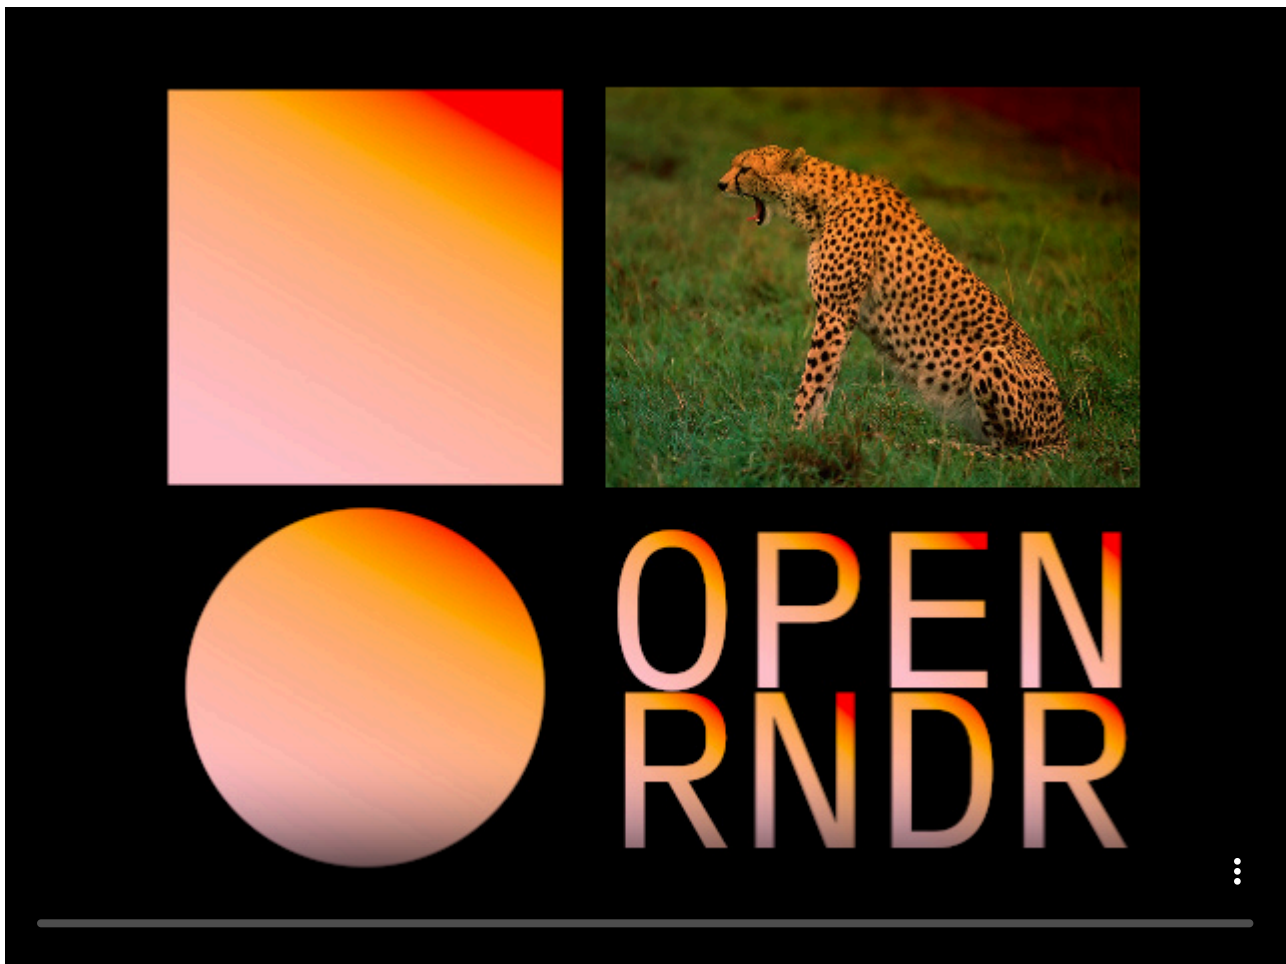

```
fun main() = application {  
  program {  
    val image = loadImage("data/images/cheeta.jpg")  
    val font = loadFont("data/fonts/default.otf", 144.0)  
    extend {  
      drawer.shadeStyle = gradient<ColorRGBa> {  
        stops[0.0] = ColorRGBa.PINK  
        stops[0.8] = ColorRGBa.ORANGE  
        stops[1.0] = ColorRGBa.RED  
        linear {
```

```


        start = Polar(seconds * 60.0, 0.5).cartesian + 0.5
        end = Polar(seconds * 60.0 + 180.0, 0.5).cartesian + 0.5
    }
}
drawer.rectangle(80.0, 40.0, 200.0, 200.0)
drawer.circle(180.0, 340.0, 90.0)
drawer.image(image, 300.0, 40.0, 640 * (200 / 480.0), 200.0)
drawer.fontMap = font
drawer.text("OPEN", 300.0, 340.0)
drawer.text("RNDR", 300.0, 420.0)
}
}
}

```

[Link to the full example](#)

Radial gradient

Radial gradients blend colors based on the distance to a center point. In this example the center point's x and y coordinates are animated using the sine and cosine of time.

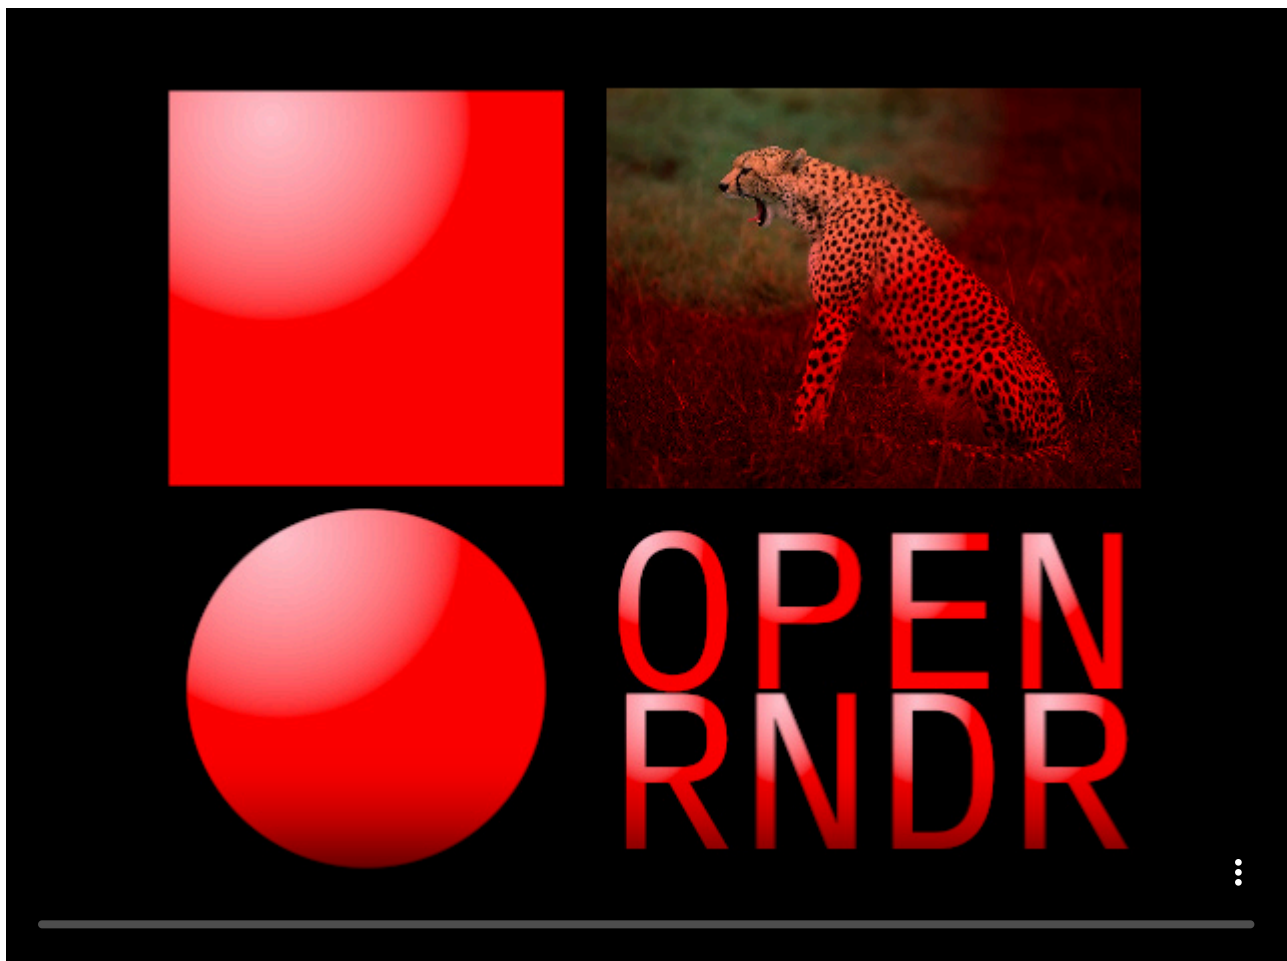

```

drawer.shadeStyle = gradient<ColorRGBa> {
    stops[0.0] = ColorRGBa.PINK
    stops[1.0] = ColorRGBa.RED
    radial {
        radius = 0.5
        center = Vector2(cos(seconds), sin(seconds * 2.0)) * 0.5 + 0.5
    }
}

```




```
}  
}
```

[Link to the full example](#)

Conic gradient

Here we can see that `ColorOKLABa` is also supported by the `gradient` generator.

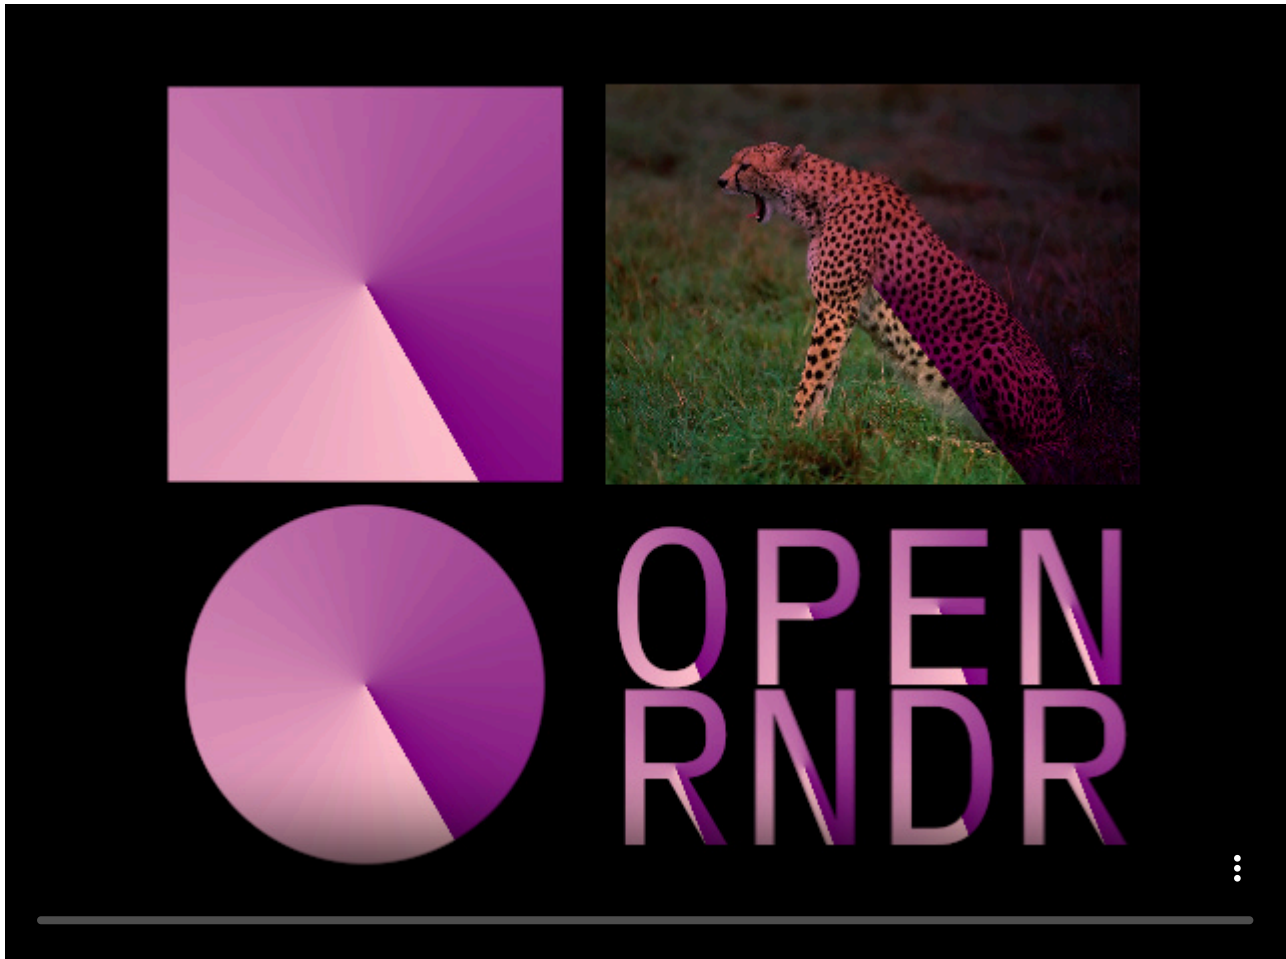


```
drawer.shadeStyle = gradient<ColorOKLABa> {  
  stops[0.0] = ColorRGBa.PINK.toOKLABa()  
  stops[1.0] = ColorRGBa.PURPLE.toOKLABa()  
  conic {  
    rotation = seconds * 60.0  
  }  
}
```

[Link to the full example](#)

Mirrored conic gradient

Here we increase the angle to 720.0 and use `SpreadMethod.REFLECT` to mirror the gradient.

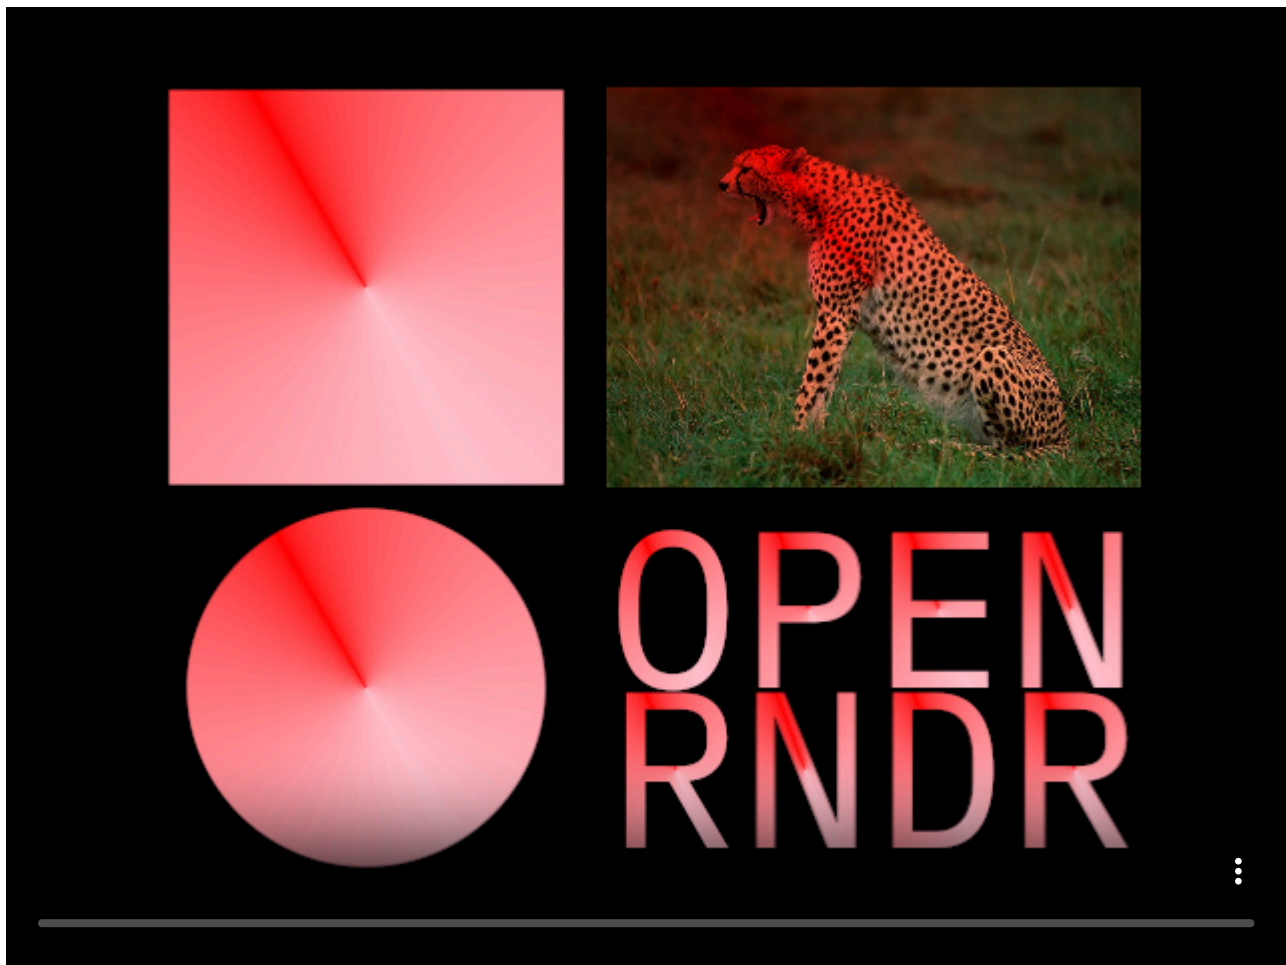

```
drawer.shadeStyle = gradient<ColorRGBA> {  
  stops[0.0] = ColorRGBA.PINK  
  stops[1.0] = ColorRGBA.RED  
  spreadMethod = SpreadMethod.REFLECT  
  conic {  
    angle = 360.0 * 2  
    rotation = seconds * 60.0  
  }  
}
```


[Link to the full example](#)

Quantize and levelWarpFunction

This program demonstrates two more gradient features. The first one is quantization, which lets us define how many discrete colors we want our gradient to have.

The second new feature is an advanced one: `levelWarpFunction` lets us inject custom GLSL code into our shader to modify the gradient level based on the default level, on the pixel's coordinates, or both. We apply here a very simple adjustment, to elevate the level to a power of 1.0, 2.0 or 3.0, which skews the balance between white and black.

When using `levelWarpFunction`, provide a string formatted like this: `float levelWarp(vec2 p, float level) { return ____; }` where `____` evaluates to a float, typically based in the `p` and/or `level` arguments.

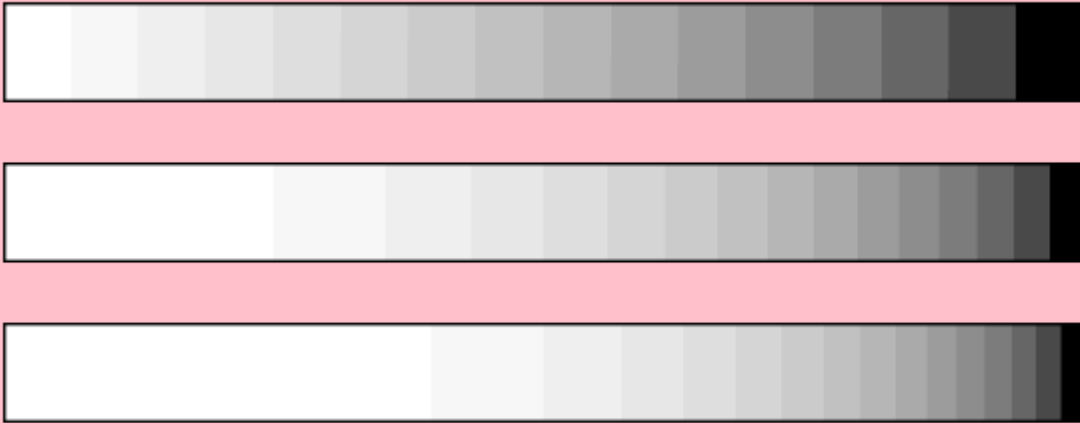

```
fun main() = application {
  program {
    extend {
      drawer.clear(ColorRGBa.PINK)
      repeat(3) {
        val e = it + 1.0
        drawer.shadeStyle = gradient<ColorRGBa> {
          stops[0.0] = ColorRGBa.WHITE
          stops[1.0] = ColorRGBa.BLACK
          quantization = 16
          levelWarpFunction = "float levelWarp(vec2 p, float level) { return pow(level, $e); }"
          linear { }
        }
        drawer.rectangle(50.0, 50.0 + it * 80.0, width - 100.0, 50.0)
      }
    }
  }
}
```

[Link to the full example](#)

domainWarpFunction

One more advanced feature available to us is `domainWarpFunction`, which lets us inject custom GLSL code into our shader to distort the gradient calculations based on the pixel's coordinates.

When using `levelWarpFunction`, provide a string formatted like this: `vec2 domainWarp(vec2 coord) { return __; } where __ evaluates to a vec2 based on the input coord.`



```
fun main() = application {
  program {
    extend {
      drawer.clear(ColorRGBa.PINK)
      repeat(3) {
        val e = it * 0.02
        drawer.shadeStyle = gradient<ColorRGBa> {
          stops[0.0] = ColorRGBa.WHITE
          stops[1.0] = ColorRGBa.BLACK
          domainWarpFunction = "vec2 domainWarp(vec2 p) { return p + sin(p * 50.0) * $e; }"
          radial { }
        }
        drawer.rectangle(50.0, 50.0 + it * 130.0, width - 100.0, 110.0)
      }
    }
  }
}
```

[Link to the full example](#)

For more examples, explore the available [gradient demos](#).

[edit on GitHub](#)

[ORX](#) / Image fit


Image fit

`orx-image-fit` provides functionality to making the drawing and placement of images somewhat easier. `orx-image` Fits images in frames with two options, contain and cover, similar to CSS object-fit.

Prerequisites

If you are working on an [openrndr-template](#) based project, `orx-image-fit` should be ready to use because it is part of the basic orx bundle, as described in [ORX](#).

Contain mode

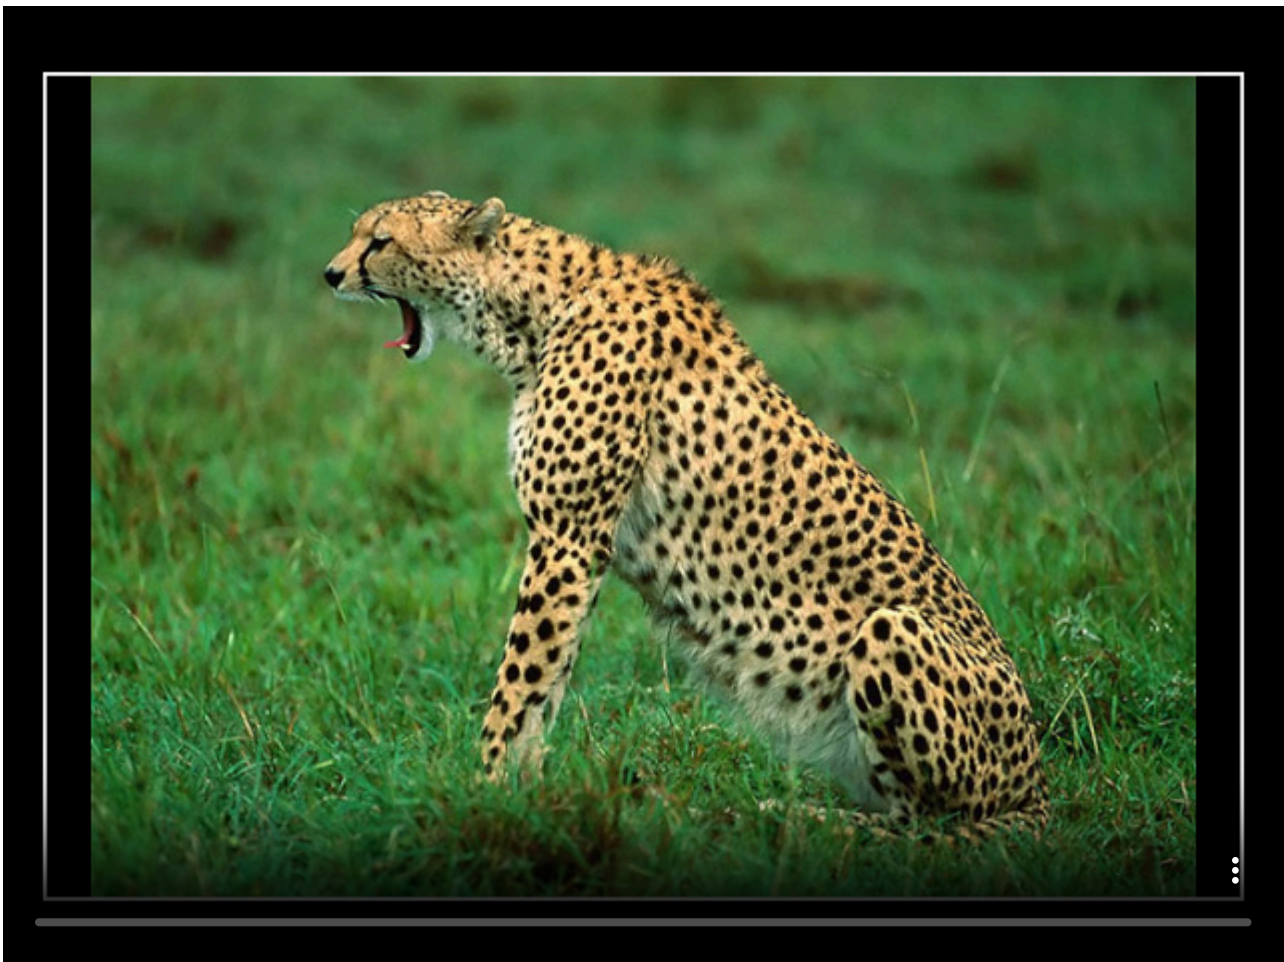


```
fun main() = application {
    program {
        val image = loadImage("data/images/cheeta.jpg")
        extend {
            val margin = cos(seconds) * 50.0 + 50.0
            drawer.imageFit(image, 20.0, 20.0 + margin / 2, width - 40.0, height - 40.0 - margin, fitMethod =
FitMethod.Contain)
            // -- illustrate the placement rectangle
            drawer.fill = null
            drawer.stroke = ColorRGBA.WHITE
            drawer.rectangle(20.0, 20.0 + margin / 2.0, width - 40.0, height - 40.0 - margin)
        }
    }
}
```

```
}  
}
```

[Link to the full example](#)


Additionally the placement of the image in the rectangle can be adjusted

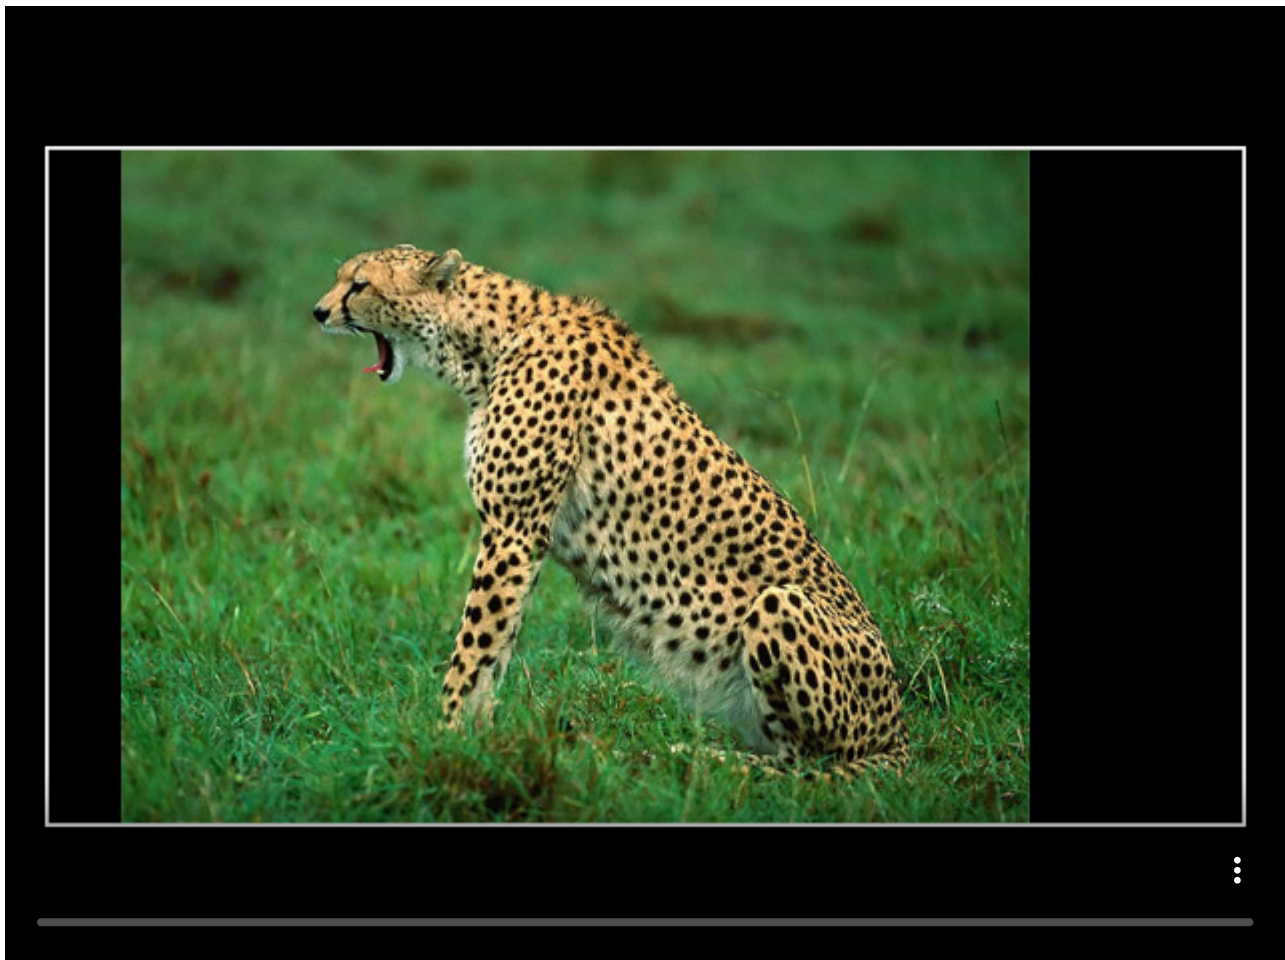

```
fun main() = application {  
    program {  
        val image = loadImage("data/images/cheeta.jpg")  
        extend {  
            val margin = 100.0  
            drawer.imageFit(image, 20.0, 20.0 + margin / 2, width - 40.0, height - 40.0 - margin, horizontalPosition  
= cos(seconds) * 1.0, fitMethod = FitMethod.Contain)  
            // -- illustrate the placement rectangle  
            drawer.fill = null  
            drawer.stroke = ColorRGBA.WHITE  
            drawer.rectangle(20.0, 20.0 + margin / 2.0, width - 40.0, height - 40.0 - margin)  
        }  
    }  
}
```

[Link to the full example](#)

Cover mode

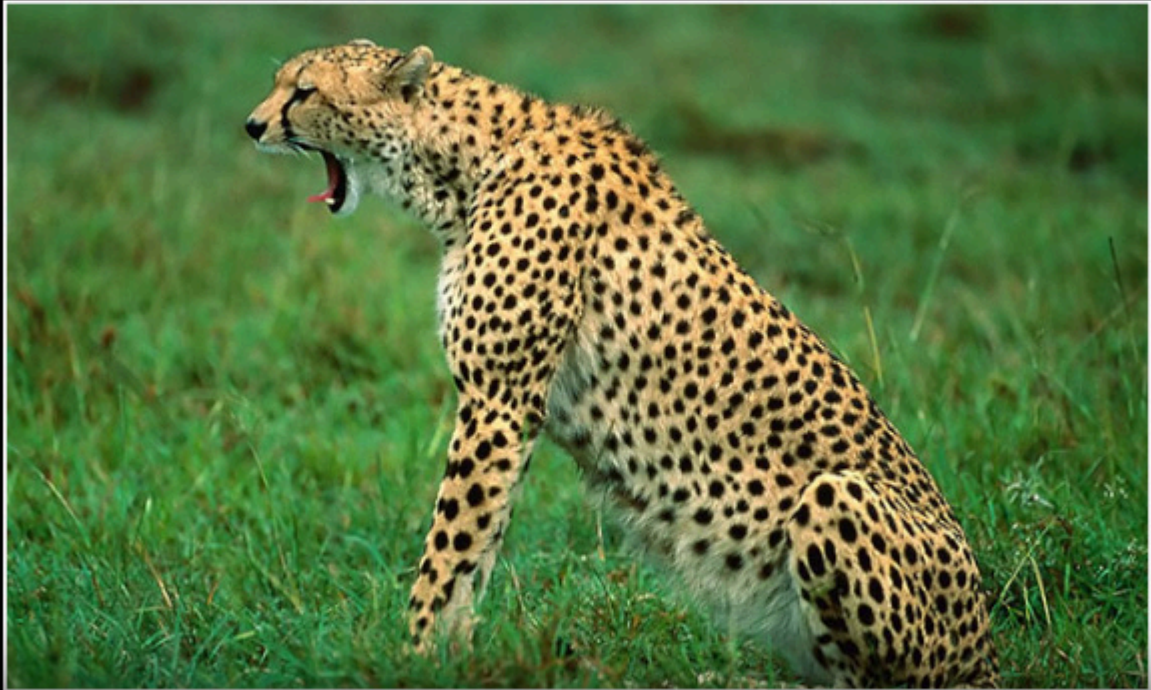


```
fun main() = application {
    program {
        val image = loadImage("data/images/cheeta.jpg")
        extend {
            // -- calculate dynamic margins
            val xm = cos(seconds) * 50.0 + 50.0
            val ym = sin(seconds) * 50.0 + 50.0

            drawer.imageFit(image, 20.0 + xm / 2.0, 20.0 + ym / 2, width - 40.0 - xm, height - 40.0 - ym)

            // -- illustrate the placement rectangle
            drawer.fill = null
            drawer.stroke = ColorRGBA.WHITE
            drawer.rectangle(20.0 + xm / 2.0, 20.0 + ym / 2.0, width - 40.0 - xm, height - 40.0 - ym)
        }
    }
}
```

[Link to the full example](#)

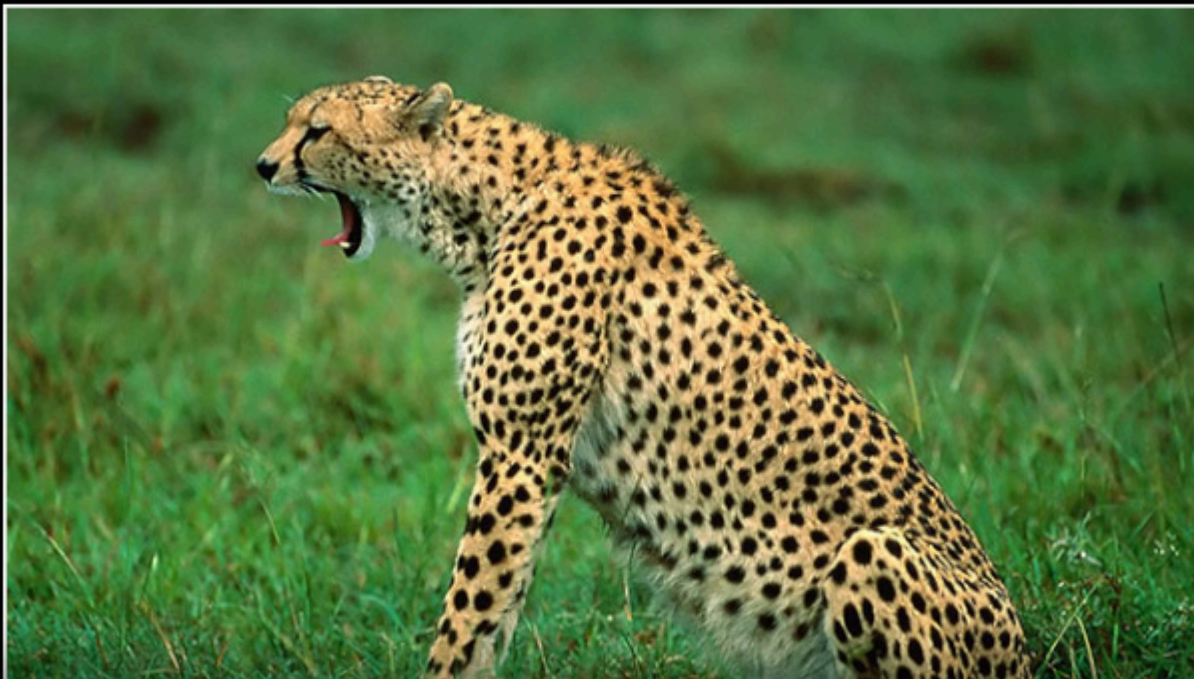

Additionally the placement of the image in the rectangle can be adjusted

```
fun main() = application {
    program {
        val image = loadImage("data/images/cheeta.jpg")
        extend {
            val margin = 100.0
            drawer.imageFit(image, 20.0, 20.0 + margin / 2, width - 40.0, height - 40.0 - margin, verticalPosition =
cos(seconds) * 1.0)

            // -- illustrate the placement rectangle
            drawer.fill = null
            drawer.stroke = ColorRGBA.WHITE
            drawer.rectangle(20.0, 20.0 + margin / 2.0, width - 40.0, height - 40.0 - margin)
        }
    }
}
```

[Link to the full example](#)

[edit on GitHub](#)

Poisson fills


orx-poisson-fills offers tool for GPU-based Poisson operations.

Prerequisites

Assuming you are working on an [openrndr-template](#) based project, all you have to do is to add `implementation(orx.poisson.fill)` to the `dependencies` block in `build.gradle.kts` and reload Gradle, as described in [ORX](#).

Filling

The `PoissonFill` filter can be used to fill in transparent parts of an image. In the following example we use `orx-compose` to simplify the code a bit. The same results can be achieved using render targets.

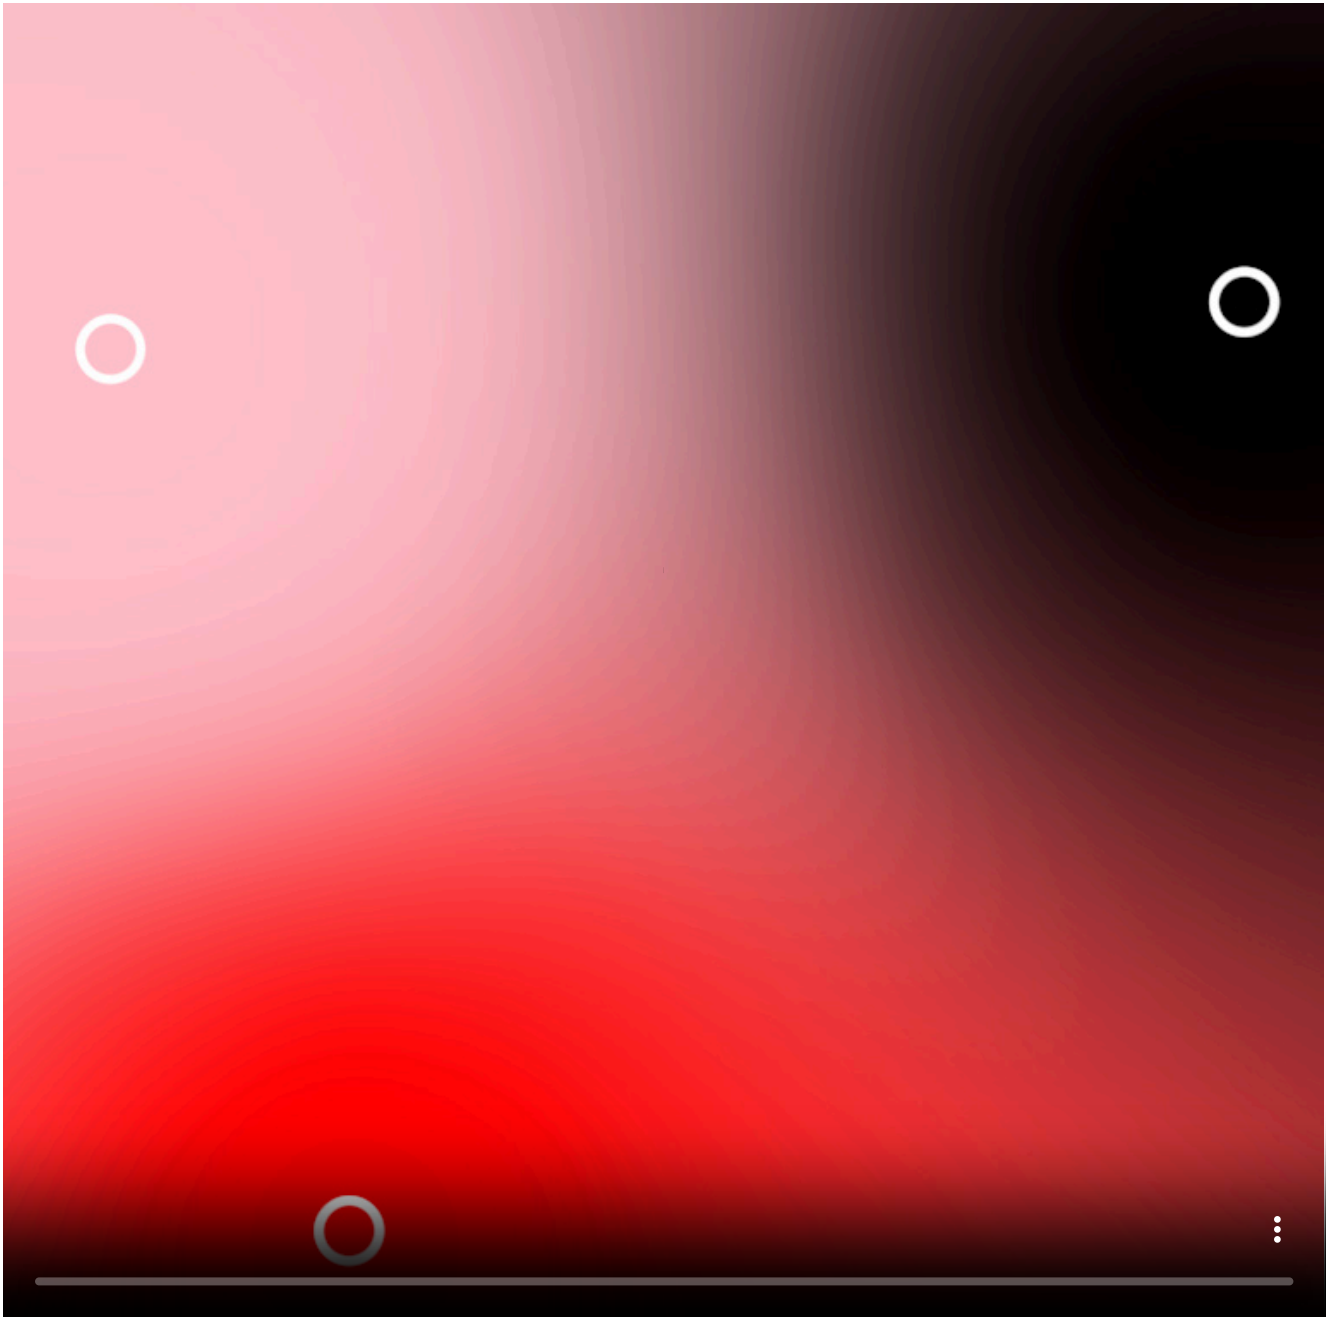

```

fun main() = application {
  program {
    val c = compose {
      layer {
        draw {
          drawer.stroke = null
          drawer.fill = ColorRGBa.RED
          drawer.circle(
            (cos(seconds) * 0.5 + 0.5) * width,
            (sin(seconds * 0.5) * 0.5 + 0.5) * height,
            20.0
          )
          drawer.fill = ColorRGBa.PINK
          drawer.circle(
            (sin(seconds * 2.0) * 0.5 + 0.5) * width,
            (cos(seconds) * 0.5 + 0.5) * height,
            20.0
          )

          drawer.fill = ColorRGBa.BLACK
          drawer.circle(
            (sin(seconds * 1.0) * 0.5 + 0.5) * width,
            (cos(seconds * 2.0) * 0.5 + 0.5) * height,
            20.0
          )
        }
        post(PoissonFill())
      }
      layer {
        // -- an extra layer just to demonstrate where the original data points are drawn
        draw {
          drawer.stroke = ColorRGBa.WHITE
          drawer.strokeWeight = 5.0
          drawer.fill = ColorRGBa.RED
          drawer.circle(
            (cos(seconds) * 0.5 + 0.5) * width,
            (sin(seconds * 0.5) * 0.5 + 0.5) * height,
            20.0
          )
          drawer.fill = ColorRGBa.PINK
          drawer.circle(
            (sin(seconds * 2.0) * 0.5 + 0.5) * width,
            (cos(seconds) * 0.5 + 0.5) * height,
            20.0
          )

          drawer.fill = ColorRGBa.BLACK
          drawer.circle(
            (sin(seconds * 1.0) * 0.5 + 0.5) * width,
            (cos(seconds * 2.0) * 0.5 + 0.5) * height,
            20.0
          )
        }
      }
    }
  }
}

```

```
    }  
  }  
}  
extend {  
  c.draw(drawer)  
}  
}  
}
```

[Link to the full example](#)



```
fun main() = application {  
  program {  
    val c = compose {  
      layer {  
        val image = loadImage("data/images/cheeta.jpg")  
        draw {  
          drawer.image(  


```

```
        image,
        Rectangle(
            (cos(seconds) * 0.5 + 0.5) * 100.0,
            (sin(seconds) * 0.5 + 0.5) * 100.0,
            200.0,
            200.0
        ),
        Rectangle(
            width / 2 - 100.0,
            height / 2.0 - 100.0,
            200.0,
            200.0
        )
    )
}
post(PoissonFill())
}

}
extend {
    c.draw(drawer)
}
}
}
```


[Link to the full example](#)

Blending

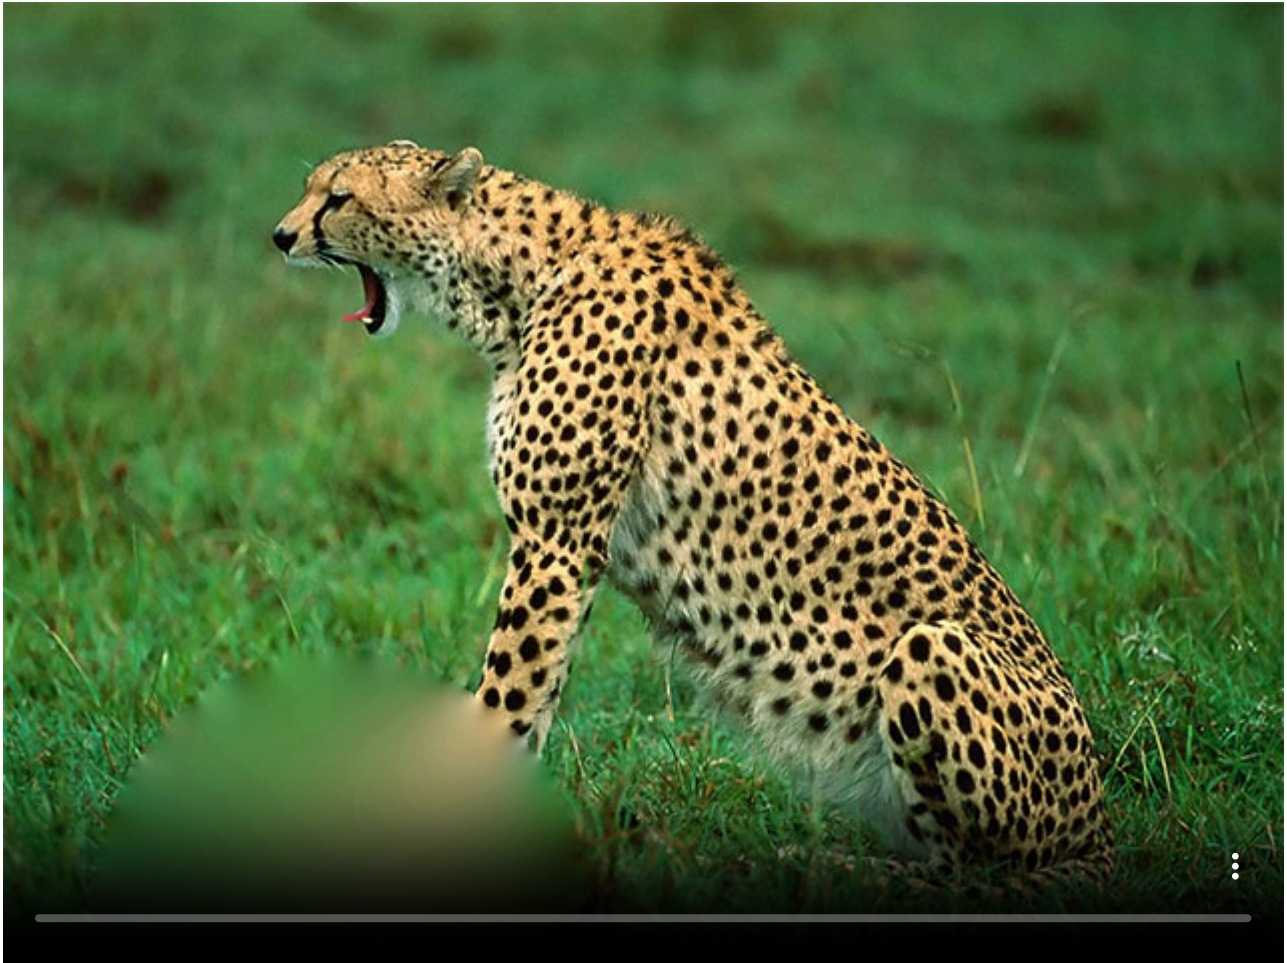

```
fun main() = application {
    program {
        val c = compose {
            layer {
                val image = loadImage("data/images/cheeta.jpg")
                draw {
                    drawer.image(image)
                }
            }
            layer {
                draw {
                    drawer.stroke = null
                    drawer.fill = ColorRGBA.BLACK
                    drawer.circle(
                        (cos(seconds) * 0.5 + 0.5) * width,
                        (sin(seconds * 0.5) * 0.5 + 0.5) * height,
                        120.0
                    )
                }
                blend(PoissonBlend())
            }
        }
        extend {
            c.draw(drawer)
        }
    }
}
```

[Link to the full example](#)

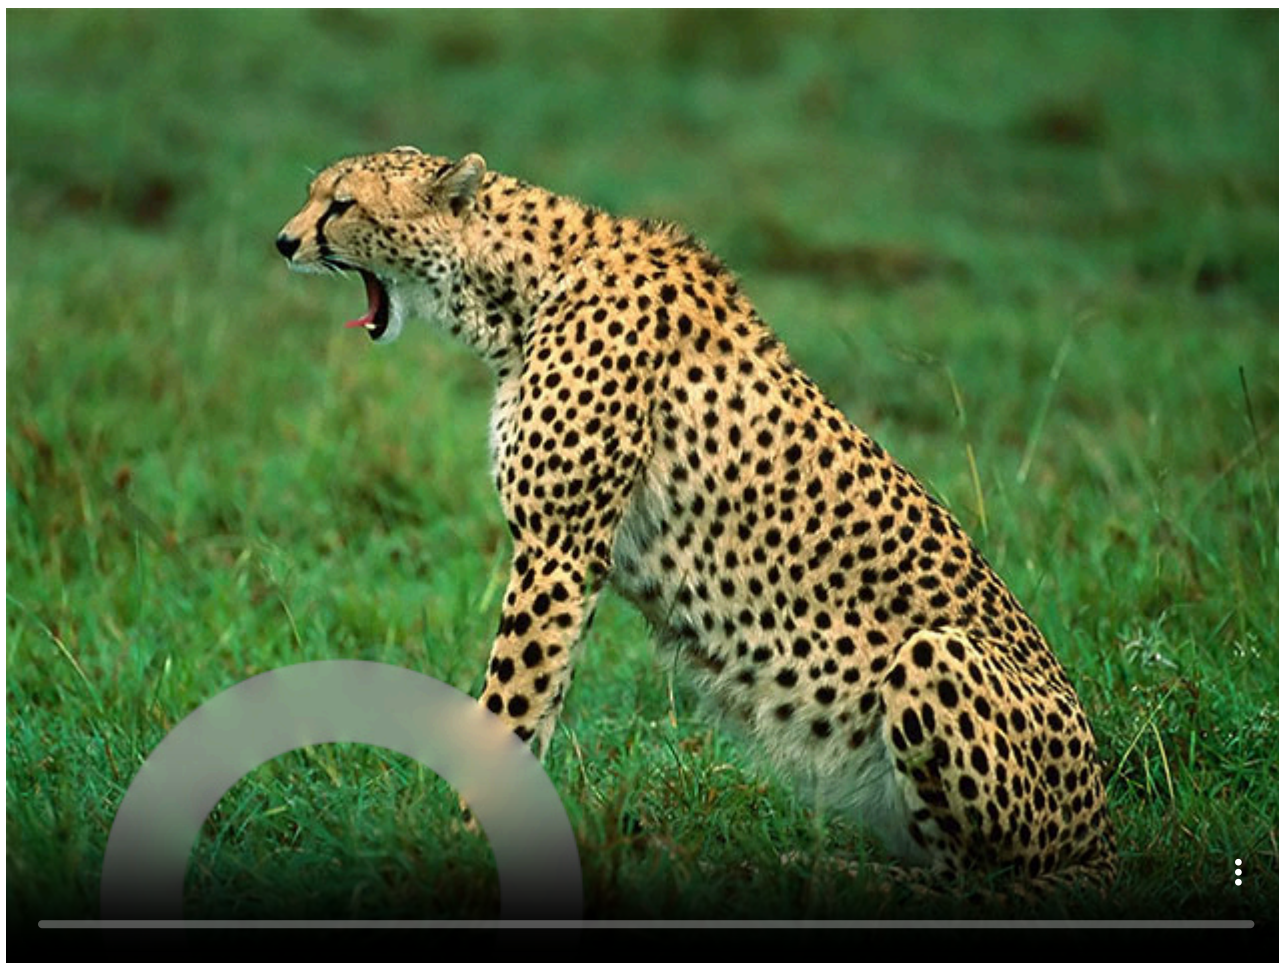

```
fun main() = application {
    program {
        val image = loadImage("data/images/cheeta.jpg")

        val c = compose {
            layer {
                draw {
                    drawer.image(image)
                }
            }
            layer {
                draw {
                    drawer.stroke = ColorRGBA.GRAY
                    drawer.fill = null
                    drawer.strokeWeight = 40.0
                    drawer.circle(
                        (cos(seconds) * 0.5 + 0.5) * width,
                        (sin(seconds * 0.5) * 0.5 + 0.5) * height,
                        120.0
                    )
                }
            }
            //post(LumaOpacity()) {
            //    this.backgroundLuma = 0.8
            //}
```

```
        blend(PoissonBlend())
    }
}
extend {
    c.draw(drawer)
}
}
}
```

[Link to the full example](#)

[edit on GitHub](#)


This site uses [Just the Docs](#), a documentation theme for Jekyll.

Distance fields using orx-jumpflood

Prerequisites

Assuming you are working on an [openrndr-template](#) based project, all you have to do is to add `implementation(orx.jumpflood)` to the `dependencies` block in `build.gradle.kts` and reload Gradle, as described in [ORX](#).

Distance field visualization



```
fun main() = application {
    program {

        val image = loadImage("data/images/cheeta.jpg")

        val c = compose {
            layer {
                colorType = ColorType.FLOAT32

                draw {
                    drawer.image(image)
                }
            }
            post(DistanceField()) {
                threshold = cos(seconds) * 0.5 + 0.5
            }
        }
    }
}
```



```

        distanceScale = 0.008
    }
}
}
extend {
    // FIXME
    //c.draw(drawer)
}
}
}
}

```

[Link to the full example](#)

Outer glow

orx-jumpflood comes with a filter that creates Photoshop-style outer glow effect.



```

fun main() = application {
    program {
        val c = compose {
            layer {
                draw {
                    drawer.fill = ColorRGBA.PINK
                    drawer.circle(width / 2.0, height / 2.0, 200.0)
                }
                post(OuterGlow()) {
                    this.width = (cos(seconds) * 0.5 + 0.5) * 100.0
                }
            }
        }
    }
}

```

```

    }
  }
  extend {
    // FIXME
    //c.draw(drawer)
  }
}
}

```

[Link to the full example](#)

Inner glow

Similar to the outer glow effect, but the glow is placed in the inside of the shape.



```


fun main() = application {
  program {
    val c = compose {
      layer {
        draw {
          drawer.fill = ColorRGBa.PINK
          drawer.circle(width / 2.0, height / 2.0, 200.0)
        }
        post(InnerGlow()) {
          this.width = (cos(seconds) * 0.5 + 0.5) * 100.0
        }
      }
    }
  }
}

```

```
    extend {  
        // FIXME  
        //c.draw(drawer)  
    }  
}  
}
```

[Link to the full example](#)

Sampling distance



```
fun main() = application {  
    program {  
  
        val image = loadImage("data/images/cheeta.jpg")  
  
        val c = compose {  
            // -- make sure accumulation is done in float32  
            colorType = ColorType.FLOAT32  
            layer {  
                colorType = ColorType.FLOAT32  
                draw {  
                    drawer.image(image)  
                }  
                post(DistanceField()) {  
                    threshold = cos(seconds) * 0.5 + 0.5  
                    distanceScale = 1.0  
                }  
            }  
        }  
    }  
}
```

```

    }
  }
  layer {
    draw {
      // -- use the accumulation buffer to get the distance field
      accumulation?.let {
        val s = it.shadow
        s.download()
        drawer.fill = ColorRGBA.PINK
        drawer.stroke = null
        for (y in 0 until height step 10) {
          for (x in 0 until width step 10) {
            val distance = s[x, y].r
            drawer.circle(x * 1.0, y * 1.0, distance * 0.05)
          }
        }
        // -- clear the accumulated contents
        it.fill(ColorRGBA.TRANSPARENT)
      }
    }
  }
}
extend {
  // FIXME
  // c.draw(drawer)
}
}
}

```

[Link to the full example](#)

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Logging

OPENRNDR uses `kotlin-logging`, which is a Kotlin flavoured wrapper around `slf4j`, to log its internal workings. Log messages are displayed in the IDE's console and saved to the `application.log` file.

Configure logging

In `build.gradle.kts` we can choose between `none`, `simple` and `full` logging. Use one of these options:

- `runtimeOnly(libs.bundles.logging.none)` to disable logging.
- `runtimeOnly(libs.bundles.logging.simple)` to display monochrome log messages in the console.
- `runtimeOnly(libs.bundles.logging.full)` to display coloured log messages in the console to distinguish their types.

In `src/main/resources/log4j2.yaml` we can change the `logging level`. To make it verbose we can replace `level: info` with `level: all`.

Exception handling

It is possible to change how exception errors are presented by IntelliJ IDEA: Open the `Run > Edit Configurations` menu and make sure the `VM Options` text field contains `-Dorg.openrndr.exceptions=JVM`. This can sometimes help figure out why a program is crashing.

Crashing shaders

If a `ShaderStyle` crashes, a `ShaderError.glsl` file is created at the root of the project. The content of the file is the actual shader program OPENRNDR tried to use. Studying this program can help figure out why shaders fail. A common reason is using incorrect names for methods, uniforms or variables.

Debugging video exporting

When a video file is produced, a `ffmpegOutput.txt` is created at the root of the project. Studying this file can help diagnose problems with video exporting.

Enabling OpenGL debug messages

If your graphics hardware and drivers support OpenGL debug contexts you can open the `Run > Edit Configurations...` menu in IntelliJ IDEA and make sure the `VM Options` text field contains `-Dorg.openrndr.gl3.debug=true` to enable the debug messages.

Using RenderDoc

`RenderDoc` is a graphics debugger currently available for Vulkan, D3D11, D3D12, OpenGL, and OpenGL ES development on Windows, Linux, Android, Stadia, and Nintendo Switch™.

[This post](#) explains how to use RenderDoc with OPENRNDR.

[edit on GitHub](#)

Advanced topics

[edit on GitHub](#)

TABLE OF CONTENTS

- [Application Flow](#)
- [Presentation Control](#)
- [Headless applications](#)
- [Low-level drawing](#)
- [Integer color buffers](#)
- [Compute shaders](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Application Flow

This section covers default and alternate application flow.

Default application flow

The default application flow aims at single window application. For clarity we list the skeleton for an OPENRNDR program below.

```
fun main() {  
    // -- define an application  
    application {  
        // -- at this point there is no window or graphical context  
        // -- attempting to work with graphics resources will lead to errors.  
        // -- configure the application window  
        configure {  
            width = 770  
            height = 578  
        }  
        // -- define the program  
        program {  
            // -- at this point there is a graphical context  
  
            // -- extend the program with drawing logic  
            extend {  
            }  
        }  
    }  
}
```

Start-up or configuration dialogs

In some scenarios it is desirable to present a simple dialog before the main program commences, for example in the case you want the user to configure resolution and fullscreen settings. While OPENRNDR natively doesn't offer the tools to create user interfaces it does offer the functionality to create a window to host a configuration dialog.

```
fun main() {  
    val settings = object {  
        var width: Int = 640  
    }  
  
    // -- configuration  
    application {  
        program {  
            // -- somehow get values in the settings object  
        }  
    }  
  
    // -- application blocks until the window is closed
```

```
application {  
  // -- configure using the settings object  
  configure {  
    width = settings.width  
  }  
  program {  
  
  }  
}  
}
```

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Presentation Control

OPENRNDR programs can use any of the two presentation modes.

The default mode is automatic presentation, the `draw` method is called as often as possible. The other mode is manual presentation, in which it is the developer's responsibility to request `draw` to be called.

Setting the presentation mode

The presentation mode can be set and changed at run-time.

```
fun main() = application {
    program {
        window.presentationMode = PresentationMode.AUTOMATIC
    }
}
```

Using the manual presentation mode

The presentation mode is set to manual, a request to draw can be made using `window.requestDraw`.

In the following example `draw()` is only called after a mouse click.

```
fun main() = application {
    program {
        window.presentationMode = PresentationMode.MANUAL
        mouse.buttonDown.listen {
            window.requestDraw()
        }

        extend {
            drawer.clear(ColorRGBa.PINK.shade(Math.random()))
        }
    }
}
```

Note that in manual presentation mode `draw()` is still called when the window is resized.

[edit on GitHub](#)

Headless Applications

OPENRNDR can be ran in headless mode on machines that have EGL support. Using the EGL backed headless mode Programs can be ran without active graphical environment. This makes it for example possible to use OPENRNDR to create command line utilities that can be run in a SSH session or as a background service.

The default backend on the JVM is GLFW, in order to use headless mode you will need to run OPENRNDR with EGL by adding `-Dorg.openrndr.application=EGL` to the VM arguments in the launch configuration.

Limitations

PLATFORMS

Only supported on platforms that support EGL for context creation; which is Linux.

BACKBUFFER

Headless applications cannot draw on the backbuffer, because there is no backbuffer. In order to draw you need to create a [RenderTarget](#) and draw on it. Render target contents can easily be saved to file, or rendered to [video](#).

MOUSE AND KEYBOARD EVENTS

Headless applications cannot handle mouse or keyboard input.

COLORBUFFERLOADER

Headless applications (currently) cannot create secondary/shared contexts and as such ColorBufferLoader does not work.

[edit on GitHub](#)

Low-level Drawing

This text is intended for developers looking to provide drawing functionality that is fully independent of the `Drawer` class. Developers that desire to do so will essentially use the same building blocks that OPENRNDR uses internally.

A good reference for low-level drawing is the `Filter` class and it is encouraged to look at its [source code](#) as it provides a good idea of how all the low-level components interact and its implementation is fully independent from `Drawer`.

All low-level drawing is performed using OPENRNDR's `Driver` class. This class provides a handful of functions for drawing. Below you will find a list of the essential ones.

- `Driver.setState()`
- `Driver.drawVertexBuffer()`
- `Driver.drawIndexedVertexBuffer()`
- `Driver.drawInstances()`
- `Driver.drawIndexedInstances()`


Classes that belong to the low-level drawing API:

- [Shader](#)
- [IndexBuffer](#)
- [VertexBuffer](#)
- [VertexFormat](#)
- [ColorBuffer](#)
- [DepthBuffer](#)
- [ArrayTexture](#)
- [CubeMap](#)
- [DrawStyle](#)
- [RenderTarget](#)

We discourage writing code that uses OpenGL directly; even though currently only an OpenGL 3.3 implementation exists for `Driver`, in the future we may add implementations that are not based on OpenGL.

Example

In the following example we show the minimum steps required for drawing a single triangle.

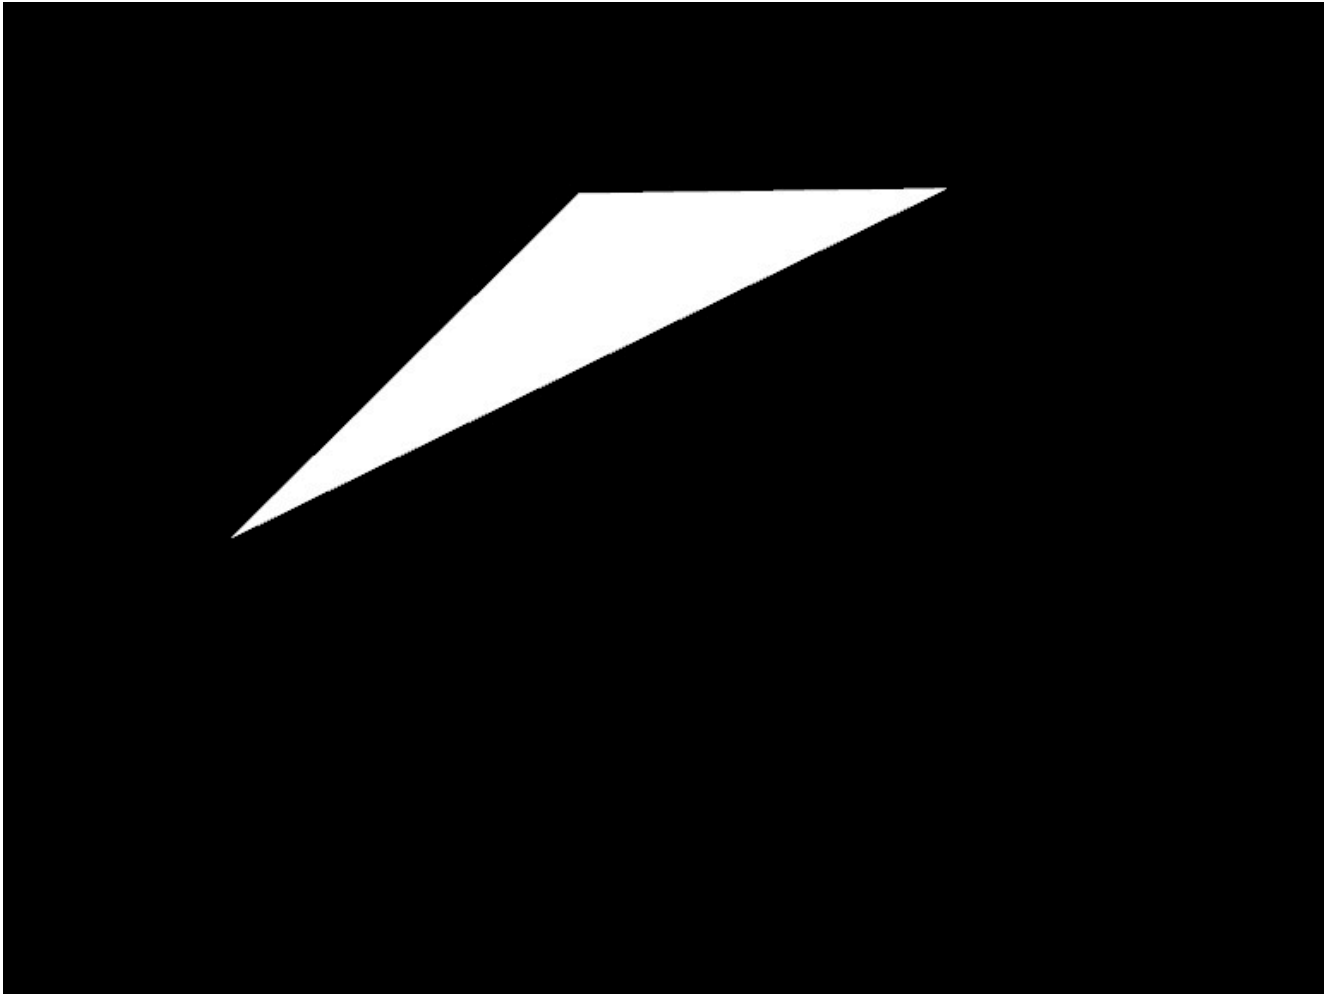

```
fun main() = application {
  program {
    val geometry = vertexBuffer(
      vertexFormat {
        position(3) // -- this attribute is named "position"
      }, 3
    )

    geometry.put {
      for (i in 0 until geometry.vertexCount) {
        write(
          Vector3(
            2.0 * Math.random() - 1.0,
            2.0 * Math.random() - 1.0,
            0.0
          )
        )
      }
    }
  }

  // -- code for the vertex shader
  val vs = """
#version 330
in vec3 a_position; // -- driver adds a_ prefix (a for attribute)
void main() {
  gl_Position = vec4(a_position, 1.0);
}
```

```

}
"""

    // -- code for the fragment shader
    val fs = """
#version 330
out vec4 o_output;
void main() {
    o_output = vec4(1.0);
}
"""

    val shader = Shader.createFromCode(
        vsCode = vs,
        fsCode = fs,
        name = "custom-shader"
    )

    extend {
        shader.begin()
        Driver.instance.drawVertexBuffer(
            shader, listOf(geometry), DrawPrimitive.TRIANGLES, 0, 3
        )
        shader.end()
    }
}
}

```

[Link to the full example](#)

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

ColorBuffers sampled as integer numbers

Default `ColorBuffers` created by OPENRNDR store values for each color channel as byte, however when used in shaders they are provided by `sampler2D` as floating point values in the range `0..1`. In rare cases it is desired to access these integer values directly, either as signed or unsigned integers, without conversion to floating point numbers. Special types of `isampler2D` and `usampler2D` come to the rescue, but color buffers have to be configured correctly for such a use.

Note: this mechanism is used internally in [orx-kinect](#) to process raw kinect data directly on GPU, as the depth readings are provided as integer numbers in the range of `0-2047` or `0-4096` depending on the kinect version.

Example use

```
fun main() = application {
    configure {
        width = 640
        height = 480
    }
    program {
        val magicNumber: Byte = 42
        // 1x1-pixel buffer holding one unsigned short / uint16 value
        val intColorBuffer = colorBuffer(
            1,
            1,
            format = ColorFormat.R,
            type = ColorType.UINT16_INT
        )

        // the following line is crucial, non-nearest filtering will result in
        // sampling texels always equal to 0 in shaders
        intColorBuffer.filter(MinifyingFilter.NEAREST, MagnifyingFilter.NEAREST)

        // standard color buffer to match the output window size, with ColorType.UINT8
        // by default, which is still sampled as a floating point number in shaders
        val imageColorBuffer = colorBuffer(width, height)

        // fragment shader to transform integer data into something visible
        // if input is matching the magic number, we are outputting whiteness
        // usampler2D is used for unsigned integer values
        val intInputRenderer = Filter(
            Shader.createFromCode(
                fsCode = """
                    #version 330

                    uniform usampler2D tex0;
                    out    vec4 color;

                    const uint EXPECTED_VALUE = uint($magicNumber);
```

```

        void main() {
            uvec4 texel = texelFetch(tex0, ivec2(0), 0);
            color = vec4(
                vec3((texel.r == EXPECTED_VALUE) ? 1.0 : 0.0),
                1.0
            );
        }
    """.trimIndent(),
    vsCode = Filter.filterVertexCode,
    name = "shader with usampler2D as input"
)
)

// in the same example we are also testing texture write / read
val inData = ByteBuffer.allocateDirect(2) // 2 because we are storing shorts
val outData = ByteBuffer.allocateDirect(2)
inData.rewind()
inData.put(magicNumber)
inData.put(0)
inData.rewind()
intColorBuffer.write(inData)
outData.rewind()
intColorBuffer.read(outData)
outData.rewind()
println("outData should contain $magicNumber, is: ${outData.short}")
extend {
    intInputRenderer.apply(intColorBuffer, imageColorBuffer)
    drawer.image(imageColorBuffer, 0.0, 0.0, width.toDouble(), height.toDouble())
}
}
}

```

[edit on GitHub](#)

Compute shaders

Compute shader functionality is supported on systems with OpenGL 4.3 or higher. MacOS support is provided via [Angle](#).

Example use

This example is composed of two code blocks. The first block is a compute shader program written in GLSL which produces an `outputImg` by mixing three input colors:

- A pixel sampled from `inputImg`.
- A `fillColor` sent as a uniform from Kotlin.
- A color generated by calculating the cosine of the coordinates of the pixel currently being processed.

A typical location for such a compute shader could be `data/compute-shaders/fill.cs`.

```
#version 430
layout(local_size_x = 1, local_size_y = 1) in;

uniform vec4 fillColor;
uniform float seconds;
layout(rgba8) uniform readonly image2D inputImg;
layout(rgba8) uniform writeonly image2D outputImg;

void main() {
    ivec2 coords = ivec2(gl_GlobalInvocationID.xy);
    float v = cos(coords.x * 0.01 + coords.y * 0.01 + seconds) * 0.5 + 0.5;
    vec4 wave = vec4(v, 0.0, 0.0, 1.0);
    vec4 inputImagePixel = imageLoad(inputImg, coords);

    imageStore(outputImg, coords, wave + inputImagePixel + fillColor);
}
```




The second code block is an OPENRNDR program making use of the compute shader:

- 1 It creates a compute shader program from a file.
- 2 Initializes the input buffer using a image loaded from disk.
- 3 Inside the extend block (called multiple times per second) some uniforms are updated: a `fillColor`, the time in seconds, the `inputImg` and the `outputImg`. In this example only the time changes on every frame.
- 4 The compute shader is executed, writing the result to the `outputBuffer`.
- 5 Finally, the result is displayed by calling `drawer.image()`.

```
fun main() = application {
    program {
        val cs = ComputeShader.fromCode(
            File("data/compute-shaders/fill.cs").readText(), "cs1"
        )

        val tempBuffer = loadImage("data/images/cheeta.jpg")
        val inputBuffer = colorBuffer(width, height, type = ColorType.UINT8)
        tempBuffer.copyTo(inputBuffer)
        val outputBuffer = colorBuffer(width, height, type = ColorType.UINT8)

        extend {
            cs.uniform("fillColor", ColorRGBA.PINK.shade(0.1))
            cs.uniform("seconds", seconds)
            cs.image("inputImg", 0, inputBuffer.imageBinding(0, ImageAccess.READ))
            cs.image("outputImg", 1, outputBuffer.imageBinding(0, ImageAccess.WRITE))
            cs.execute(outputBuffer.width, outputBuffer.height, 1)
            drawer.image(outputBuffer)
        }
    }
}
```

```

    }
  }
}

```

[Link to the full example](#)

If we prefer to work with floating point buffers, we could set the `type` of both `ColorBuffer` instances to `ColorType.FLOAT32` instead of `ColorType.UINT8`, and use `layout(rgb32f)` instead of `layout(rgb8)` in the GLSL code.

ComputeStyle

To simplify working with compute shaders, OPENRNDR provides the `computeStyle` builder, which should feel familiar if you've used `shadeStyle`. The `computeStyle` builder takes care of declaring the GLSL version, the layout and the uniforms, which helps avoid typos and other errors in the code.

The same program above written using `shadeStyle` looks like this:

```

fun main() = application {
  program {
    val cs = computeStyle {
      computeTransform = """
        ivec2 coords = ivec2(gl_GlobalInvocationID.xy);
        float v = cos(coords.x * 0.01 + coords.y * 0.01 + p_seconds) * 0.5 + 0.5;
        vec4 wave = vec4(v, 0.0, 0.0, 1.0);
        vec4 inputImagePixel = imageLoad(p_inputImg, coords);

        imageStore(p_outputImg, coords, wave + inputImagePixel + p_fillColor);
      """.trimIndent()
    }

    val tempBuffer = loadImage("data/images/cheeta.jpg")
    val inputBuffer = colorBuffer(width, height, type = ColorType.UINT8)
    tempBuffer.copyTo(inputBuffer)
    val outputBuffer = colorBuffer(width, height, type = ColorType.UINT8)

    extend {
      cs.parameter("fillColor", ColorRGBa.PINK.shade(0.1))
      cs.parameter("seconds", seconds)
      cs.image("inputImg", inputBuffer.imageBinding(0, BufferAccess.READ))
      cs.image("outputImg", outputBuffer.imageBinding(0, ImageAccess.WRITE))
      cs.execute(outputBuffer.width, outputBuffer.height, 1)
      drawer.image(outputBuffer)
    }
  }
}

```

[Link to the full example](#)

Notice how we used `cs.parameter()` instead of `cs.uniform()`, the `cs.image()` method lost one argument, and the GLSL code got simplified by writing only the content of its `main()` function.

The names of the parameters we passed to the compute shader received a `p_` prefix, for instance `seconds` became `p_seconds` in the GLSL code. This makes parameters easy to distinguish from other GLSL variables.

This site uses [Just the Docs](#), a documentation theme for Jekyll.

A growing list of uses cases

OPENRNDR can be used to create a wide variety of programs involving 2D and 3D graphics, interactive experiences, live coding sessions and more.

Here we list some use cases for inspiration.

[edit on GitHub](#)

TABLE OF CONTENTS

- [Live coding](#)
 - [Pen plotters](#)
-

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Live coding with orx-olive

By using Kotlin's ability to run script files we can build a live coding environment. The `orx-olive` library simplifies the work to be done to set up a live coding environment. Code and additional documentation for the library can be found in the [Github repository](#).

Prerequisites

Assuming you are working on an `openrndr-template` based project, `orx-olive` is enabled by default.

⚠ Make sure your `.kt` file name starts with an upper case letter.

Basic example

```
fun main() = application {
    configure {
        width = 768
        height = 576
    }
    oliveProgram {
        extend {
            // drawer.fill = ColorRGBA.PINK
            drawer.rectangle(0.0, 0.0, 100.0, 200.0)
        }
    }
}
```

Try editing the source code to change the fill color of the rectangle (or any other property) and save your changes. The new color should appear instantly without having to re-run the program.

Interaction with extensions

The Olive extension works well together with other extensions. In the following example we see the use of `Camera2D` in combination with `olive`.

```
fun main() = application {
    oliveProgram {
        extend(Camera2D())
        extend {
            drawer.rectangle(0.0, 0.0, 100.0, 200.0)
        }
    }
}
```

Adding persistent state

Sometimes you want to keep parts of your application persistent, that means its state will survive a script reload.

This is how we can make the `Camera2D` from the previous example persistent:

```

fun main() = application {
    oliveProgram {
        val camera by Once {
            persistent {
                Camera2D()
            }
        }
        extend(camera)
        extend {
            drawer.rectangle(0.0, 0.0, 100.0, 200.0)
        }
    }
}

```

The same approach can be used to maintain a persistent connection to a webcam:

```

fun main() = application {
    oliveProgram {
        val webcam by Once {
            persistent {
                VideoPlayerFFMPEG.fromDevice(null)
            }
        }
        webcam.play()
        extend {
            webcam.colorBuffer?.let {
                drawer.image(it, 0.0, 0.0, 128.0, 96.0)
            }
        }
    }
}

```

GUI workflow

orx-gui is built with the orx-olive environment in mind. Its use is similar to the workflows described prior, however, in live mode the ui comes with some extra features to make live-coding more fun. The best part is that orx-gui can retain parameter settings between script changes by default, so nothing jumps around.

Notice the use of `Reloadable()` in the settings object.

```

@file:Suppress("UNUSED_LAMBDA_EXPRESSION")
import org.openrndr.Program
import org.openrndr.color.ColorRGBa
import org.openrndr.draw.*
import org.openrndr.extra.compositor.compose
import org.openrndr.extra.compositor.draw
import org.openrndr.extra.compositor.layer
import org.openrndr.extra.compositor.post
import org.openrndr.extra.gui.GUI
import org.openrndr.extra.parameters.*

fun main() = application {

```

```

configure {
    width = 800
    height = 800
}
oliveProgram {
    val gui = GUI()
    val settings = @Description("User settings") object : Reloadable() {
        @DoubleParameter("x", 0.0, 1000.0)
        var x = 0.0
    }
    val composite = compose {
        draw {
            drawer.clear(ColorRGBa.PINK)
            drawer.circle(settings.x, height / 2.0, 100.0)
        }
    }
    extend(gui) {
        add(settings)
    }
    extend {
        composite.draw(drawer)
    }
}
}

```

[edit on GitHub](#)

Generating pen plotter art

A pen plotter is a computer output device that can draw with a pen (or a brush, marker, etc) on a paper. Some such devices move the pen in the X and Y axes, while others can move the paper instead.

Pen plotters were introduced in the 1950s and 60s and have become popular among artists since the mid 2000s.

Unlike other output devices like ink-jet and laser printers which accept pixels, pen plotters must be fed with vector data: lines and curves.

OPENRNDR provides a rich toolset to generate and manipulate vector data.

SVG vs G-code

There are two main file formats used to send designs to pen plotters:

- [SVG](#) (Scalable Vector Graphics), used with devices like the AxiDraw / NextDraw.
- [G-code](#), often supported by older plotters, CNC devices and laser cutters.

OPENRNDR can easily load, manipulate, generate and save SVG files to be plotted with devices like the AxiDraw / NextDraw. Such files can then be loaded into the [Inkscape](#) design program to be sent to the pen-plotter using a plugin.

Starting with `orx` version 0.5.0, two new modules are available to facilitate interacting with hardware pen plotters:

- ¹ [orx-axidraw](#) provides a GUI to control and configure the AxiDraw / NextDraw device, removing the Inkscape requirement.
- ² [orx-g-code](#) can be used to convert designs into G-code format, which can then be sent to a pen-plotter, a laser cutter or a CnC device using another application.

We will demonstrate these different approaches below.

Creating an SVG file

This is one of the simplest programs we can write to produce an SVG file containing just a circle.

```
fun main() = application {
    program {
        val design = drawComposition {
            circle(drawer.bounds.center, 200.0)
        }
        design.saveToFile(File("data/design.svg"))
    }
}
```

The API in the composition drawer is almost identical to the one of the standard drawer: we can use methods like `segment`, `contour`, `shape`, `circle`, `rectangle`, etc.

Note: with OPENRNDR / ORX versions 0.4.5 and earlier you need to enable `orx-composition` and `orx-svg` in the `build.gradle.kts` file.

Interactively creating an SVG file

Lets take our simple program a step further and make it interactive. Our program will listen to mouse clicks and key presses. The design will be initially empty. Every time we click the mouse button we will add elements to it. By pressing the `c` key the design will be cleared so we can start over. Once we are happy with the design we can press the `s` key to save the design as an SVG file.

```
fun main() = application {
    program {
        // Create an empty composition
        val design = drawComposition { }

        // A function to draw concentric circles into the composition.
        fun addCircles(pos: Vector2) {
            design.draw {
                repeat(15) {
                    circle(pos, 1.0 + it * it)
                }
            }
        }


        // Draw the composition onto the window
        extend {
            drawer.clear(ColorRGBA.WHITE)
            drawer.fill = null
            drawer.composition(design)
        }

        // Generate a new design every time we click the mouse
        mouse.buttonDown.listen {
            addCircles(it.position)
        }

        keyboard.keyDown.listen {
            // Clear the design when pressing the `c` key
            if (it.name == "c") {
                design.clear()
            }

            // Show a save dialog when pressing the `s` key, then save the design
            // with the chosen file name into the selected folder.
            if (it.name == "s") {
                saveFileDialog(supportedExtensions = listOf("SVG" to listOf("svg"))) { file ->
                    design.saveToFile(file)
                }
            }
        }
    }
}
```

[Link to the full example](#)

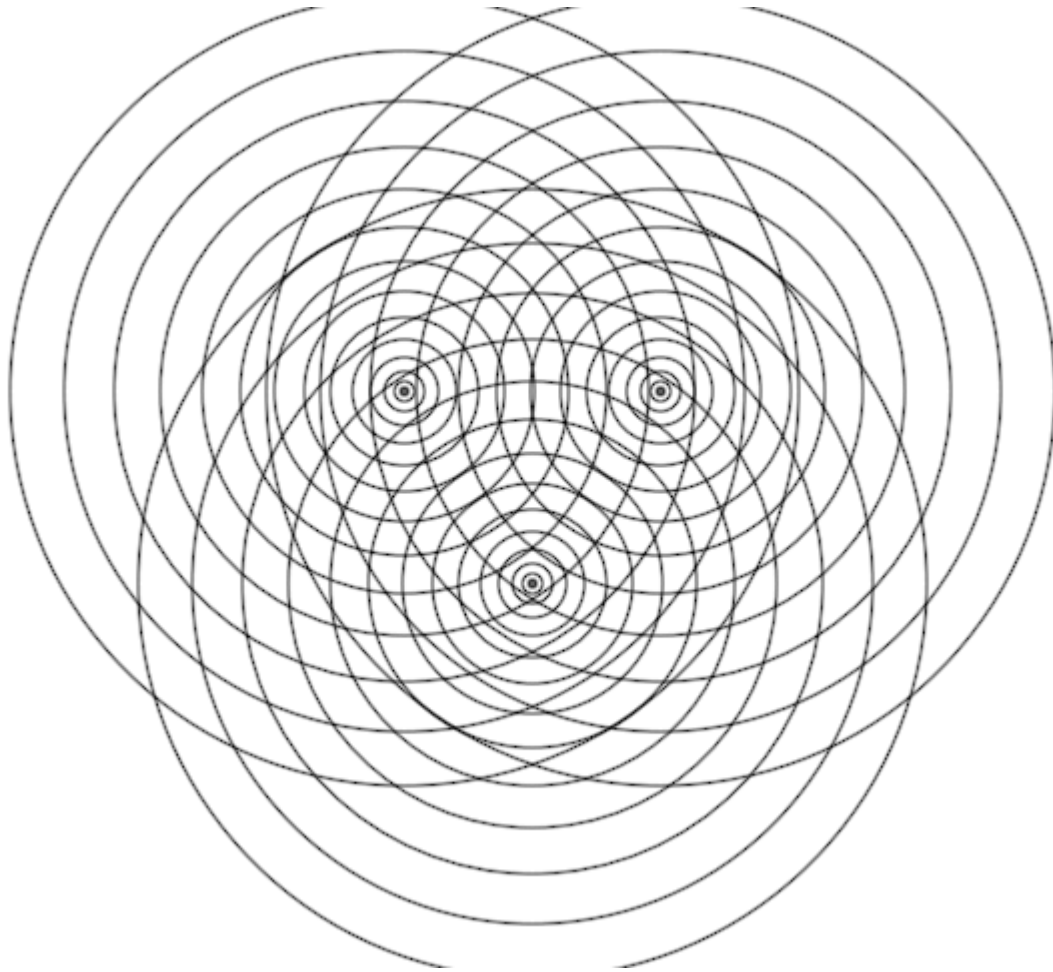

If we open the resulting design in a design program we will notice that the document size is 640 pixels wide and 480 pixels height, matching the default OPENRNDR window size. In most design programs we can choose a different document size (A4 for instance) then scale and re-center the design to fill the page.

Next, let's take a look at how `orx-axidraw` can simplify plotting with AxiDraw / NextDraw devices.

orx-axidraw

What does `orx-axidraw` provide?

- A GUI to configure all AxiDraw / NextDraw pen-plotter parameters like pen vertical positions, pen speeds, and much more.
- Direct plotting from your OPENRNDR program.
- A 2D camera to position, scale and rotate your design in the paper before plotting.
- Simplified multi-pen plots by inserting pauses to switch pens.
- Saving and loading designs.
- Applying a margin around the edges of the paper.

To use `orx-axidraw` we need to add it as a dependency to our project's `build.gradle.kts` file. Simply add `implementation(orx.axidraw)` inside the `dependencies { }` block and reload Gradle.

Let's change the program we wrote above for interactively creating an SVG file to make use of `orx-axidraw`:

```
fun main() = application {
    program {
        // Instantiate orx-axidraw specifying the paper size in portrait mode.
        // Use `PaperSize.A5.size.yx` for landscape mode, or provide custom paper sizes
        // as a Vector2 in millimeters.
```

```

val axi = Axidraw(this, PaperSize.A5.size)

// Create a GUI and add the the controls provided by orx-axidraw
val gui = GUI()
gui.add(axi)

// A function to draw concentric circles into the composition.
fun addCircles(pos: Vector2) {
    axi.draw {
        repeat(15) {
            circle(pos, 1.0 + it * it)
        }
    }
}

// Activate the GUI
extend(gui)
extend {
    drawer.clear(ColorRGBa.WHITE)


    // Draw the design held by orx-axidraw on the program window
    axi.display(drawer)
}

// Generate a new design every time we click the mouse
mouse.buttonDown.listen {
    addCircles(it.position)
}
keyboard.keyDown.listen {
    // Clear the design when pressing the `c` key
    if (it.name == "c") {
        axi.clear()
    }

    // No need to add a saving option here:
    // orx-axidraw adds saving and loading GUI buttons by default
}
}
}

```

[Link to the full example](#)

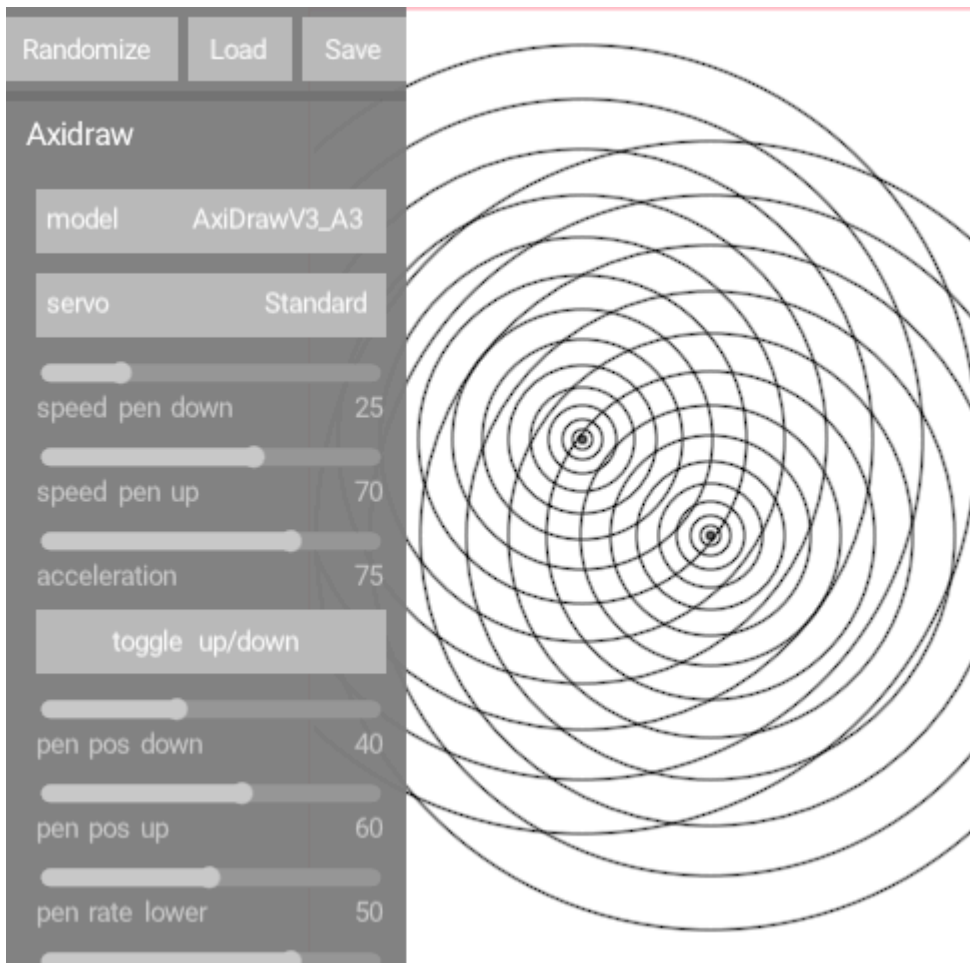

To learn more about orx-axidraw, study the [demos](#) it provides.

orx-g-code

Most laser-cutters, CnC devices and pen-plotters use the G-code vector file format. This includes larger pen-plotters by Bantam Tools, the company behind the NextDraw devices. Let's take a look at how we can output G-code files using orx-g-code.

The first step is to add orx-g-code as a dependency to our project's `build.gradle.kts` file. To do so, add `implementation(orx.g.code)` inside the `dependencies { }` block and reload Gradle.

Here is a third version of the earlier interactive program, this time outputting G-code when the `g` key is pressed:

```
fun main() = application {
    program {
        // Instantiate Plot specifying the paper size in millimeters.
        val plot = Plot(
            dimensions = Vector2(148.0, 210.0), // A5 Portrait
            manualRedraw = false,
            origin = Origin.CENTER
        )

        extend(plot) {
            generator = BasicGrlGenerator()
            layerMode = LayerMode.SINGLE_FILE
            folder = "/tmp"
        }
    }
}
```

```

// A function to draw concentric circles into a layer
// with a unique name.
fun addCircles(pos: Vector2) {
    plot.layer("layer_${plot.layers.size}") {
        strokeWidth = 0.5
        repeat(15) {
            circle(pos, 1.0 + it * it)
        }
    }
}


// Generate a new design every time we click the mouse
mouse.buttonDown.listen {
    addCircles(plot.toDocumentSpace(it.position))
}

run {
    addCircles(plot.docBounds.position(0.2, 0.2))
    addCircles(plot.docBounds.position(0.8, 0.8))
}

keyboard.keyDown.listen {
    // Clear the design when pressing the `c` key
    if (it.name == "c") {
        plot.layers.clear()
    }
    // Press "g" to export G-code to /tmp.
    // (implemented by Plot)
}
}
}

```

[Link to the full example](#)

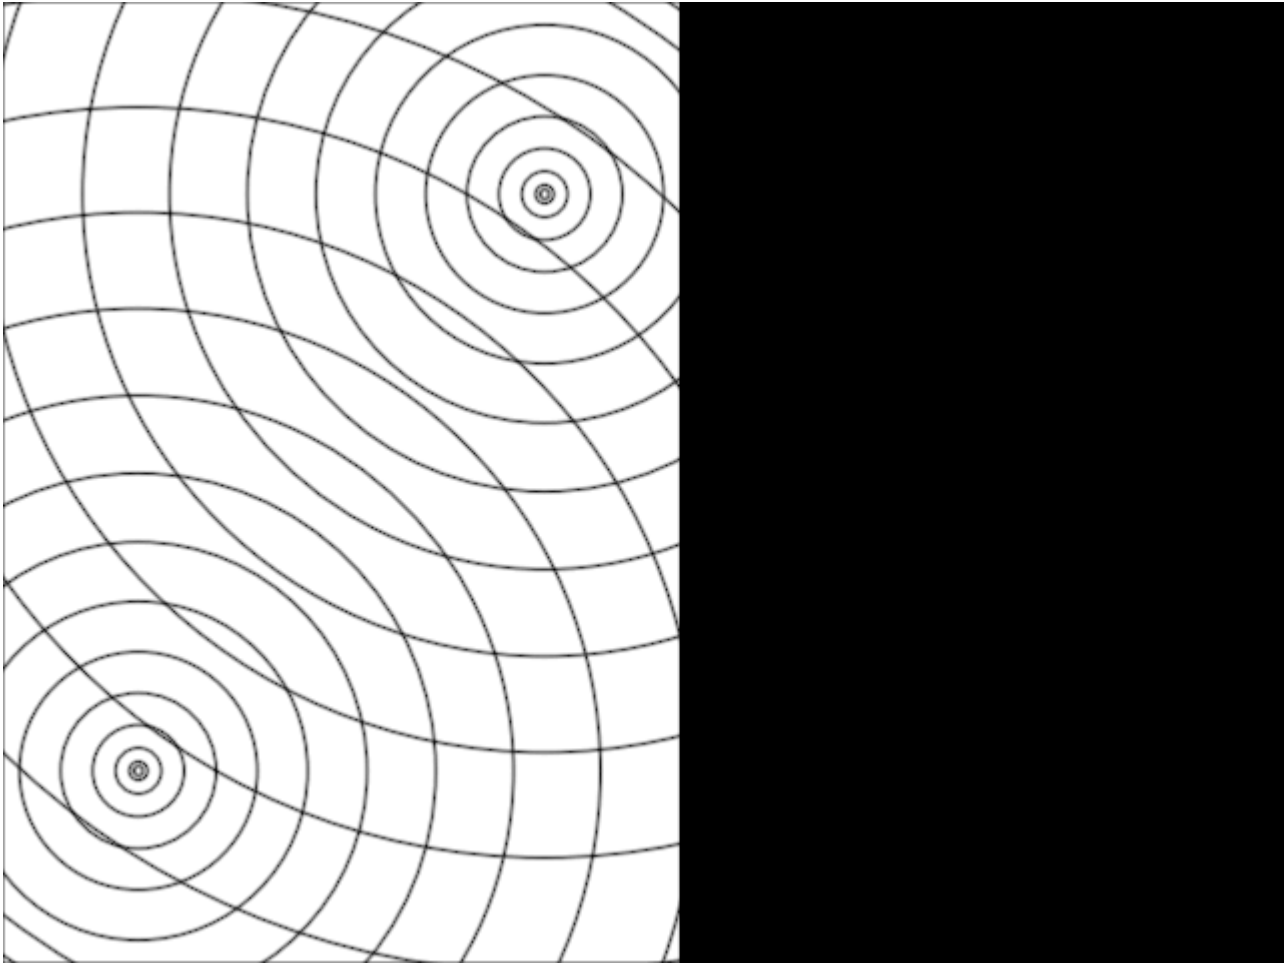

The beginning of the resulting text file looks like this:

```
G21
G90
;begin layer: layer_0
;begin shape
G0 X-45.4 Y-63.0
M3 S255
G1 X-45.344 Y-63.401 F500.0
G1 X-44.801 Y-63.944 F500.0
G1 X-43.999 Y-63.944 F500.0
G1 X-43.456 Y-63.401 F500.0
G1 X-43.456 Y-62.599 F500.0
G1 X-43.999 Y-62.056 F500.0
G1 X-44.801 Y-62.056 F500.0
G1 X-45.344 Y-62.599 F500.0
M3 S0
;end shape
;begin shape
G0 X-46.4 Y-63.0
M3 S255
G1 X-46.288 Y-63.802 F500.0
G1 X-45.202 Y-64.888 F500.0
...
```

To send the output to your hardware device, you have two main options:

- Controller software (recommended): load the file into a tool like VisiCut or a GRBL sender. This is generally safer because controller software lets you set working bounds, position, scale, and rotate your design before plotting.
- Direct serial communication: send the raw G-code stream directly over a serial port.

Warning: Hardware devices interpreting G-code usually do not perform boundary validation. If you stream commands directly to a machine, ensure all coordinates stay within physical limits.

To learn more about orx-g-code, study the [demos](#) it provides.

Tips

Find more tips on [using OPENRNDR with pen plotters](#) in the forum.

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.

Best practices

Coming soon.

[edit on GitHub](#)

This site uses [Just the Docs](#), a documentation theme for Jekyll.