

# How to open an application in a Linux terminal?



Brajagopal Tripathi · [Follow](#)

1 min read · Sep 15



[Open in app](#) ↗

[Sign up](#)

[Sign in](#)

 Medium

 Search

 Write



**To** open an application in a Linux terminal, you can use either of the following methods:

### Method 1:

1. Open a terminal window.
2. Type the name of the application and press `Enter`.

For example, to open the Firefox web browser, you would type the following command:

```
firefox
```

### Method 2:

- Open a terminal window.
- Navigate to the directory where the application is located.
- Type the following command:

```
./<application_name>
```

For example, to open the Firefox web browser if it is located in the `/usr/bin` directory, you would type the following command:

```
/usr/bin/firefox
```

If you do not know where the application is located, you can use the `locate` command to find it. For example, to find the location of the Firefox web browser, you would type the following command:

```
locate firefox
```

This will print a list of all the files and directories on your system that contain the word “Firefox”.

Once you have found the location of the application, you can use either of the methods above to open it.

Note: Some applications, such as graphical applications, may not be able to be opened directly from a terminal window. In these cases, you will need to use a graphical user interface (GUI) to open the application.

[Linux](#)[Linux Tutorial](#)[Linuxworld](#)[Web](#)[Application](#)

**Written by Brajagopal Tripathi**


43 Followers

Follow



## More from Brajagopal Tripathi




 Brajagopal Tripathi


### What is the best way to transfer Steam games to another compute...

There are two ways to transfer Steam games to another computer without downloading...

2 min read · Aug 12

 7 

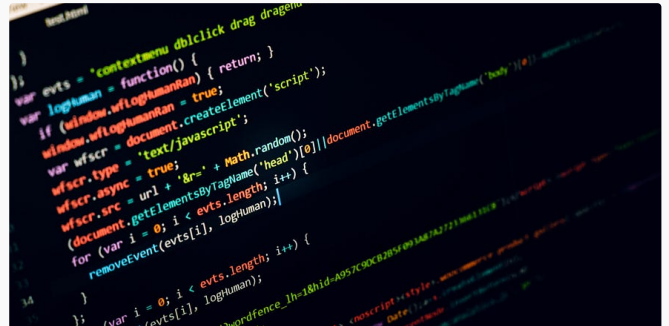

 Brajagopal Tripathi


### How to run a Python script from an HTML button?

To run a Python script from an HTML button, you can use the following steps:

2 min read · Sep 26

 66  3



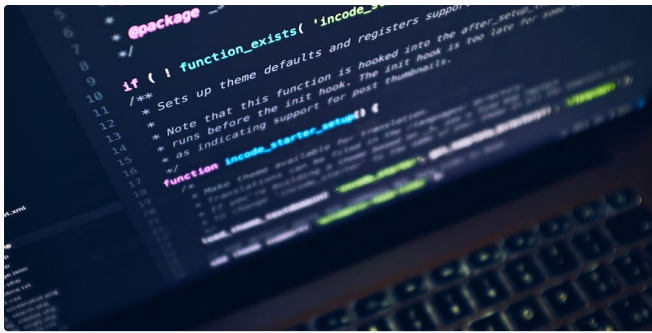



 Brajagopal Tripathi

## How to enable developer mode in Google Chrome?

To enable developer mode in Google Chrome, follow these steps:

2 min read · Oct 5

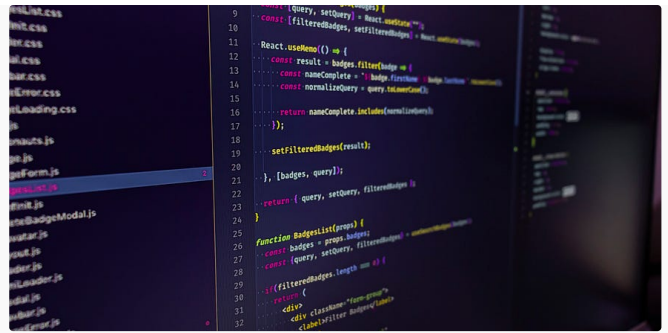

 Brajagopal Tripathi

## How do you write JavaScript code inside PHP?


There are two main ways to write JavaScript code inside PHP:

3 min read · Sep 14



See all from Brajagopal Tripathi


## Recommended from Medium

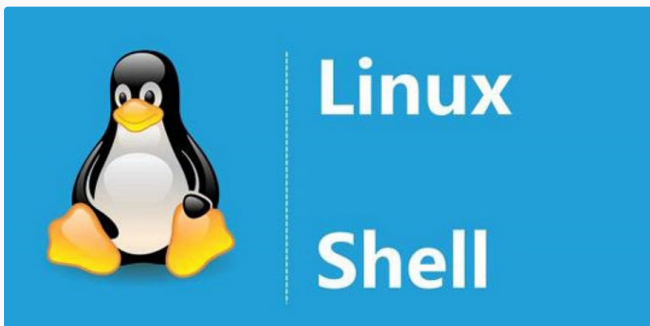


 Luffy-x in FAUN—Developer Community 🐾

## Shell Script Beginner Exercises

Script 1

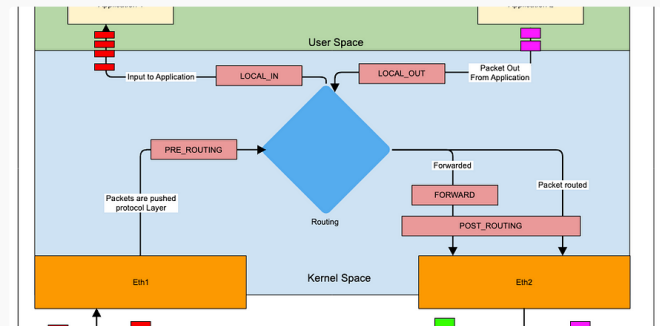

 Dipak Kr das

## Packet Flow, Netfilter and Iptables

2 min read · Jul 18

 8  1




Netfilter is a framework provided by the Linux Kernel that allows packet manipulation to be...

6 min read · Jul 24

 24 



## Lists



### Stories to Help You Grow as a Software Developer

19 stories · 664 saves




### General Coding Knowledge

20 stories · 723 saves




### Productivity

234 stories · 249 saves



### Staff Picks

541 stories · 576 saves

 psychomong

## WIFI Hacking Without External WIFI Adapter

Psychomongians

6 min read · Nov 6

 204  3



 Folutile writes Tech


## 5 fun features that locked me into macOS

#3: Continuity

15 min read · Dec 21

 250 



 Gurpreet Singh

## 15 Fun Linux Command Line Programs to Spice Up Your...

The Linux command line is a versatile and powerful tool, but did you know it can also b...

4 min read · Aug 16




156



1



 Nikhil Vemu in Mac O'Clock

## 11 Absolutely Useful macOS Utility Apps Most People Don't Know...

Your Mac isn't worth \$1,000 — but these apps will make it so



· 12 min read · 5 days ago



356



5



See more recommendations