

# Profiling Applications to Choose the Right Computing Infrastructure plus Batch Management with HTCondor

Rob Quick <rquick@iu.edu>

Deputy Directory Science Gateways Research Center  
Indiana University

Content Contributed by the University of Wisconsin  
Condor Team and Scot Kronenfeld





# Follow Along at:



[https://opensciencegrid.org/dosar/DataKigali2018/  
Materials/](https://opensciencegrid.org/dosar/DataKigali2018/Materials/)



INDIANA UNIVERSITY

# Some thoughts on the exercises

- It's okay to move ahead on exercises if you have time
- It's okay to take longer on them if you need to
- If you move along quickly, try the “On Your Own” sections and “Challenges”

# Most important!

- Please ask me questions!
  - ...during the lectures
  - ...during the exercises
  - ...during the breaks
  - ...during the meals
  - ...over dinner
  - ...via email after we depart ([rquick@iu.edu](mailto:rquick@iu.edu))
- If I don't know, I'll find the right person to answer your question.


# Goals for this session

- Profiling your application
- Picking the appropriate resources
- Understand the basics of HTCondor



# Let's take one step at a time

Small      Local

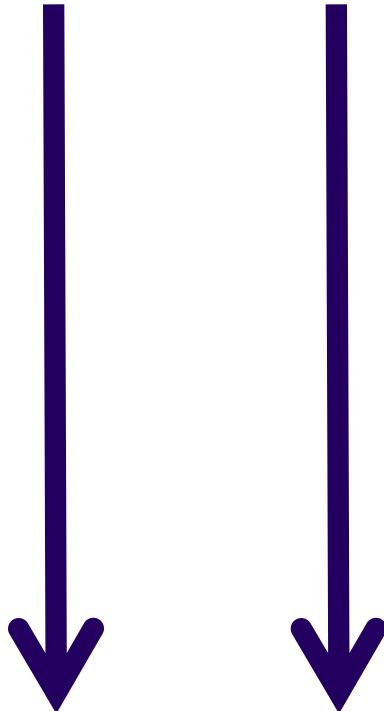

- Can you run one job on one computer?
- Can you run one job on another computer?
- Can you run 10 jobs on a set of computers?
- Can you run a multiple job workflow?
- How do we put this all together?

This is the path we'll take in the school

Large      Distributed



# What does the user provide?

- A “headless job”
  - Not interactive/no GUI: how could you interact with 1000 simultaneous jobs?
- A set of input files
- A set of output files
- A set of parameters (command-line arguments)
- Requirements:
  - Ex: My job requires at least 2GB of RAM
  - Ex: My job requires Linux
- Control/Policy:
  - Ex: Send me email when the job is done
  - Ex: Job 2 is more important than Job 1
  - Ex: Kill my job if it runs for more than 6 hours

# What does the system provide?

- Methods to:
  - Submit/Cancel job
  - Check on state of job
  - Check on state of available computers
- Processes to:
  - Reliably track set of submitted jobs
  - Reliably track set of available computers
  - Decide which job runs on which computer
  - Manage a single computer
  - Start up a single job

# Gedankenexperiment

- Let's assume you have a 'large job'
  - What factors could make it large?
- Large Data Input or Output or both
- Needs to do heavy calculation
- Needs a lot of memory
- Needs to communicate with other jobs (whether required or not)
- Reads and writes a lot of data/files
- Heavy graphics processing
- Any combination of any of the above

# There is no “One Size Fits All Solution”

- But some solutions are more "Open" than others.
  - Local Laptop/Desktop
  - Local Cluster
  - HPC System
  - Shared HTC Resources
  - Clouds

# Why is HTC hard?

- The HTC system has to keep track of:
  - Individual tasks (a.k.a. jobs) & their inputs
  - Computers that are available
- The system has to recover from failures
  - There will be failures! Distributed computers means more chances for failures.
- You have to share computers
  - Sharing can be within an organization, or between orgs
  - So you have to worry about security
  - And you have to worry about policies on how you share
- If you use a lot of computers, you have to handle variety:
  - Different kinds of computers (arch, OS, speed, etc..)
  - Different kinds of storage (access methodology, size, speed, etc...)
  - Different networks interacting (network problems are hard to debug!)

- Methods to:
  - Submit/Cancel job. `condor_submit/condor_rm`
  - Check on state of job. `condor_q`
  - Check on state of avail. computers. `condor_status`
- Processes to:
  - Reliably track set of submitted jobs. `schedd`
  - Reliably track set of avail. computers. `collector`
  - Decide which job runs on where. `negotiator`
  - Manage a single computer `startd`
  - Start up a single job `starter`

# But not only Condor

- You can use other systems:
  - PBS/Torque
  - Oracle Grid Engine (né Sun Grid Engine)
  - LSF
  - SLURM
  - ...
- But I won't cover them.
  - My experience is with Condor
  - My bias is with Condor
  - Overlays exist
- What should you learn at the school?
  - How do you think about Computing Resources?
  - How can you do your science with HTC?
  - ... For now, learn it with Condor, but you can apply it to other systems.

# A brief introduction to Condor


- Please note, we will only scratch the surface of Condor:
  - We won't cover MPI, Master-Worker, advanced policies, site administration, security mechanisms, submission to other batch systems, virtual machines, cron, high-availability, computing on demand, containers.

# ...And jobs take computers...

I need a Mac!


$$E = mc^2$$

$$\begin{aligned} &= 1\text{kg} \times (3 \times 10^8 \text{ ms}^{-1})^2 \\ &= 1\text{kg} \times (3 \times 10^8 \text{ ms}^{-1}) \times (3 \times 10^8 \text{ ms}^{-1}) \\ &= 1\text{kg} \times (9 \times 10^{16} \text{ m}^2\text{s}^{-2}) \\ &= 1 \times (9 \times 10^{16}) \text{ kg m}^2\text{s}^{-2} \\ &= 9 \times 10^{16} \text{ J} \end{aligned}$$

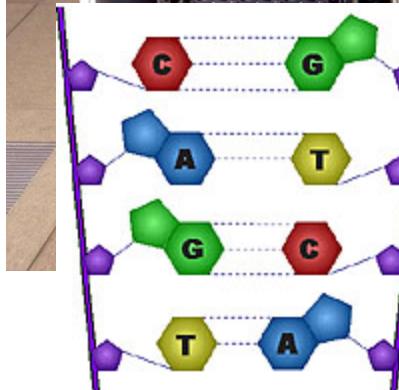

Desktop Computers

Desktop Computers

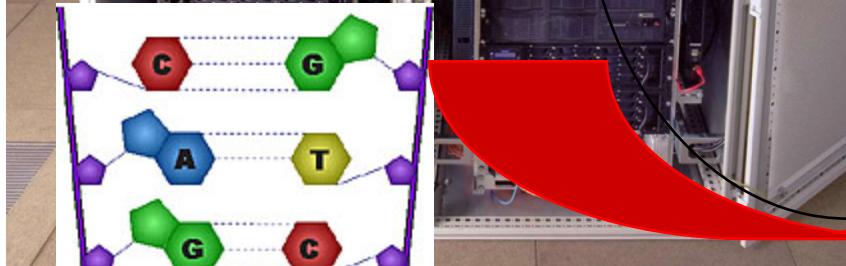

# Quick Terminology

- **Cluster:** A dedicated set of computers not for interactive use
- **Pool:** A collection of computers used by Condor
  - May be dedicated
  - May be interactive
- **Remember:**
  - Condor can manage a cluster in a machine room
  - Condor can use desktop computers
  - Condor can access remote computers
  - HTC uses all available resources

# Matchmaking

- Matchmaking is fundamental to Condor
- Matchmaking is two-way
  - Job describes what it requires:  
**I need Linux && 8 GB of RAM**
  - Machine describes what it requires:  
**I will only run jobs from the Physics department**
- Matchmaking allows preferences
  - I **need** Linux, and I **prefer** machines with more memory but will run on any machine you provide me

# Why Two-way Matching?

- Condor conceptually divides people into three groups:
    - Job submitters
    - Computer owners
    - Pool (cluster) administrator
  - All three of these groups have preferences
- } May or may not be the same people

# ClassAds

- ClassAds state facts
  - My job's executable is analysis.exe
  - My machine's load average is 5.6
- ClassAds state preferences
  - I require a computer with Linux
- ClassAds are extensible
  - They say whatever you want them to say



# Example ClassAd

```
MyType      = "Job" ←String
TargetType   = "Machine"
ClusterId    = 1377 ←Number
Owner        = "roy"
Cmd          = "analysis.exe"
Requirements =           ←Expression
                  (Arch == "INTEL")
                  && (OpSys == "LINUX")
                  && (Disk >= DiskUsage)
                  && ((Memory * 1024) >= ImageSize)

...
```



# Schema-free ClassAds


- Condor imposes some schema
  - Owner is a string, ClusterID is a number...
- But users can extend it however they like, for jobs or machines
  - AnalysisJobType = "simulation"
  - HasJava\_1\_6 = TRUE
  - ShoeLength = 10
- Matchmaking can use these attributes
  - Requirements = OpSys == "LINUX"  
    && HasJava\_1\_6 == TRUE



# Don't worry

- You won't write ClassAds (usually)
  - You'll create a simple *submit file*
  - Condor will write the ClassAd
  - You can extend the ClassAd if you want to
- You won't write requirements (usually)
  - Condor writes them for you
  - You can extend them
  - In some environments you provide attributes instead of requirements expressions

# Matchmaking diagram

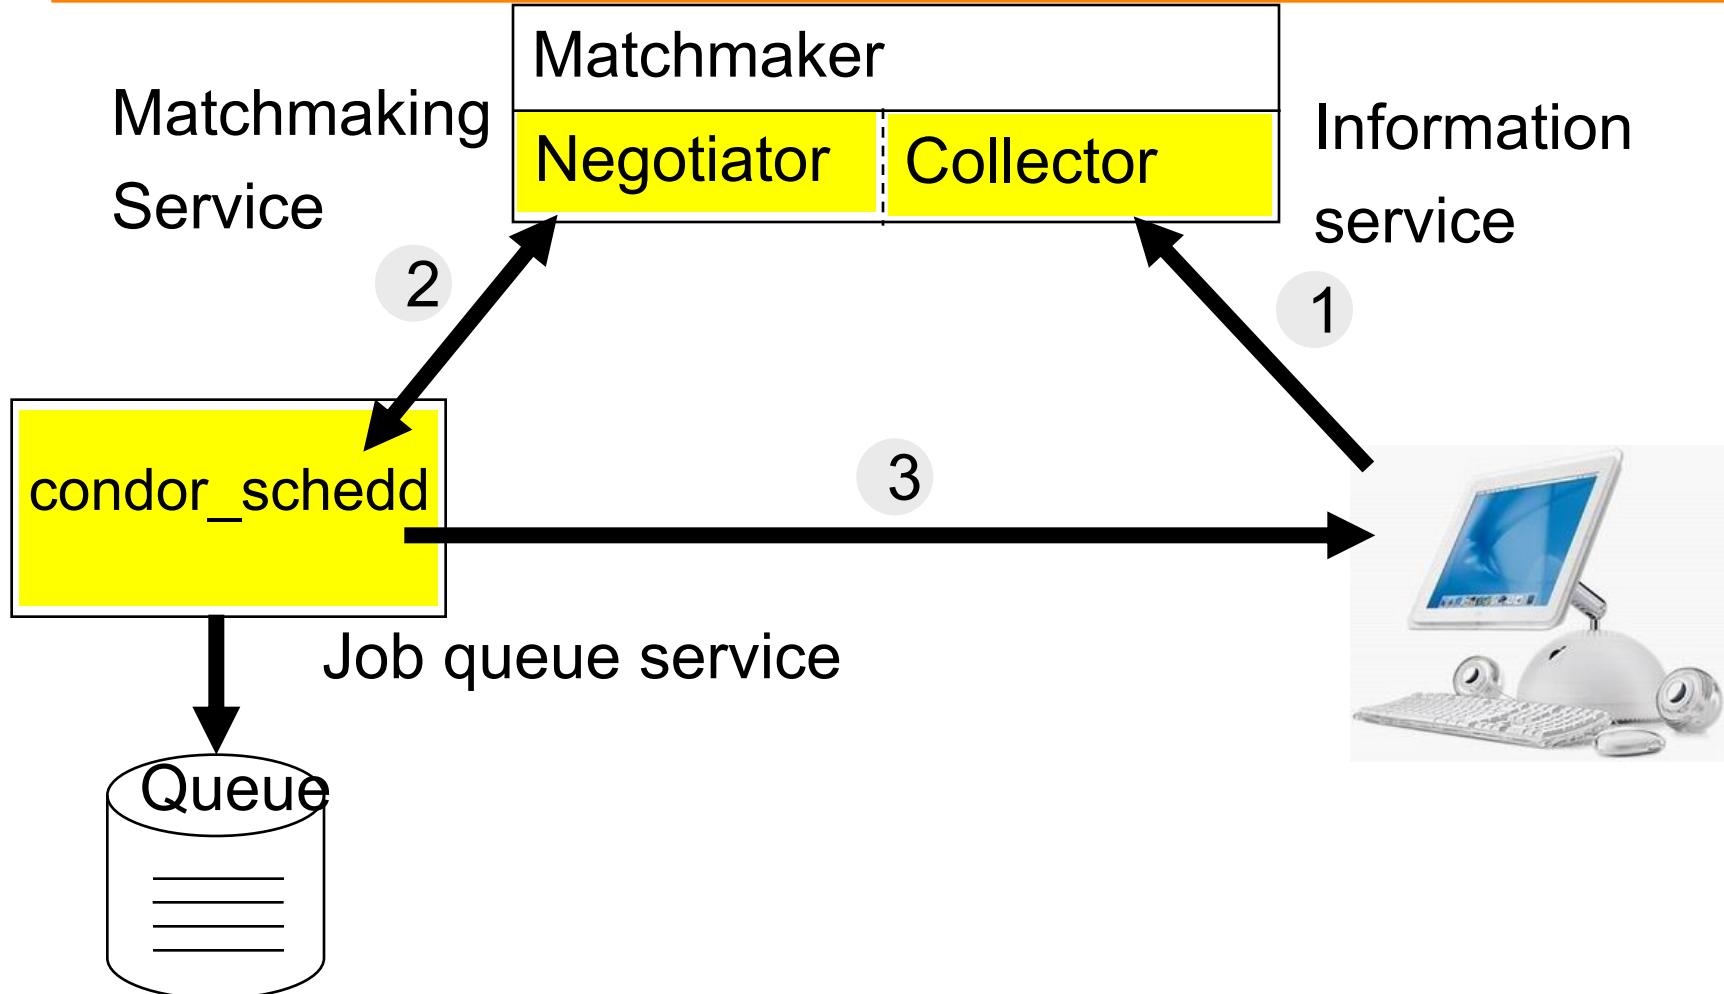

# Why do jobs fail?

- The computer running the job fails
  - Or the network, or the disk, or the OS, or...
- Your job might be *preempted*:
  - Condor decides your job is less important than another, so your job is stopped and another started.
  - Not a “failure” per se, but it may feel like it to you.

# Reliability

- When a job fails or is preempted:
  - It stays in the queue (on the schedd)
  - A note is written to the job log file
  - It reverts to “idle” state
  - It is eligible to be matched again
- Relax! Condor will run your job again

# Access to data in Condor

- Option #1: Shared filesystem
  - Simple to use, but make sure your filesystem can handle the load
- Option #2: Condor's file transfer
  - Can automatically send back changed files
  - Atomic transfer of multiple files
  - Can be encrypted over the wire
  - Most common for small applications and data
- Option #3: Remote I/O

- ShouldTransferFiles = YES
  - Always transfer files to execution site
- ShouldTransferFiles = NO
  - Rely on a shared filesystem
- ShouldTransferFiles = IF\_NEEDED
  - Will automatically transfer the files if needed

```
Universe      = vanilla
Executable   = my_job
Log          = my_job.log
ShouldTransferFiles = YES
Transfer_input_files = dataset$(Process), common.data
Queue 600
```

- Transfer\_input\_files can be a URL  
For example:

```
transfer_input_files = http://www.example.com/input.data
```

# Clusters & Processes

- One submit file can describe lots of jobs
  - All the jobs in a submit file are a *cluster* of jobs
  - Yeah, same term as a cluster of computers
- Each cluster has a unique “cluster number”
- Each job in a cluster is called a “process”
- A Condor “job ID” is the cluster number, a period, and the process number (“20.1”)
- A cluster is allowed to have one or more processes.
  - There is always a cluster for every job

# The \$(Process) macro

- The initial directory for each job can be specified as `run_$(Process)`, and instead of submitting a single job, we use “Queue 600” to submit 600 jobs at once
- The `$(Process)` macro will be expanded to the process number for each job in the cluster (0 - 599), so we’ll have “`run_0`”, “`run_1`”, ... “`run_599`” directories
- All the input/output files will be in different directories!

# Example of \$(Process)

```
# Example condor_submit input file that defines
# a cluster of 600 jobs with different directories
Universe      = vanilla
Executable    = my_job
Log           = my_job.log
Arguments     = -arg1 -arg2
Input          = my_job.stdin
Output         = my_job.stdout
Error          = my_job.stderr
InitialDir    = run_$(Process)
Queue 600
```

run\_0 ... run\_599  
Creates job 3.0 ... 3.599

# More \$(Process)

- You can use \$(Process) anywhere:

```
Universe      = vanilla
```

```
Executable    = my_job
```

```
Log           = my_job.$(Process).log
```

```
Arguments     = -randomseed $(Process)
```

```
Input          = my_job.stdin
```

```
Output         = my_job.stdout
```

```
Error          = my_job.stderr
```

```
InitialDir   = run_$(Process)
```

```
Queue 600
```



Open Science Grid

# Sharing a directory



- You don't have to use separate directories.
- `$(Cluster)` will help distinguish runs

```
Universe      = vanilla
```

```
Executable    = my_job
```

```
Arguments     = -randomseed $(Process)
```

```
Input         = my_job.input.$(Process)
```

```
Output        = my_job.stdout.$(Cluster).$(Process)
```

```
Error         = my_job.stderr.$(Cluster).$(Process)
```

```
Log           = my_job.$(Cluster).$(Process).log
```

```
Queue 600
```



INDIANA UNIVERSITY

# Not Only Programming Languages

- You ran a C program this morning
- You can also run scripting languages such as bash, python, and perl
- You can also executing programs via the command like R

# Wrap Up Notes

- There are several different computing environments
- There is a very diverse set of computing jobs
- Matching jobs to resources is key to not wasting resources
- Not all of the available environments are open environments
- Research Computing is Complex

# Quick UNIX Refresher Before We Start

- \$
- nano, vi, emacs, cat >, etc.
- **source, module, chmod, ls**



# That was a whirlwind tour!

- Enough with the presentation: let's use HTCondor!
- Goal: Extend the diversity of our jobs and add some data to the mix.



# Questions?

- Questions? Comments?
  - Feel free to ask me questions now or later:  
Rob Quick [rquick@iu.edu](mailto:rquick@iu.edu)

Exercises start here:

[https://opensciencegrid.org/dosar/DataKigali\\_2018/Materials/](https://opensciencegrid.org/dosar/DataKigali_2018/Materials/)

Presentations are also available from this URL.