
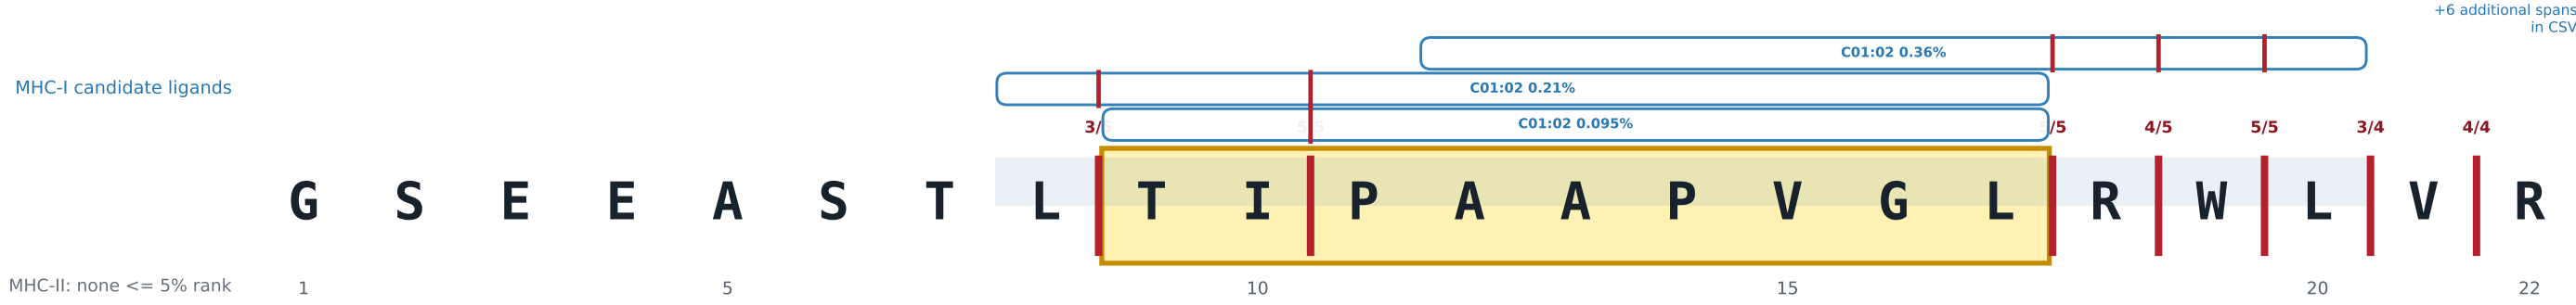


TECPR1 p.Thr259fs | JLF V3, JLF V2, JLF V1 | 22 aa

disclosed minimal epitope TIPAAPVGL at 9-17

CLASS-I PROCESSING - higher native site score = taller profile

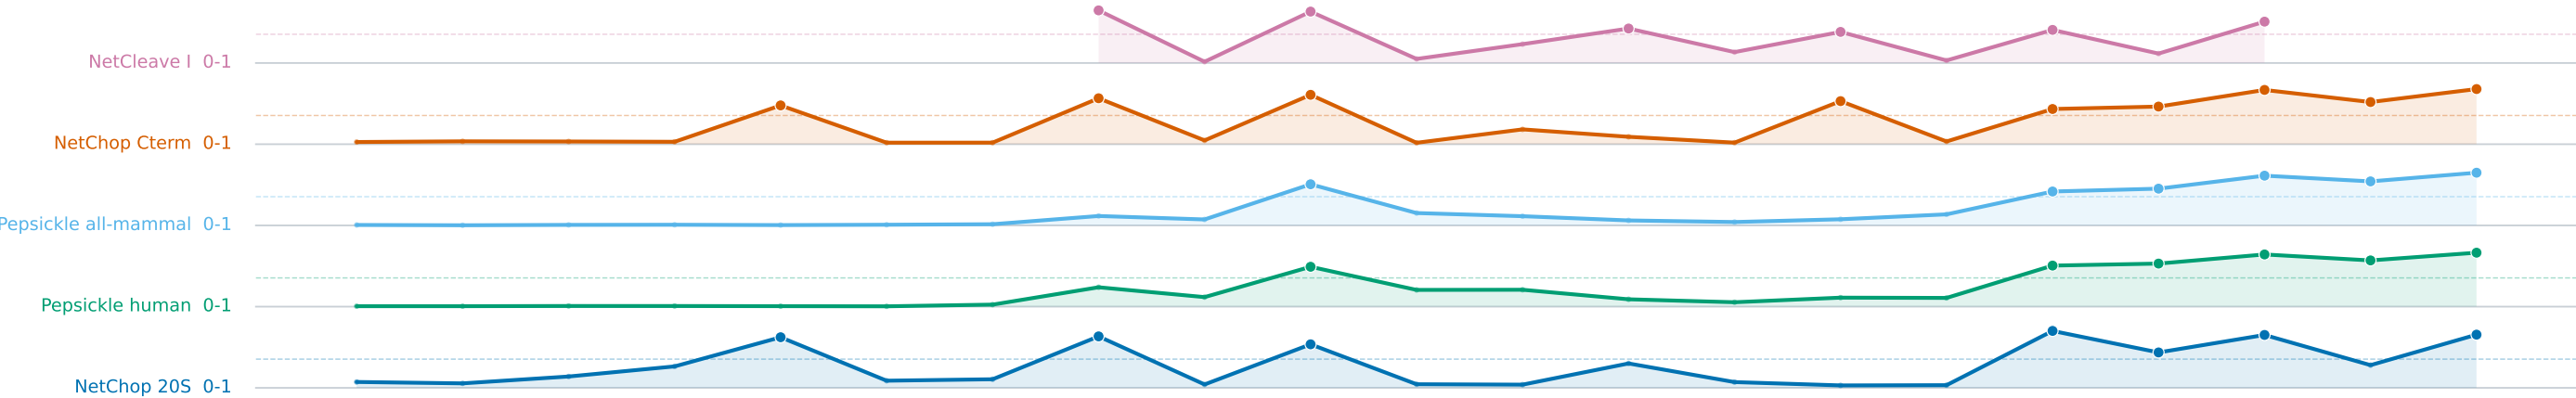

MHC-II: none <= 5% rank 1 5 10 15 20 22



DPP4 native -0.085

ERAP1 / ERAMER

plasma / extracellular motifs

cytosol / ER motifs

TPP2 MME MME PREP PREP MME MME ACE CPB2+CPN1

Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. Red slashes between residues require >=3 of the five class-I-processing models. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.