


BTD p.Phe445Val | JLF V3, JLF V2, JLF V1 | 23 aa

disclosed minimal epitope GVVDGLHTV at 12-20

CLASS-I PROCESSING - higher native site score = taller profile

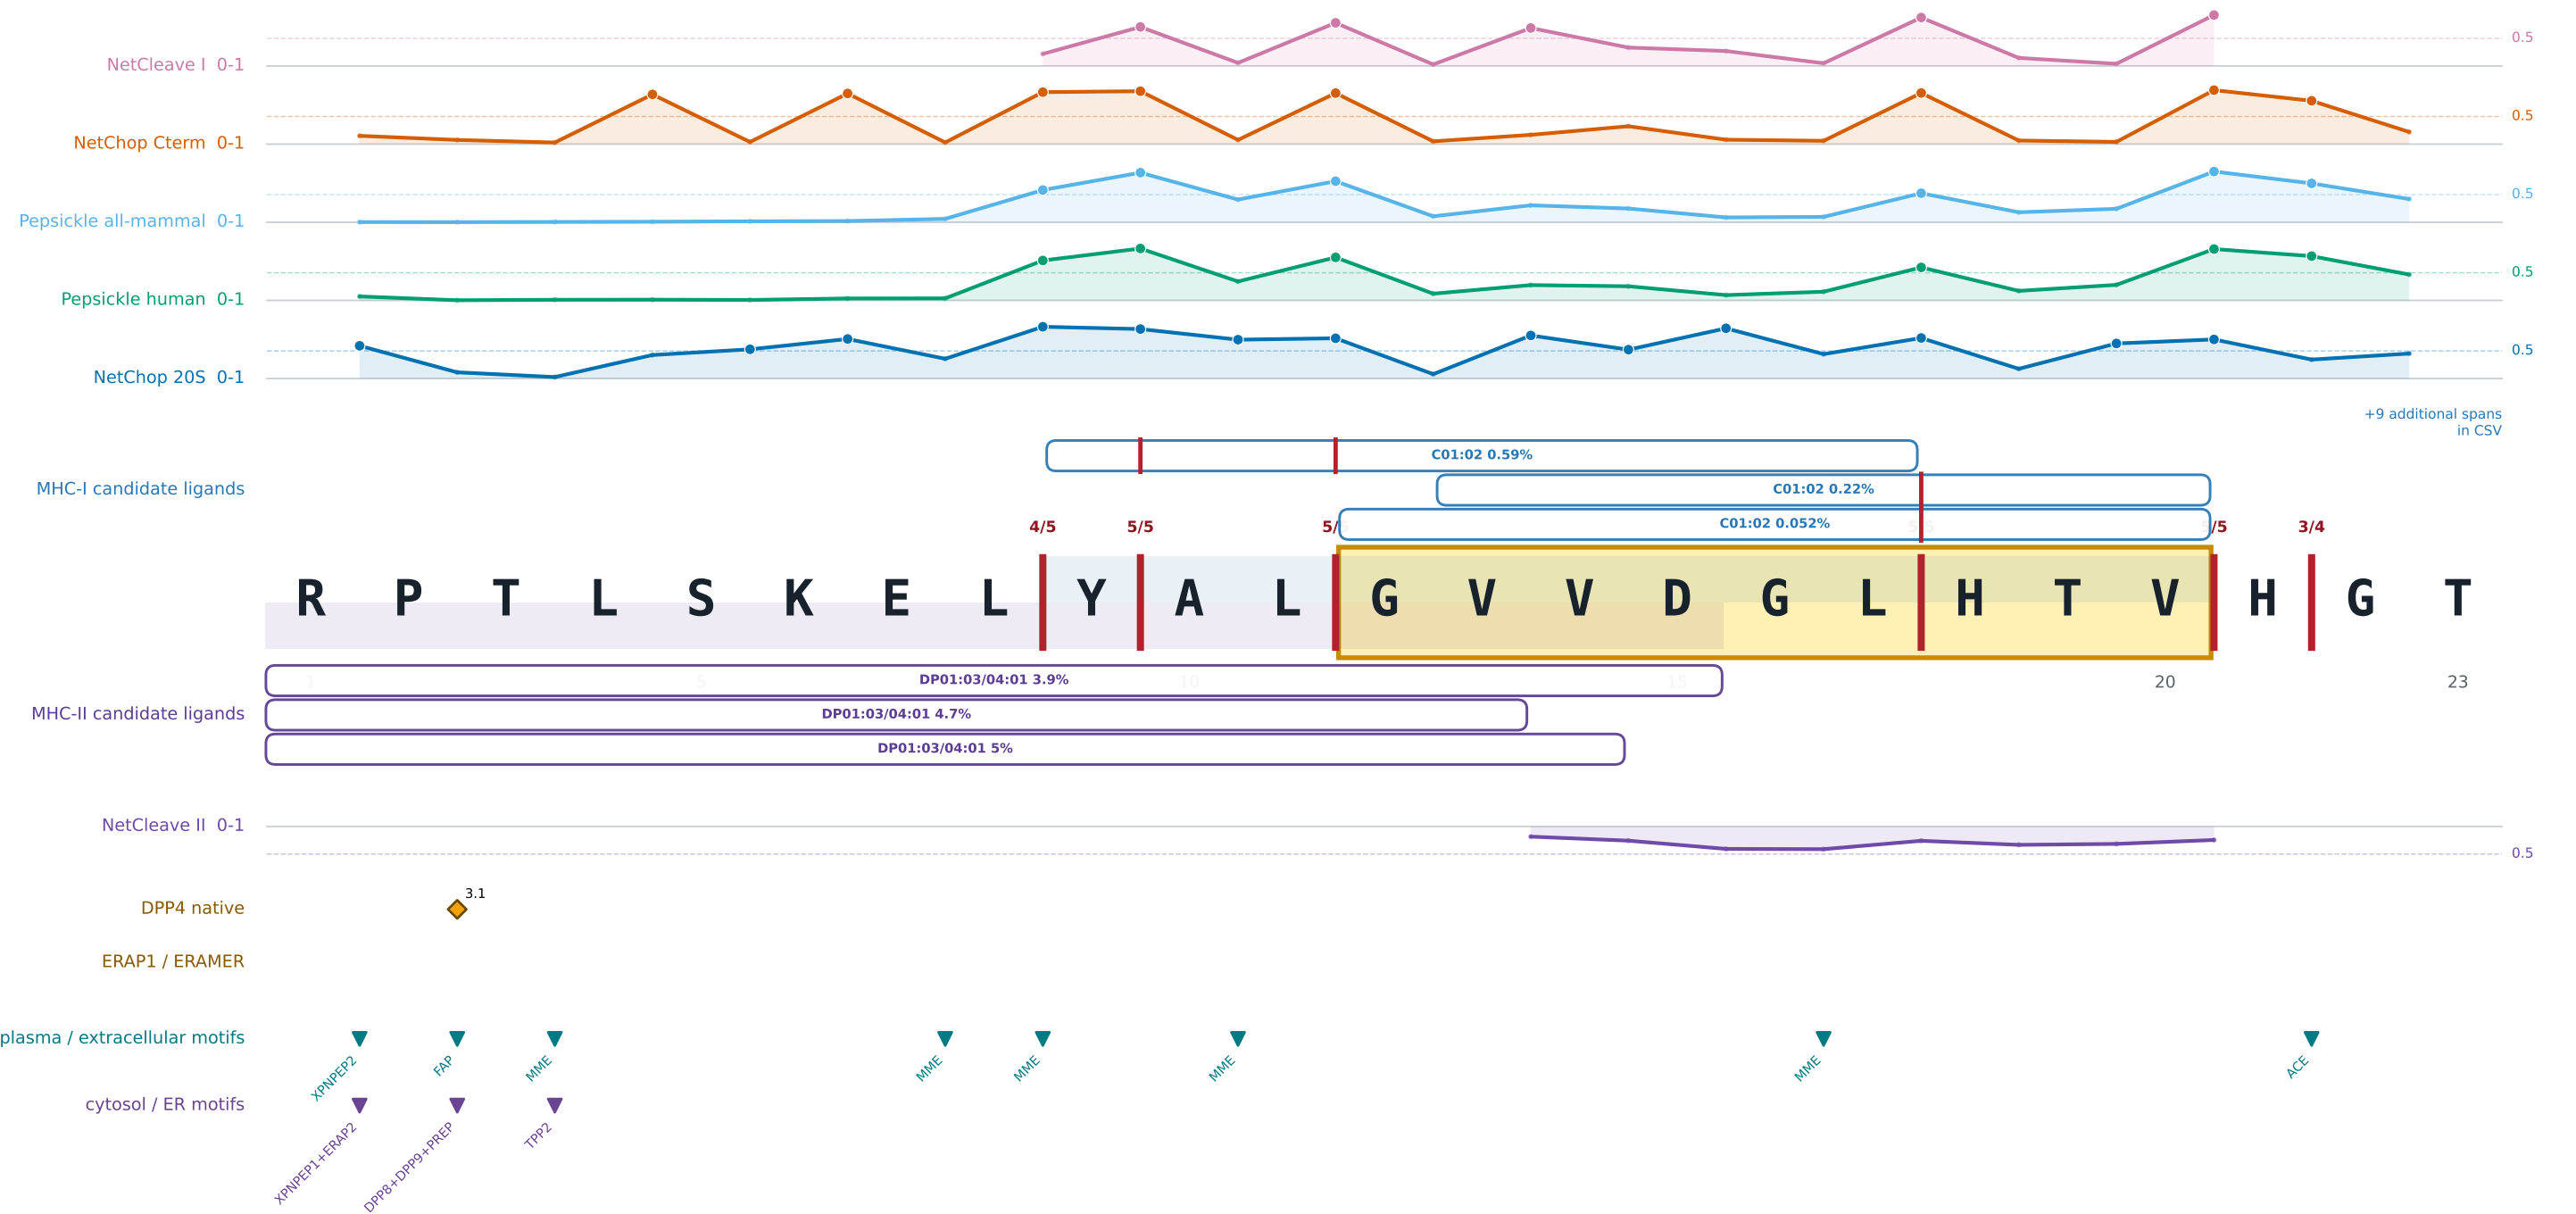

Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. Red slashes between residues require  $\geq 3$  of the five class-I-processing models. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at  $\leq 2\%$ / $\leq 5\%$  rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.