

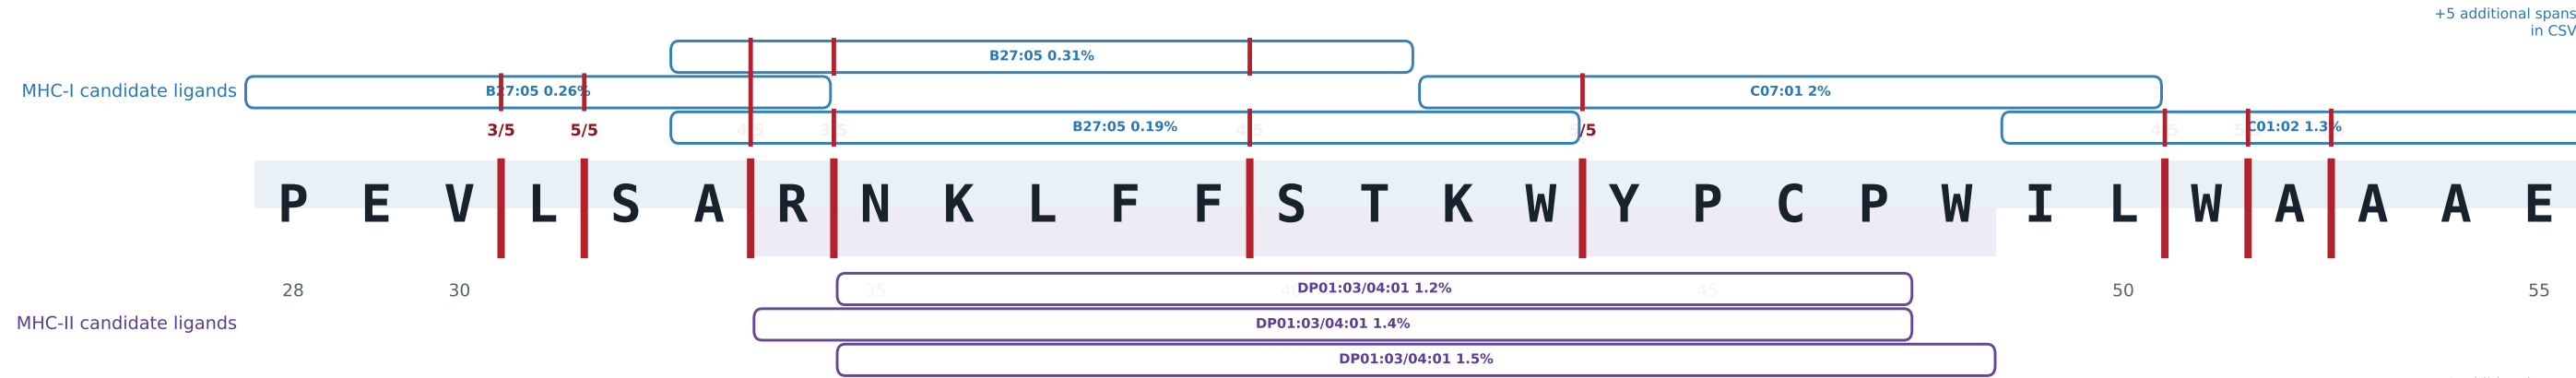


GLIS3 p.Ser775fs | JLF V3 | 80 aa - segment 2/3, bonds 28-54

minimal epitope/window not disclosed for this SLP

CLASS-I PROCESSING - higher native site score = taller profile

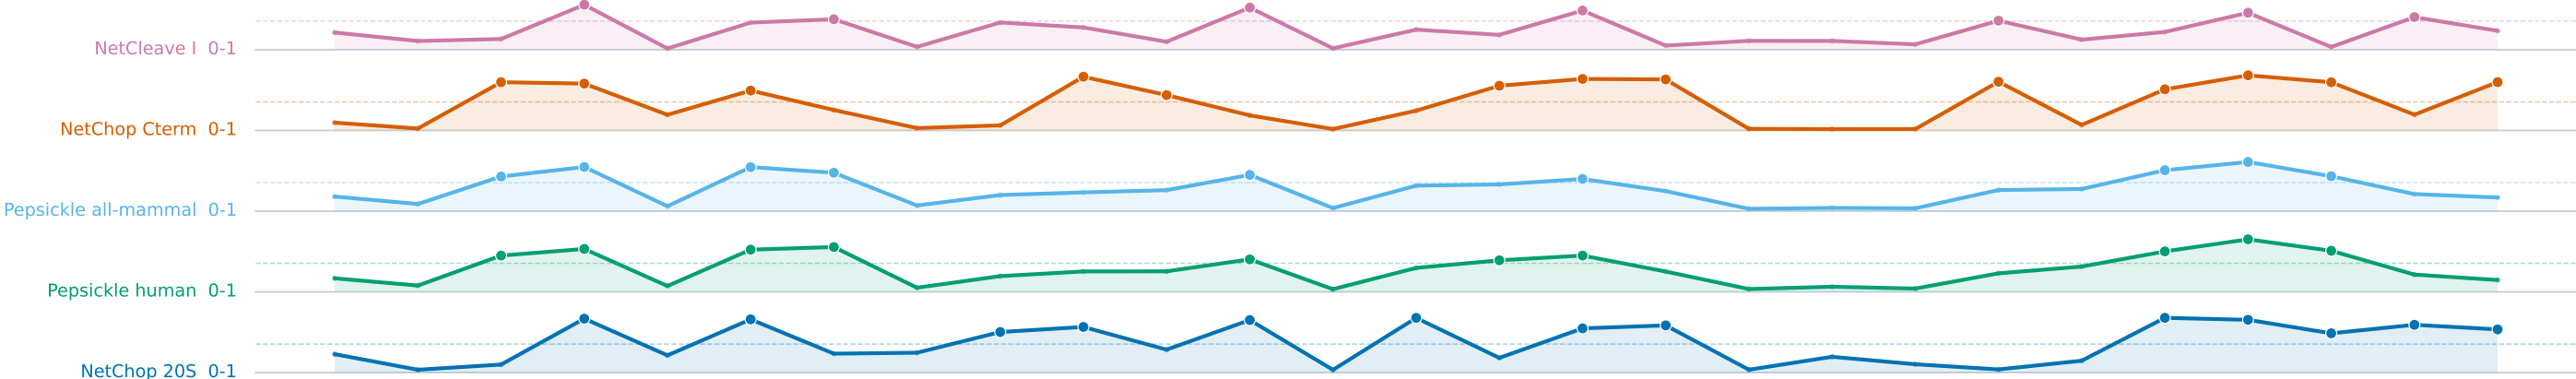

DPP4 native

ERAP1 / ERAMER

plasma / extracellular motifs

cytosol / ER motifs

Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. Red slashes between residues require ≥ 3 of the five class-I-processing models. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at $\leq 2\%$ / $\leq 5\%$ rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.