



Agreement map for the vaccine SLP cleavage atlas

SLPs clustered by within-model candidate-site fraction

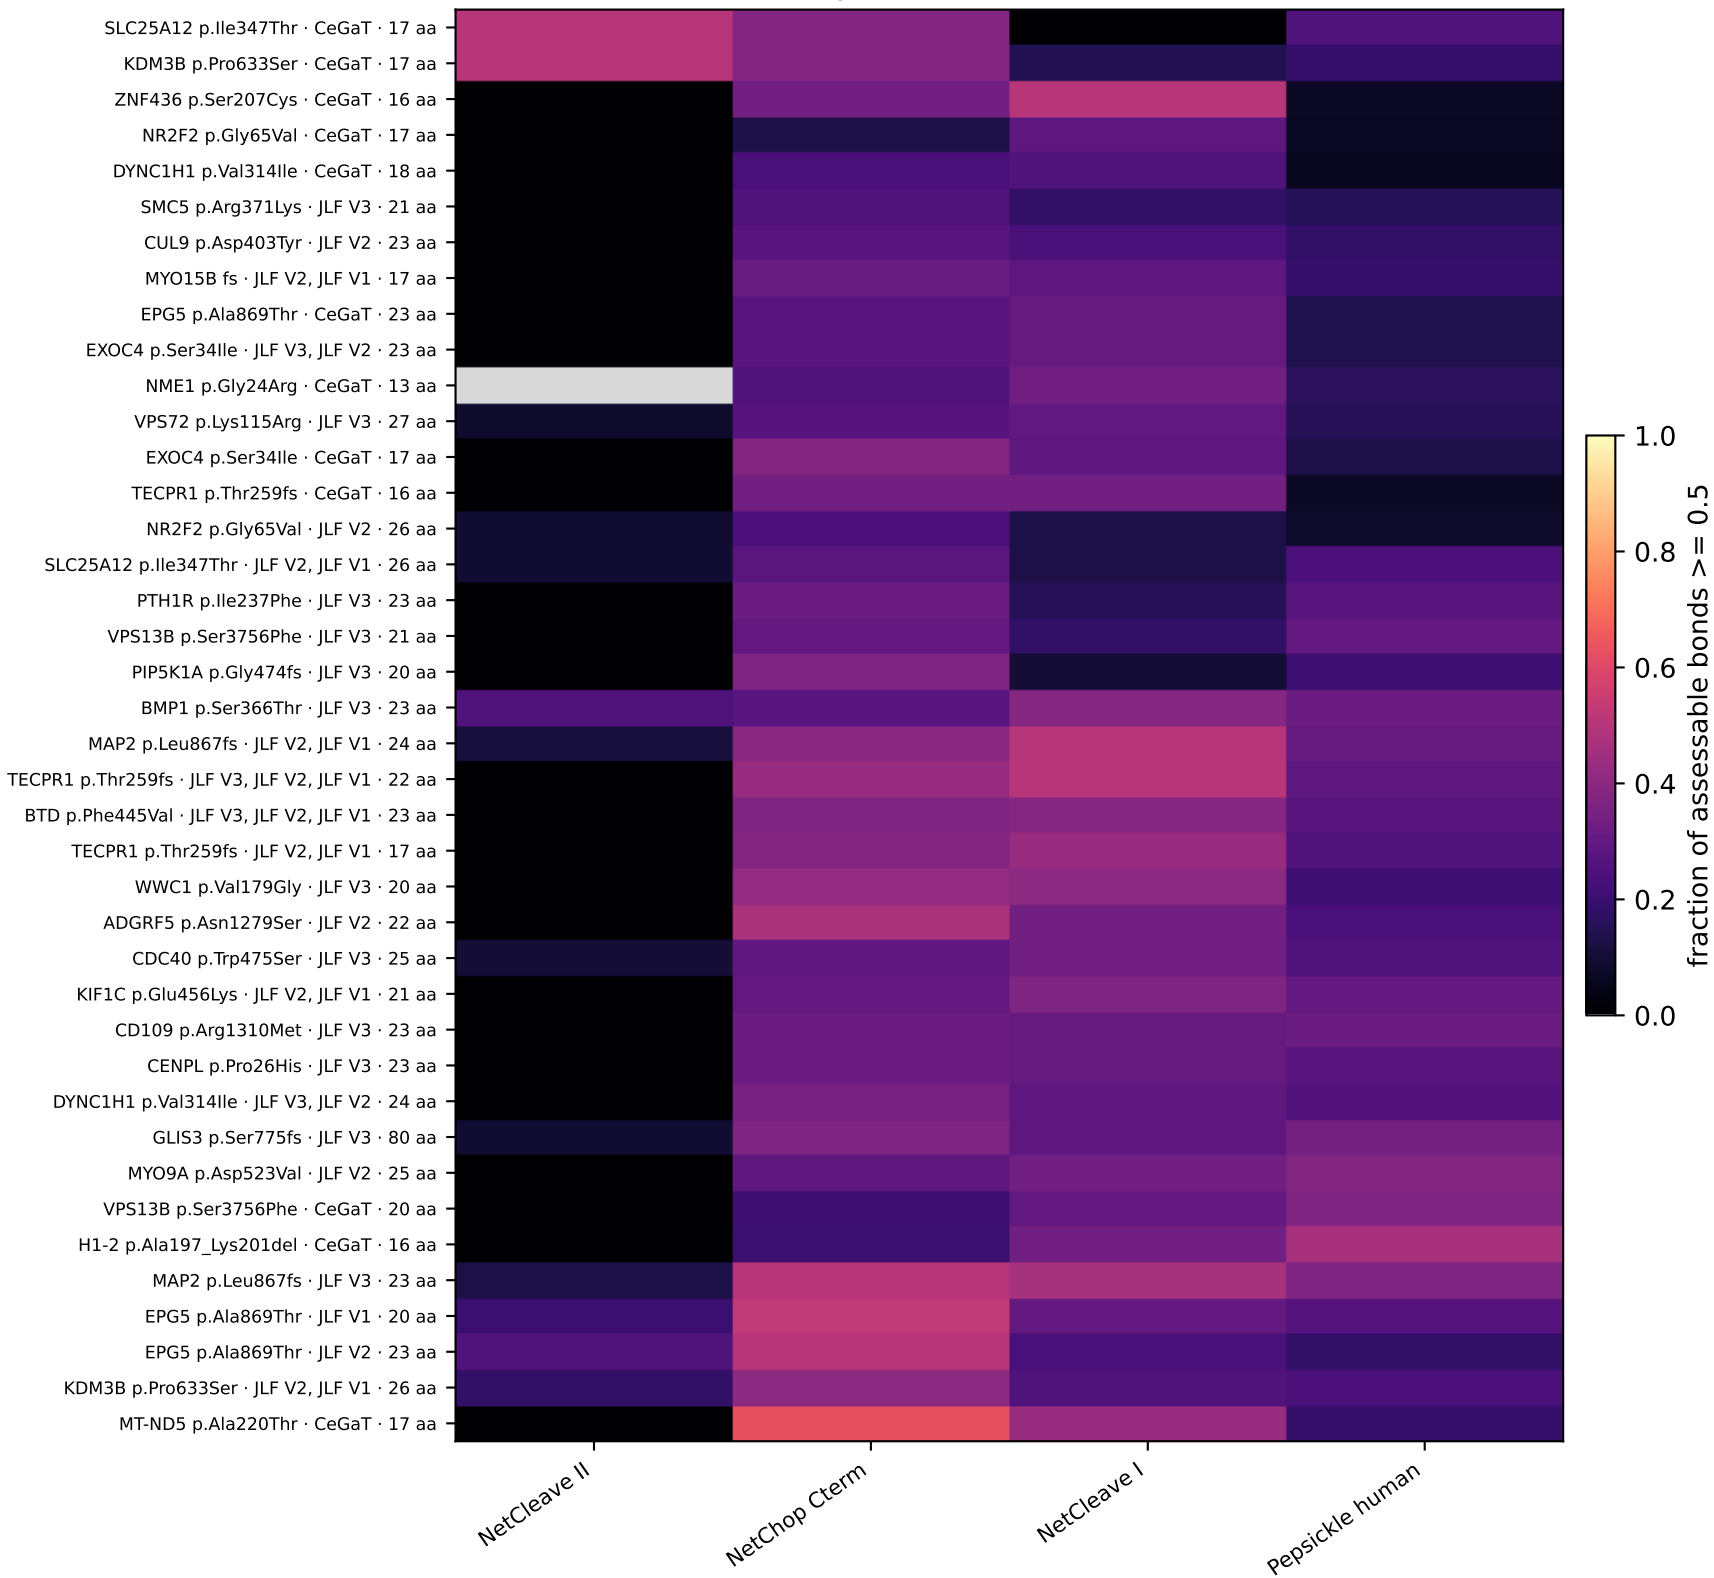

Predictor agreement at shared peptide bonds


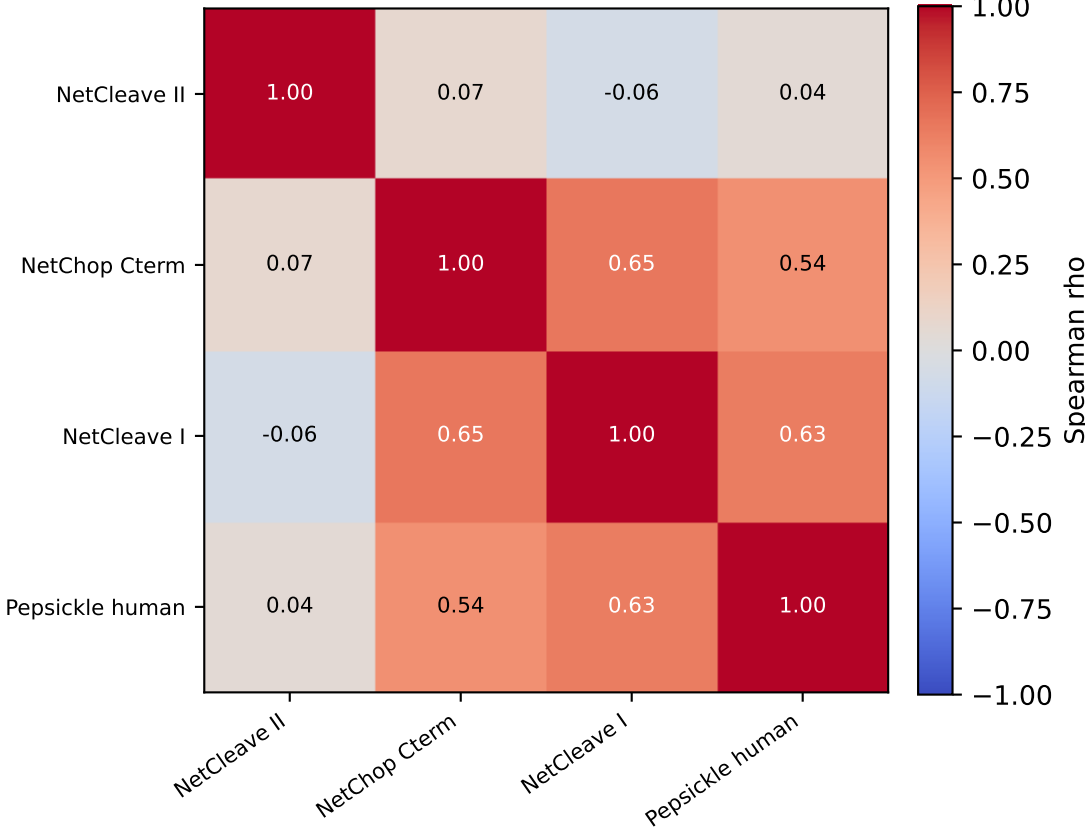


Clustering organizes the atlas; it does not create an ensemble probability. Sequence pages follow the left-panel SLP order. The figure intentionally shows human-only Pepsickle, NetChop Cterm, NetCleave-I, and NetCleave-II; all-mammal Pepsickle and NetChop 20S remain in the tables. The left panel uses a common display threshold on native 0-1 outputs. The right panel correlates native scores only where both models assess the same bond.

SLC25A12 p.Ile347Thr | CeGaT | 17 aa

disclosed minimal epitope ATAVYPTDL at 3-11

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

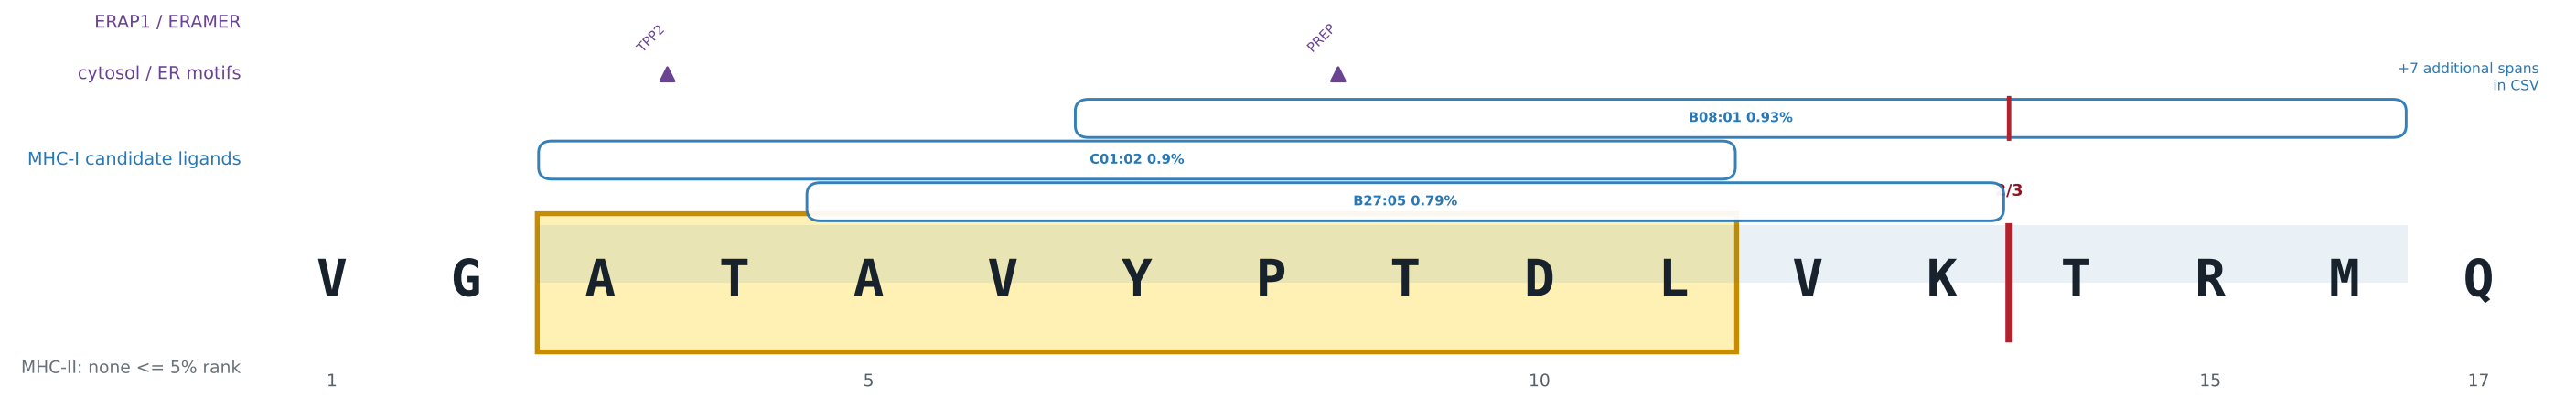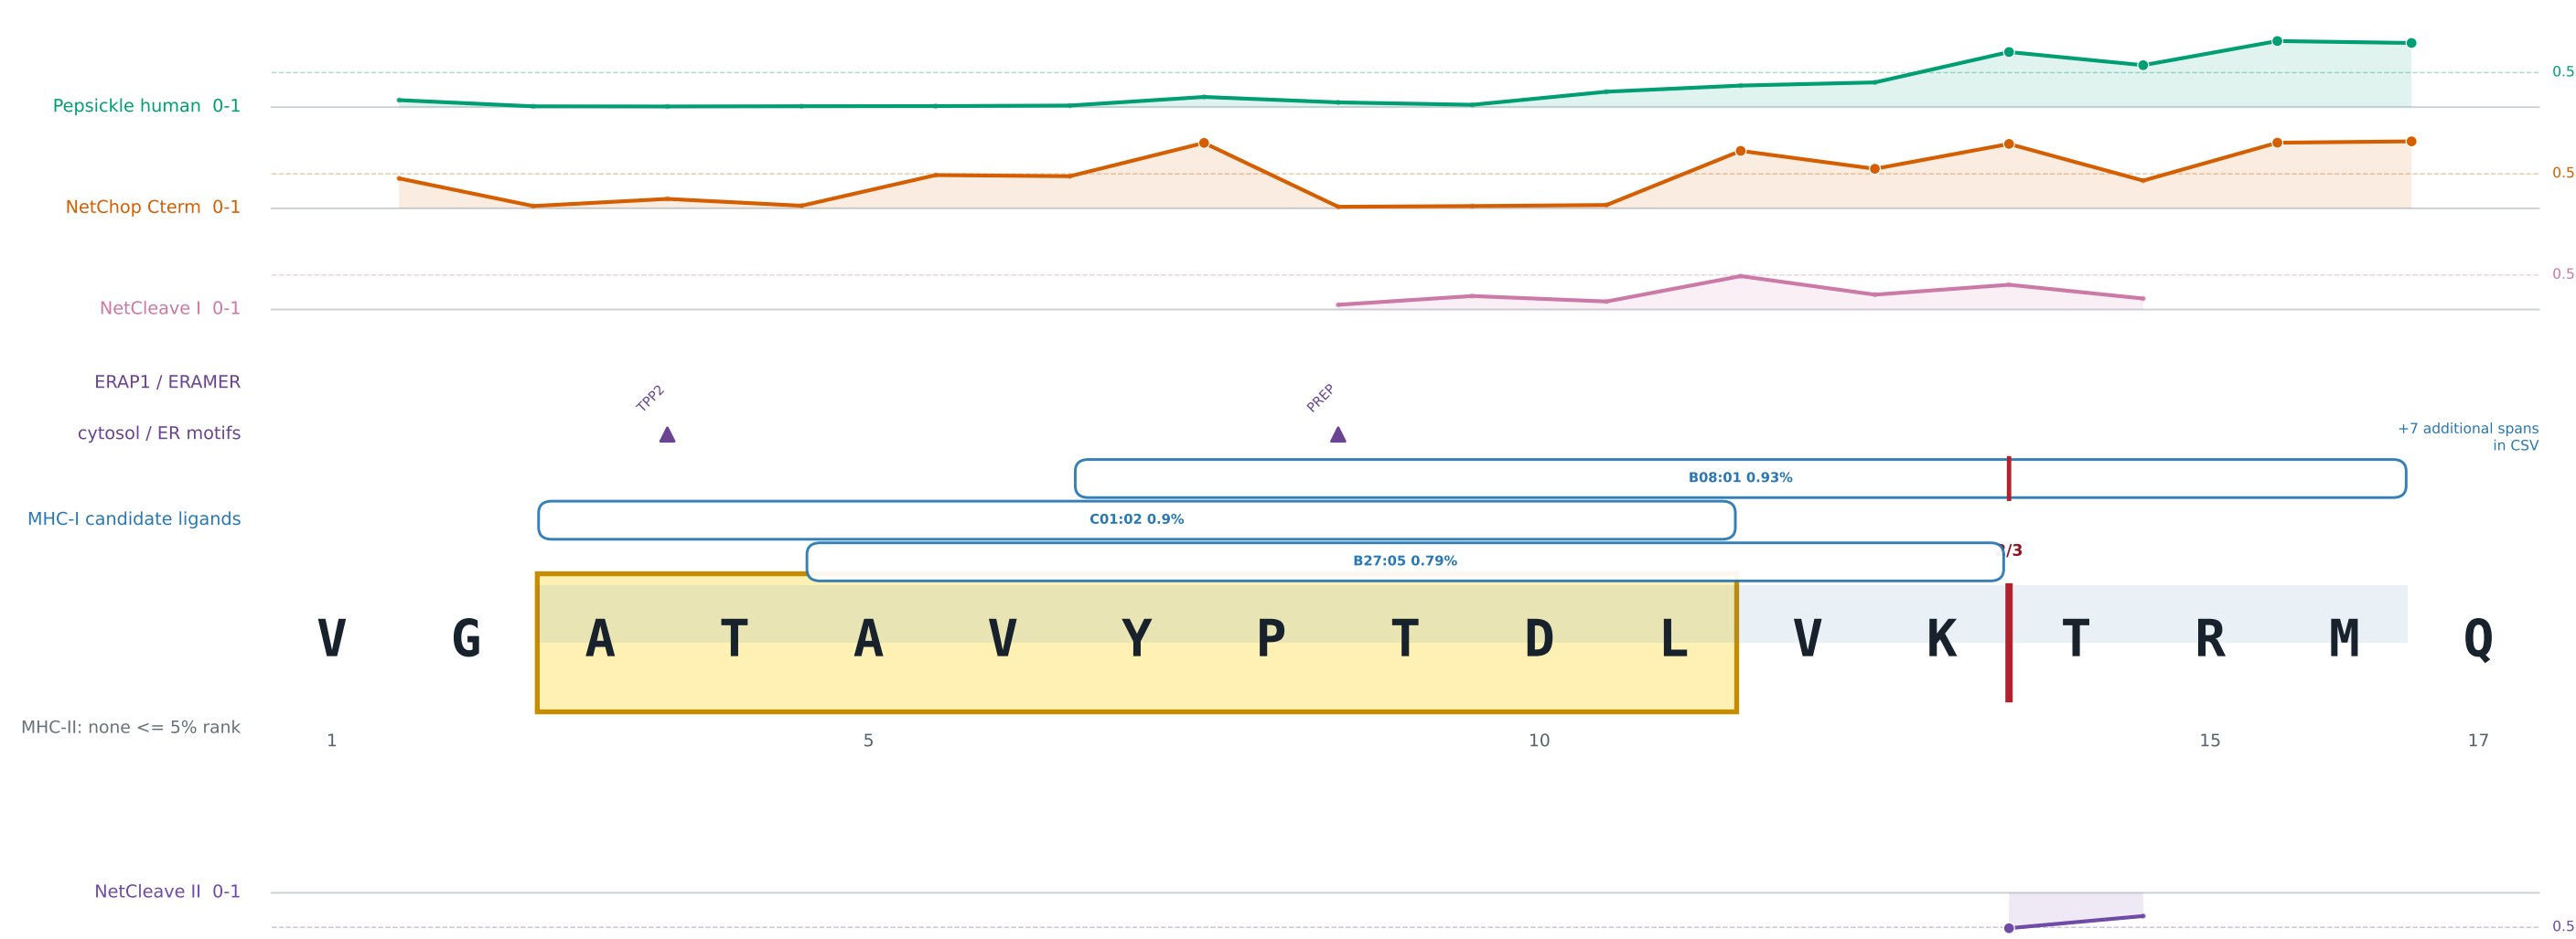

SERUM / EXTRACELLULAR - native scores and recognition motifs




Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

KDM3B p.Pro633Ser | CeGaT | 17 aa

minimal epitope/window not disclosed for this SLP

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

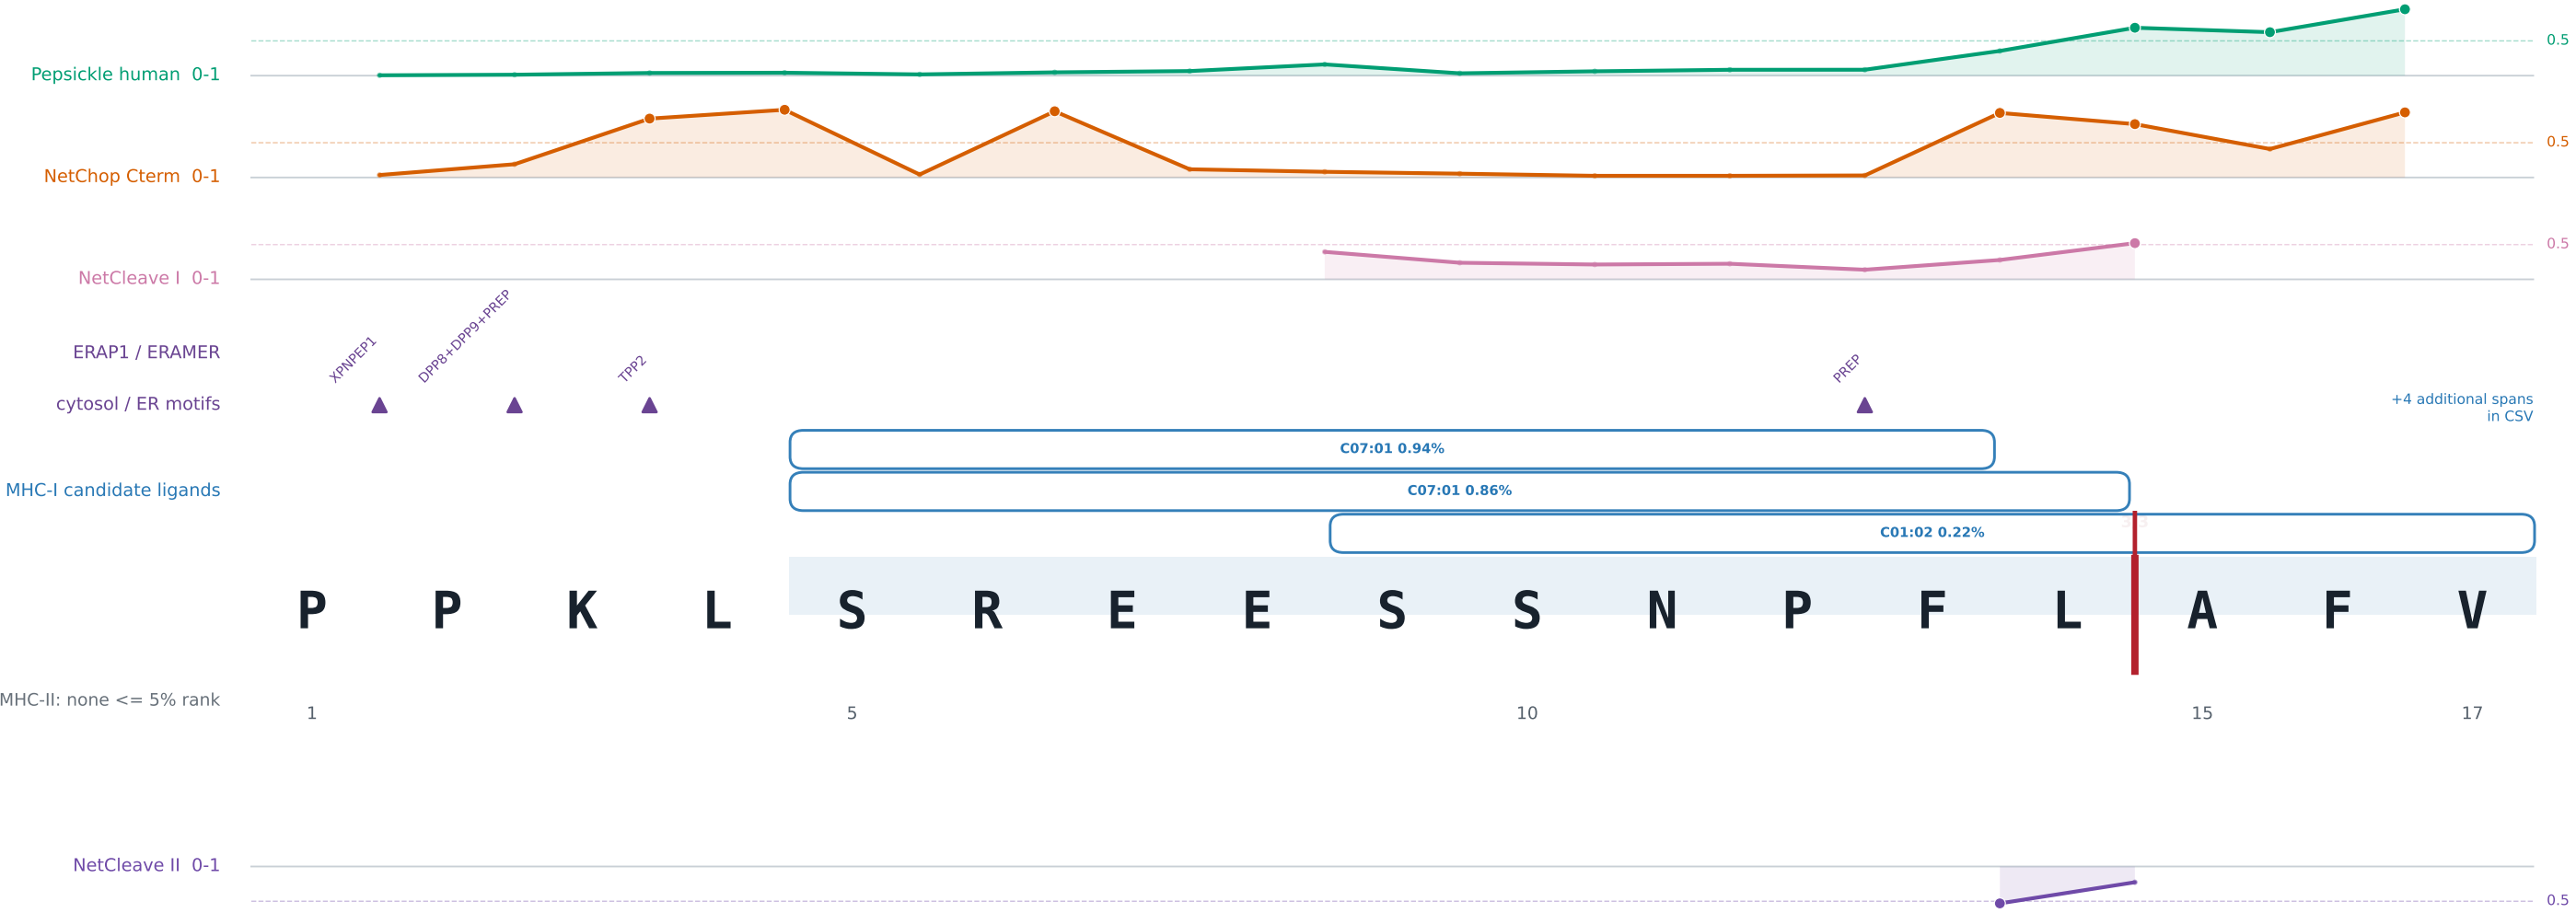

SERUM / EXTRACELLULAR - native scores and recognition motifs




Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

ZNF436 p.Ser207Cys| CeGaT | 16 aa

disclosed minimal epitope KSFGRSCHL at 2-10

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

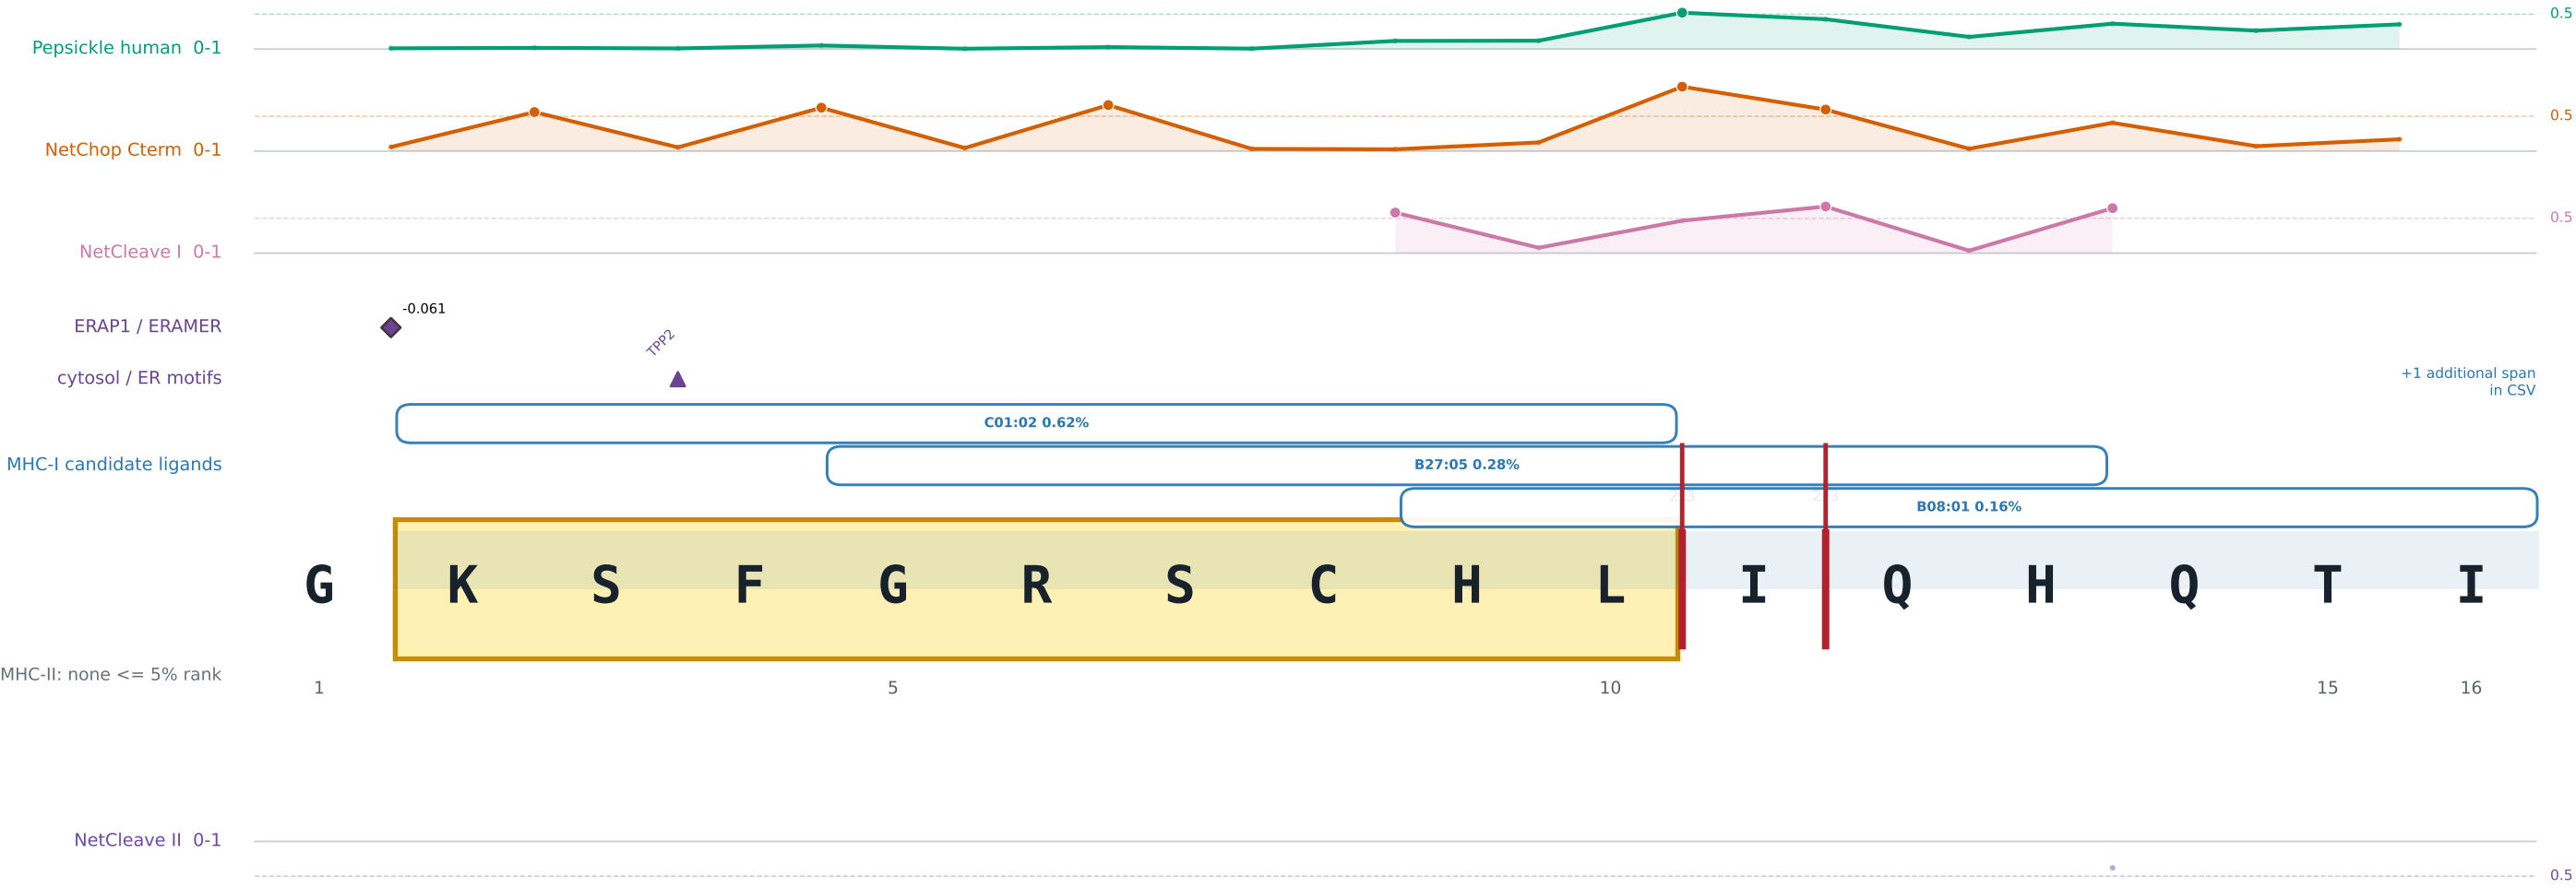

SERUM / EXTRACELLULAR - native scores and recognition motifs




Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

NR2F2 p.Gly65Val | CeGaT | 17 aa

minimal epitope/window not disclosed for this SLP

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

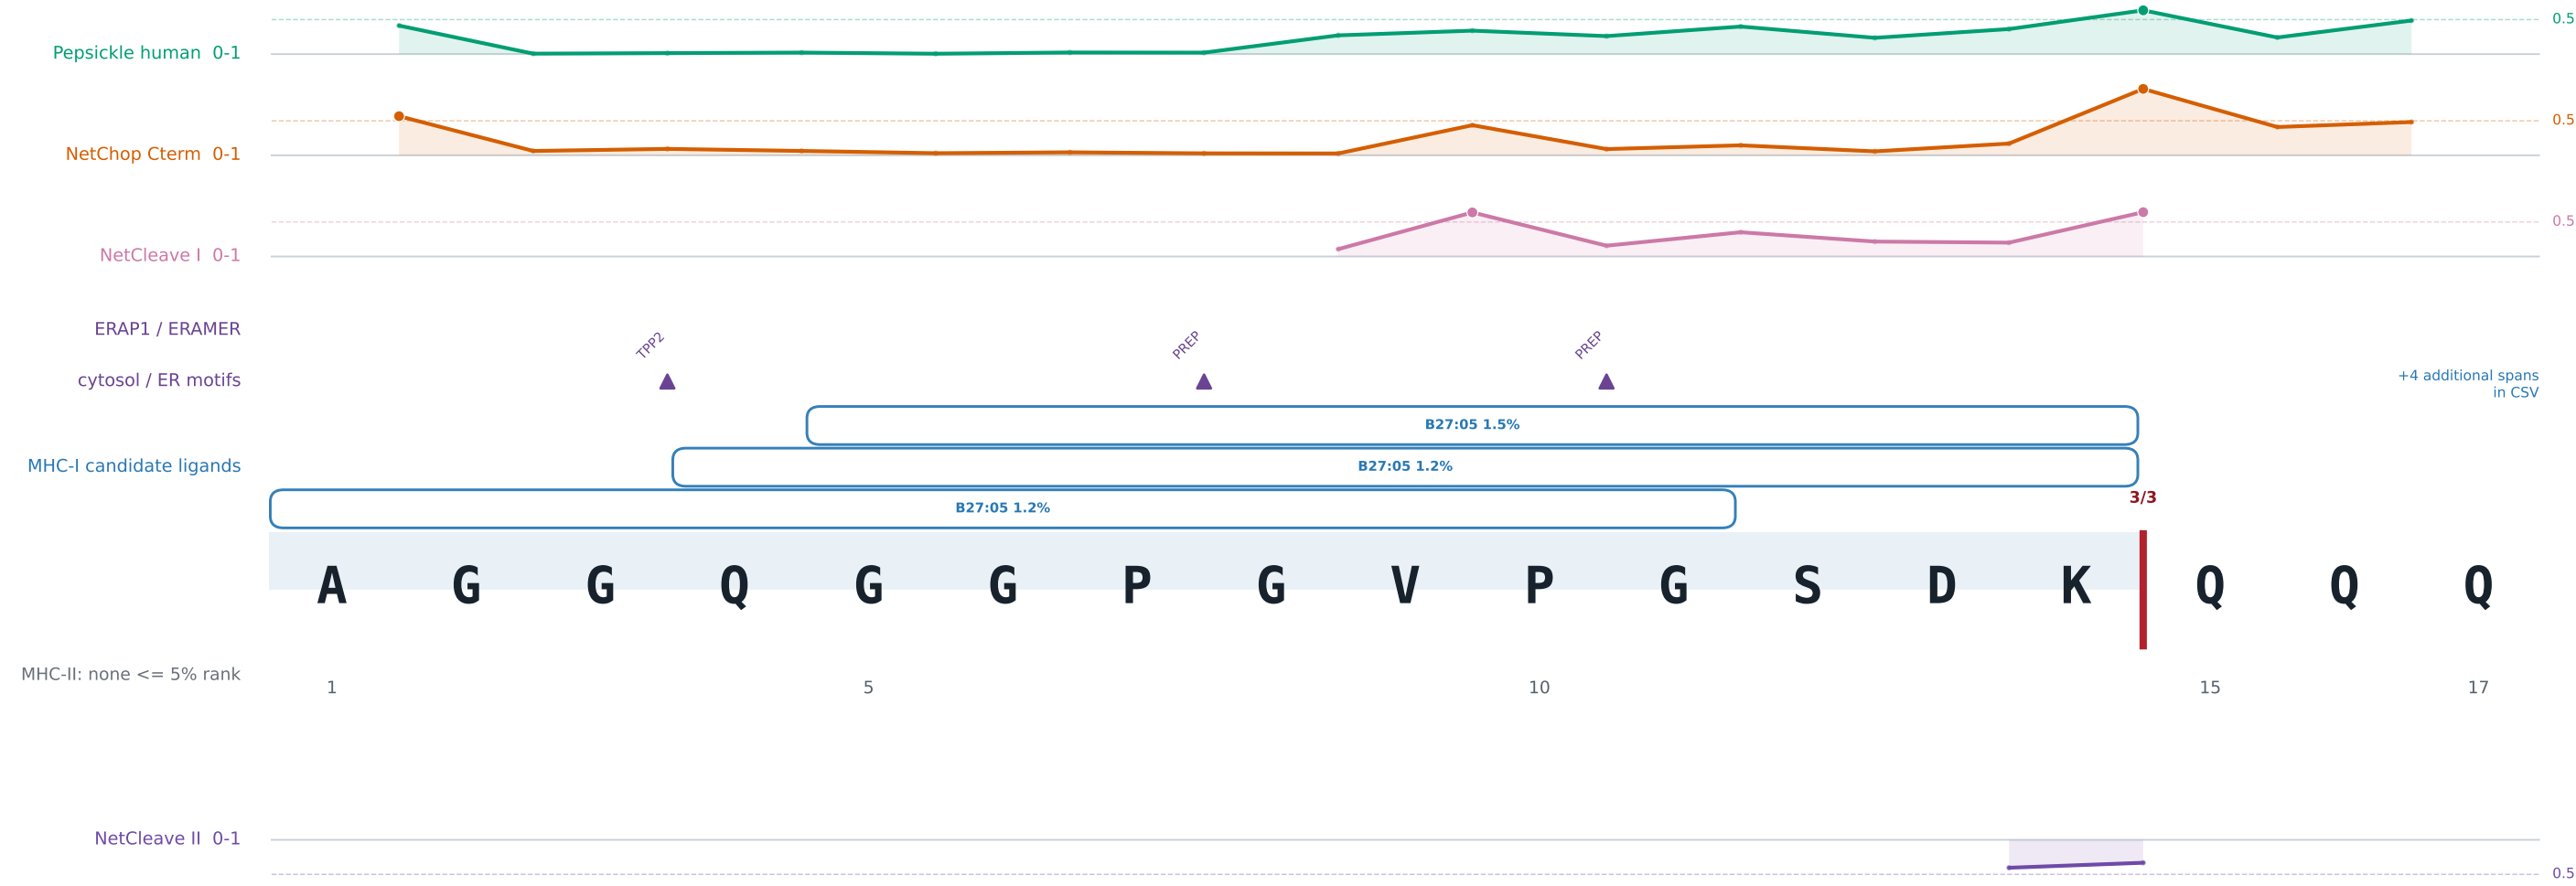

SERUM / EXTRACELLULAR - native scores and recognition motifs




Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

DYNC1H1 p.Val314Ile | CeGaT | 18 aa

disclosed minimal epitope KRFHATISF at 4-12

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at ≥ 0.5

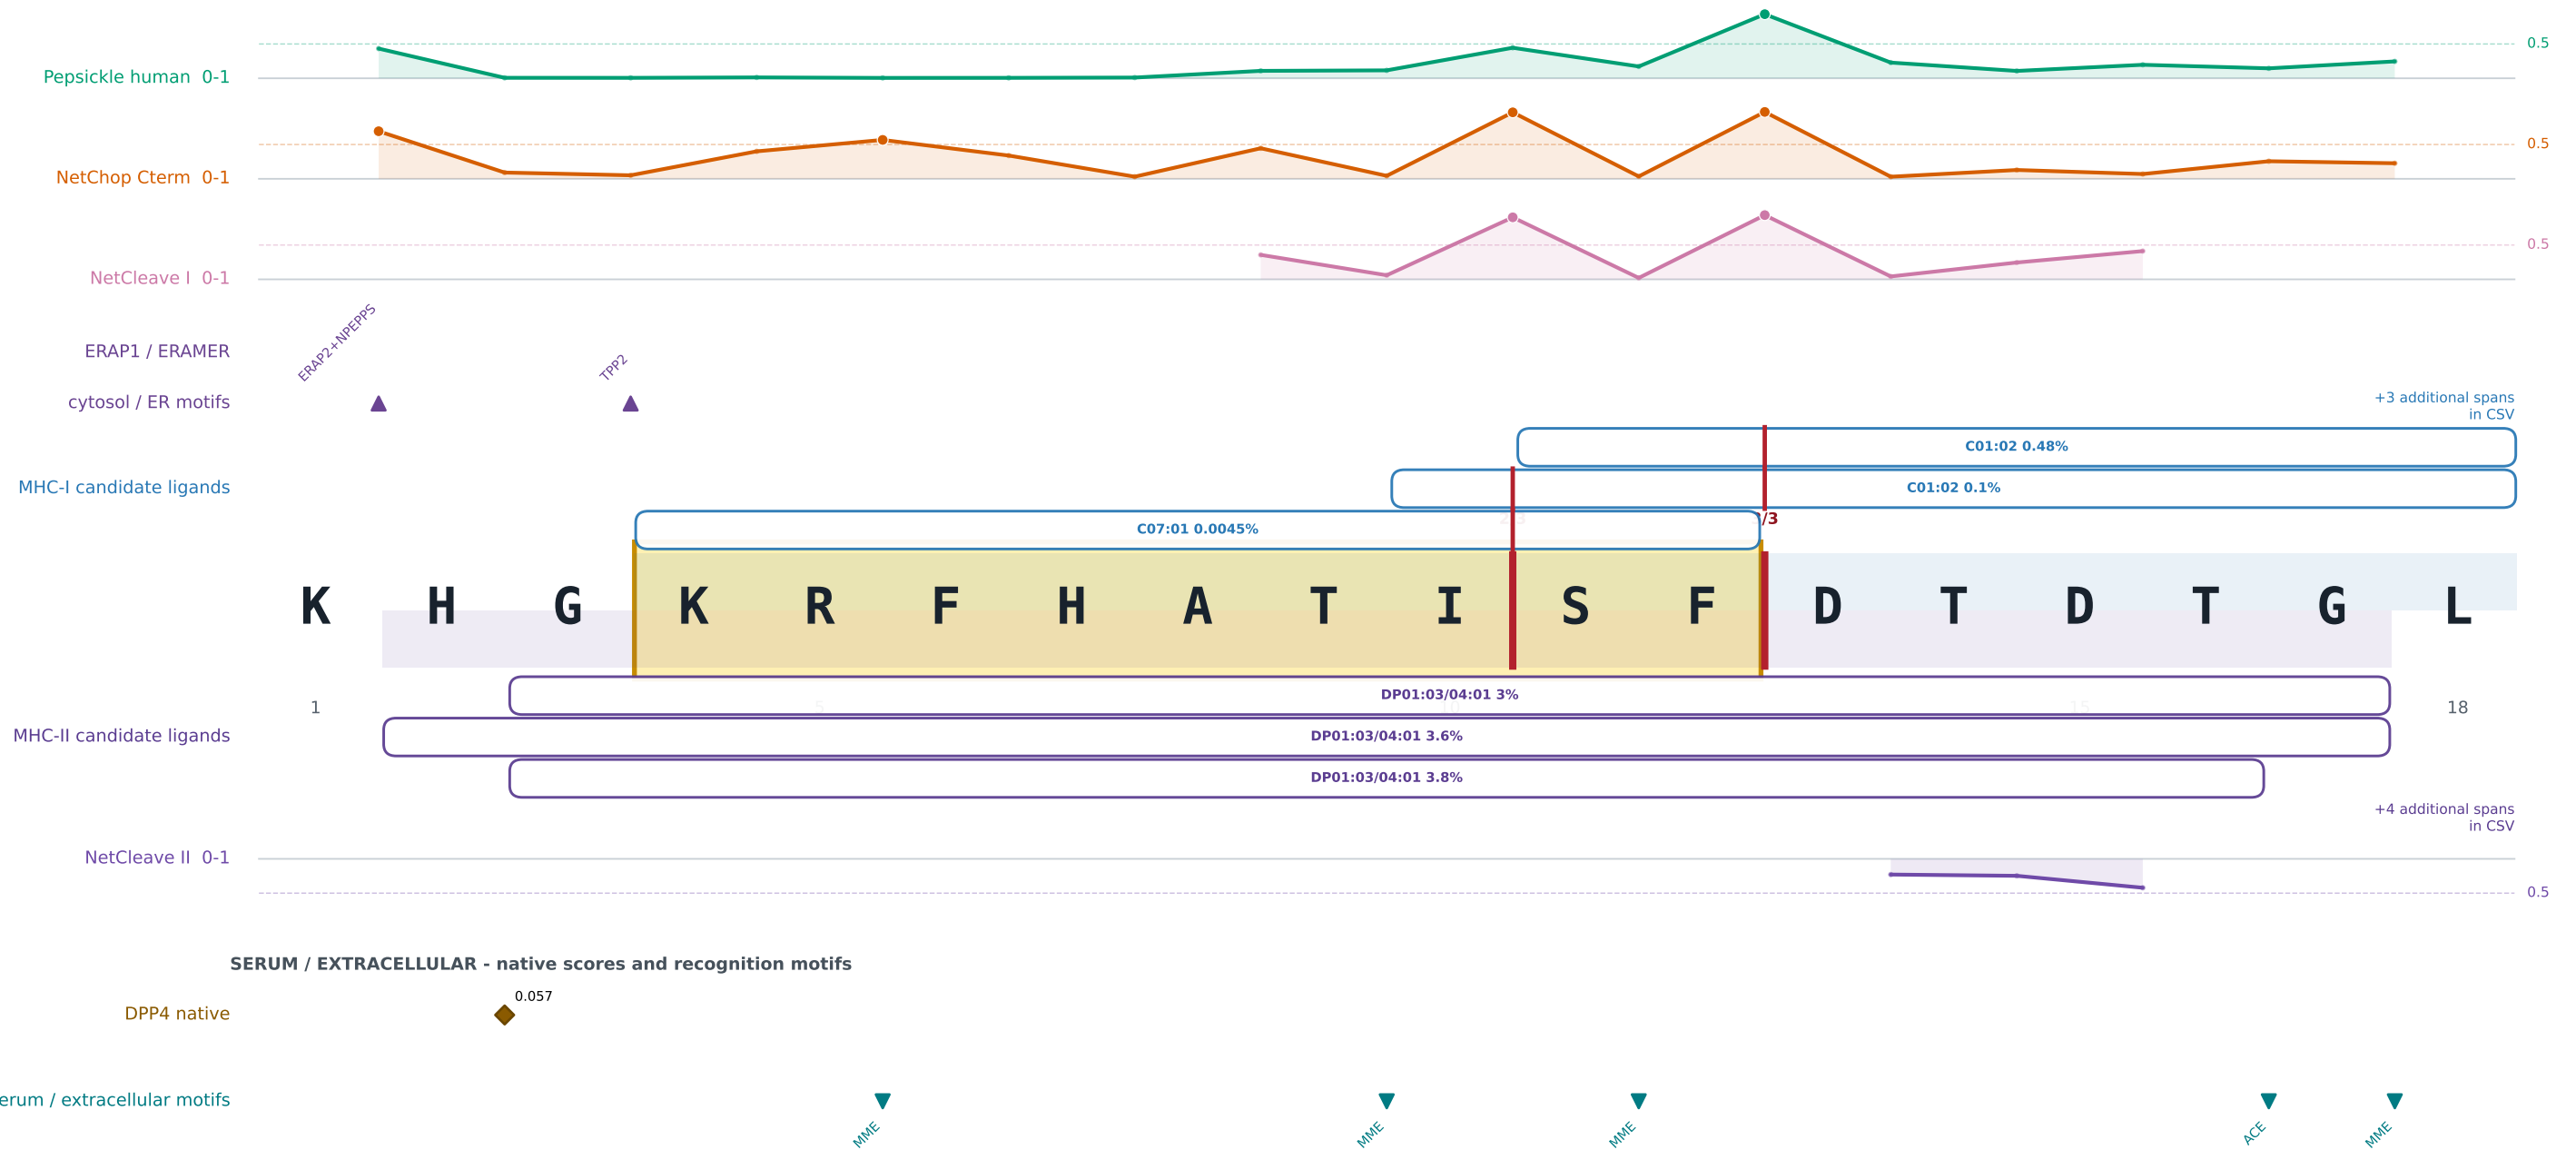


Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and ≥ 2 score ≥ 0.5 ; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at $\leq 2\%/\leq 5\%$ rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

SMC5 p.Arg371Lys | JLF V3 | 21 aa

disclosed minimal epitope RQKRIGNTR at 2-10

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

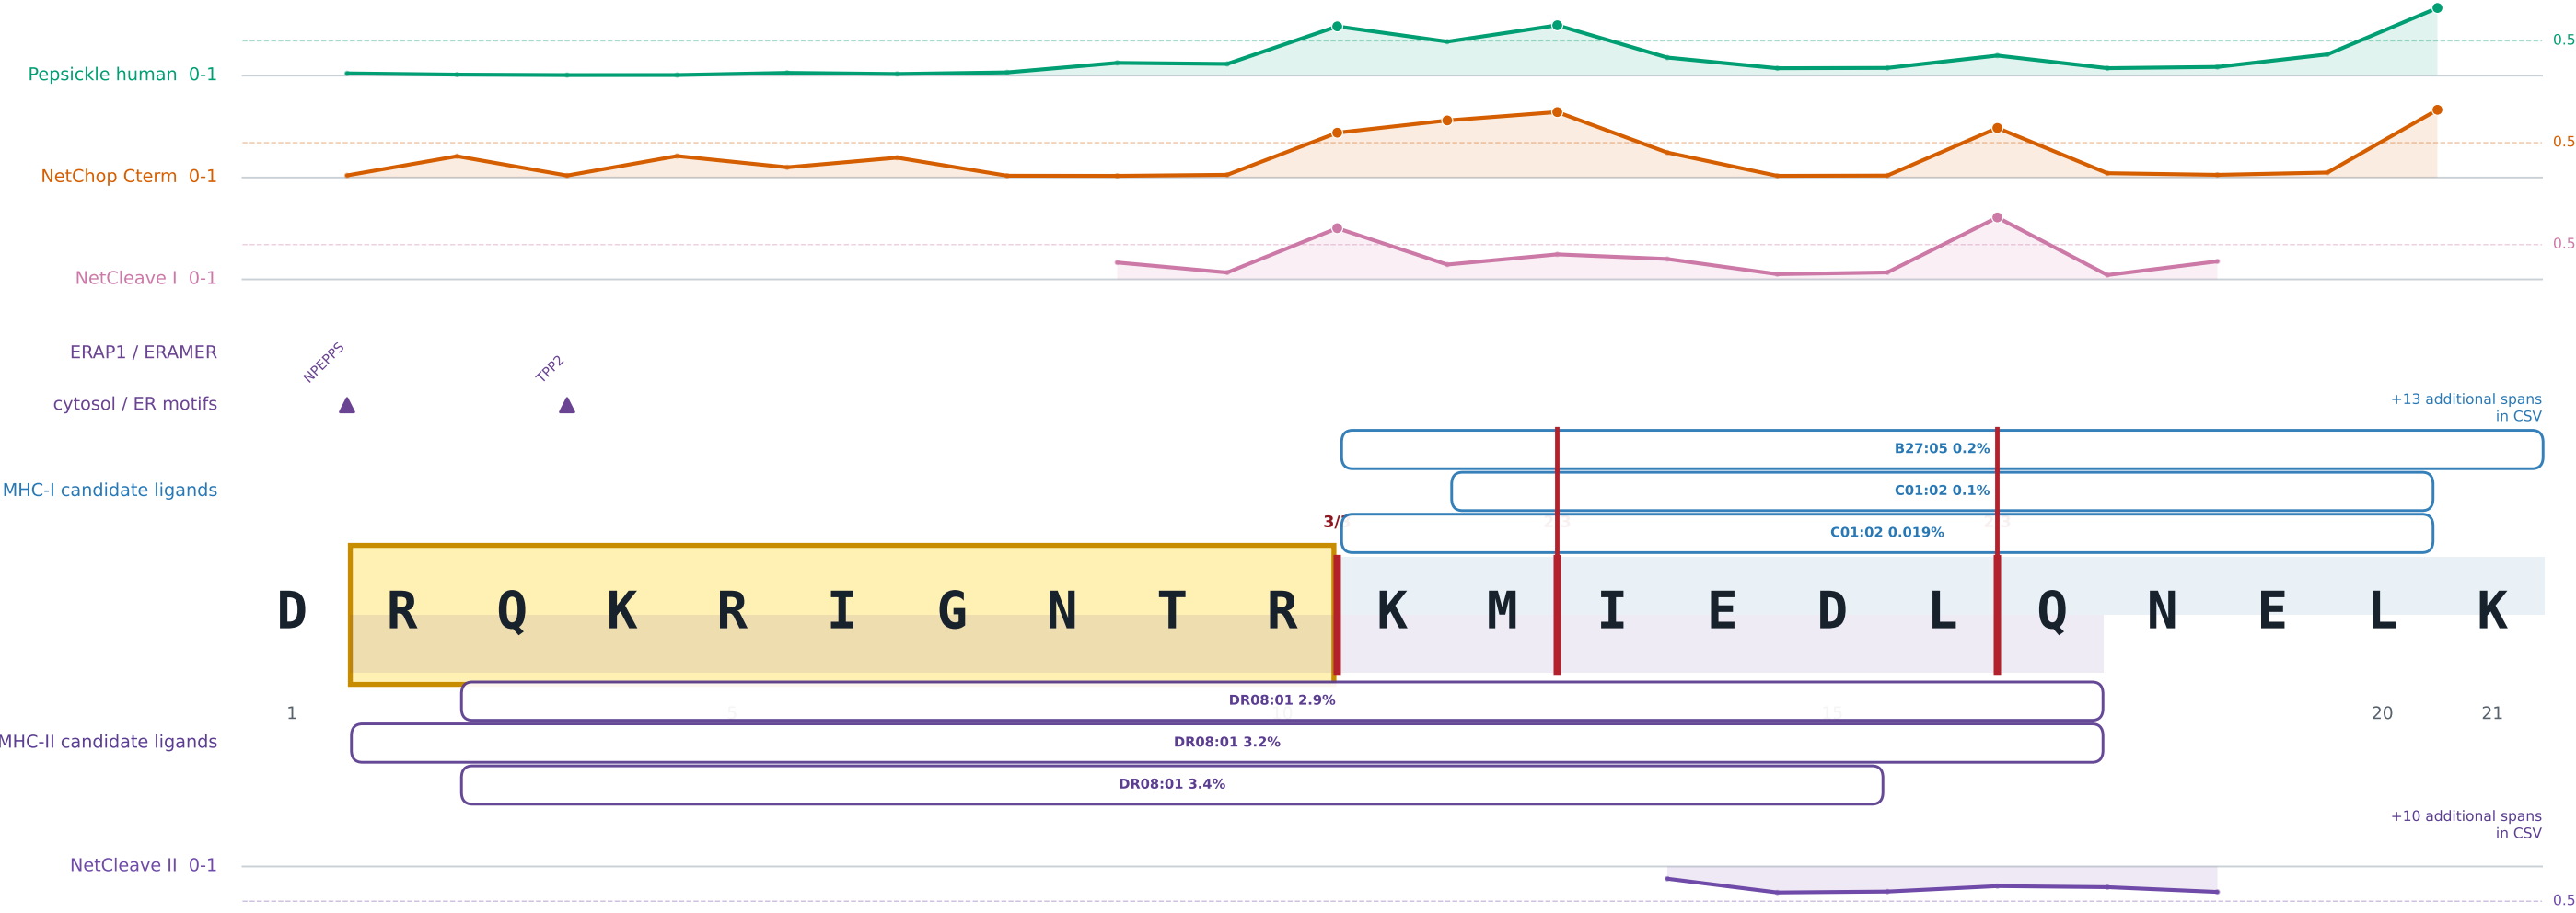

SERUM / EXTRACELLULAR - native scores and recognition motifs




Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

CUL9 p.Asp403Tyr | JLF V2 | 23 aa

minimal epitope/window not disclosed for this SLP

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

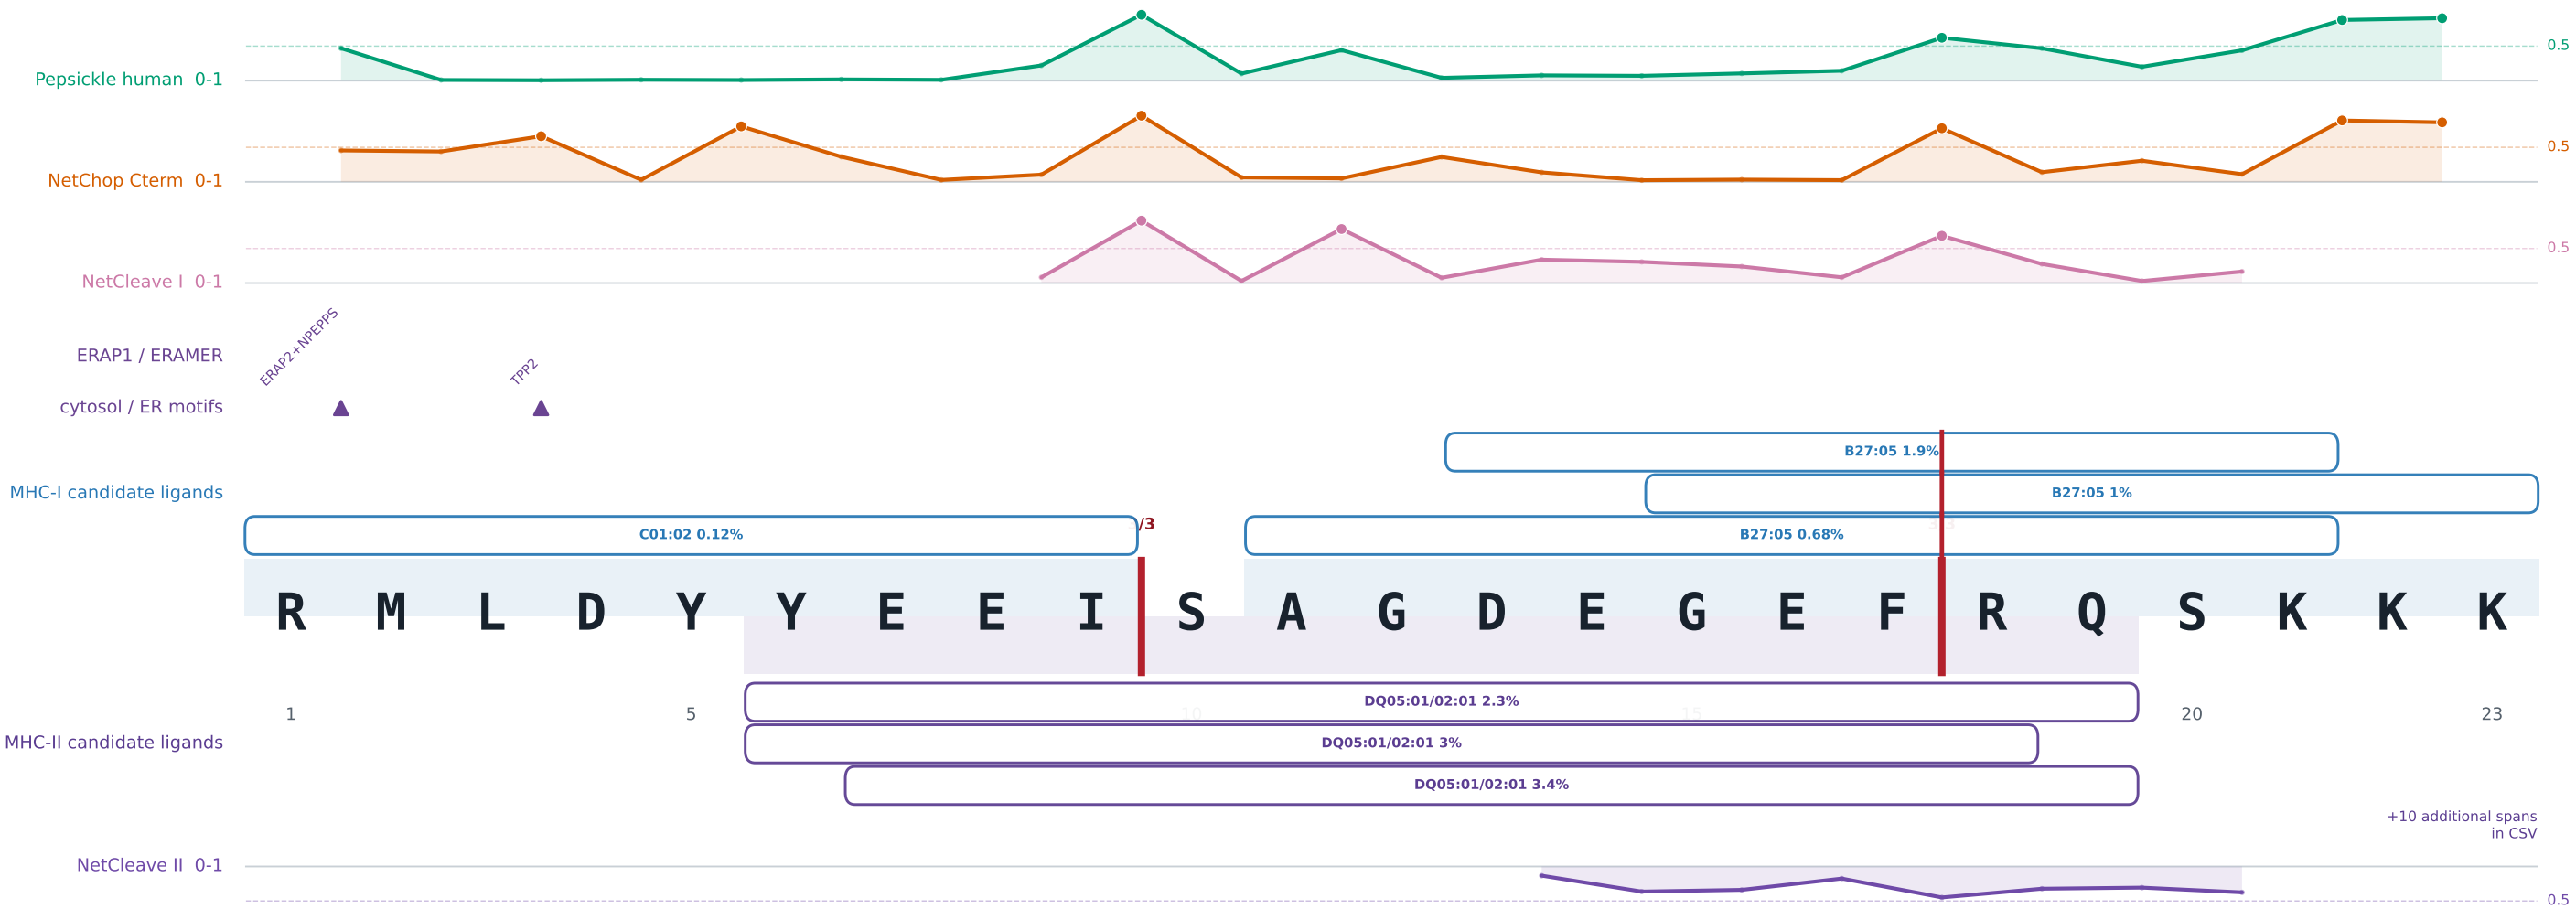

SERUM / EXTRACELLULAR - native scores and recognition motifs


DPP4 native

serum / extracellular motifs

MYO15B fs | JLF V2, JLF V1 | 17 aa

minimal epitope/window not disclosed for this SLP

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

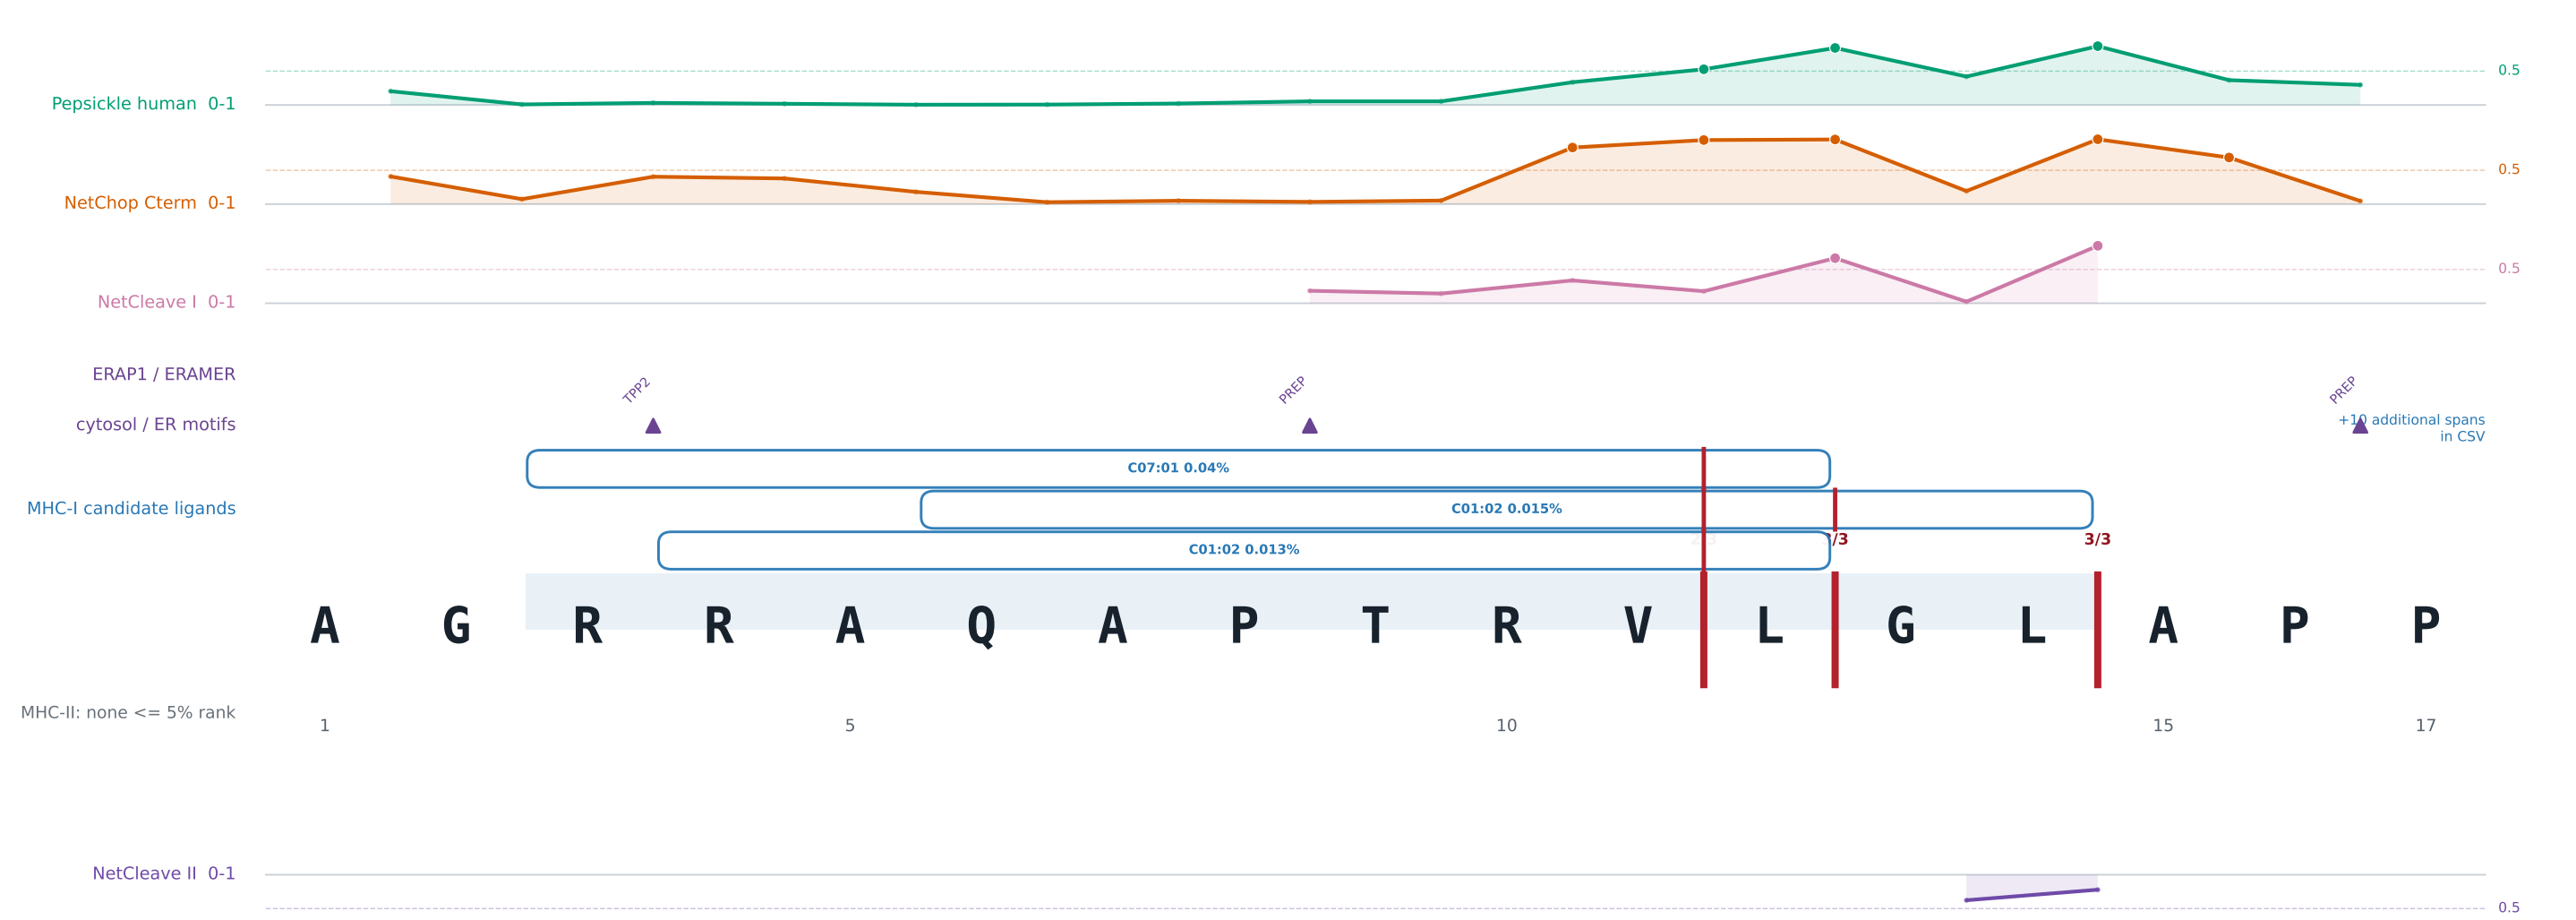

SERUM / EXTRACELLULAR - native scores and recognition motifs




Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.


EXOC4 p.Ser34Ile | JLF V3, JLF V2 | 23 aa

minimal epitope/window not disclosed for this SLP

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

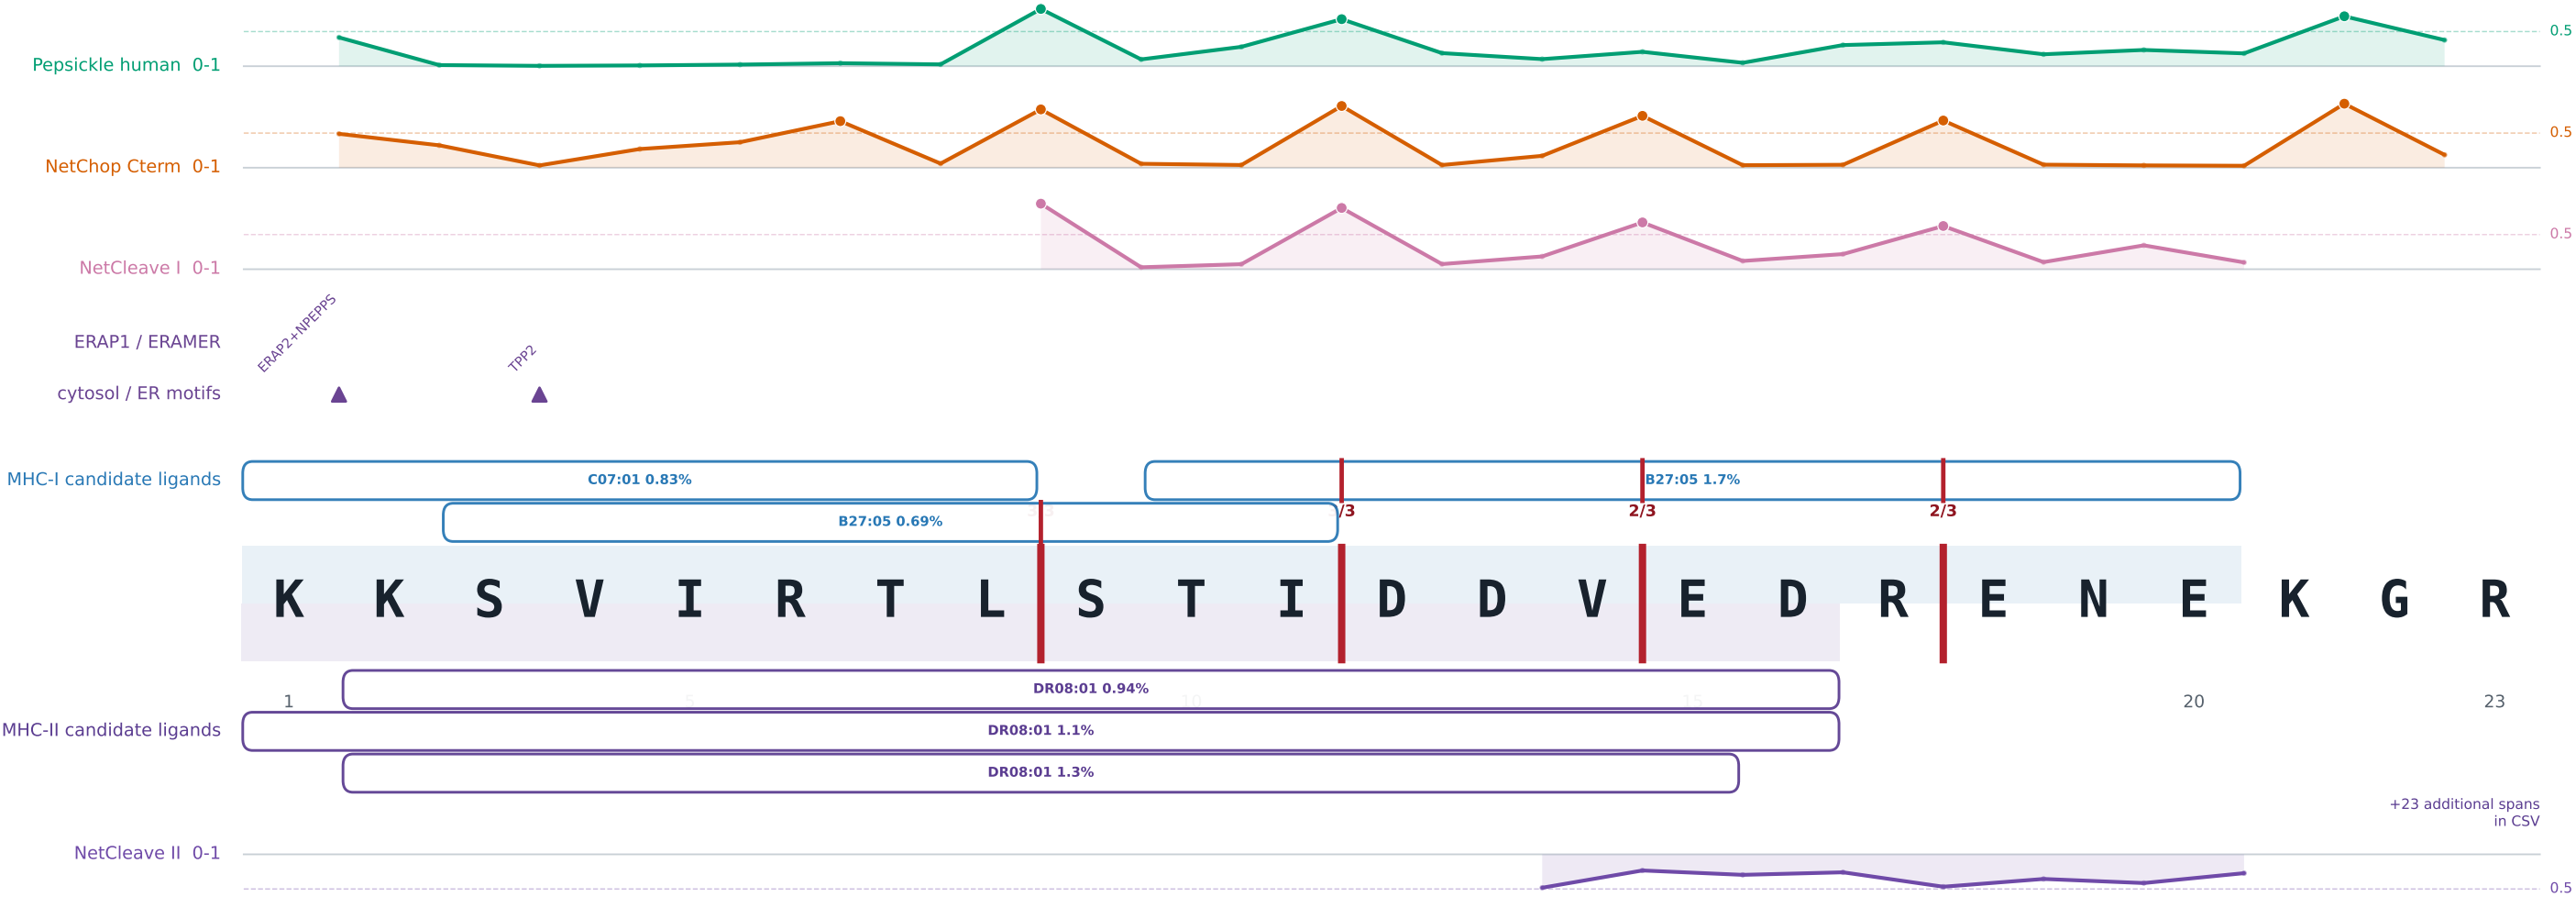

SERUM / EXTRACELLULAR - native scores and recognition motifs

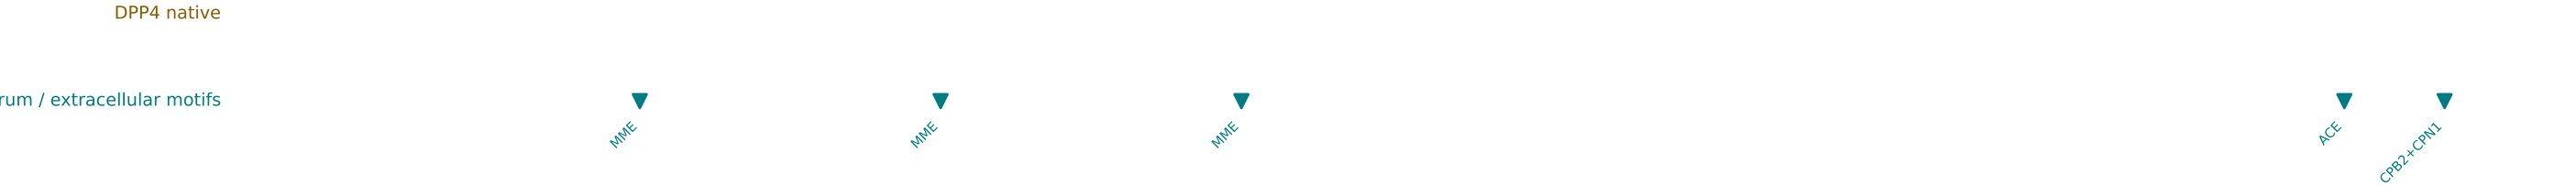


Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

NME1 p.Gly24Arg | CeGaT | 13 aa

minimal epitope/window not disclosed for this SLP

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

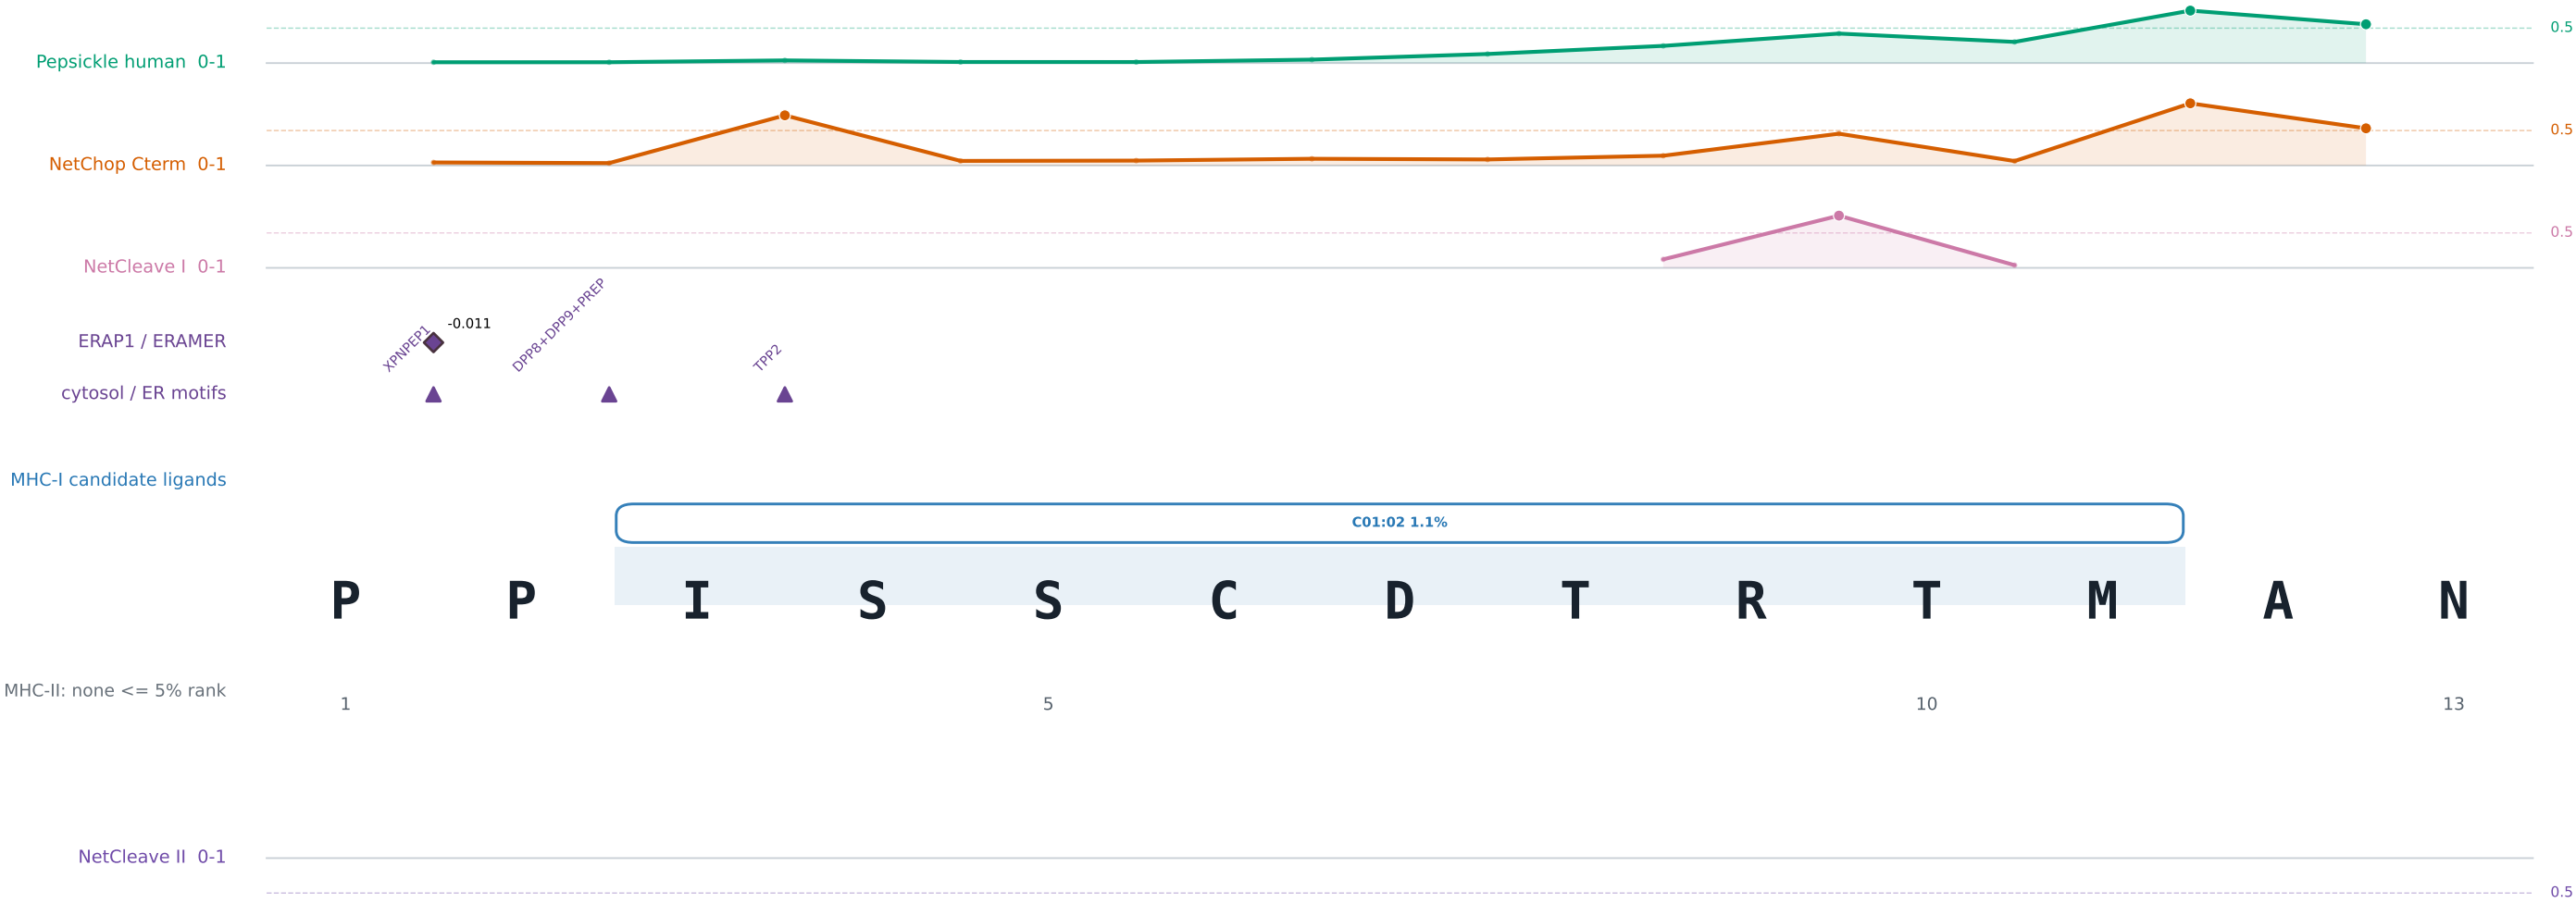

SERUM / EXTRACELLULAR - native scores and recognition motifs




Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.


VPS72 p.Lys115Arg| JLF V3 | 27 aa

disclosed minimal epitope ERALLPLEL at 9-17

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

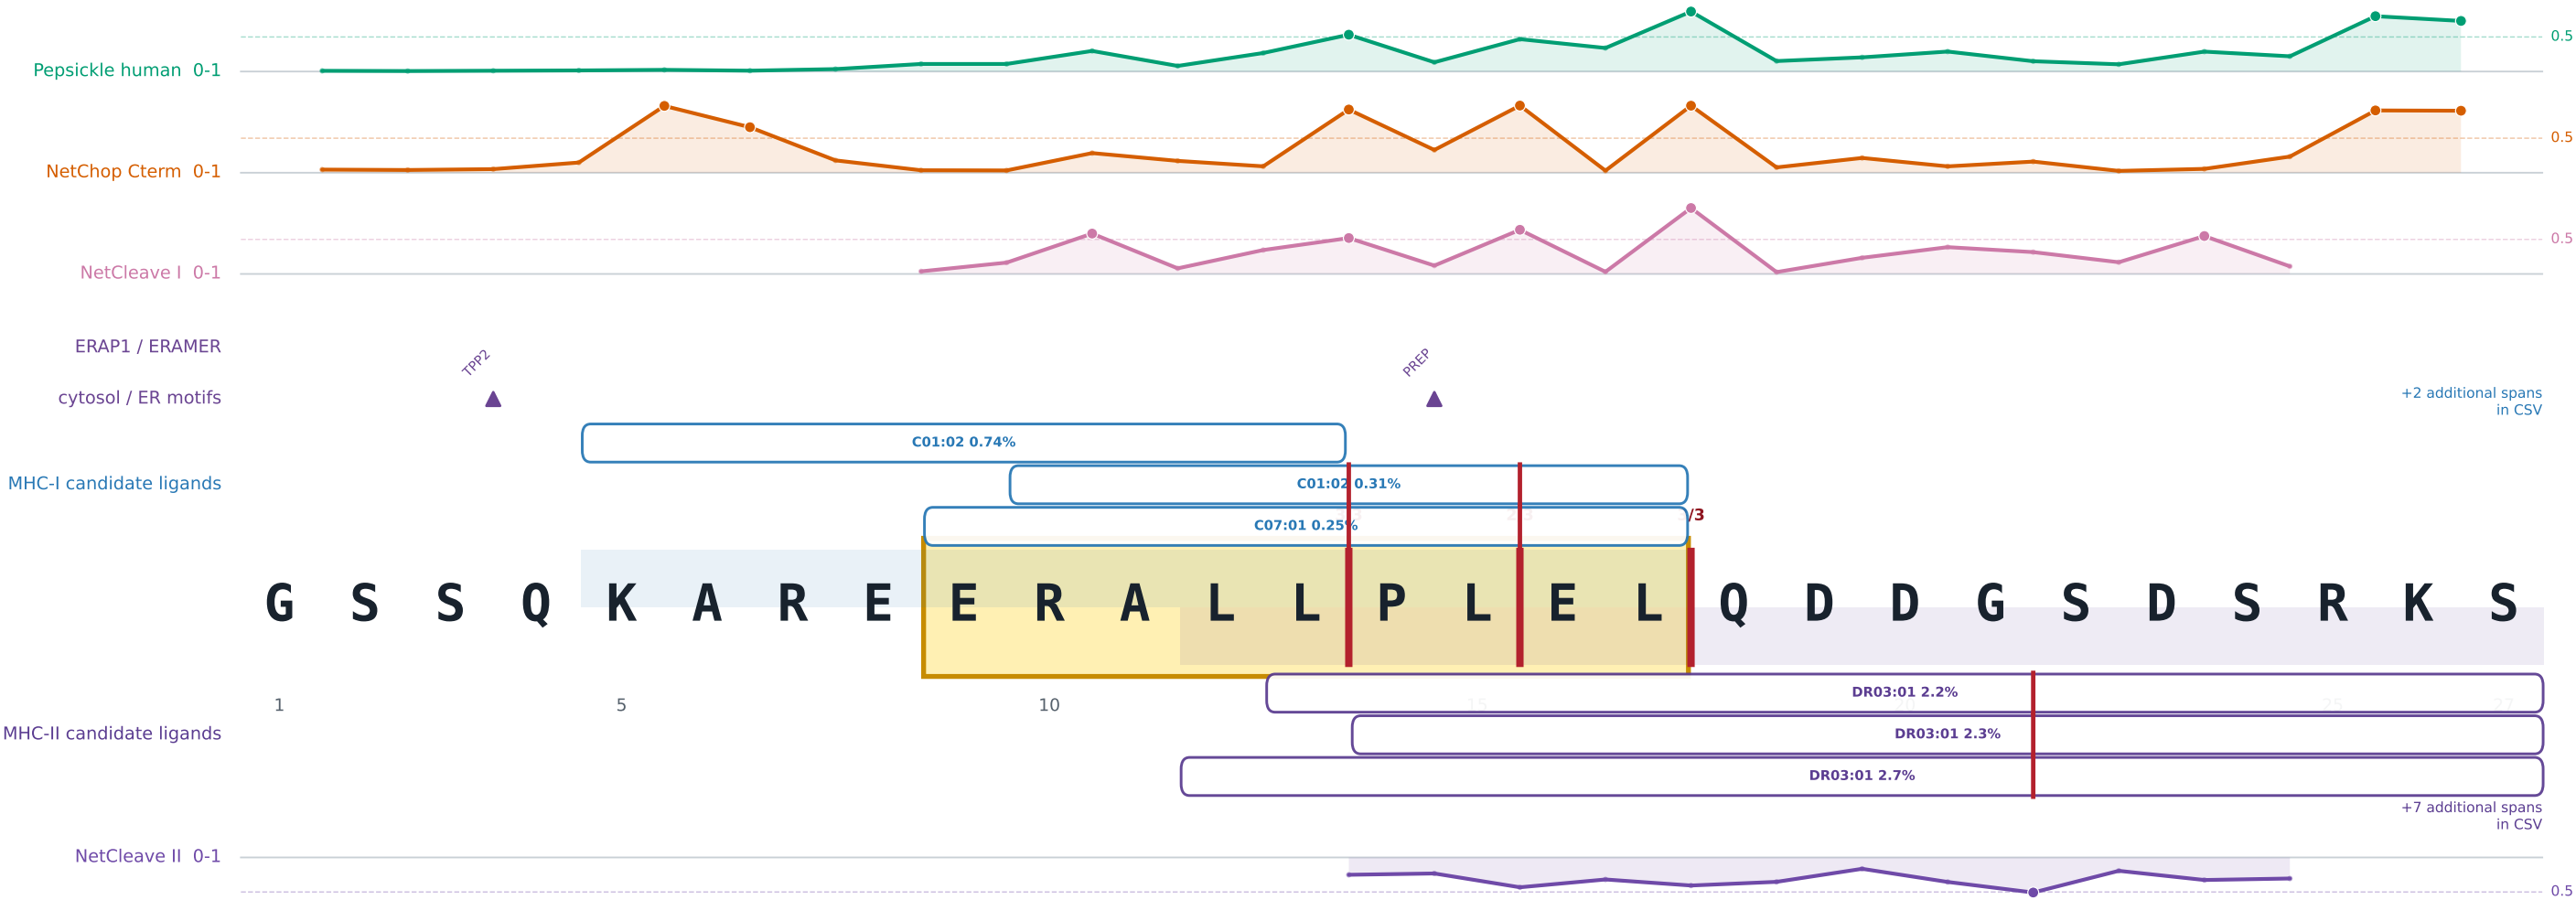

SERUM / EXTRACELLULAR - native scores and recognition motifs

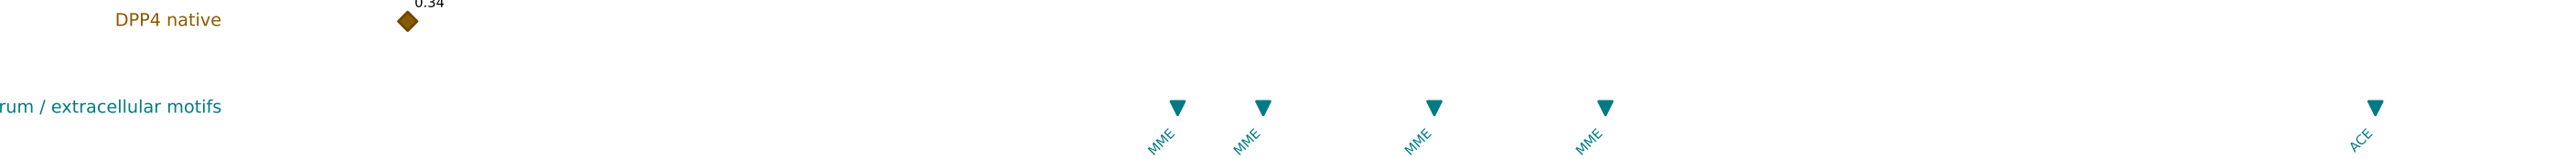


Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.


EXOC4 p.Ser34Ile | CeGaT | 17 aa

minimal epitope/window not disclosed for this SLP

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

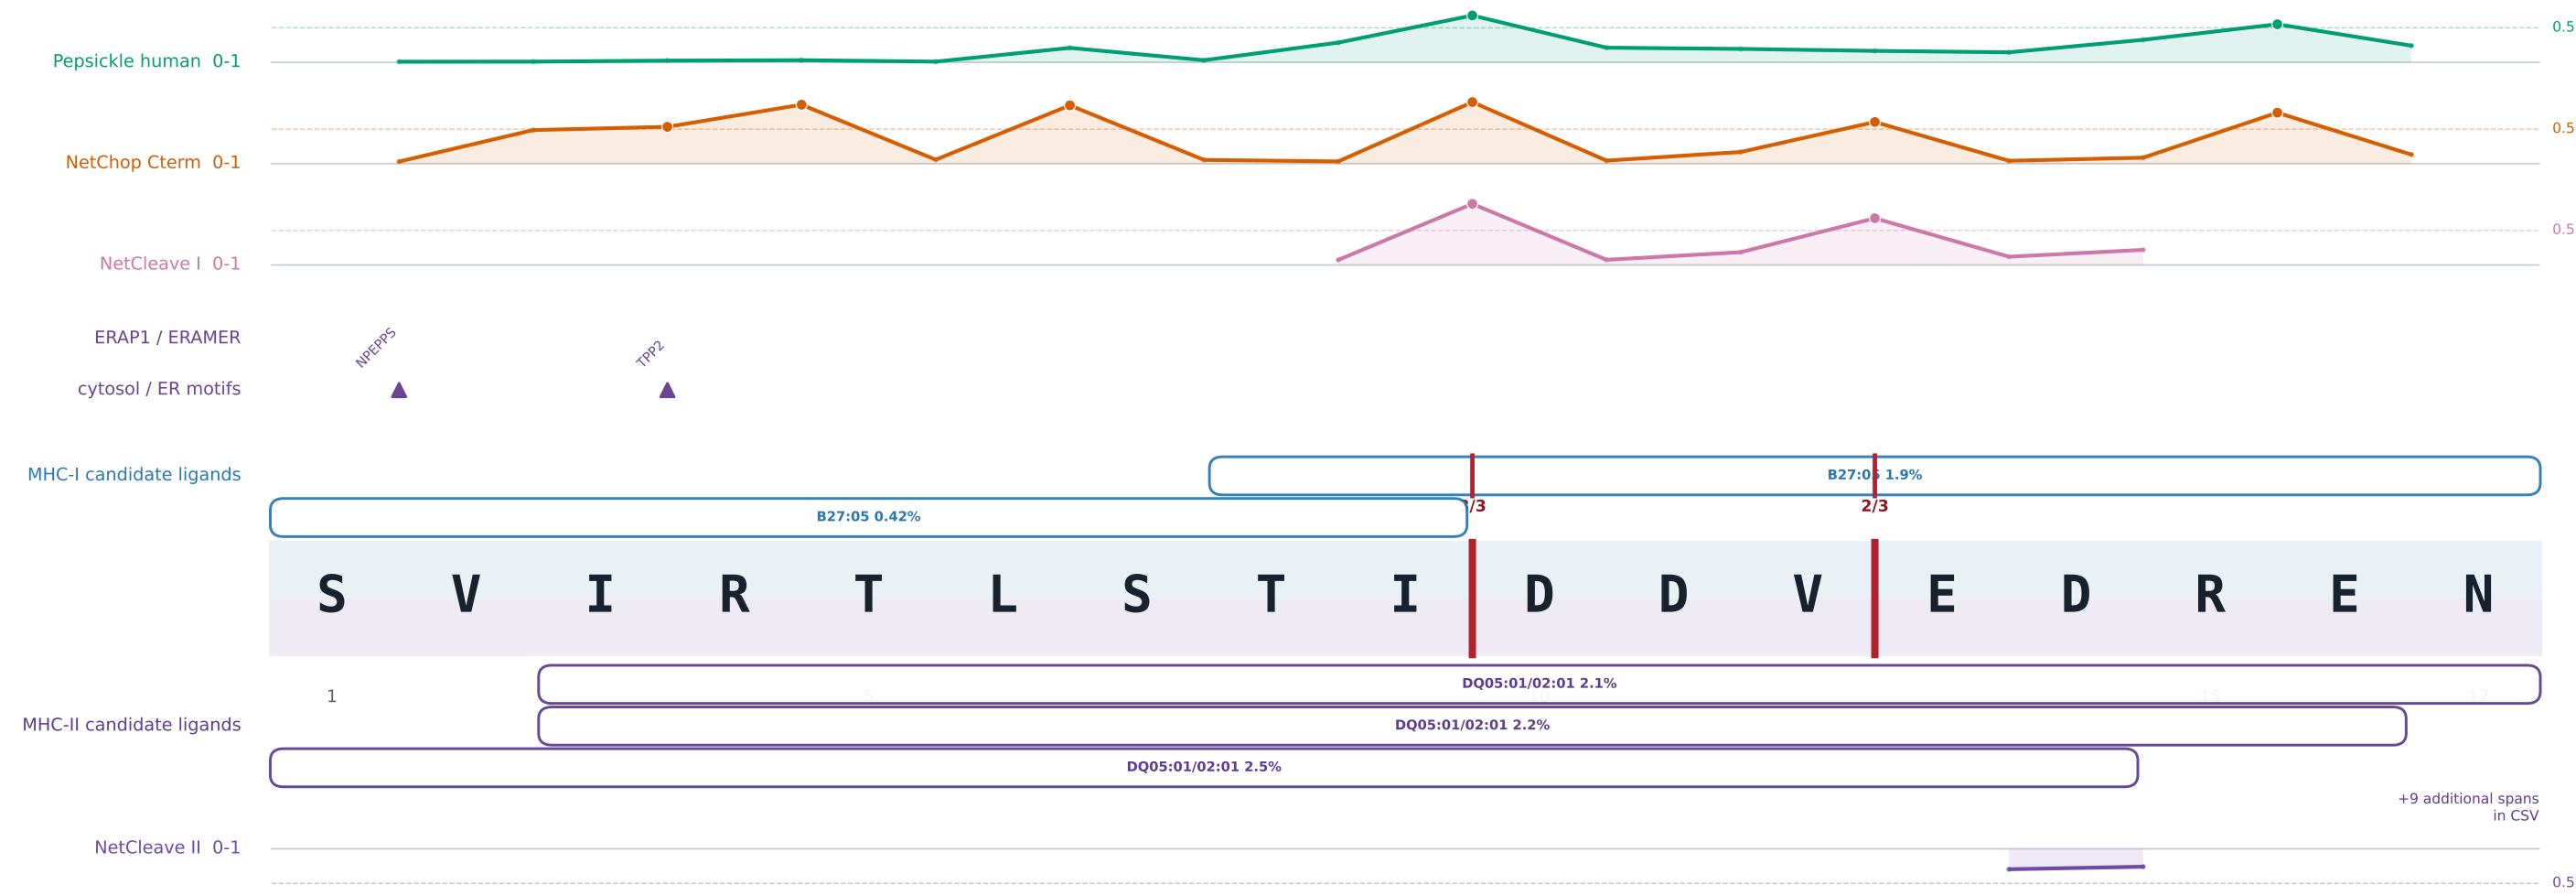


SERUM / EXTRACELLULAR - native scores and recognition motifs

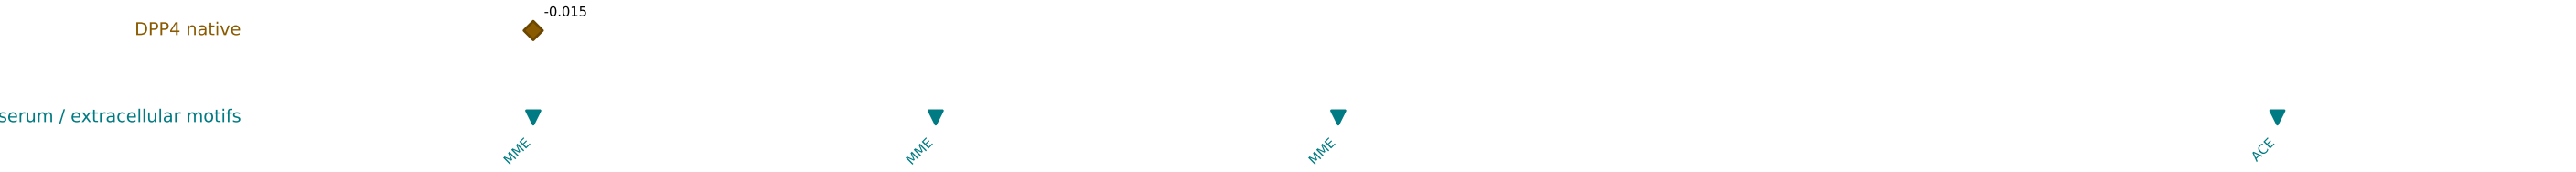

Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

TECPR1 p.Thr259fs | CeGaT | 16 aa

minimal epitope/window not disclosed for this SLP

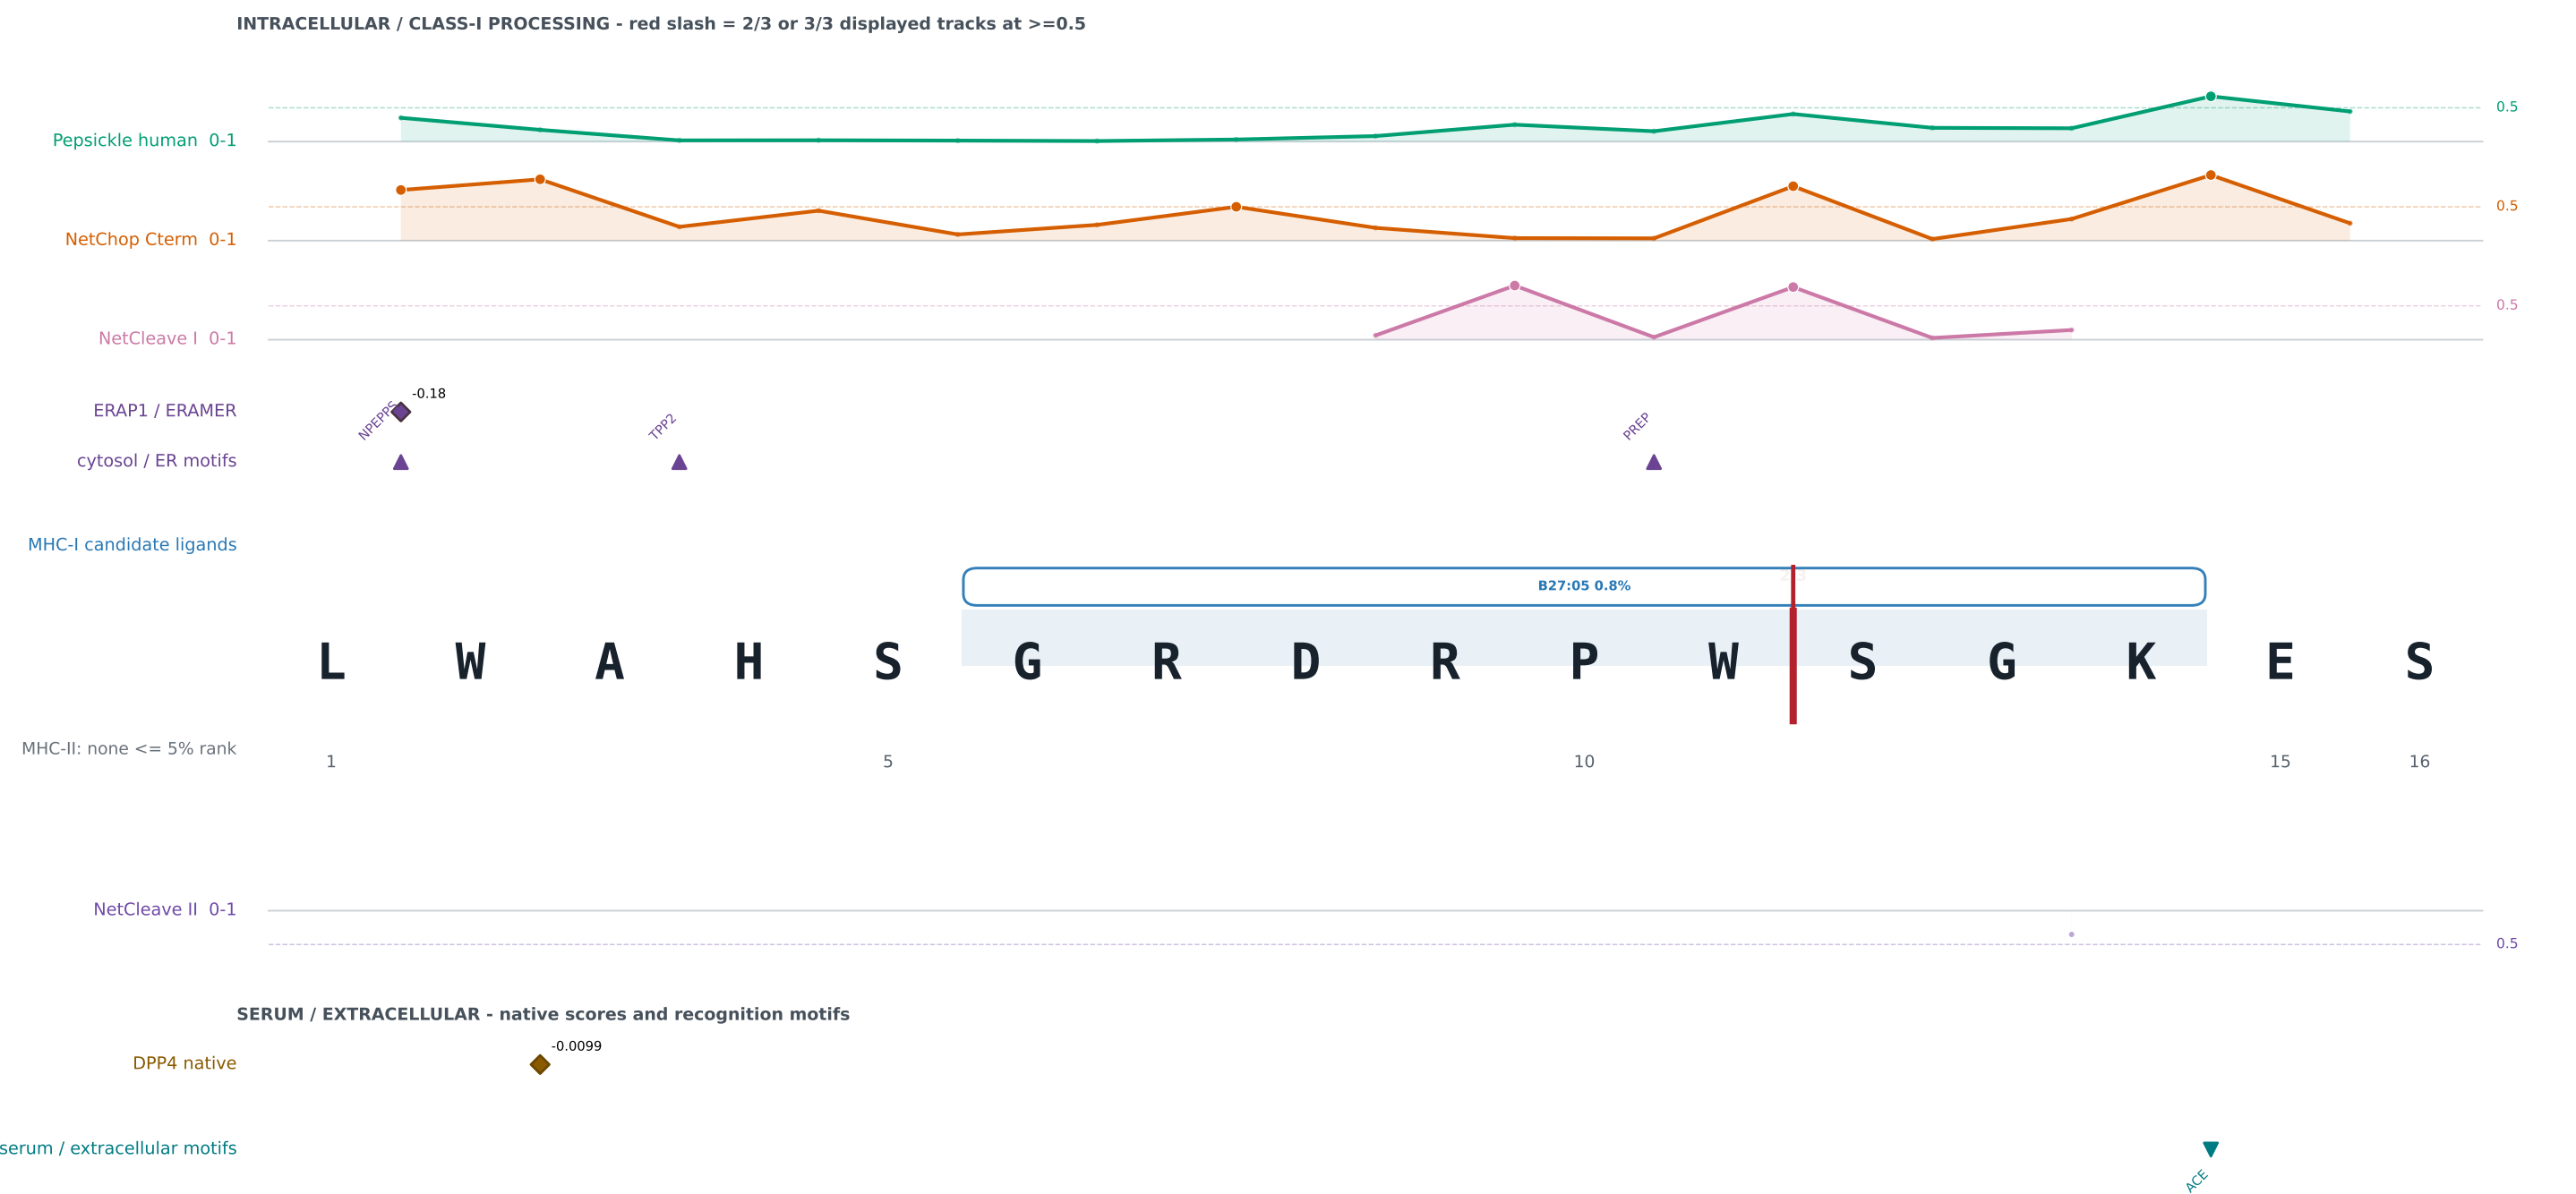


Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

NR2F2 p.Gly65Val | JLF V2 | 26 aa

minimal epitope/window not disclosed for this SLP

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

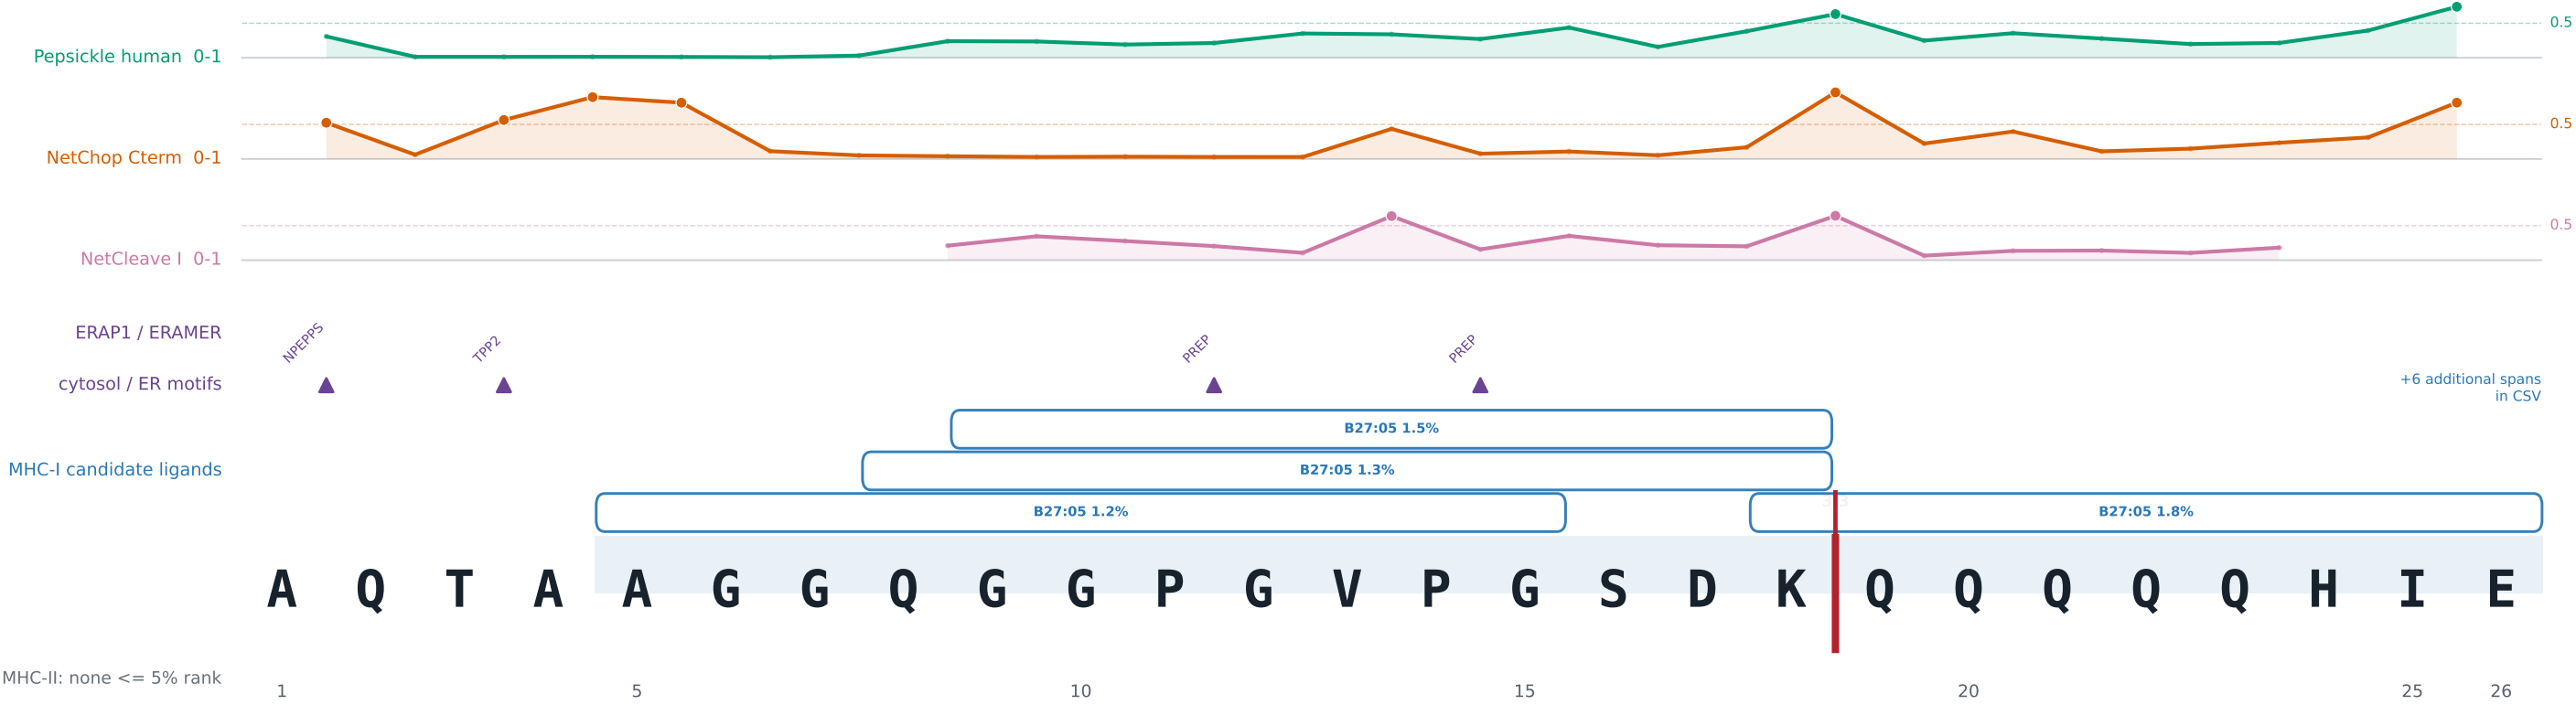

SERUM / EXTRACELLULAR - native scores and recognition motifs




Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

SLC25A12 p.Ile347Thr | JLF V2, JLF V1 | 26 aa

disclosed minimal epitope ATAVYPTDL at 9-17

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at ≥ 0.5

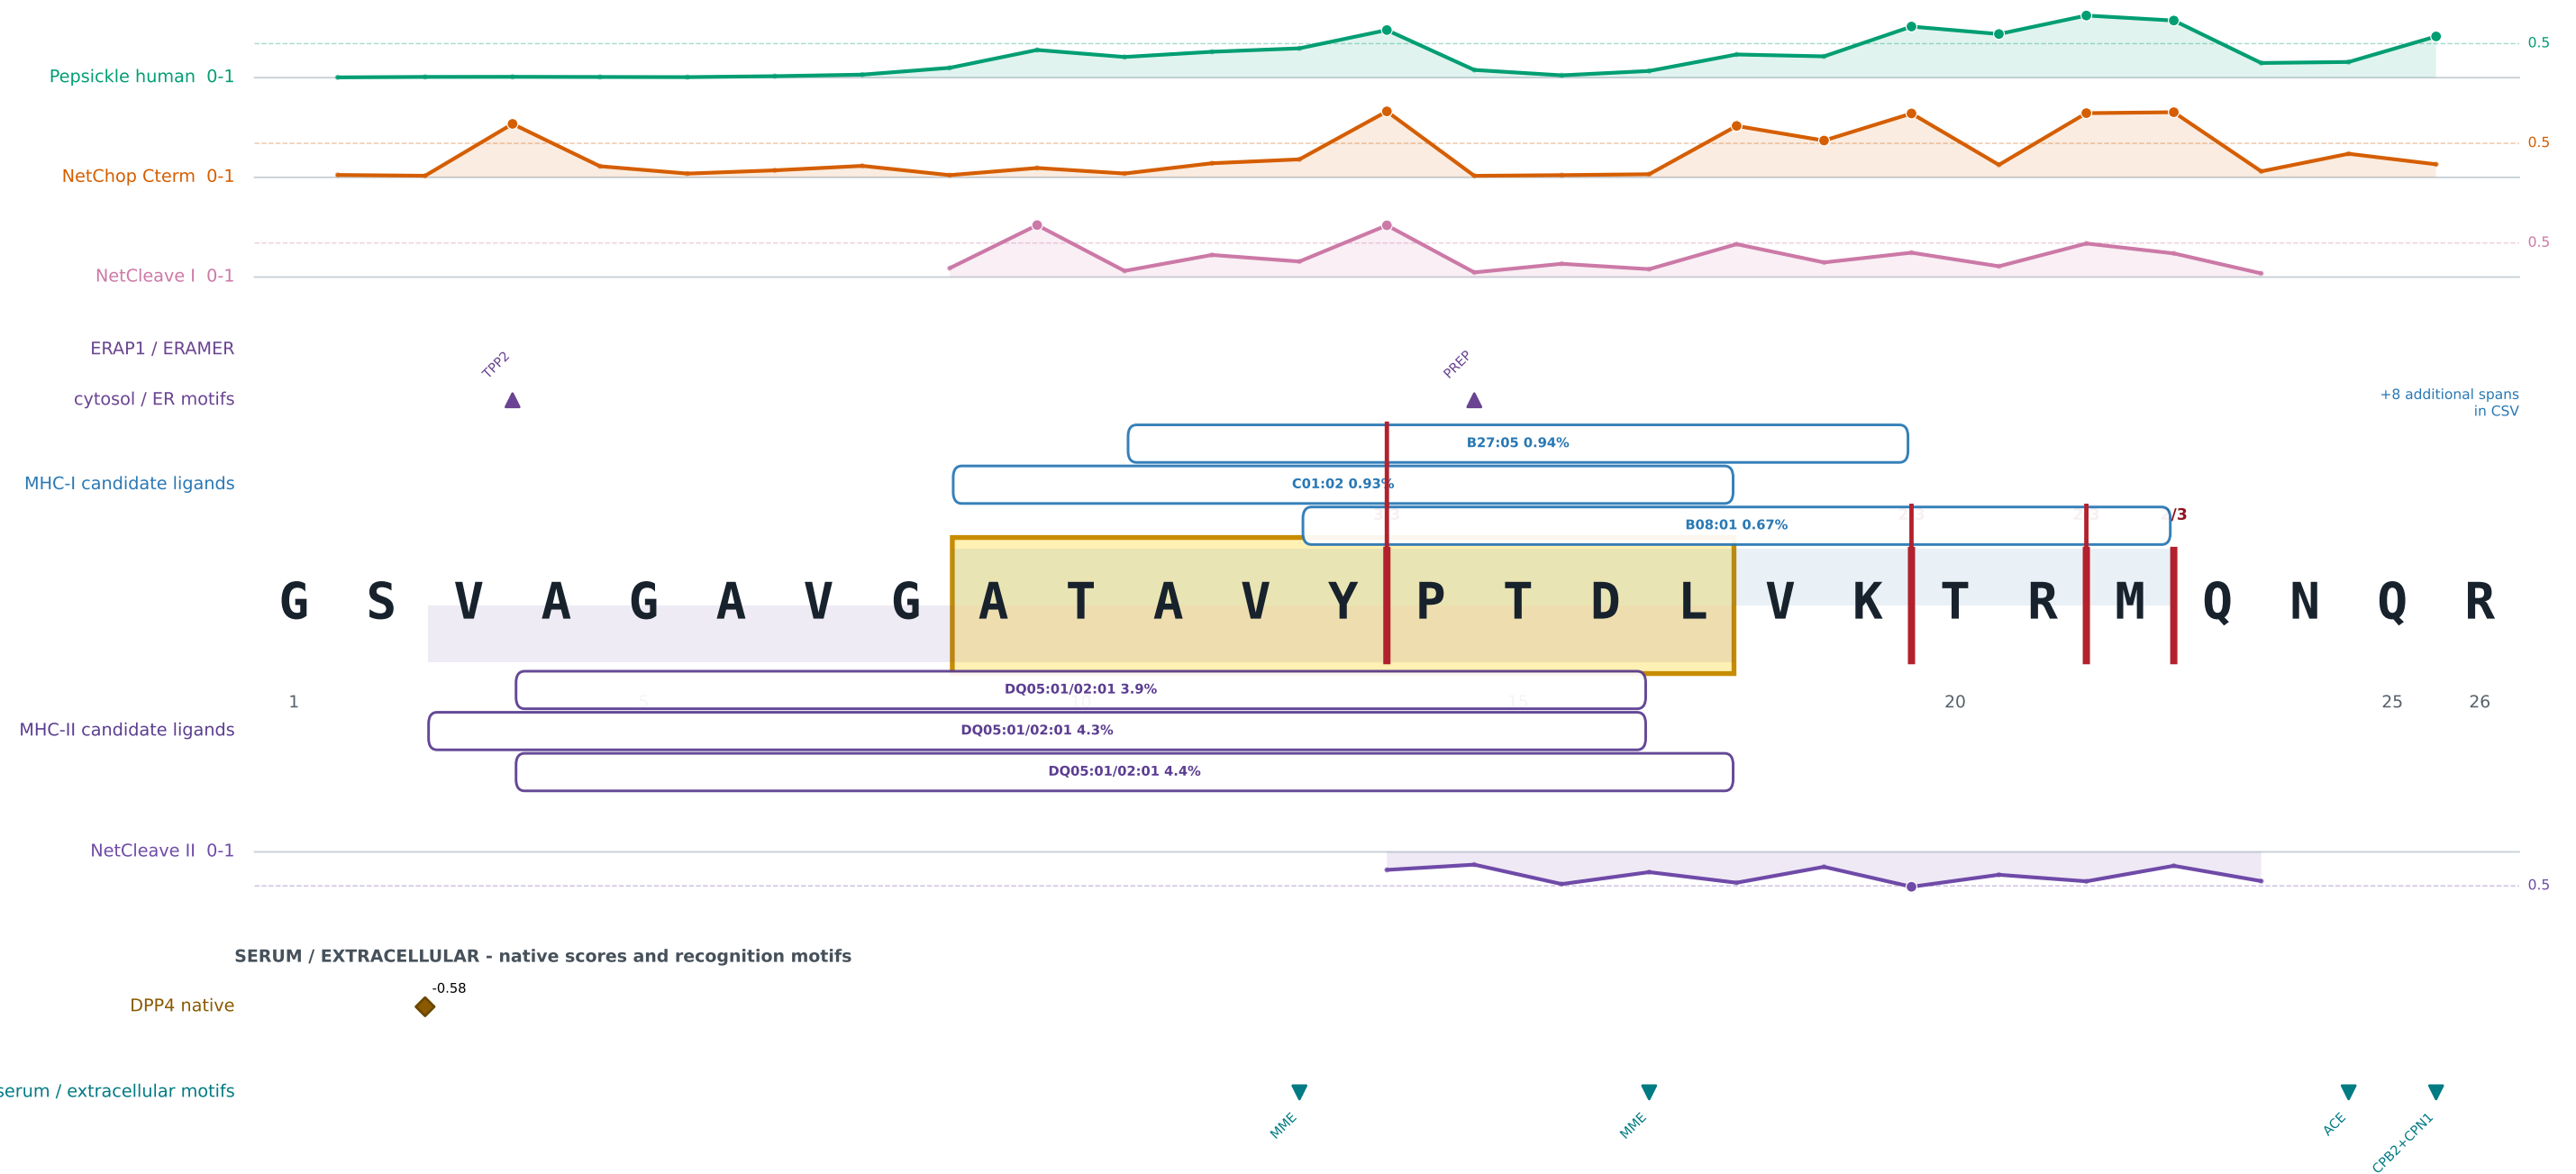


Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and ≥ 2 score ≥ 0.5 ; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at $\leq 2\%/\leq 5\%$ rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

PTH1R p.Ile237Phe | JLF V3 | 23 aa

minimal epitope/window not disclosed for this SLP


INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

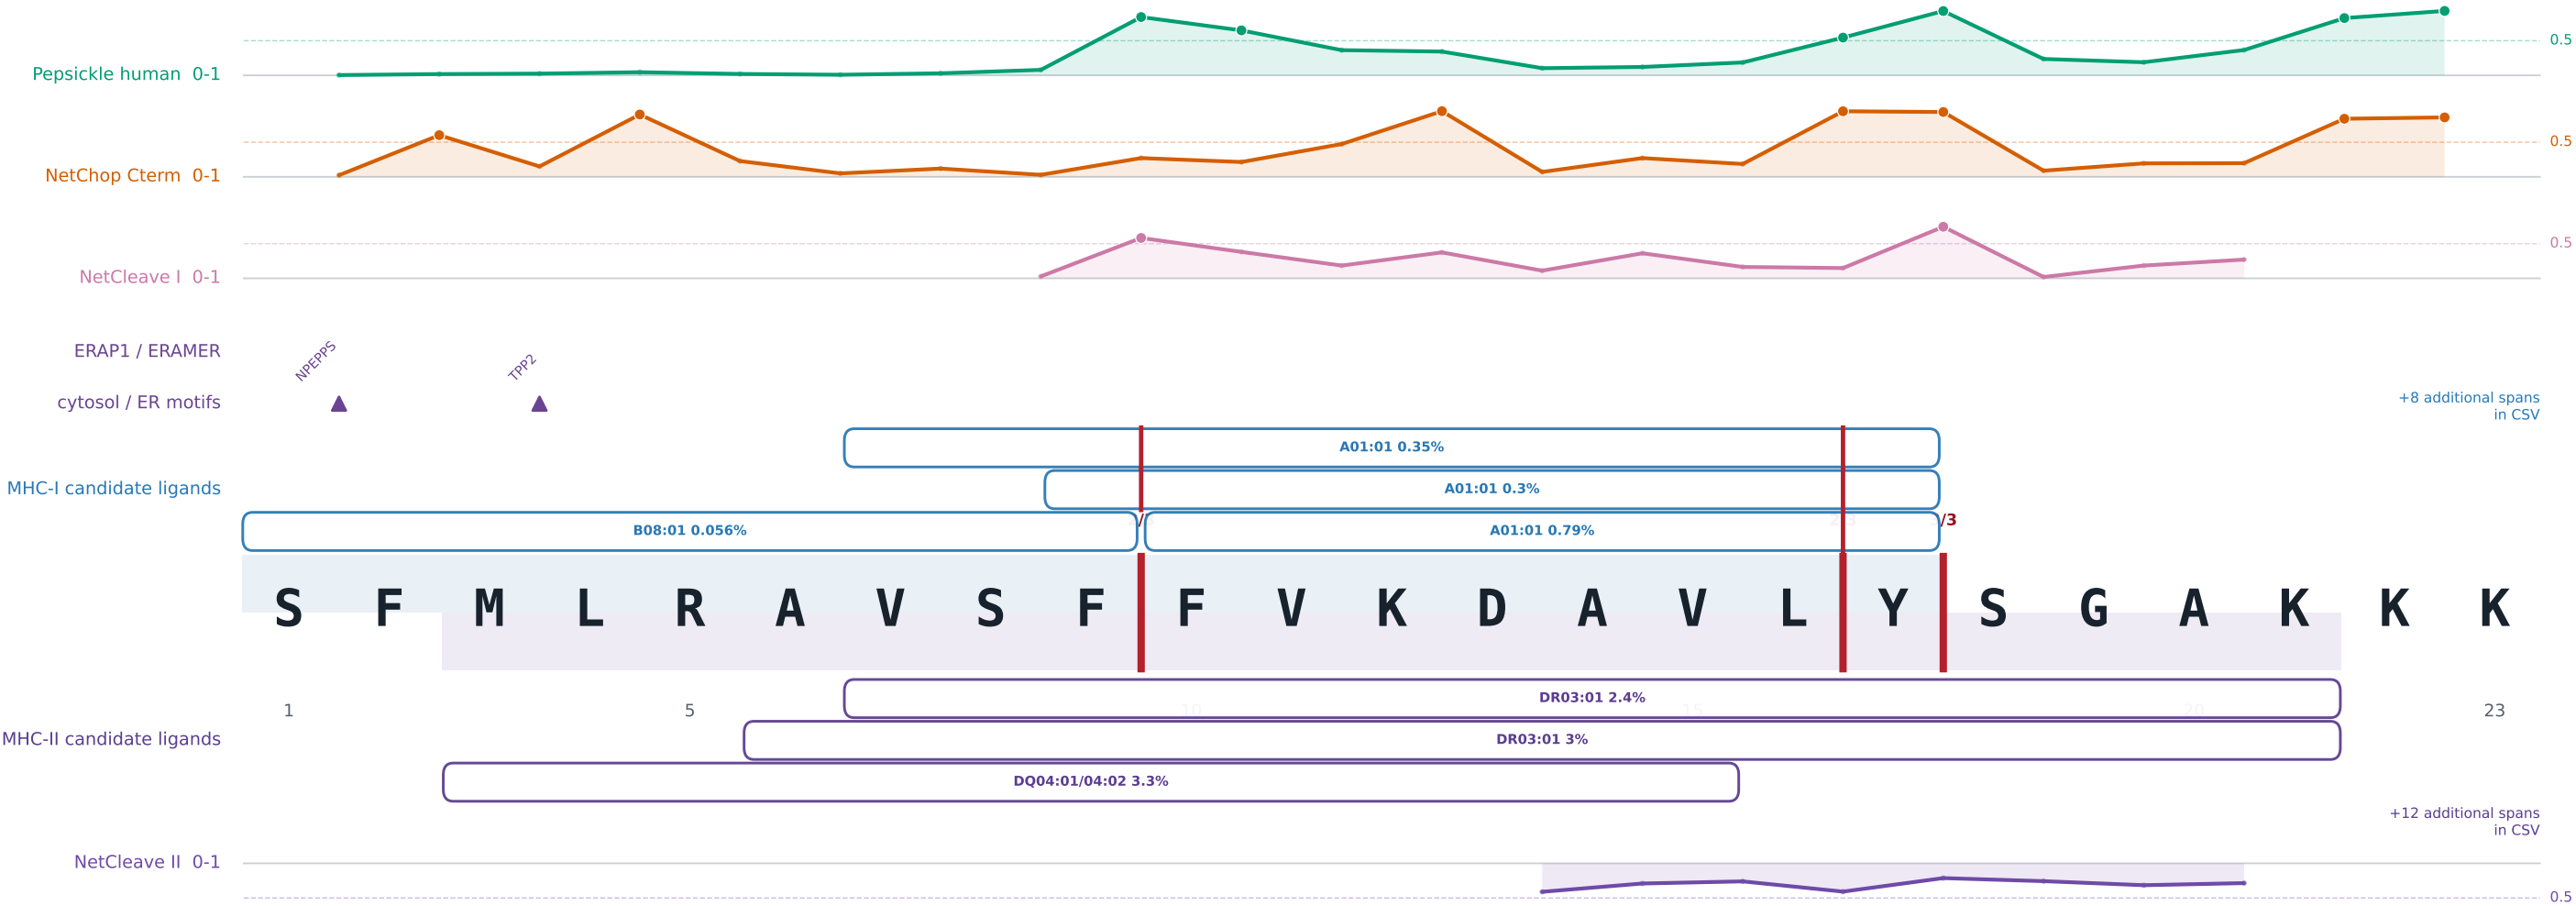

Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

VPS13B p.Ser3756Phe | JLF V3 | 21 aa

minimal epitope/window not disclosed for this SLP

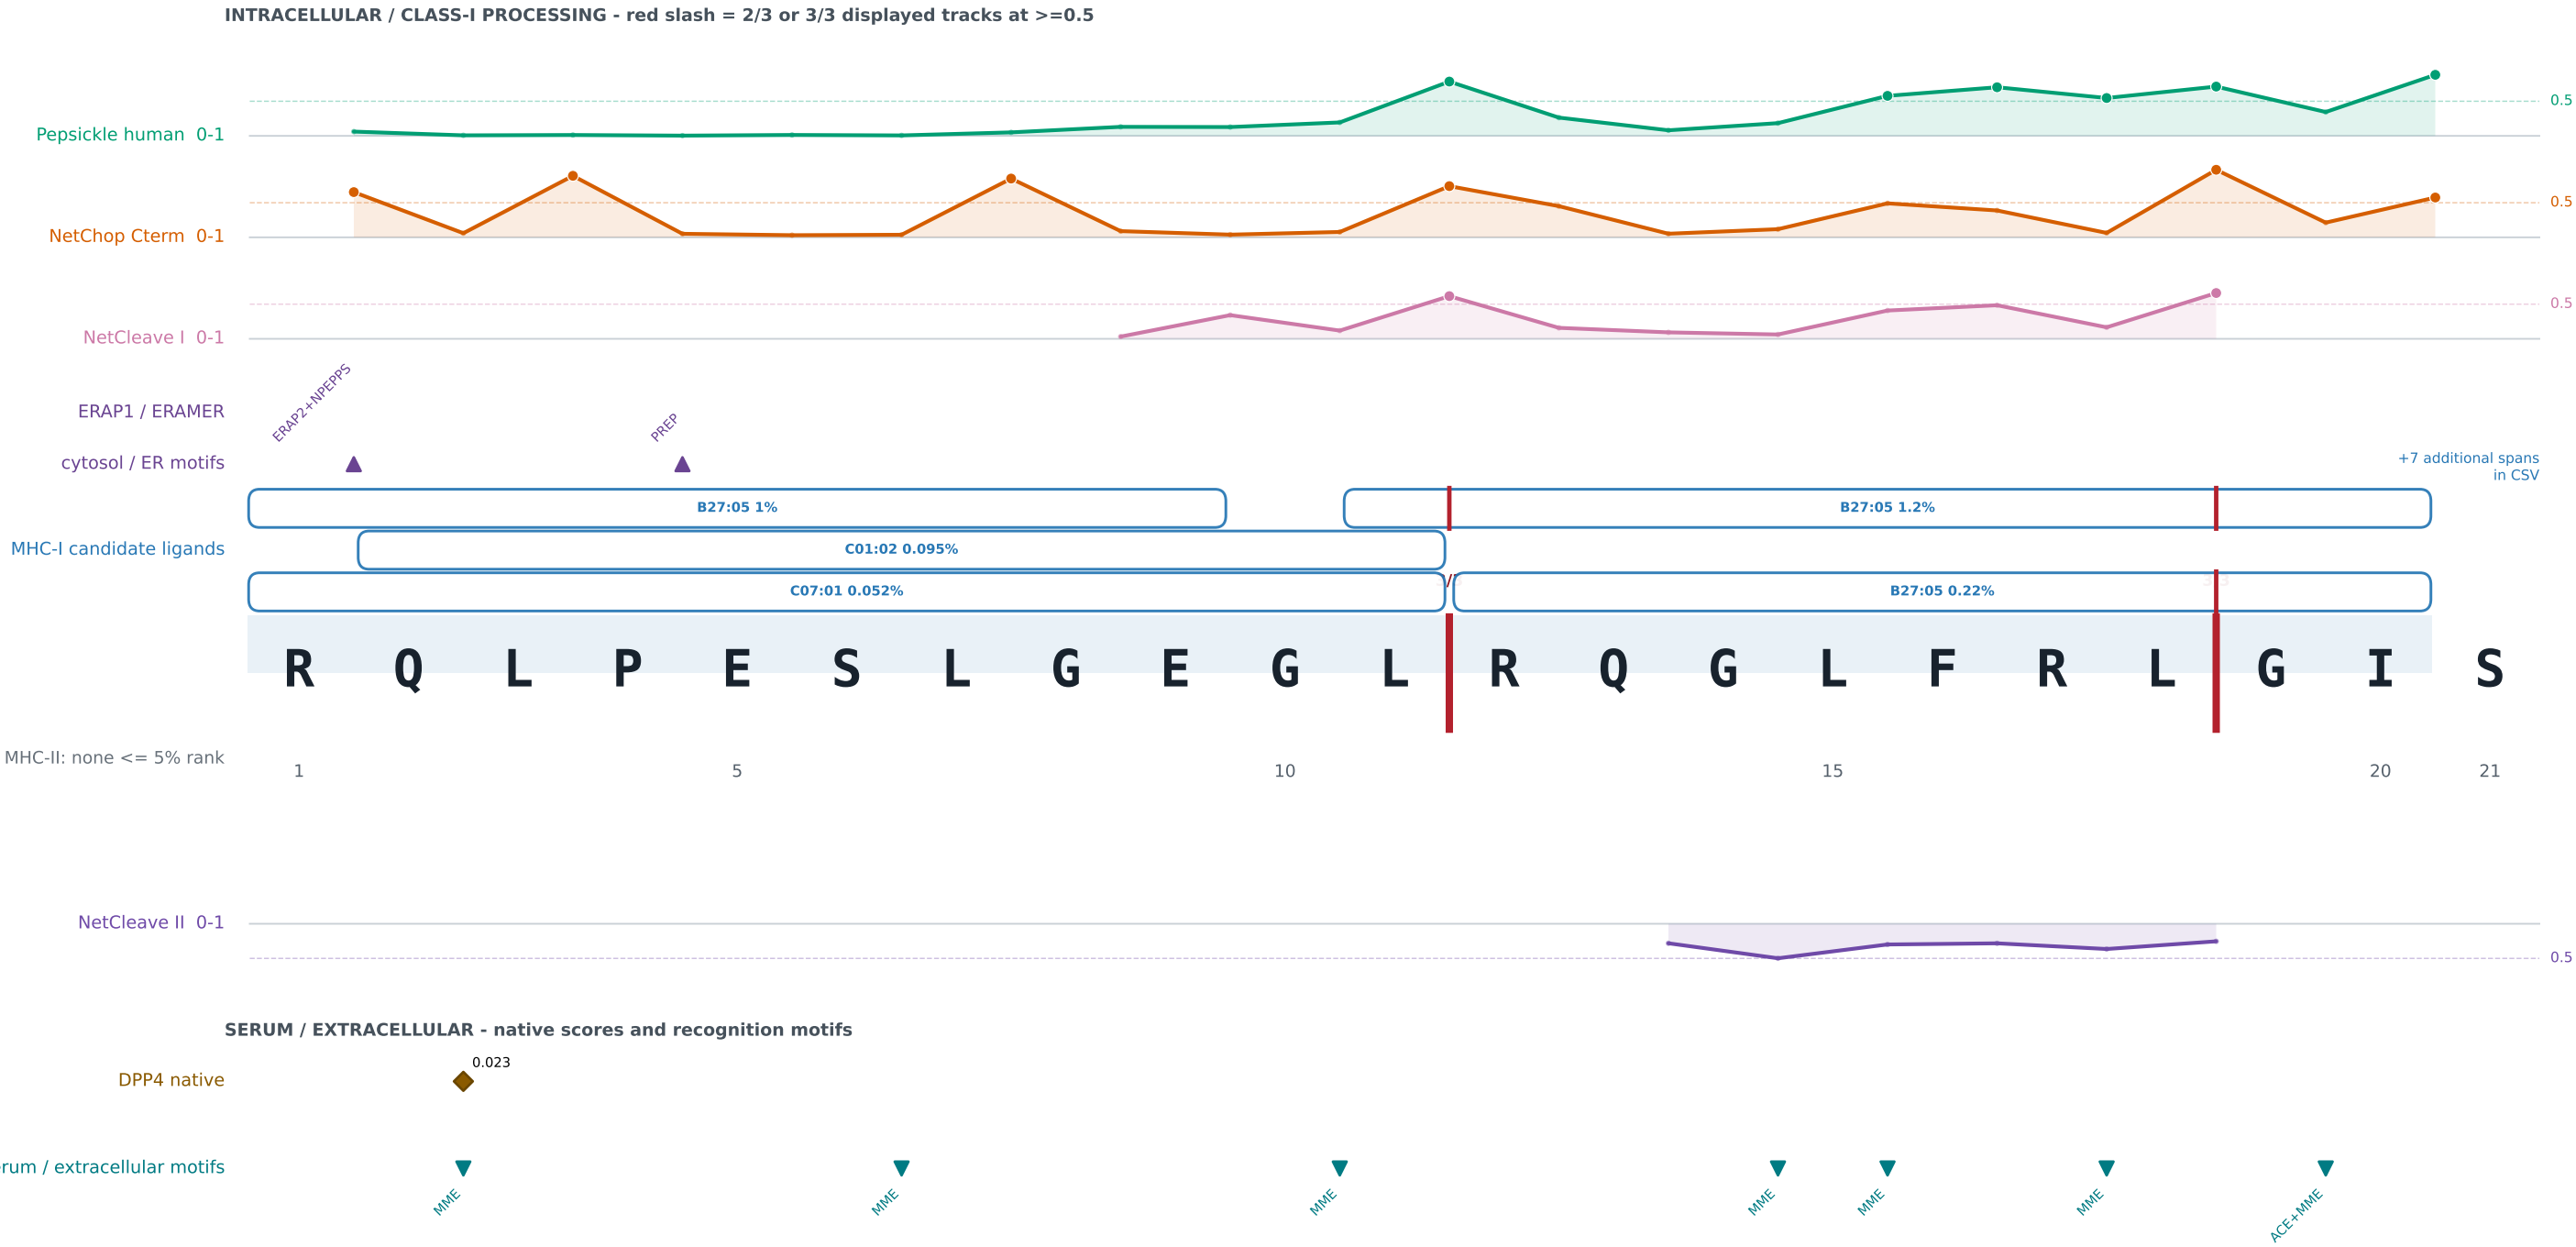


Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

PIP5K1A p.Gly474fs | JLF V3 | 20 aa

disclosed minimal epitope AAPVATPAL at 7-15

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

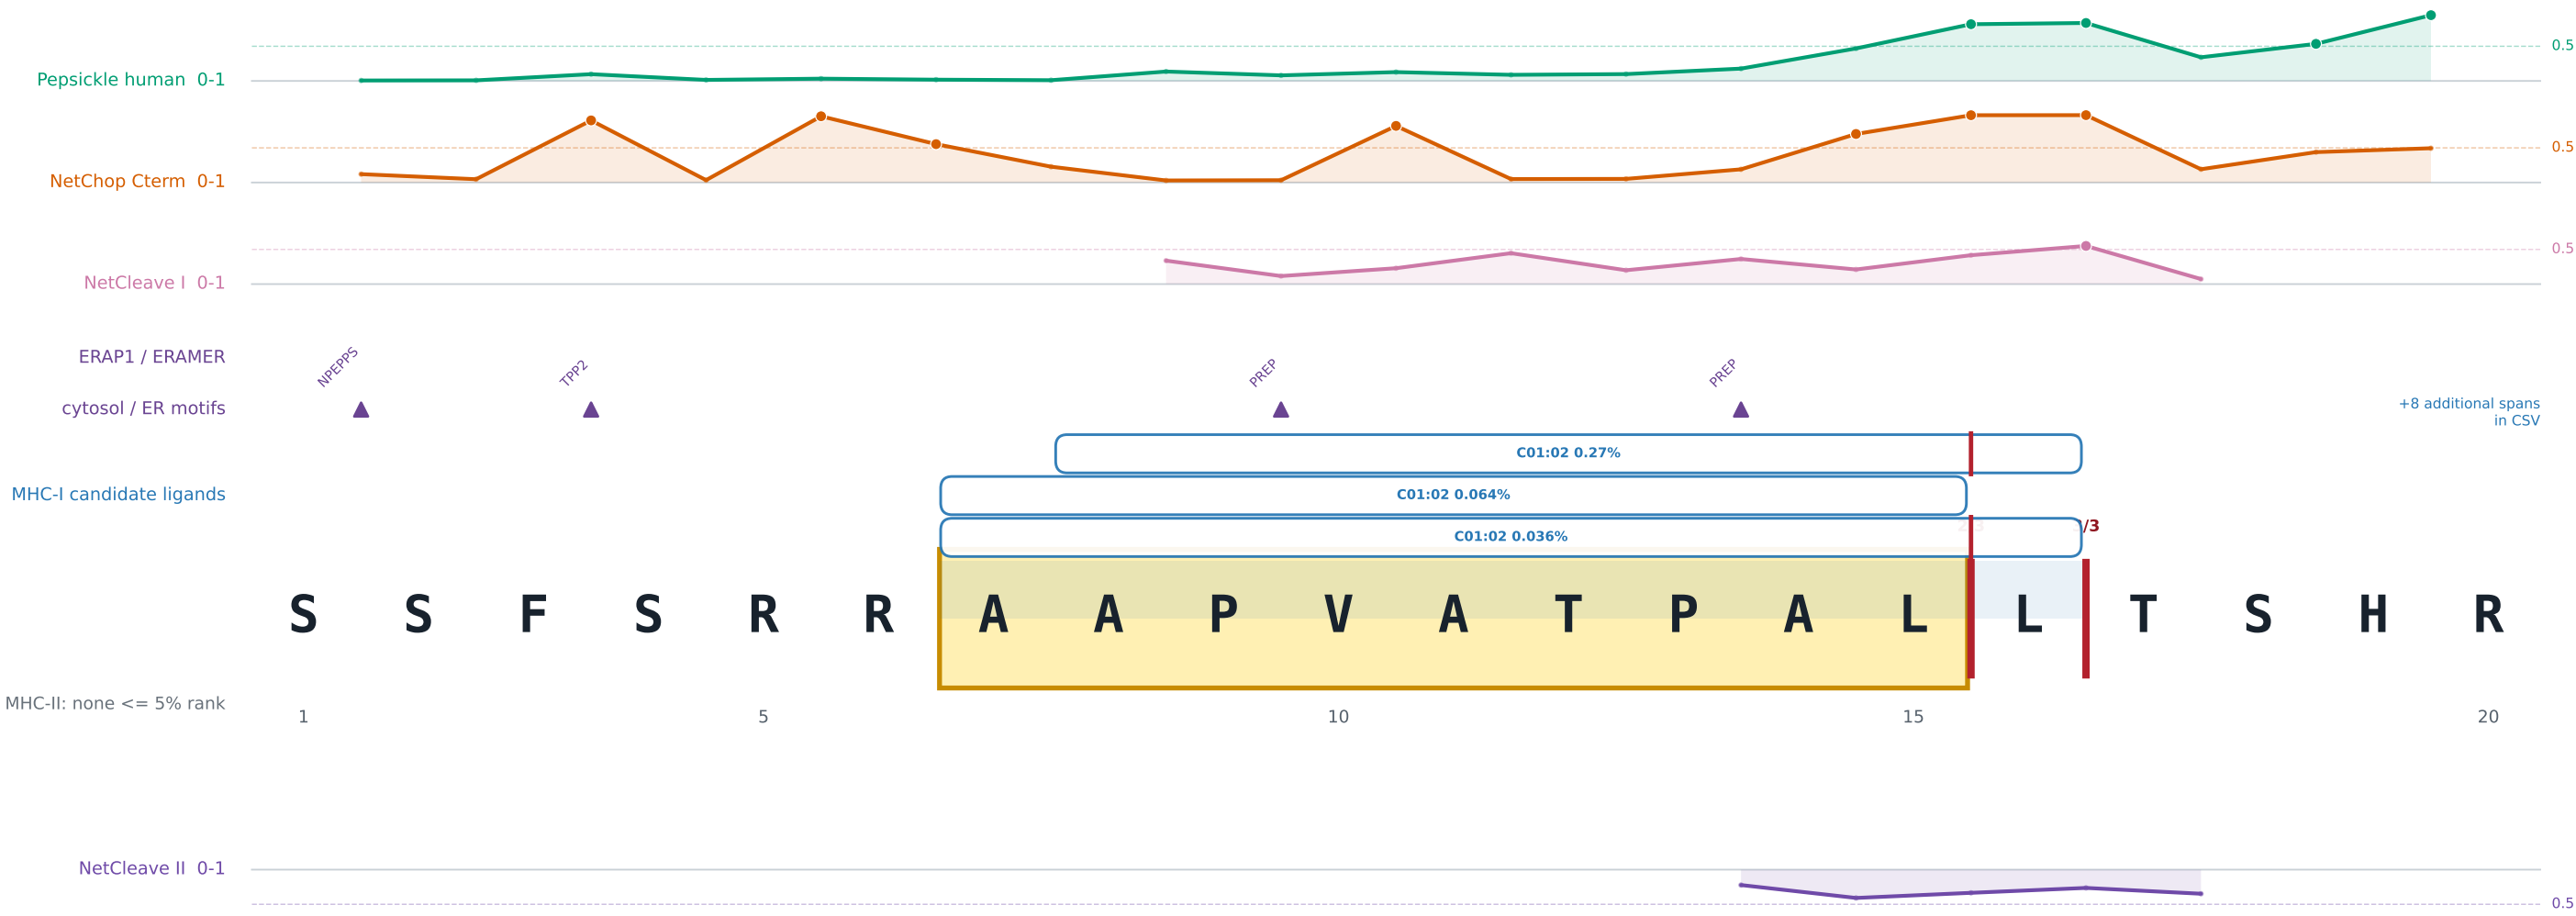

SERUM / EXTRACELLULAR - native scores and recognition motifs




Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.


BMP1 p.Ser366Thr | JLF V3 | 23 aa

disclosed minimal epitope KIILNFTTL at 9-17

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

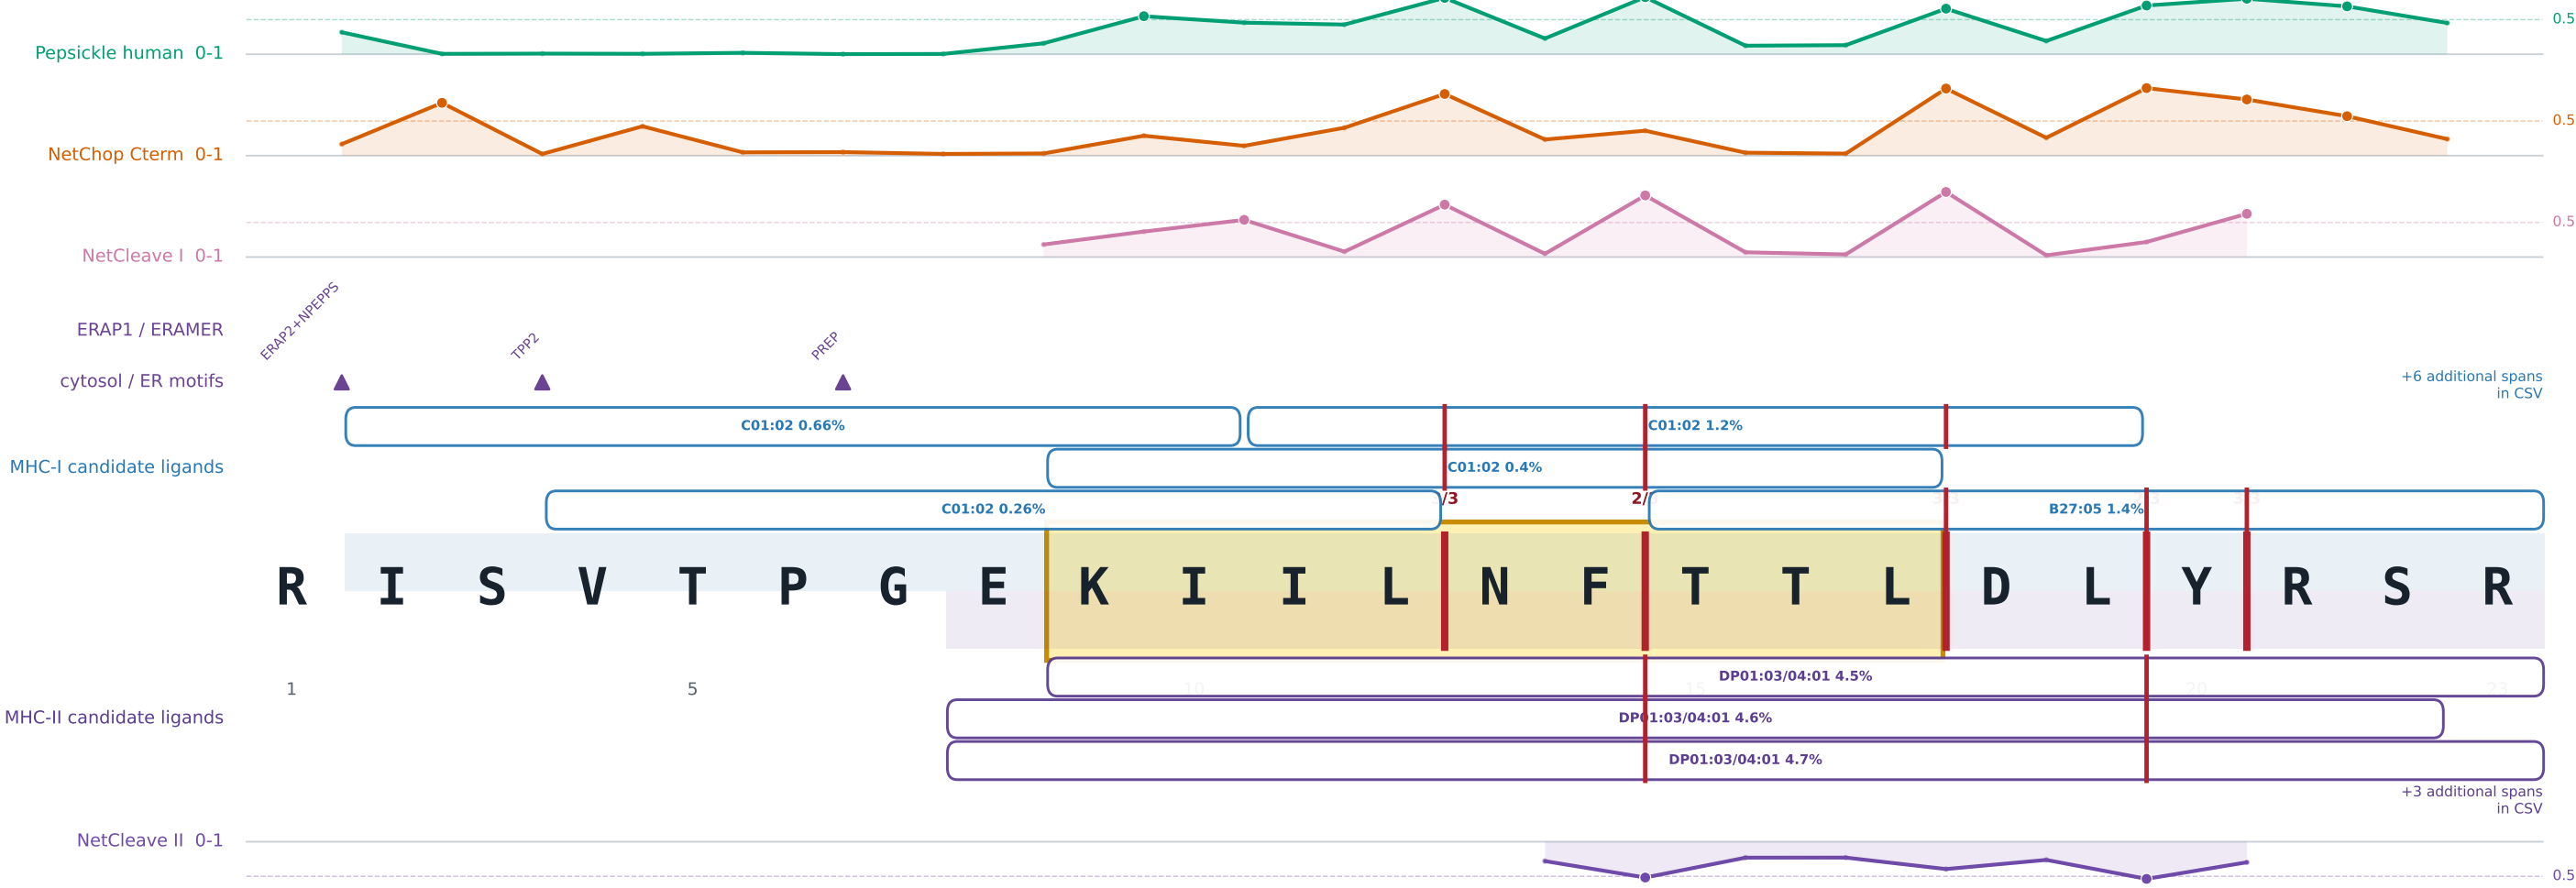

SERUM / EXTRACELLULAR - native scores and recognition motifs

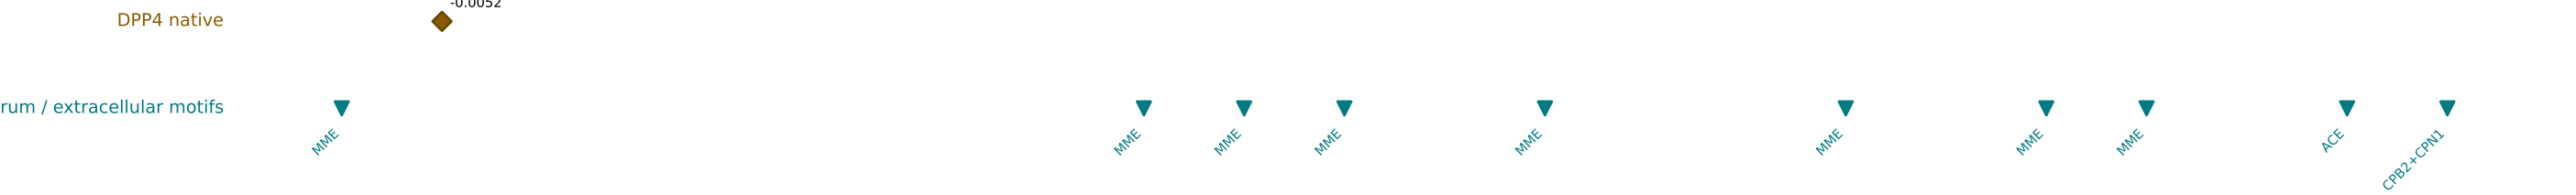


Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

MAP2 p.Leu867fs | JLF V2, JLF V1 | 24 aa

disclosed minimal epitope RVVPFTKAL at 9-17

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

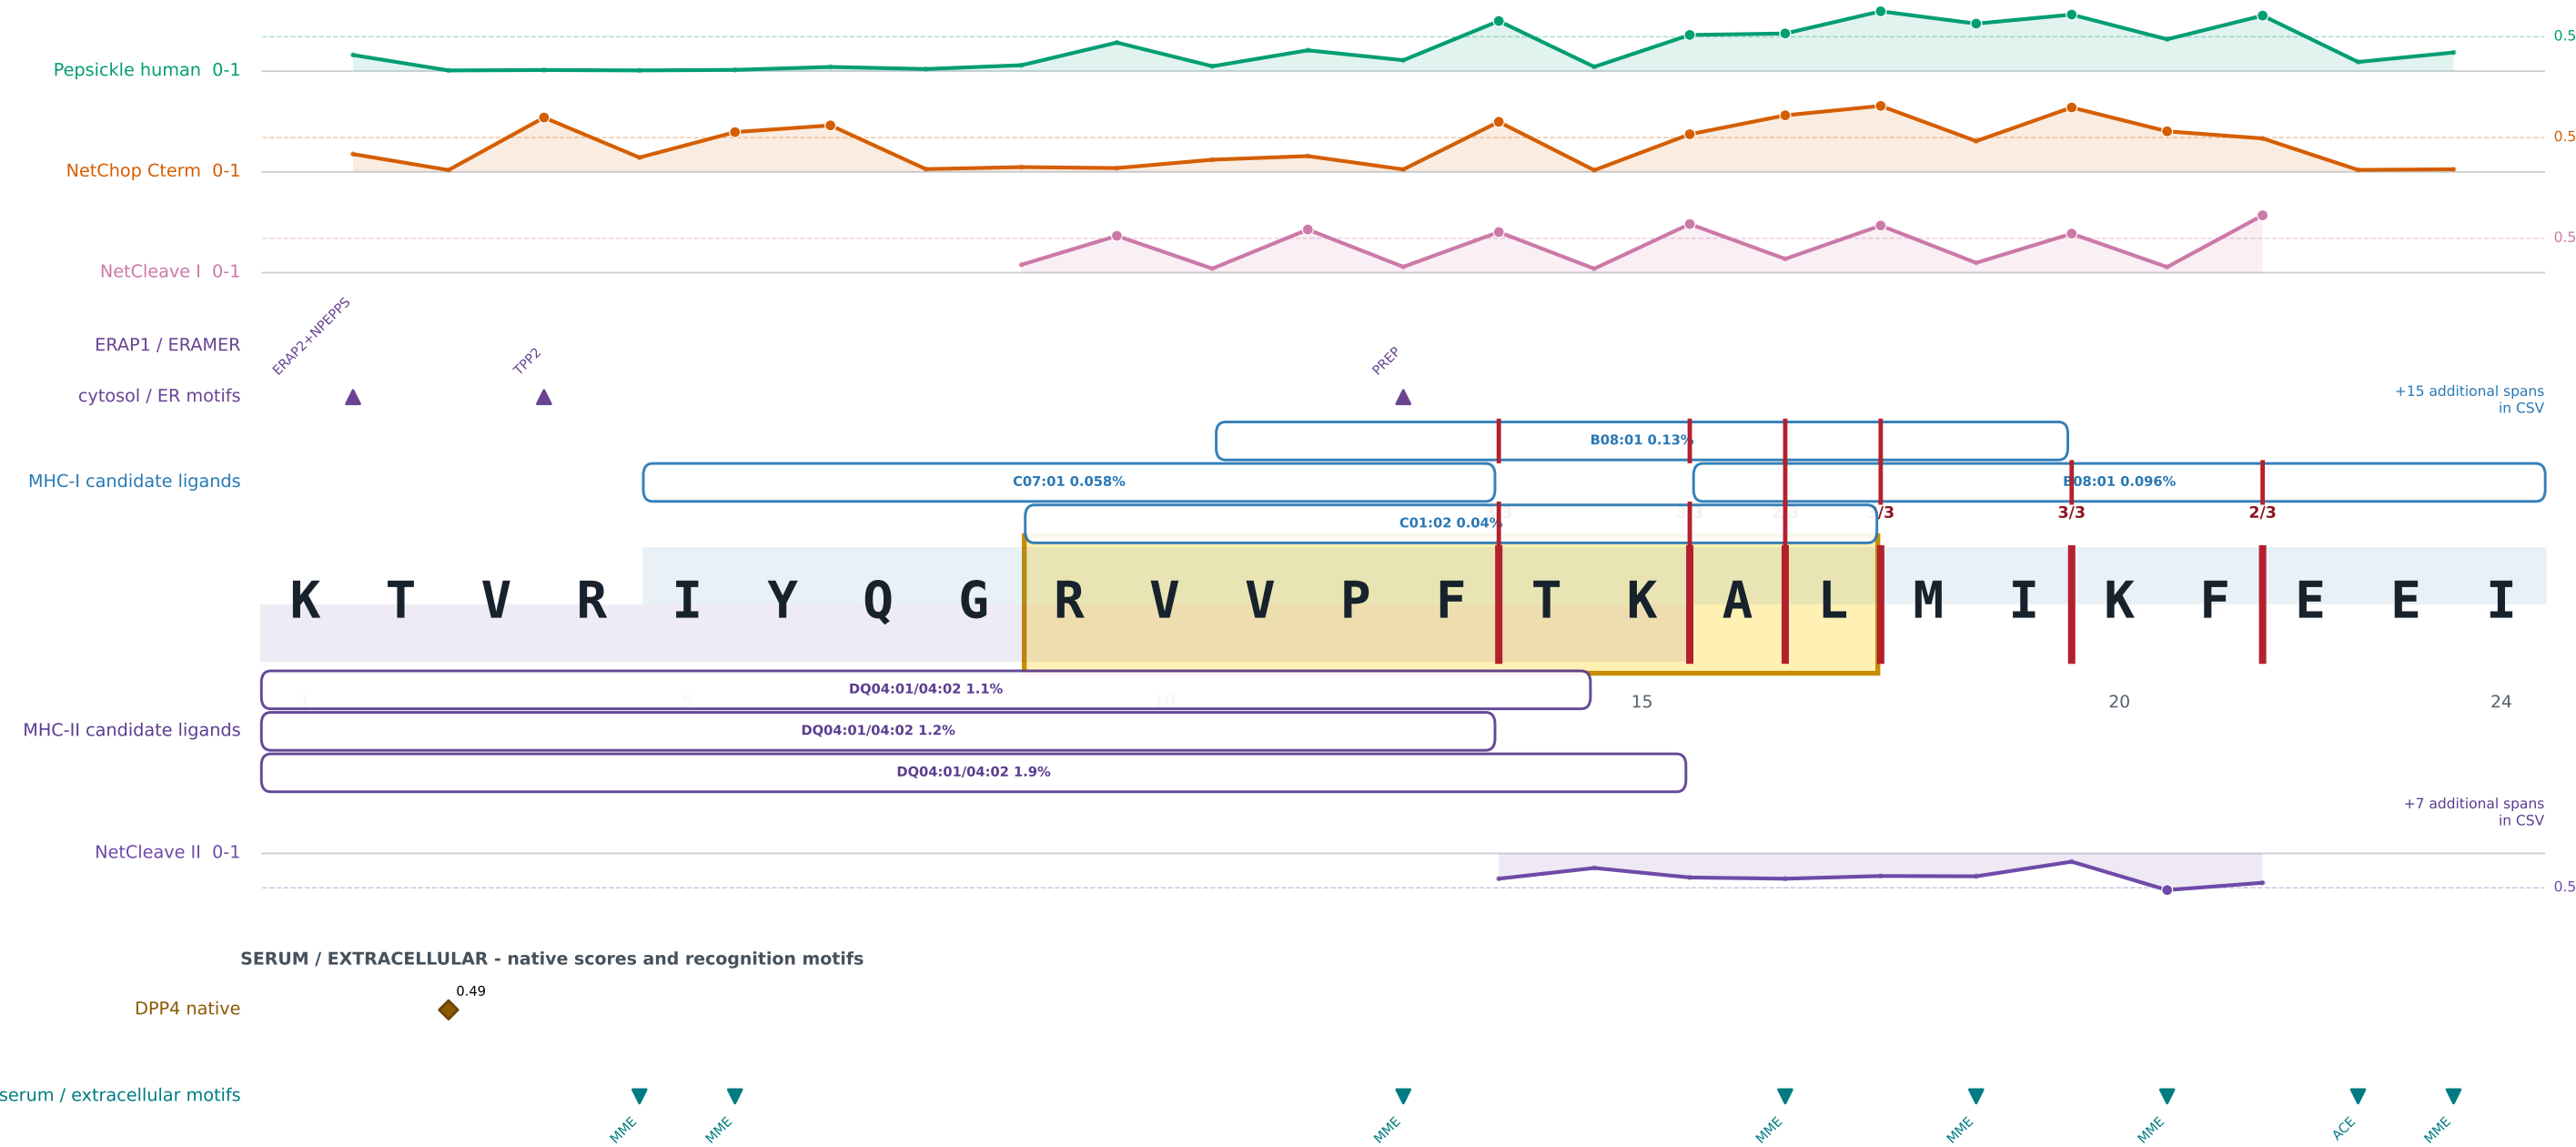


Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

TECPR1 p.Thr259fs | JLF V3, JLF V2, JLF V1 | 22 aa

disclosed minimal epitope TIPAAPVGL at 9-17

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at ≥ 0.5

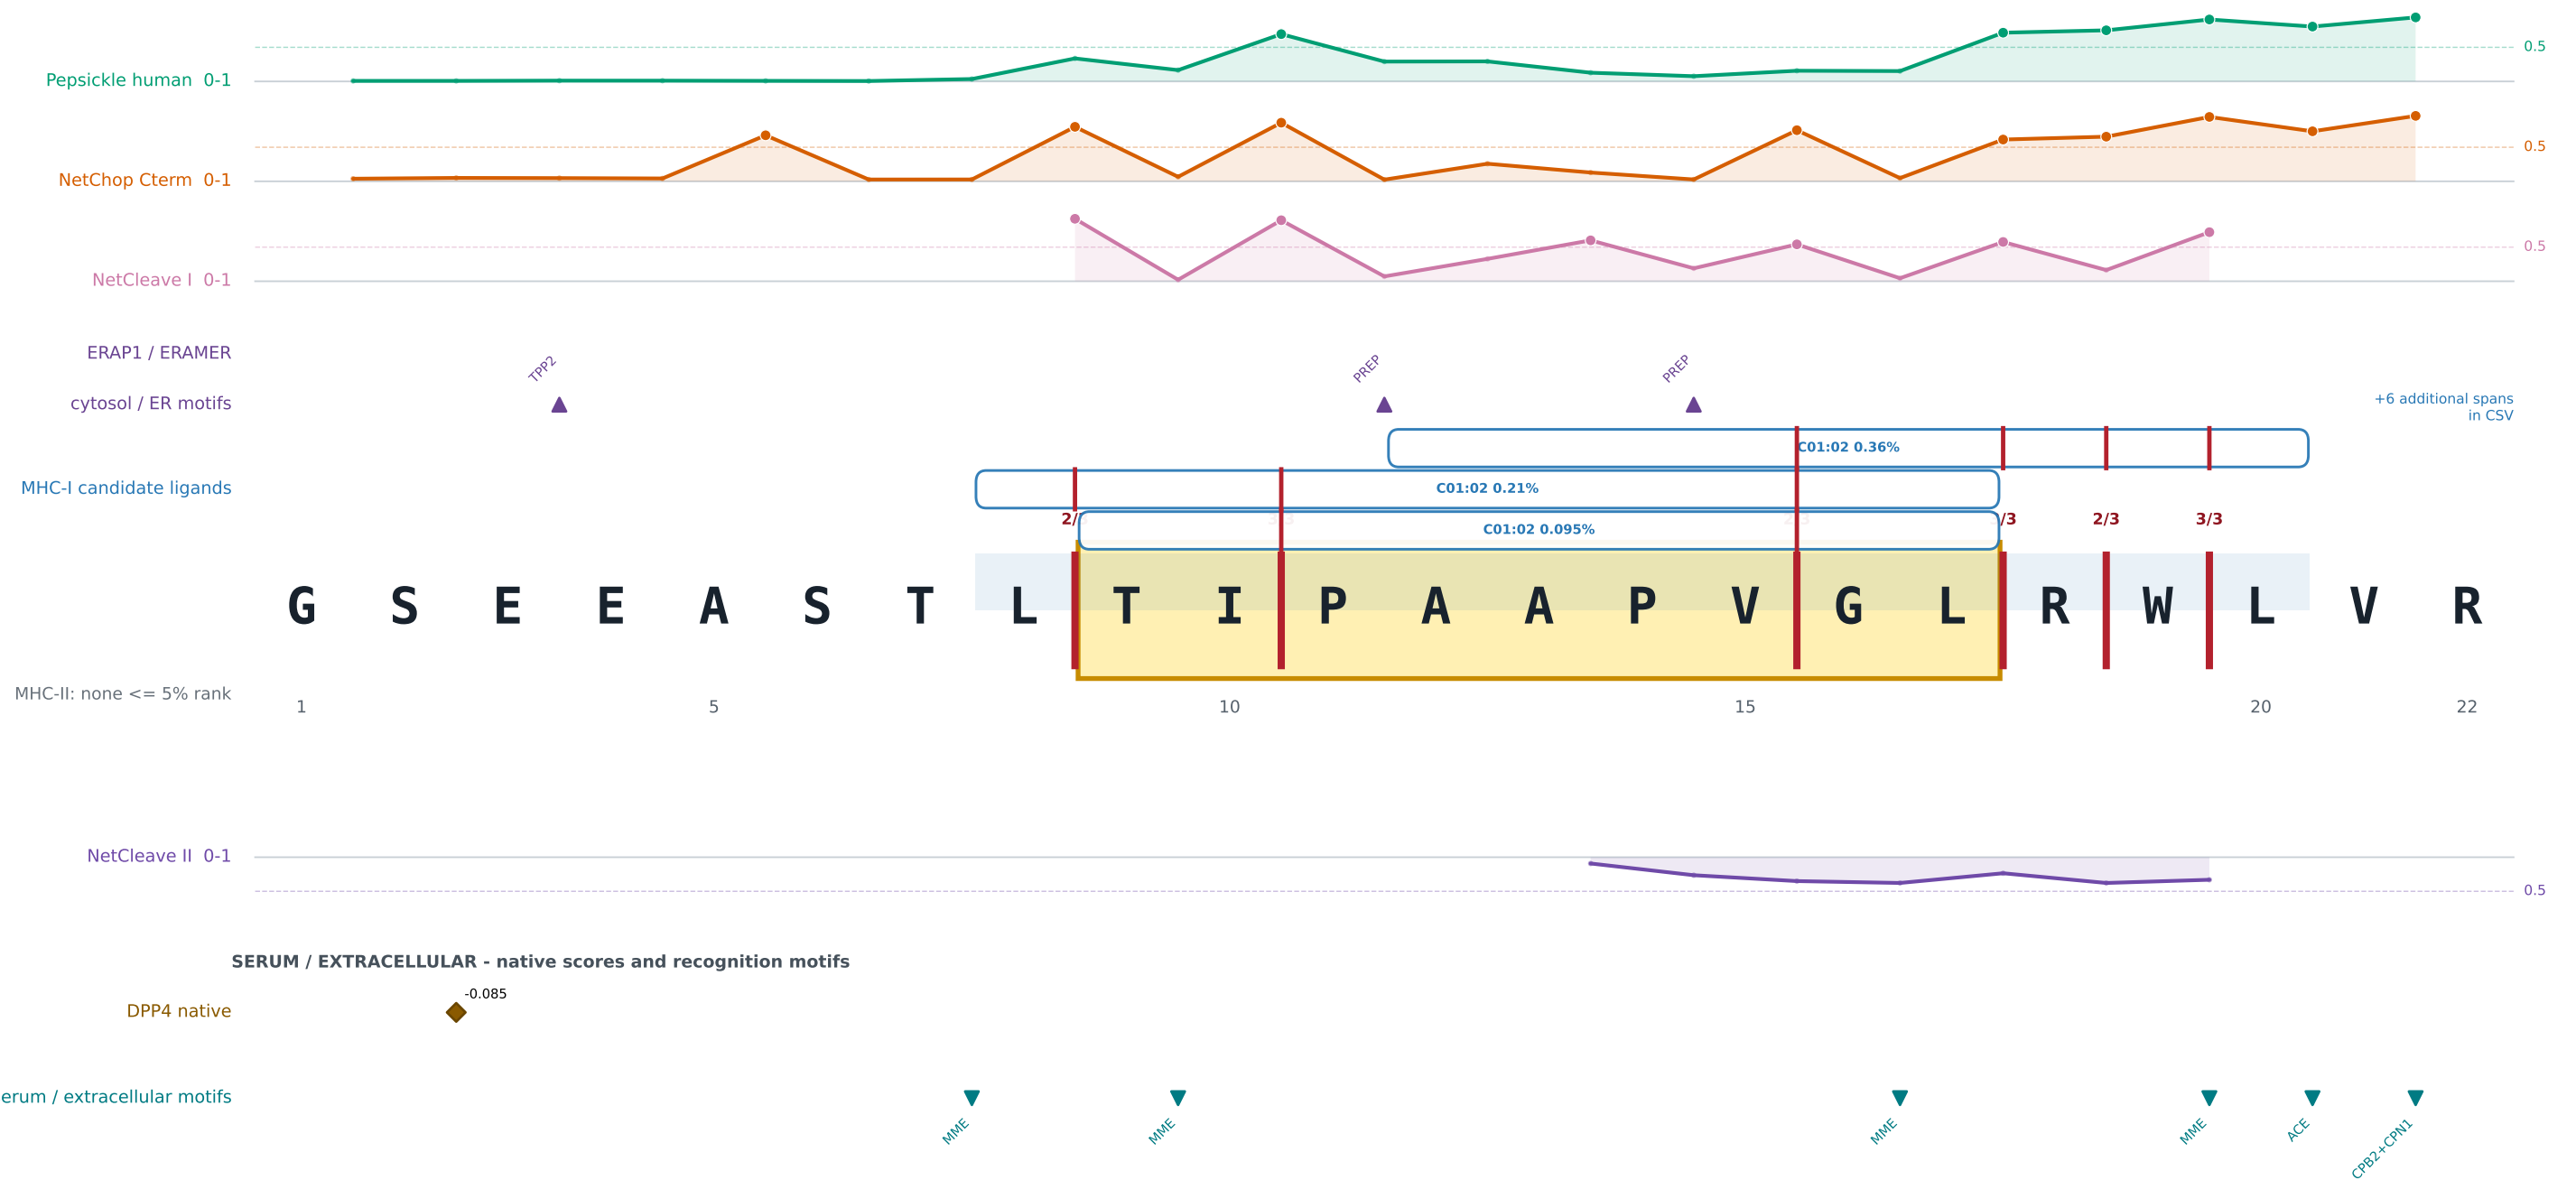


Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and ≥ 2 score ≥ 0.5 ; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at $\leq 2\%/\leq 5\%$ rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

BTD p.Phe445Val | JLF V3, JLF V2, JLF V1 | 23 aa

disclosed minimal epitope GVVDGLHTV at 12-20

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

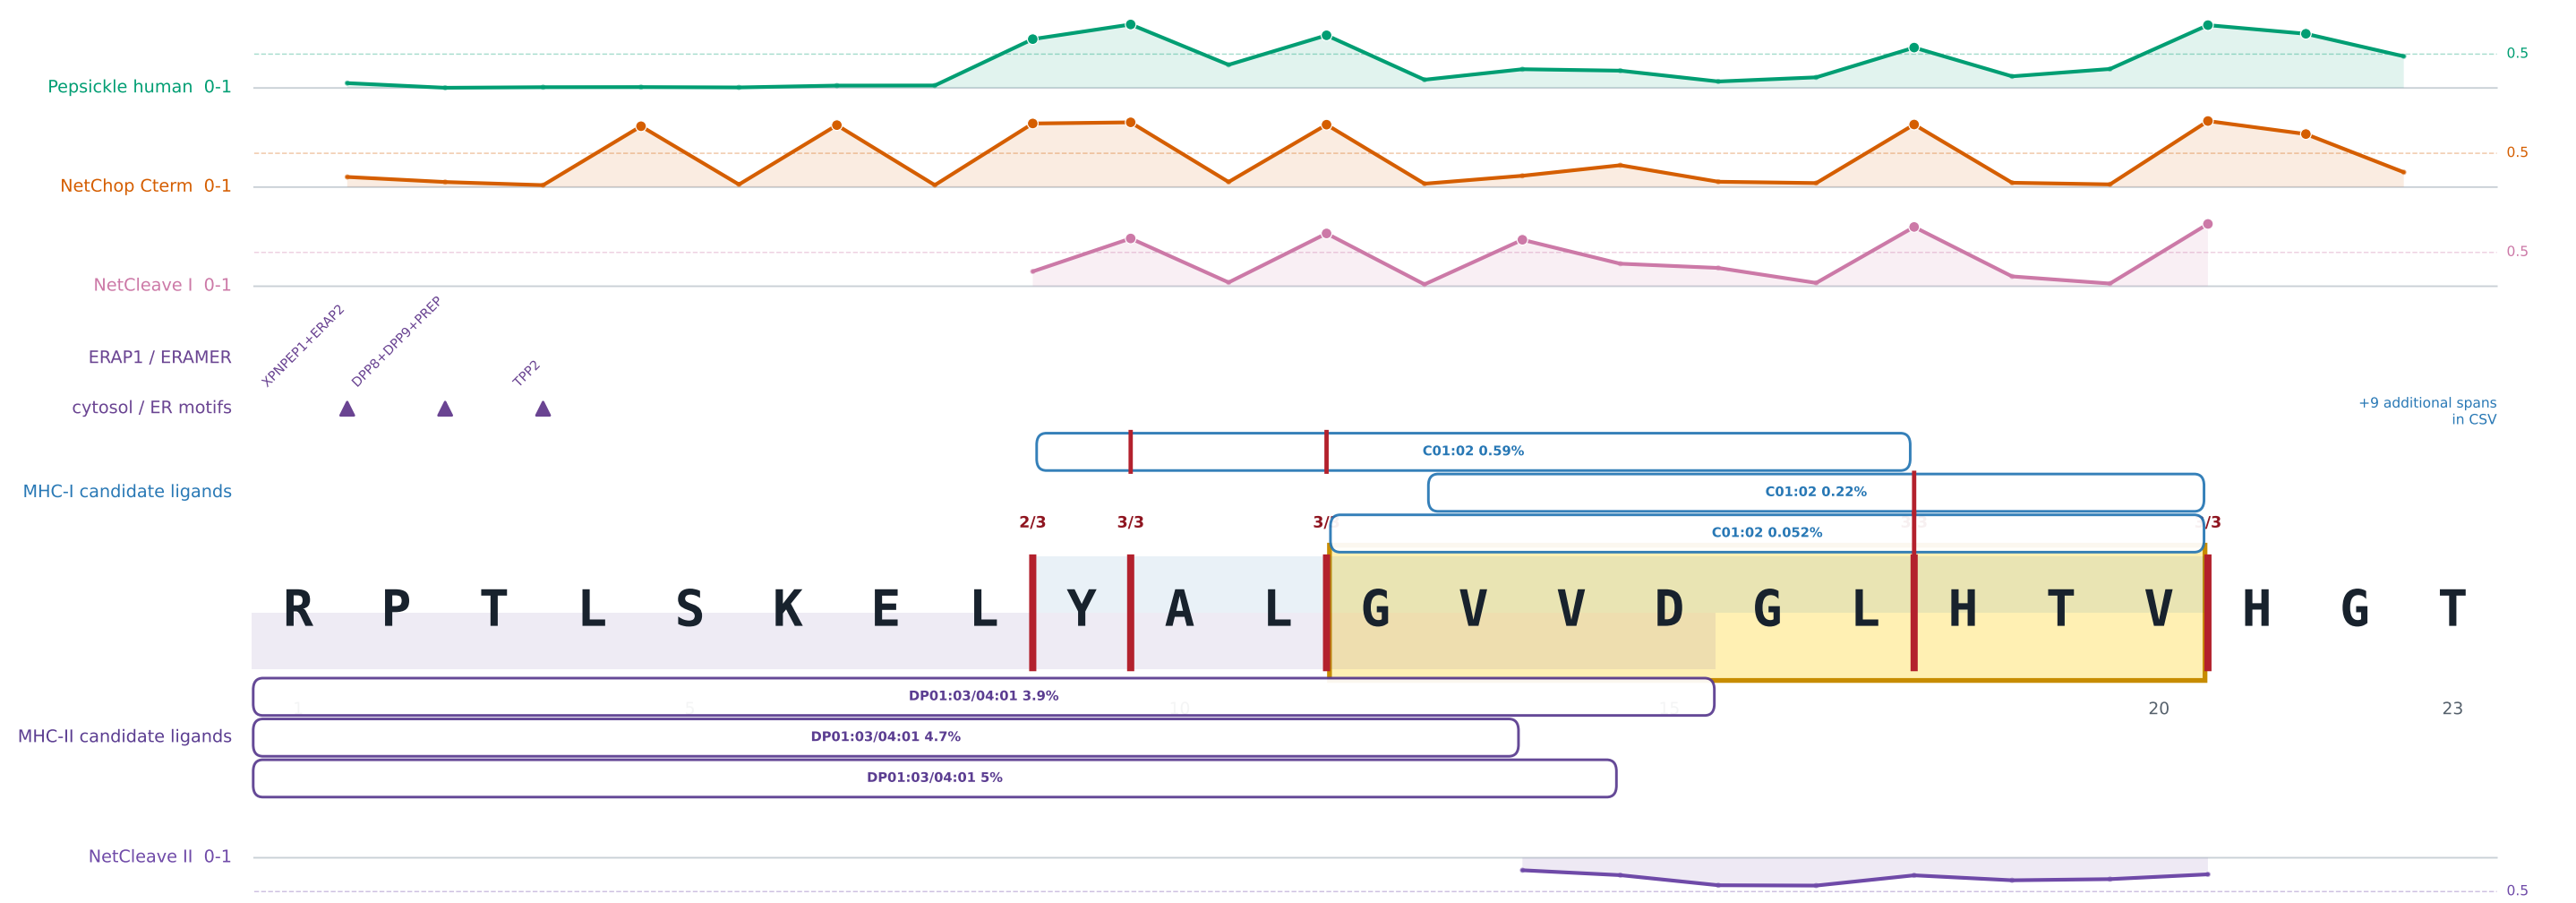

SERUM / EXTRACELLULAR - native scores and recognition motifs




Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

TECPR1 p.Thr259fs | JLF V2, JLF V1 | 17 aa

minimal epitope/window not disclosed for this SLP

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

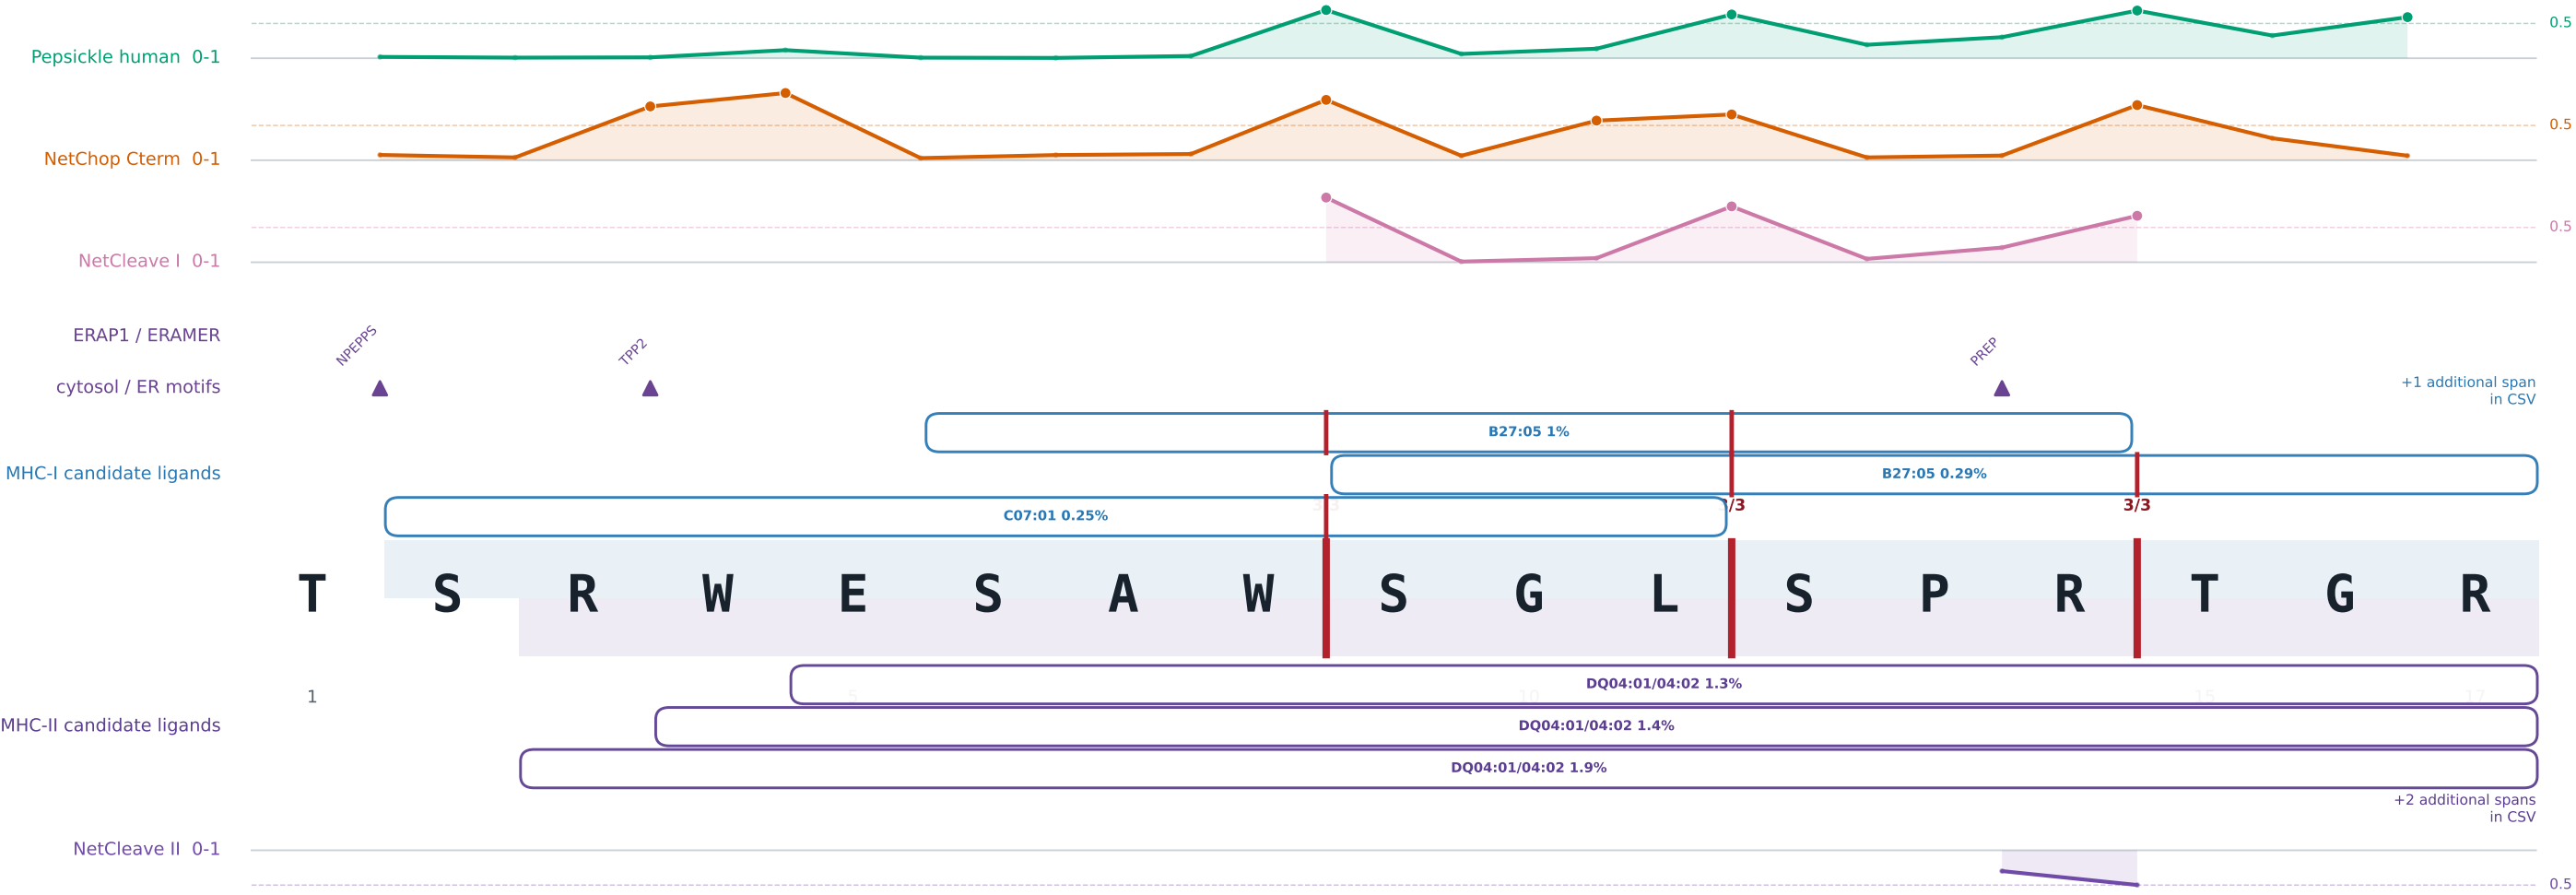


SERUM / EXTRACELLULAR - native scores and recognition motifs



Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

WWC1 p.Val179Gly | JLF V3 | 20 aa

disclosed minimal epitope GHLQHELQF at 8-16

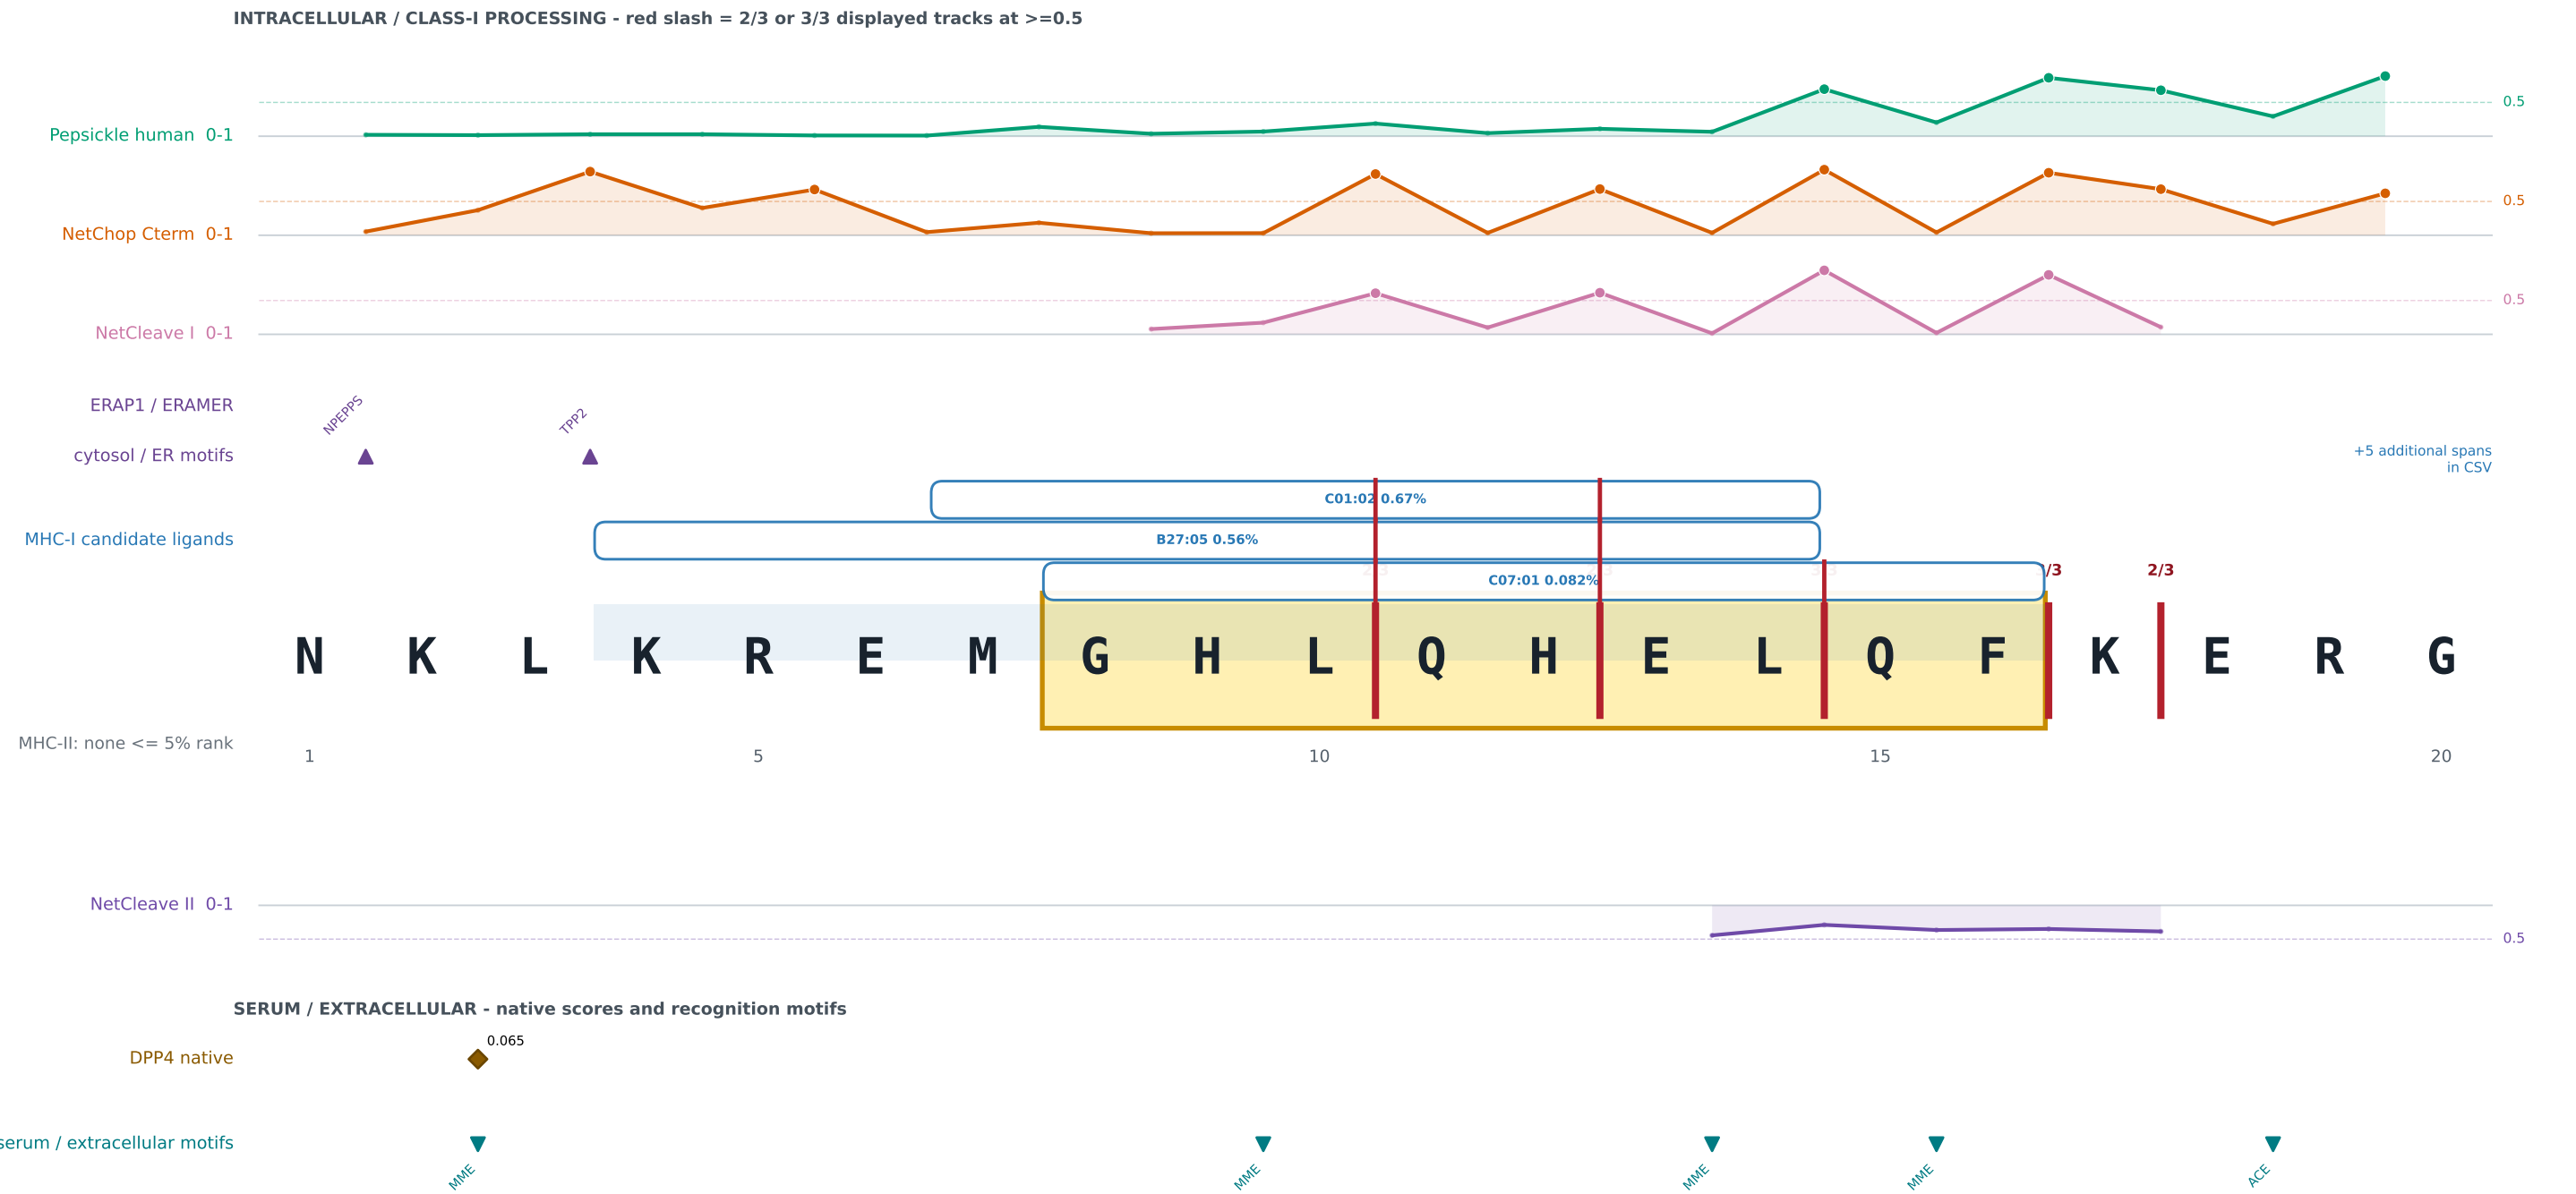


Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.


ADGRF5 p.Asn1279Ser | JLF V2 | 22 aa

minimal epitope/window not disclosed for this SLP

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

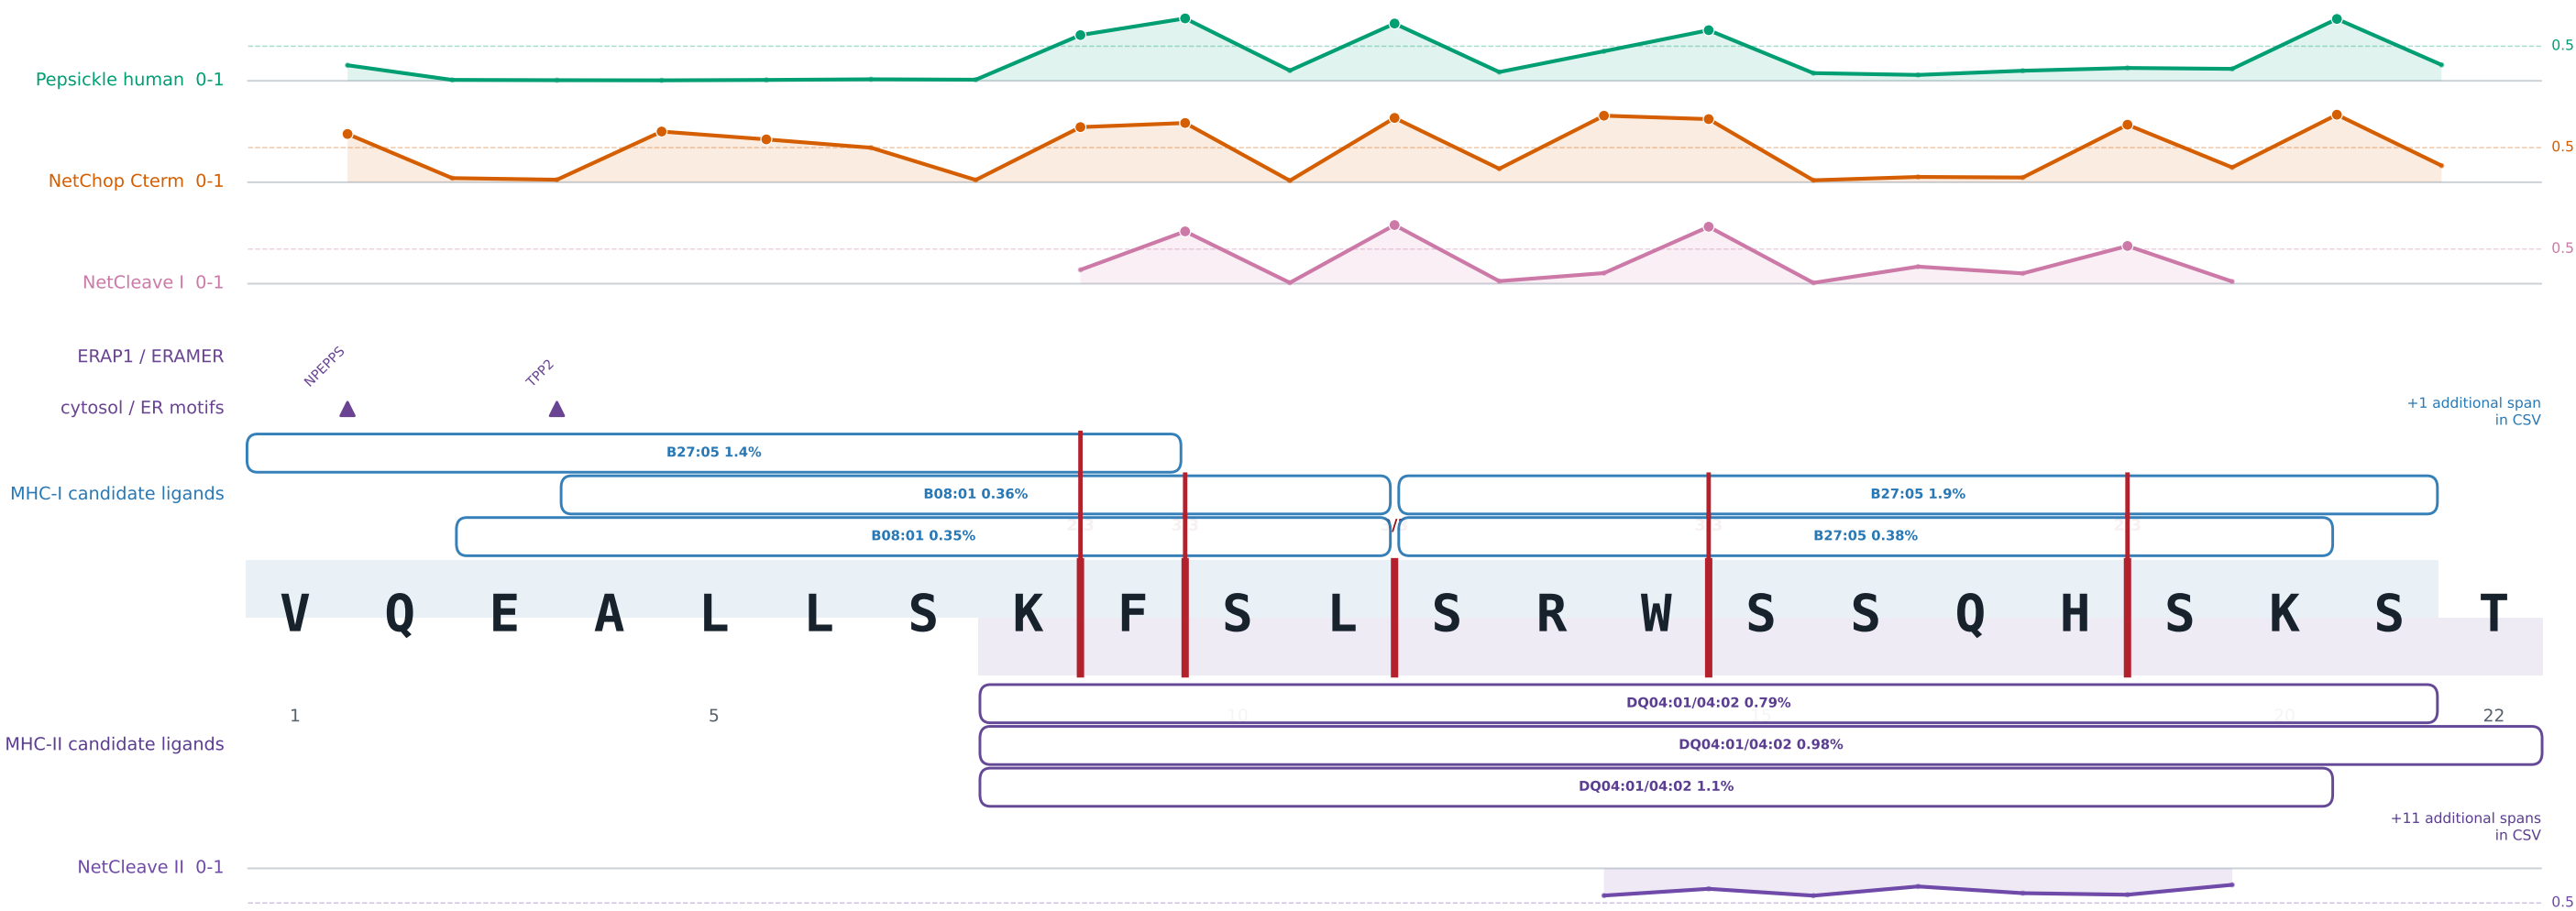


SERUM / EXTRACELLULAR - native scores and recognition motifs

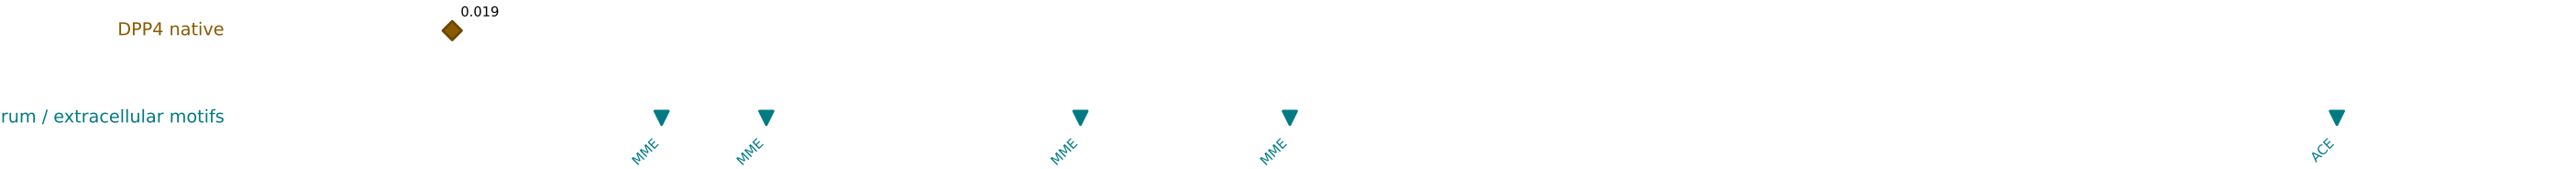

Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

CDC40 p.Trp475Ser | JLF V3 | 25 aa

disclosed minimal epitope TLSPNGKSL at 7-15

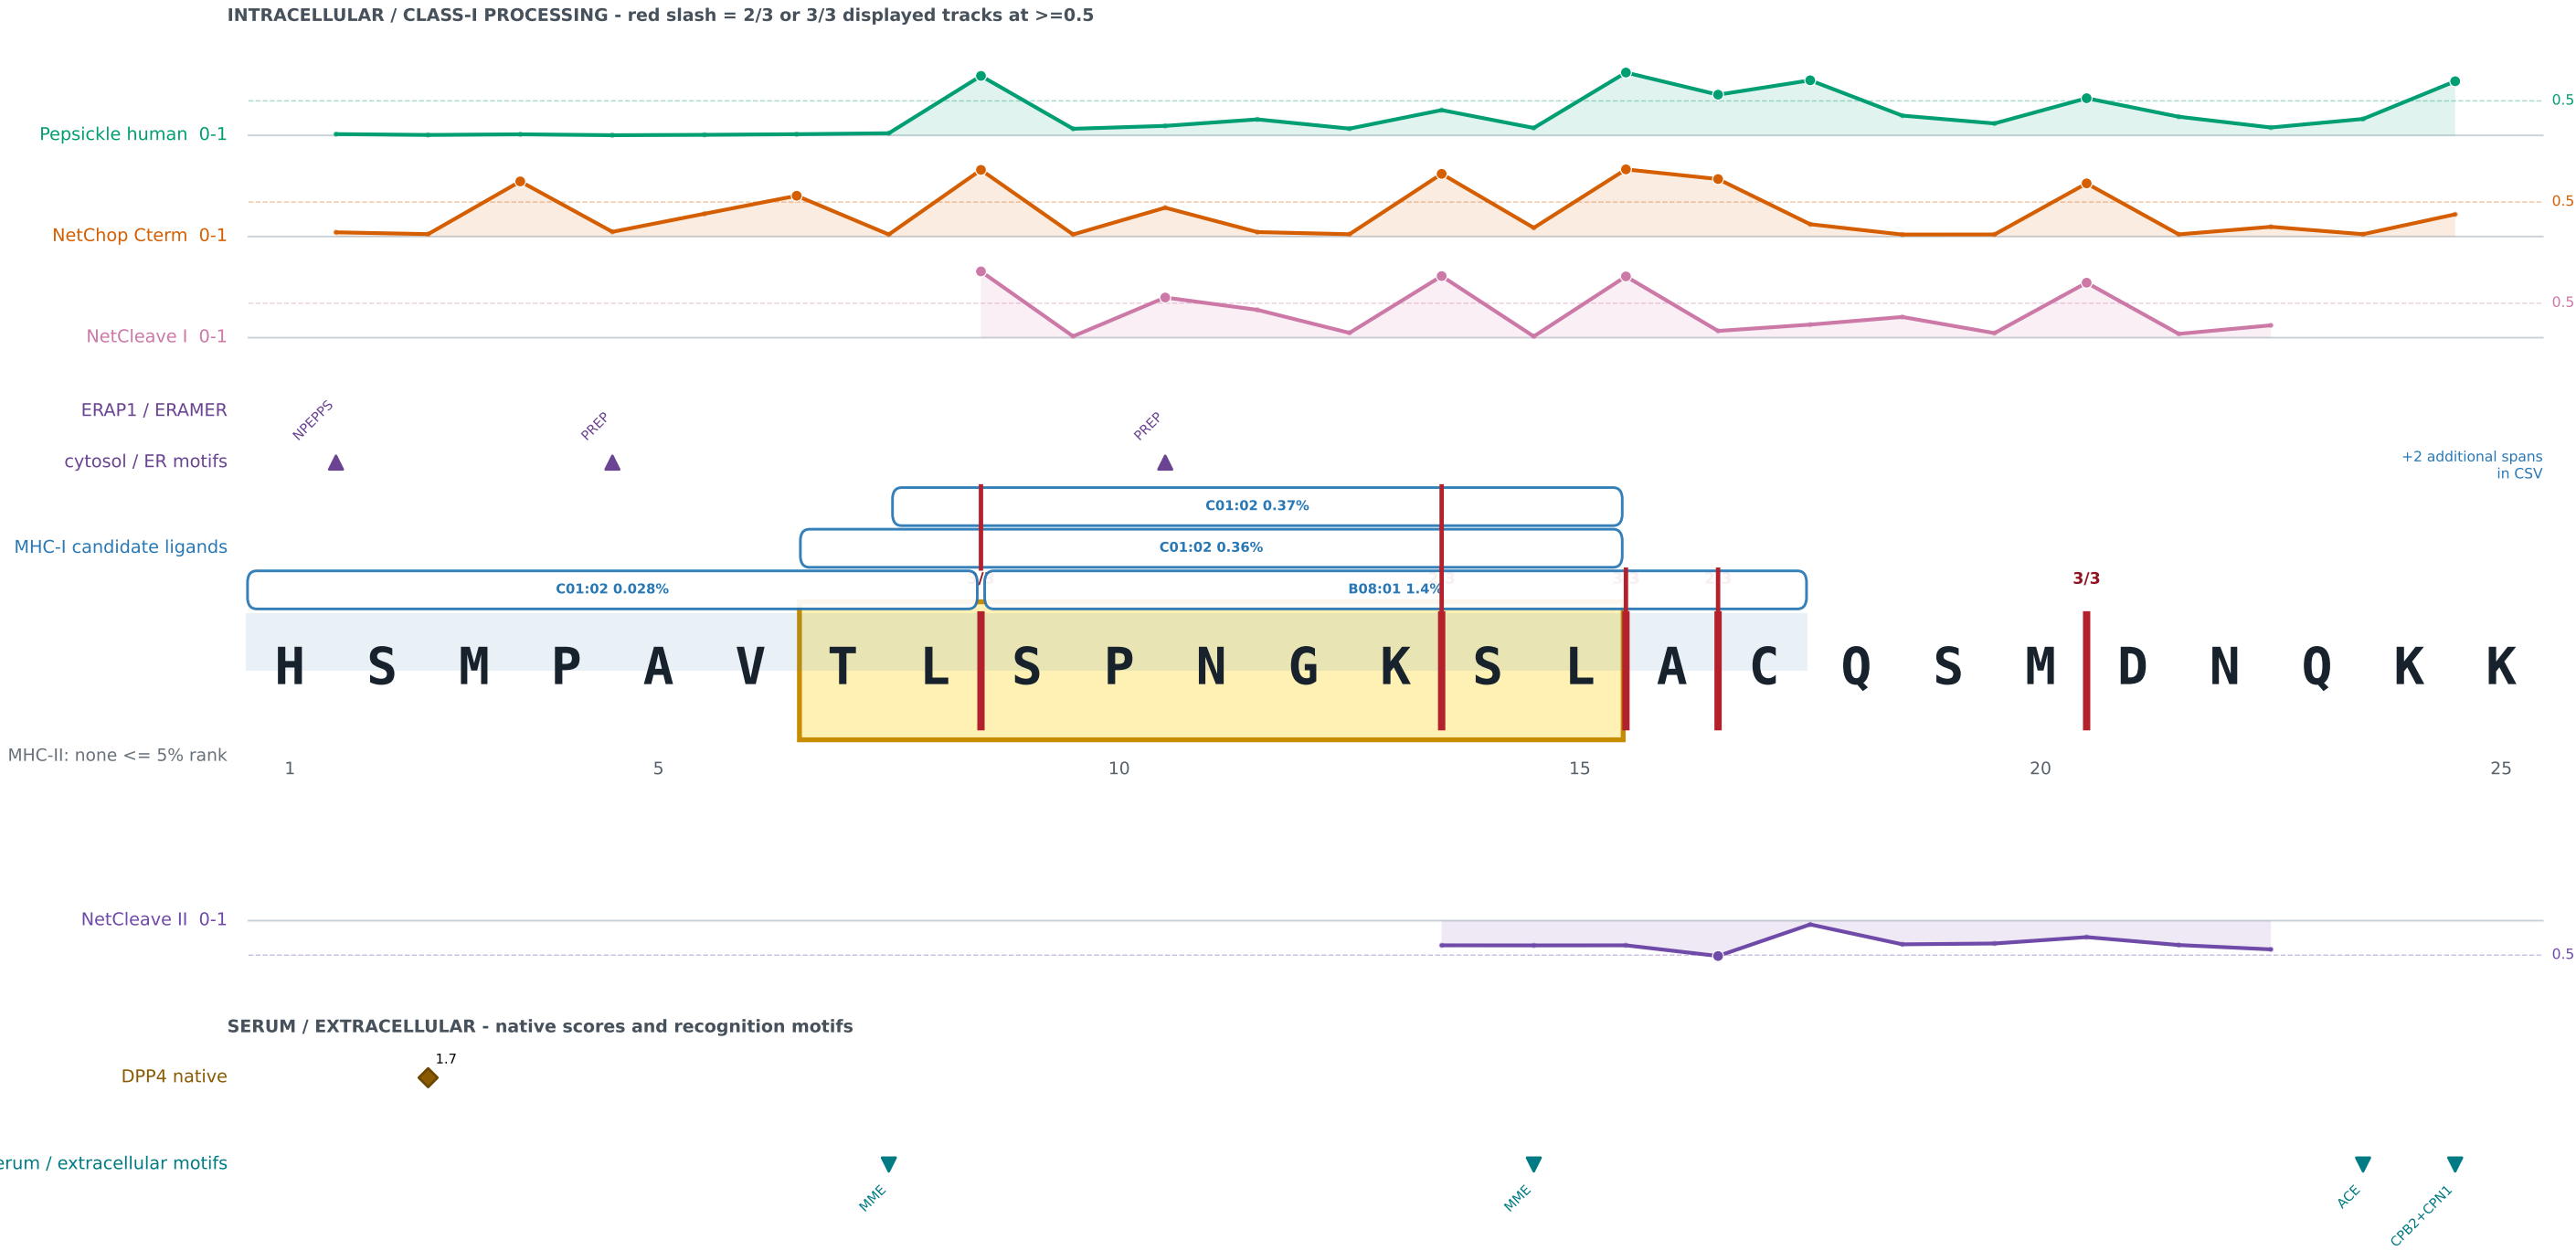


Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

KIF1C p.Glu456Lys | JLF V2, JLF V1 | 21 aa

minimal epitope/window not disclosed for this SLP

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5


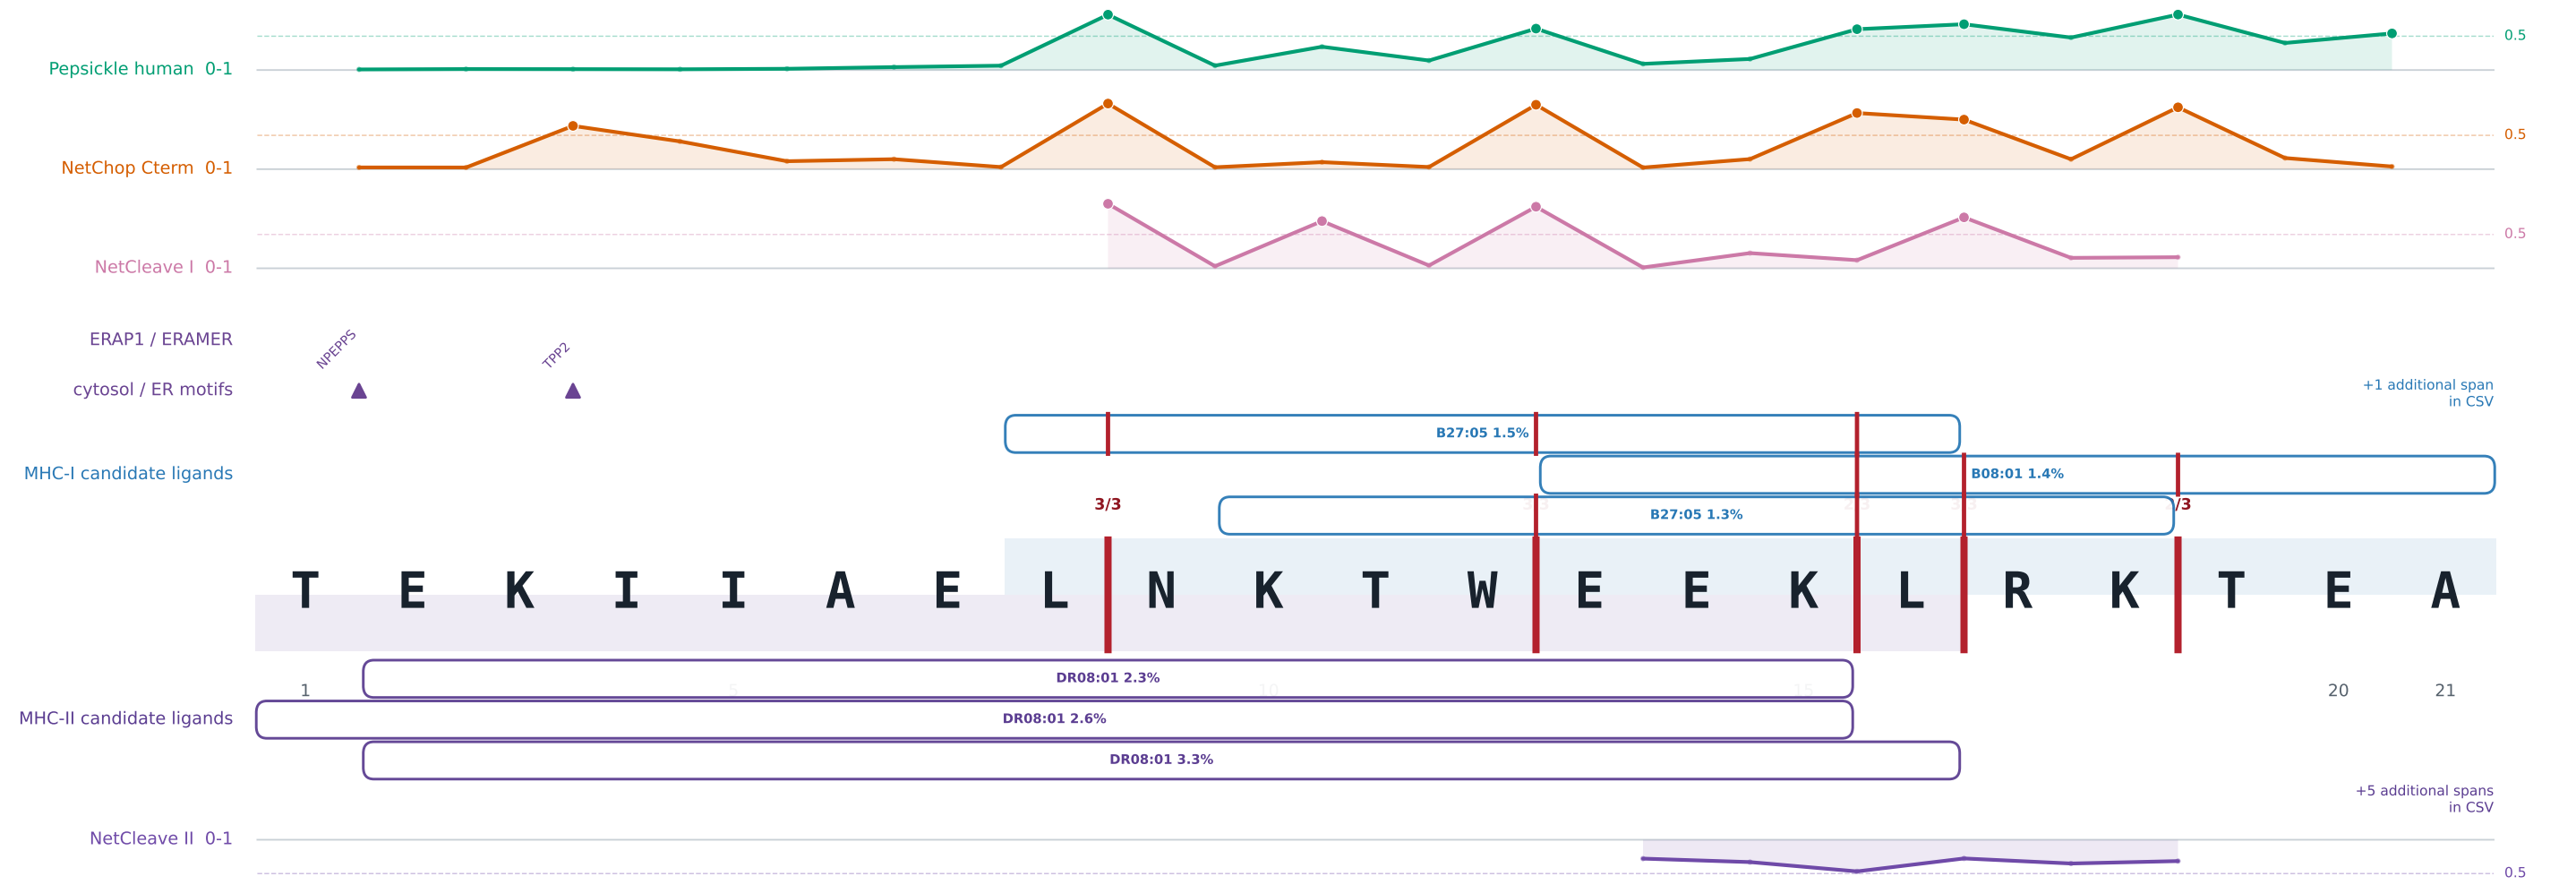


Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

CD109 p.Arg1310Met | JLF V3 | 23 aa

minimal epitope/window not disclosed for this SLP

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

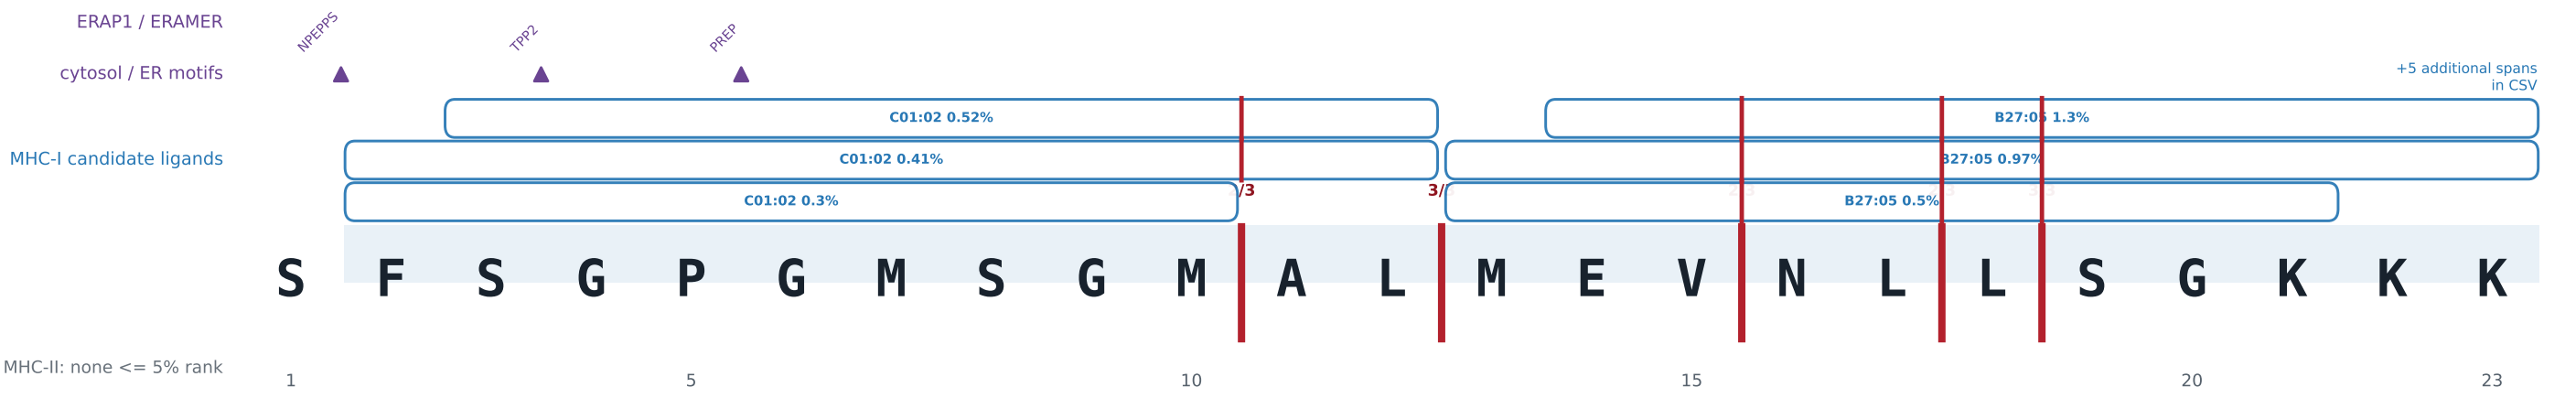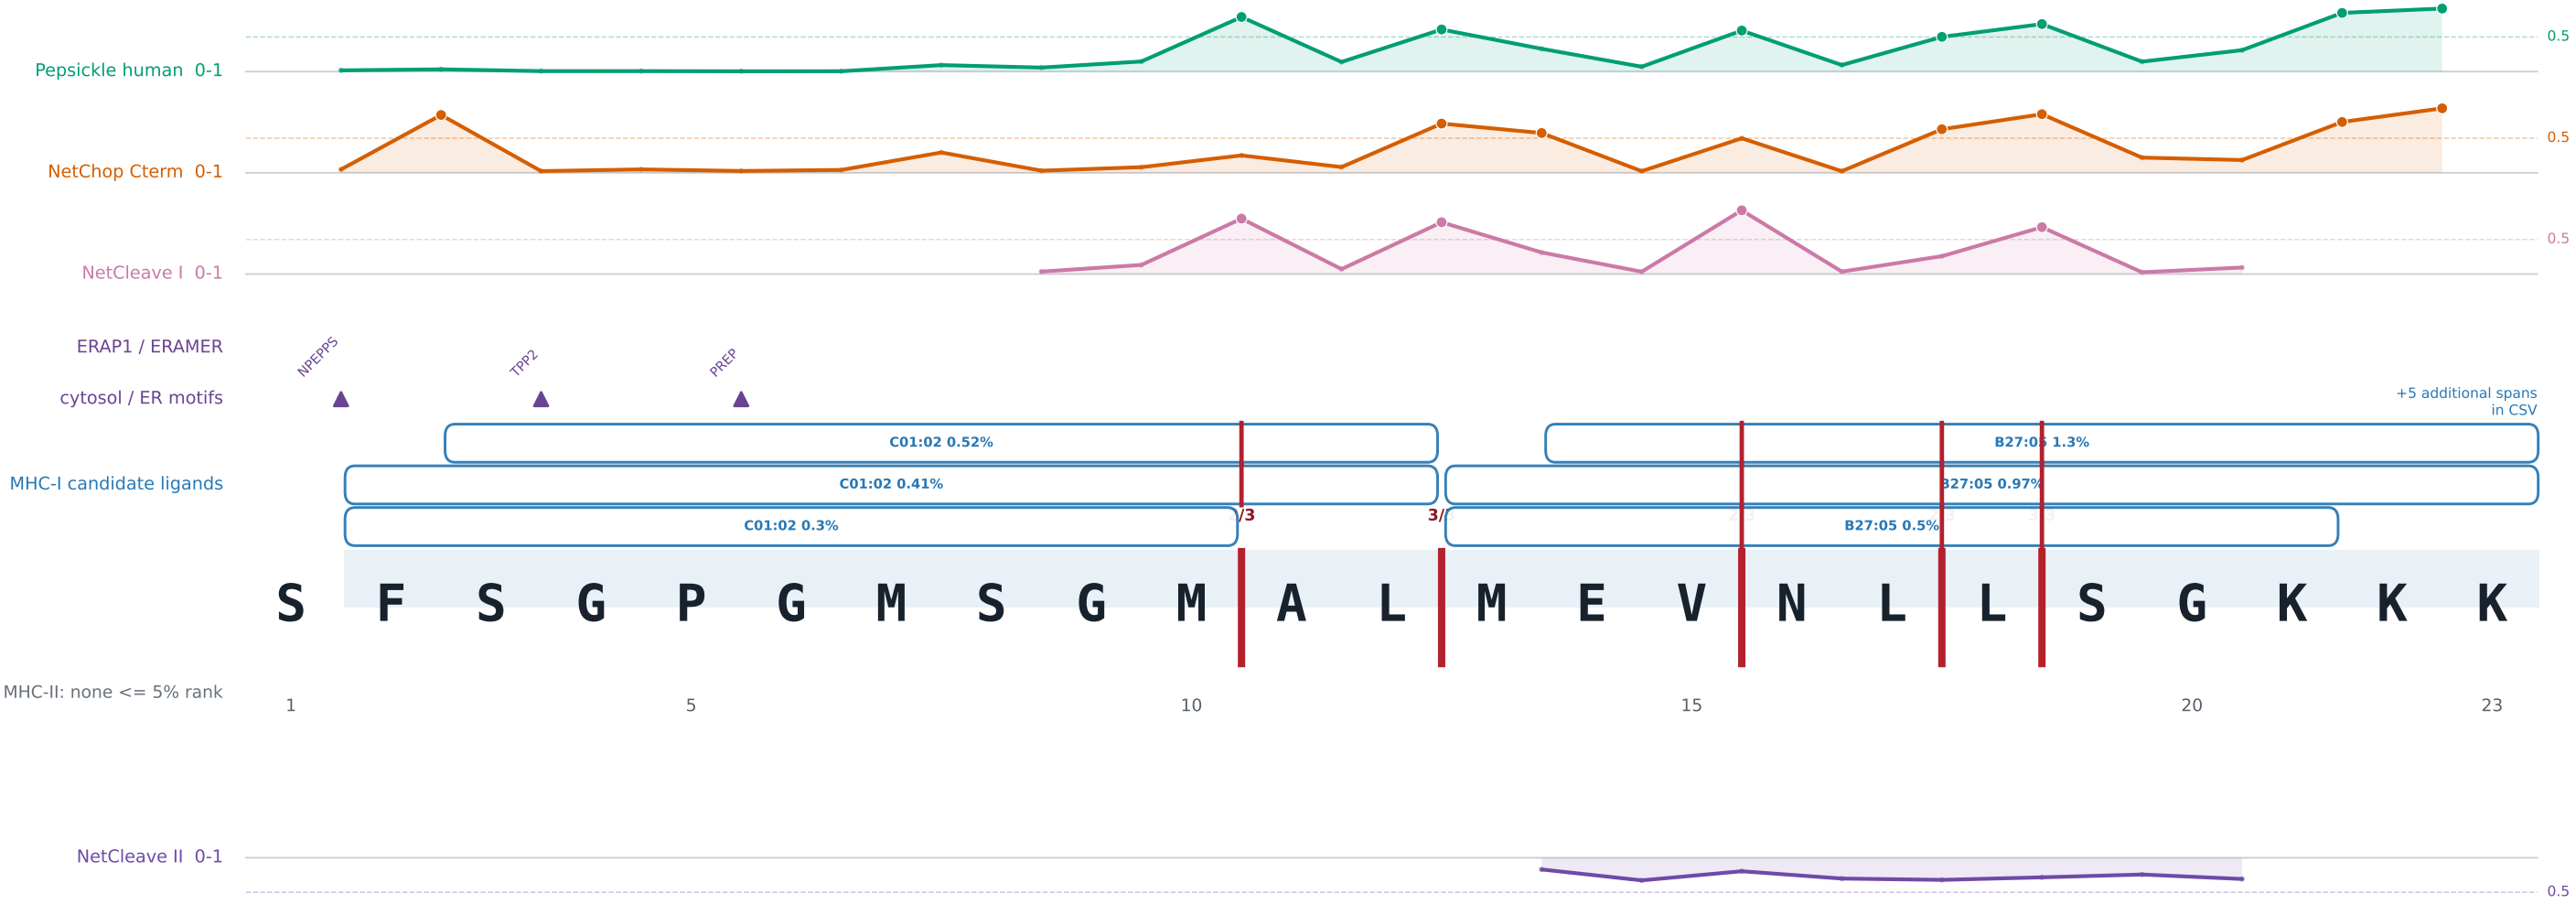

SERUM / EXTRACELLULAR - native scores and recognition motifs




Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

CENPL p.Pro26His| JLF V3 | 23 aa

minimal epitope/window not disclosed for this SLP

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

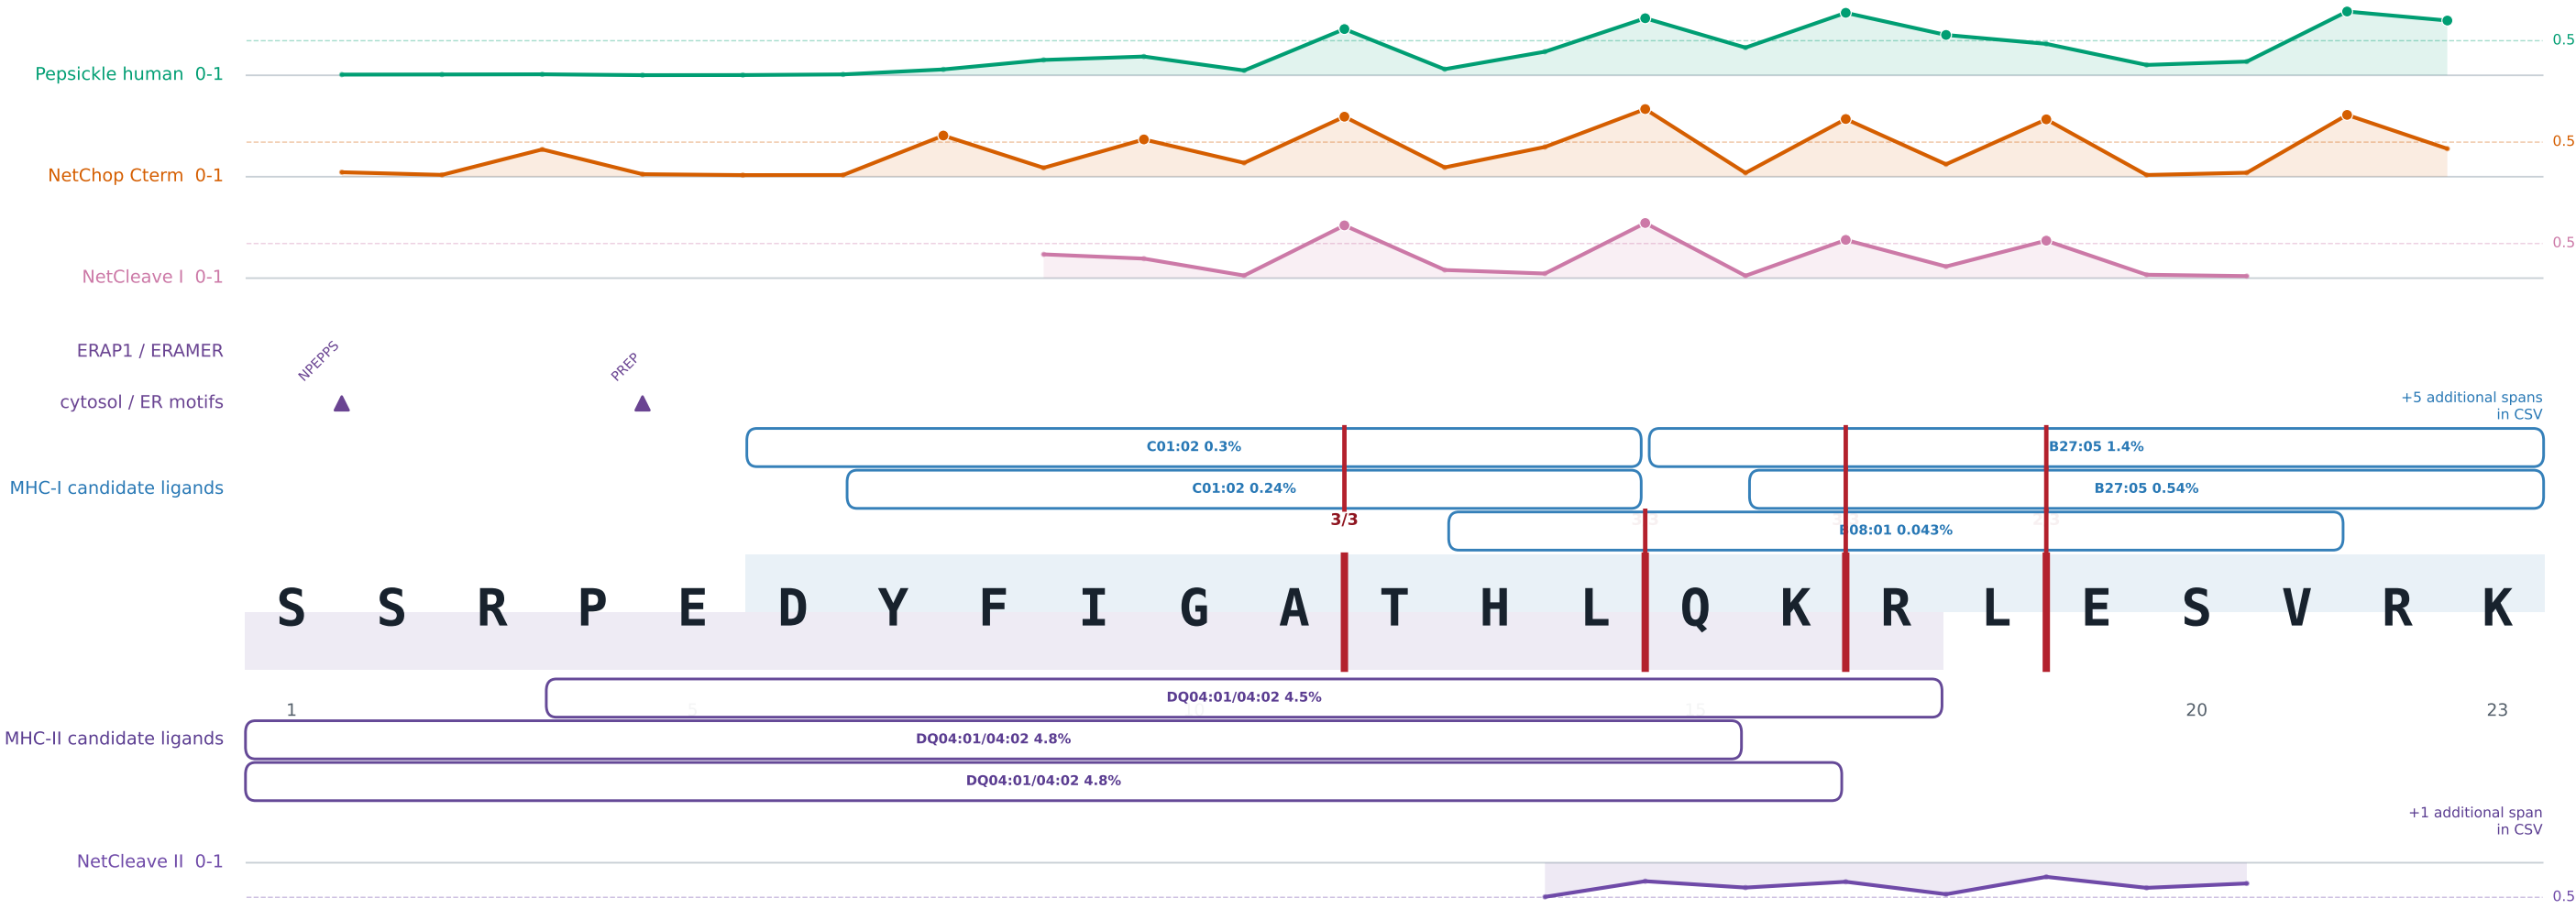

SERUM / EXTRACELLULAR - native scores and recognition motifs




Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

DYNC1H1 p.Val314Ile | JLF V3, JLF V2 | 24 aa

disclosed minimal epitope KRFHATISF at 2-10

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

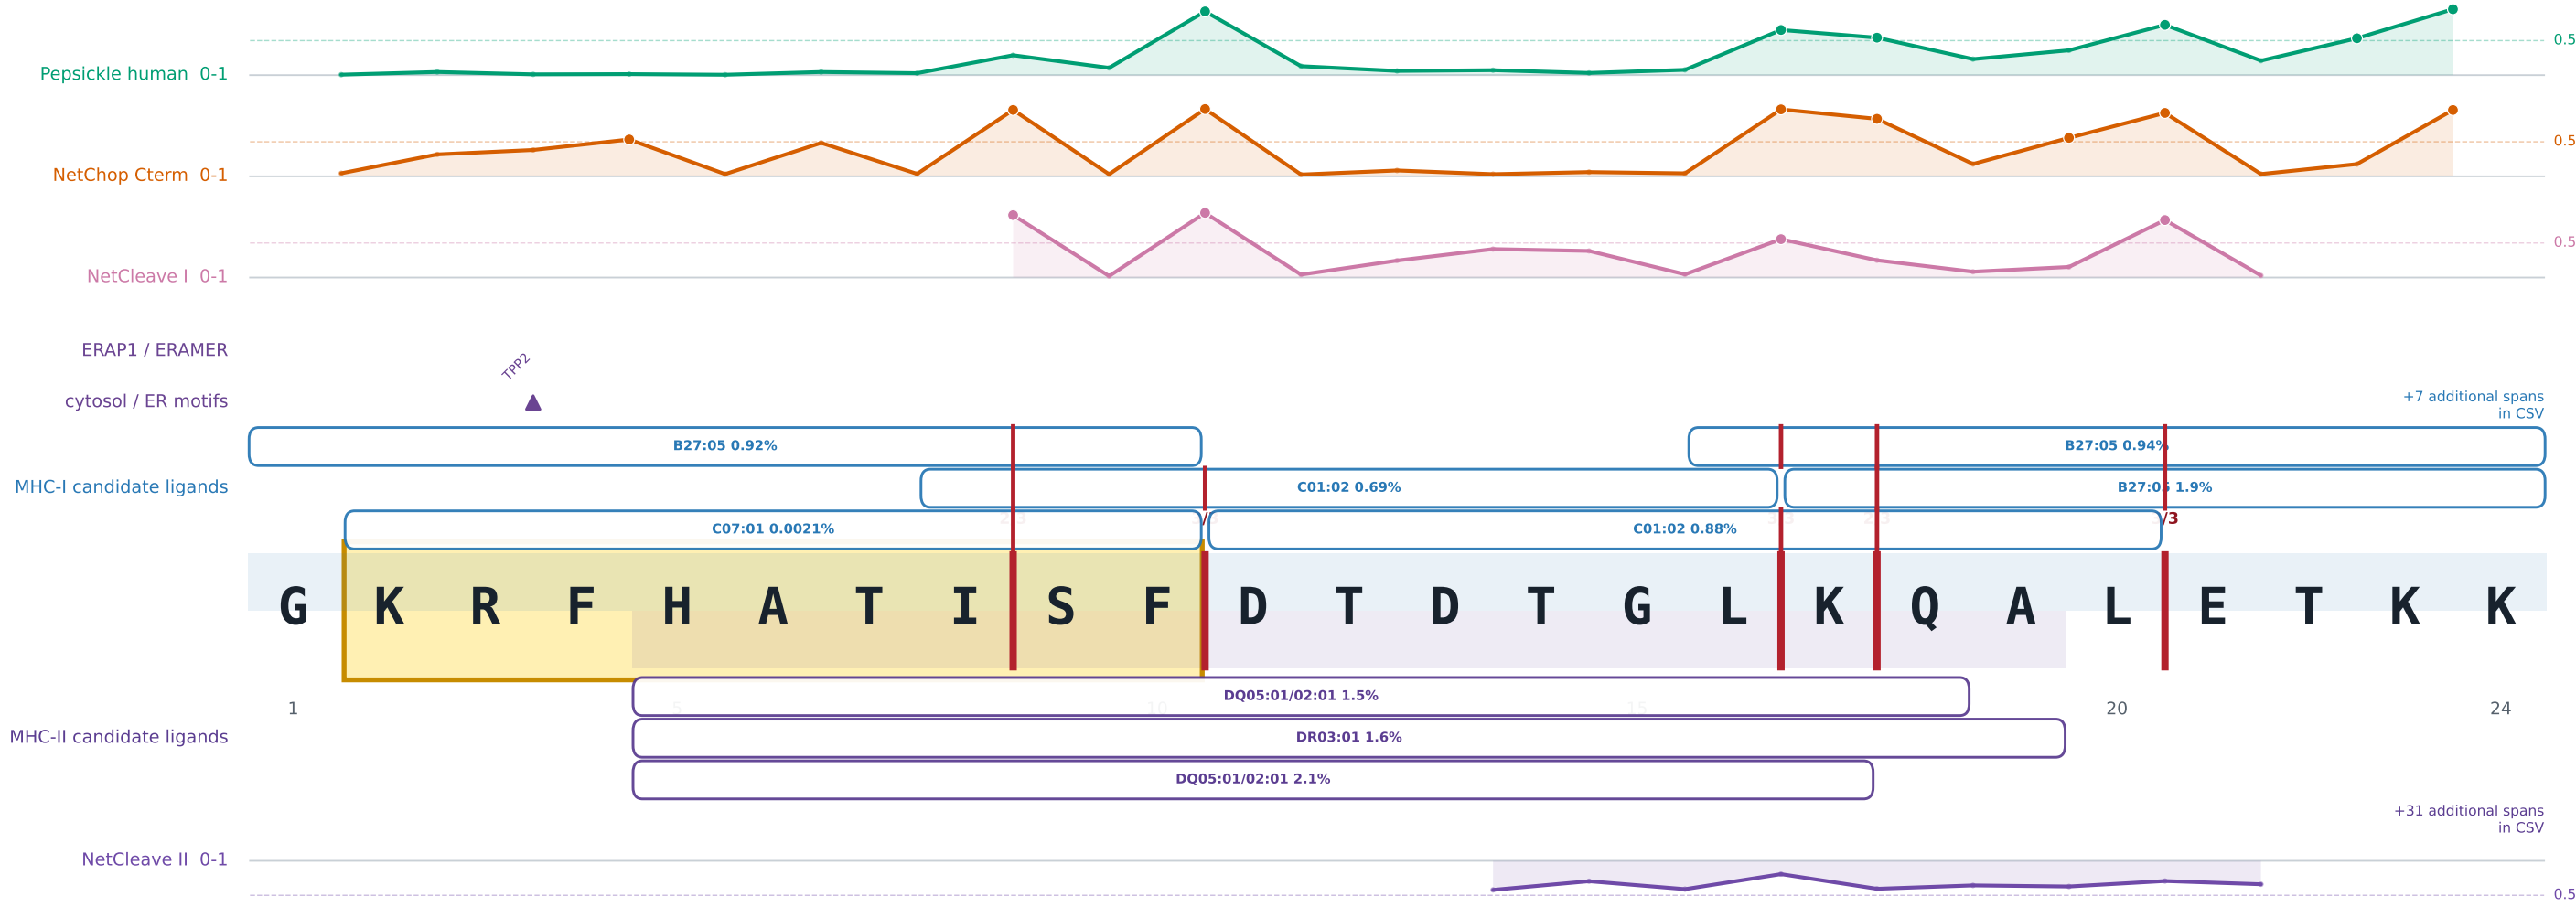

SERUM / EXTRACELLULAR - native scores and recognition motifs

DPP4 native


serum / extracellular motifs

Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

GLIS3 p.Ser775fs | JLF V3 | 80 aa - segment 1/3, bonds 1-27

minimal epitope/window not disclosed for this SLP

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

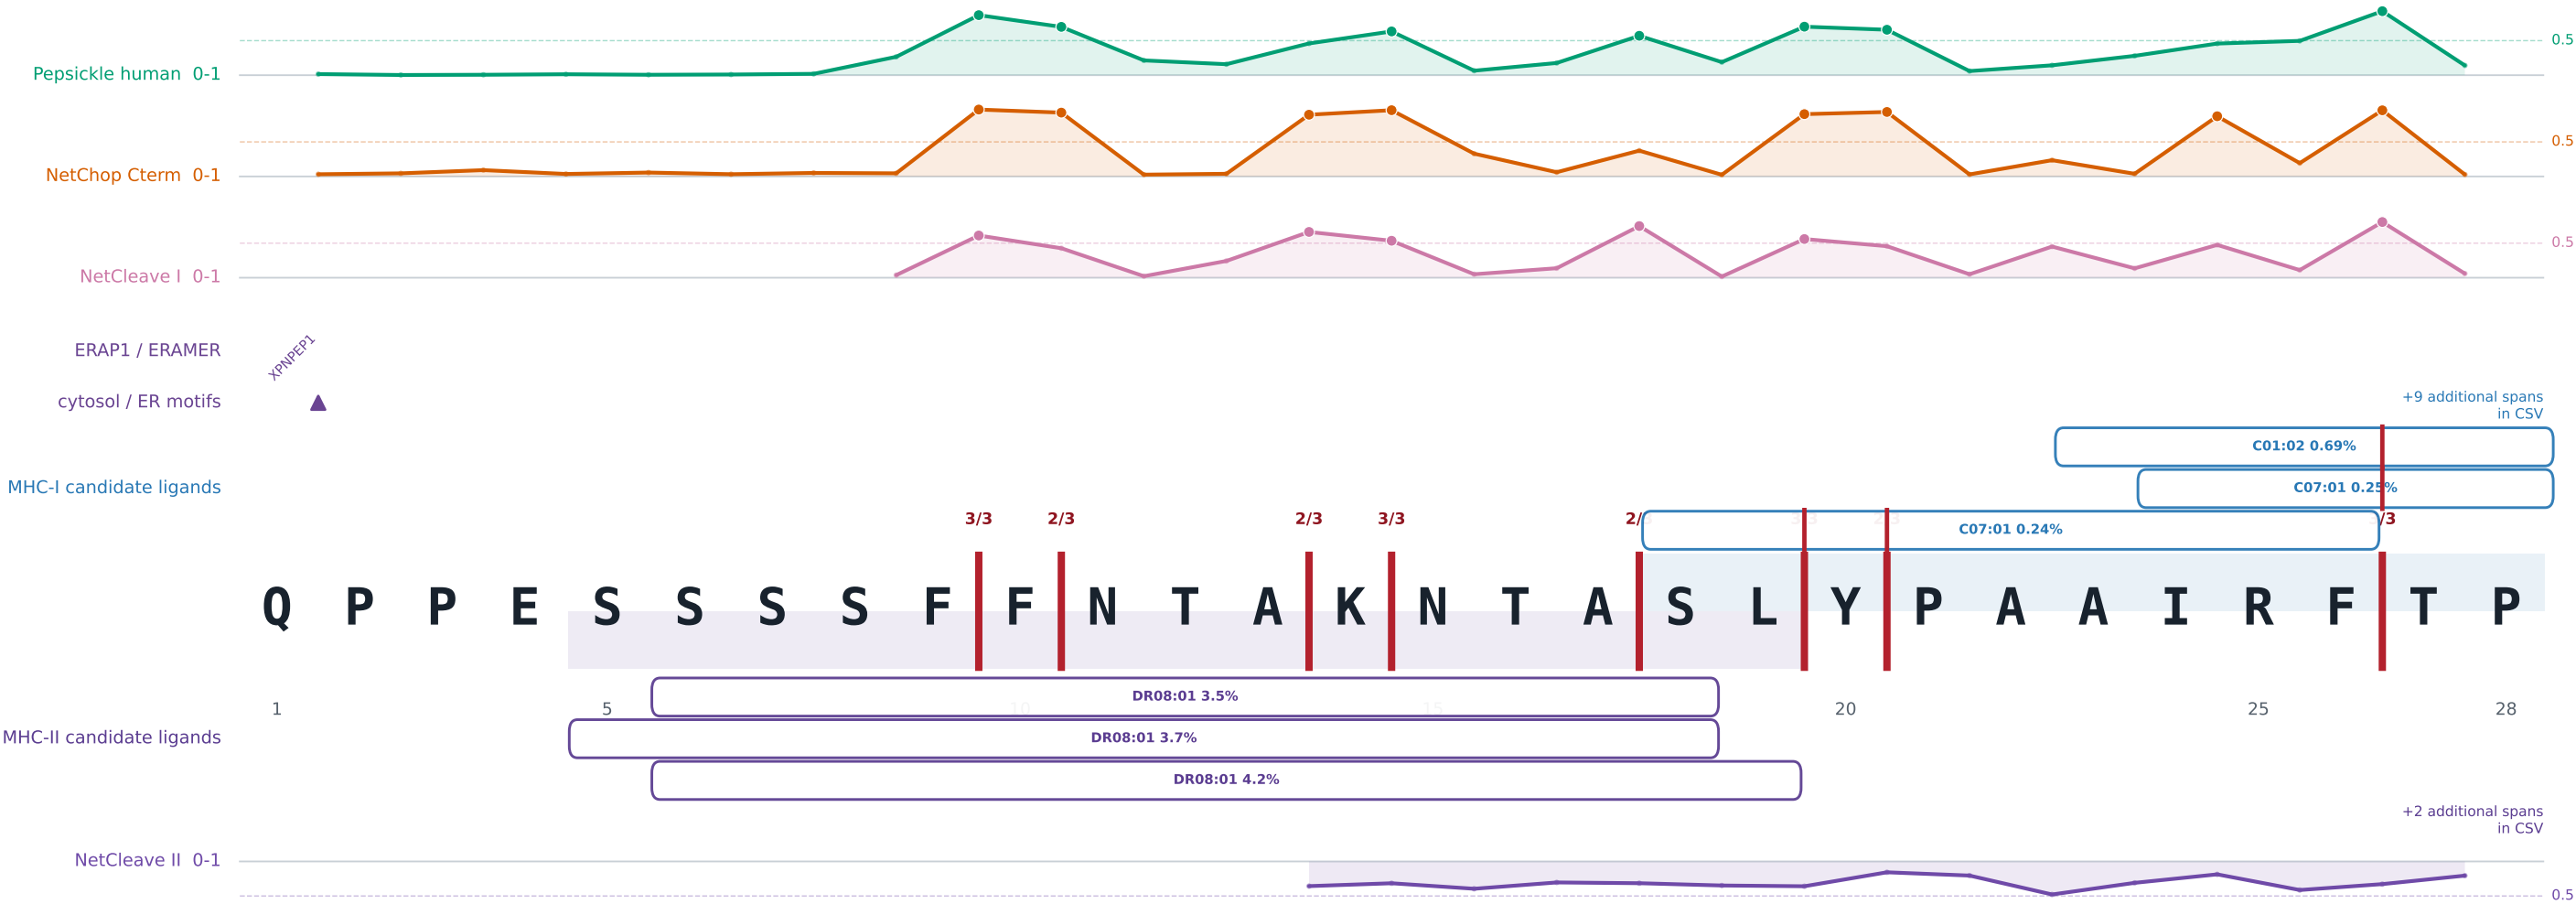

SERUM / EXTRACELLULAR - native scores and recognition motifs




Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

GLIS3 p.Ser775fs | JLF V3 | 80 aa - segment 2/3, bonds 28-54

minimal epitope/window not disclosed for this SLP

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

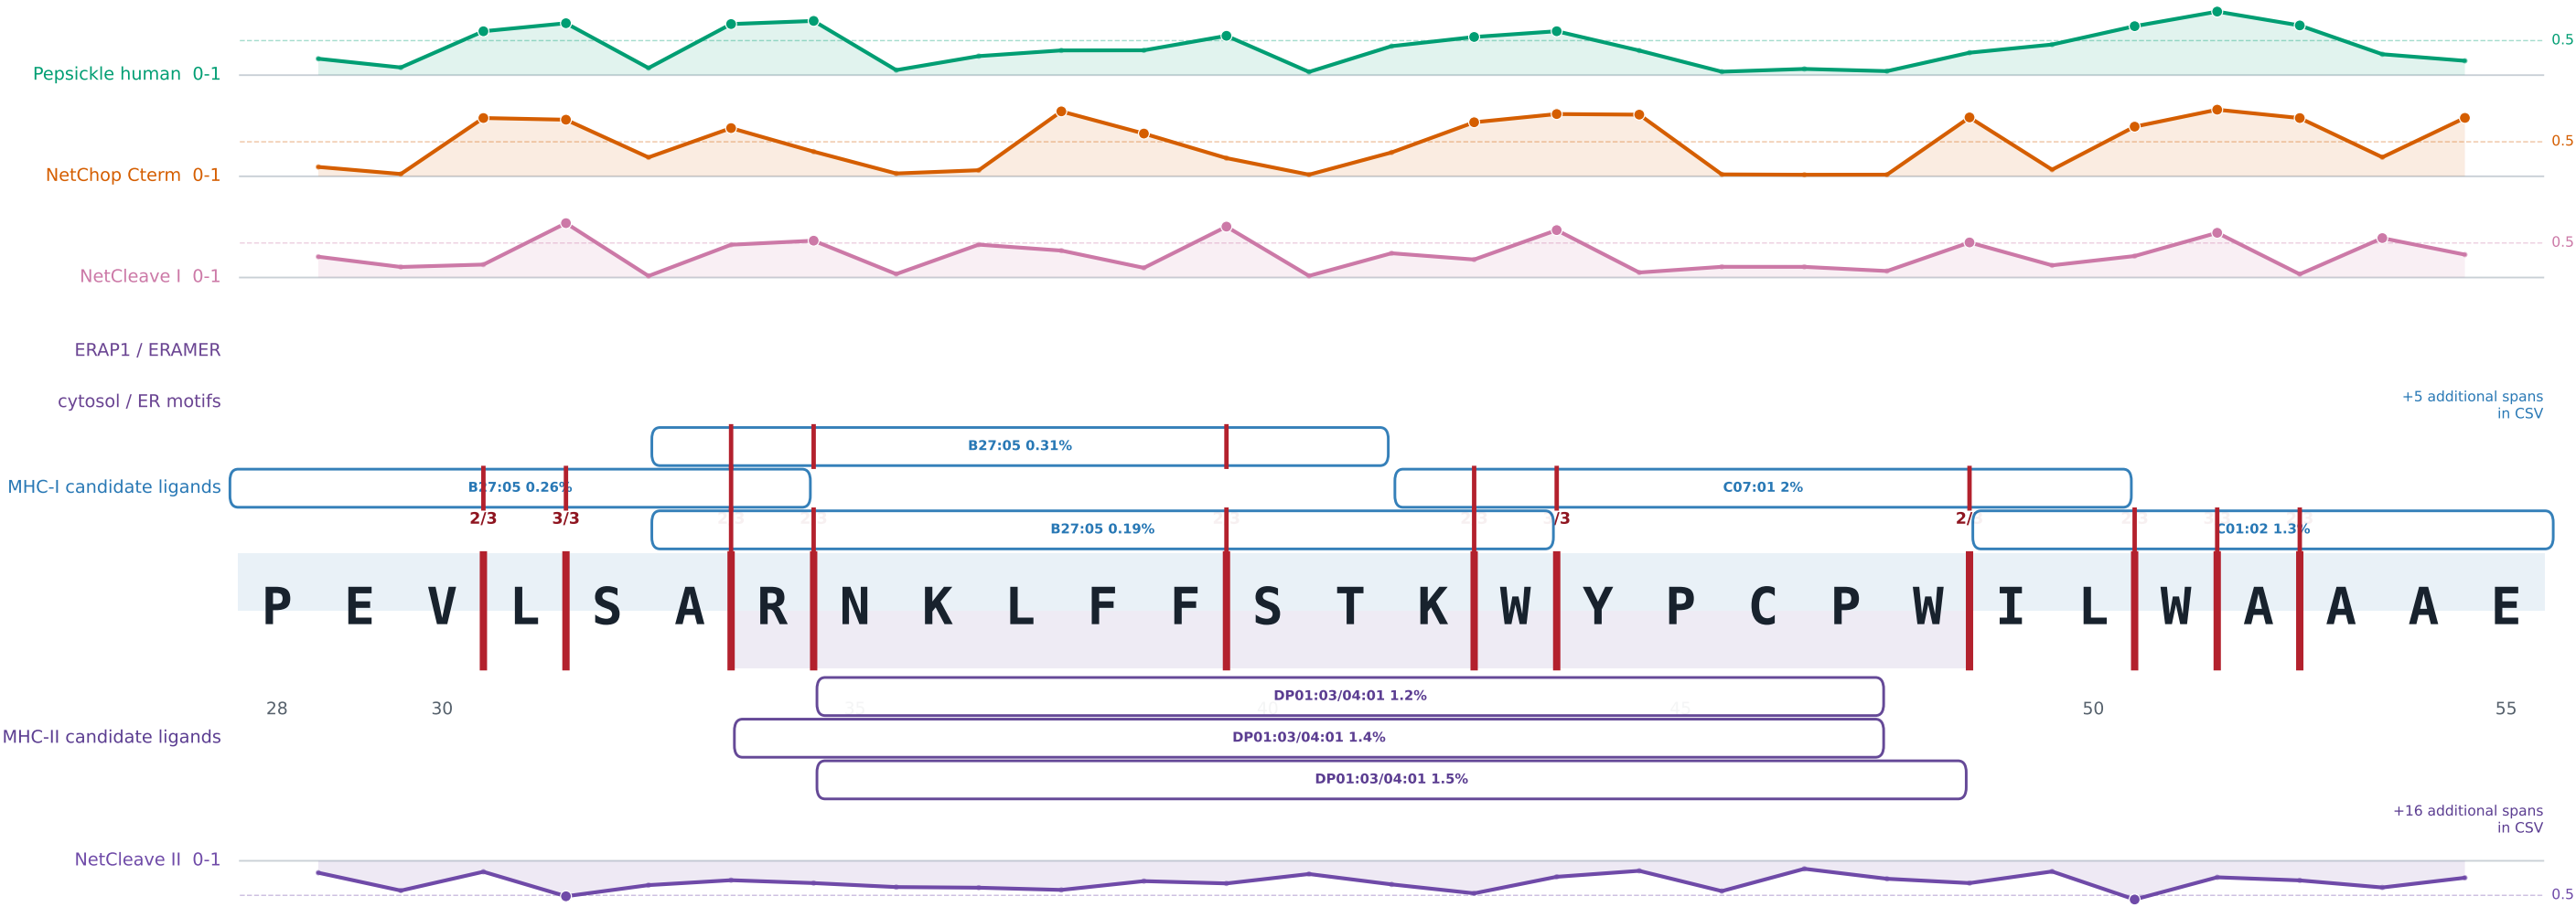

SERUM / EXTRACELLULAR - native scores and recognition motifs


DPP4 native
serum / extracellular motifs

Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

GLIS3 p.Ser775fs | JLF V3 | 80 aa - segment 3/3, bonds 55-79

minimal epitope/window not disclosed for this SLP

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

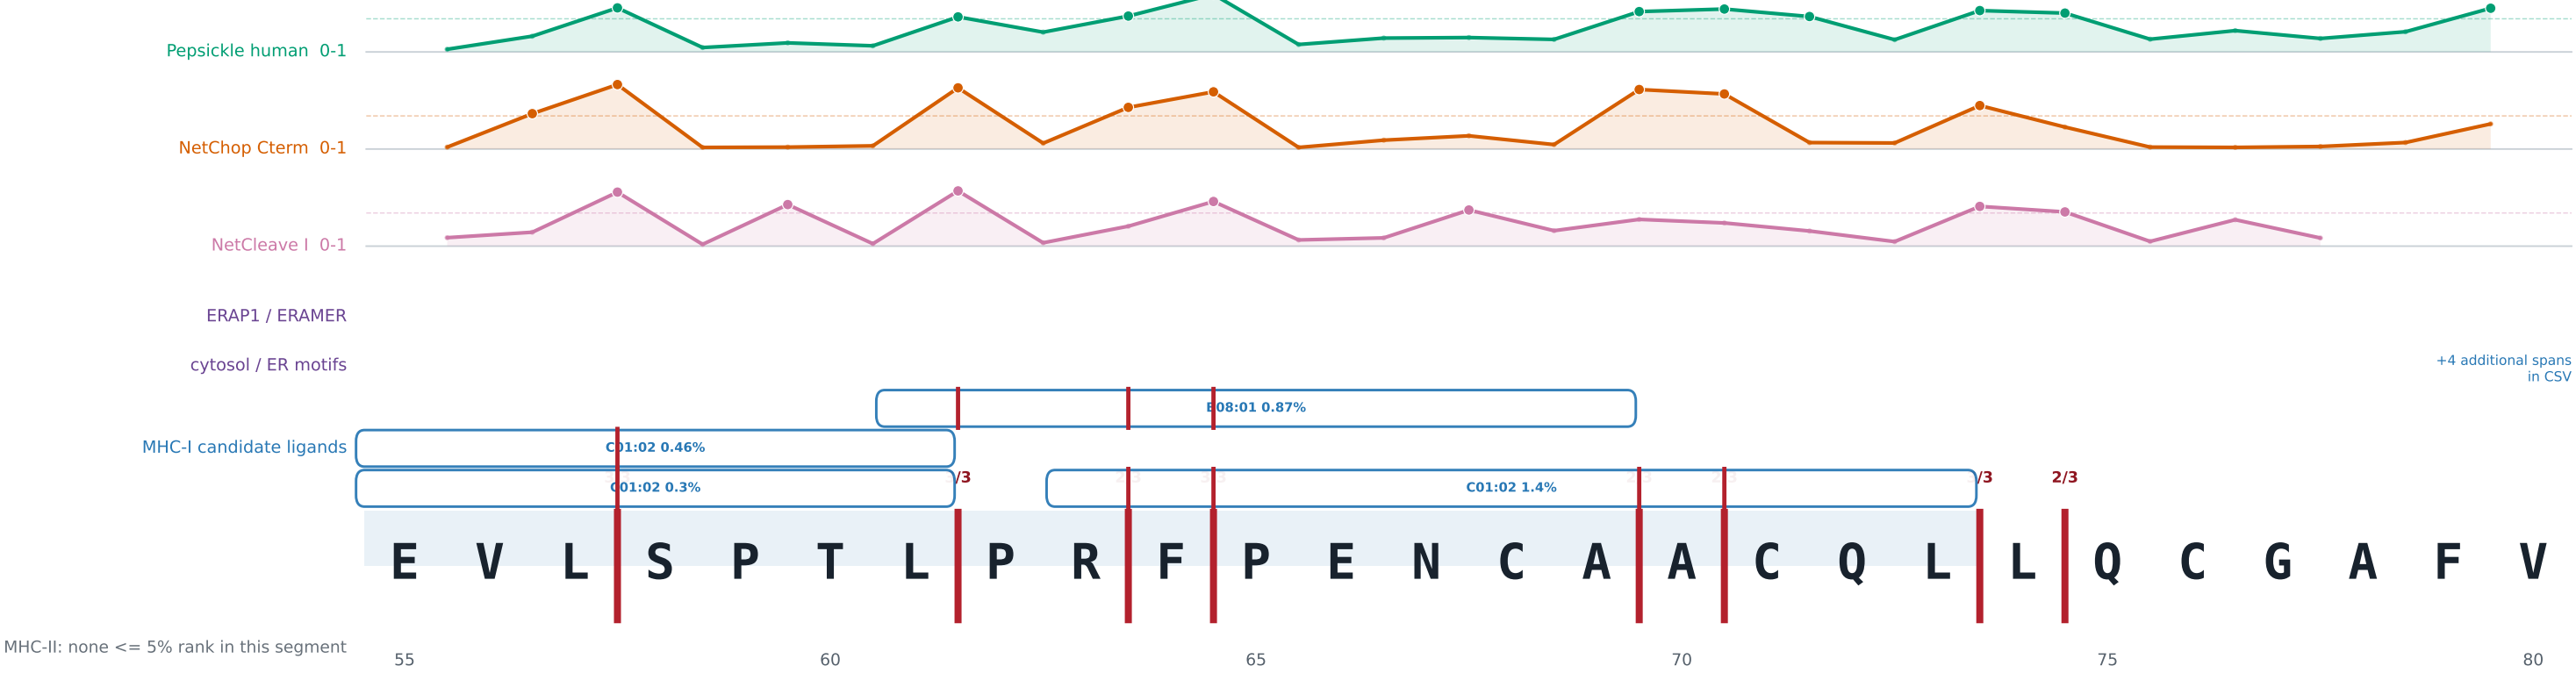

+4 additional spans in CSV

SERUM / EXTRACELLULAR - native scores and recognition motifs




ACE

Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

MYO9A p.Asp523Val | JLF V2 | 25 aa

minimal epitope/window not disclosed for this SLP

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

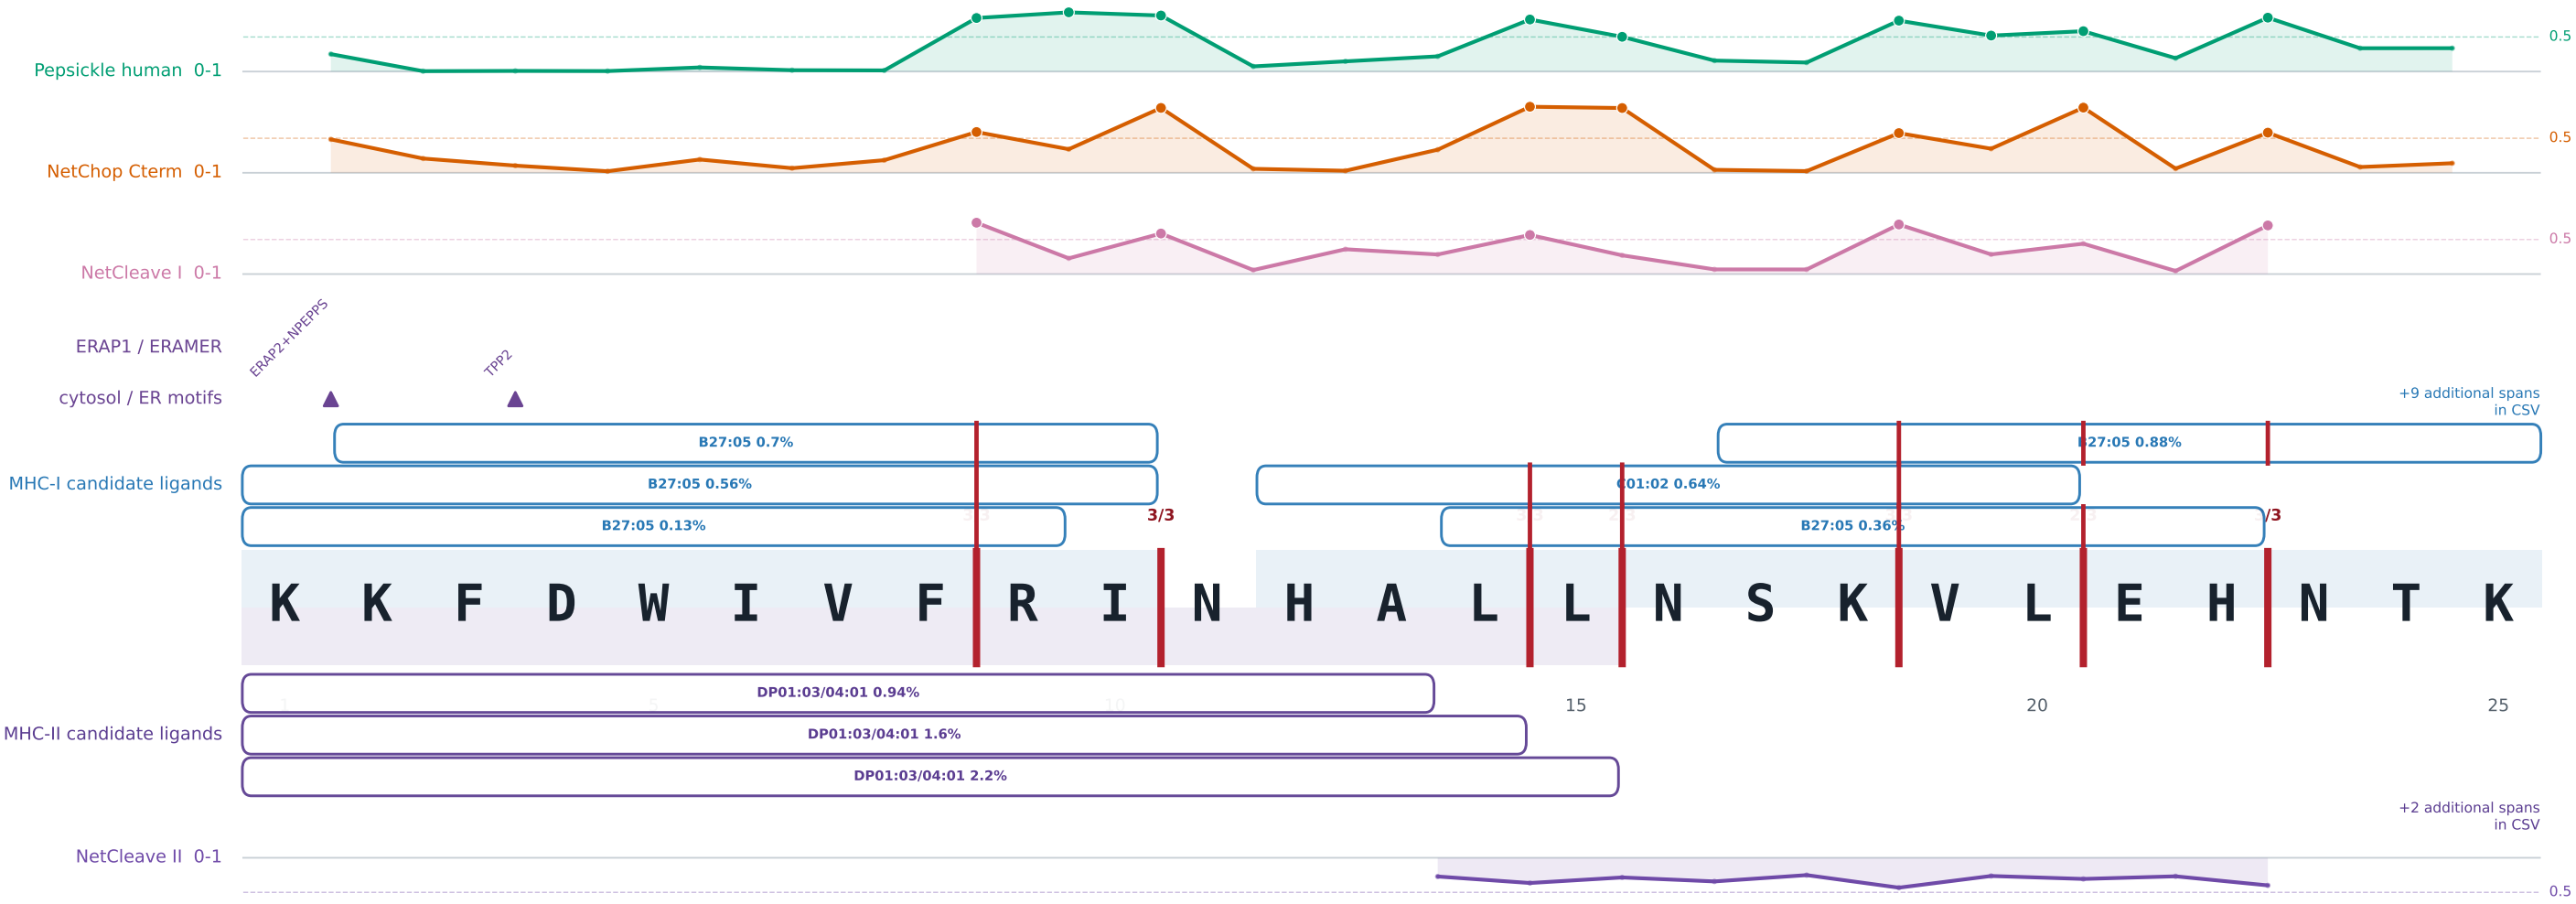

SERUM / EXTRACELLULAR - native scores and recognition motifs




Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.


VPS13B p.Ser3756Phe | CeGaT | 20 aa

minimal epitope/window not disclosed for this SLP

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

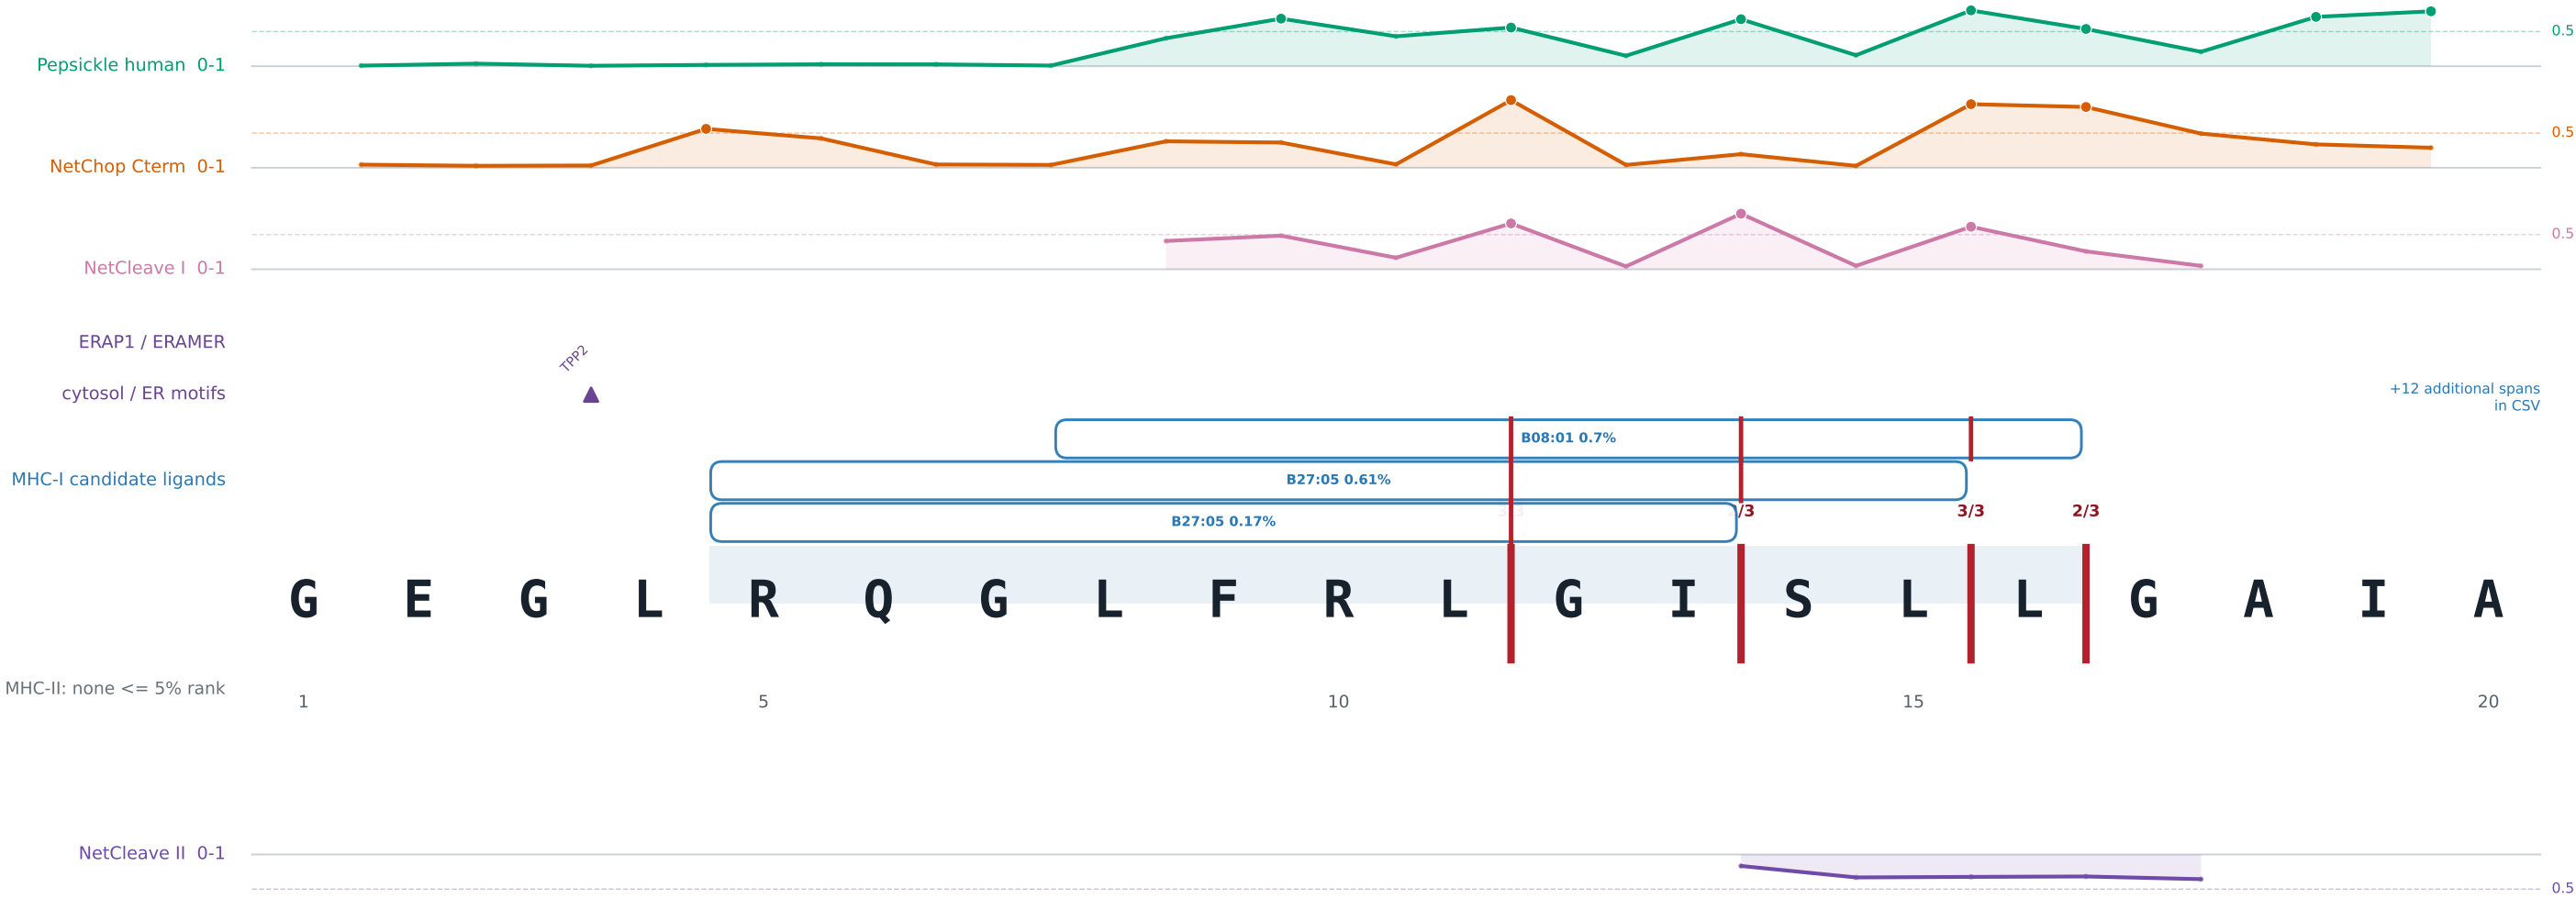

SERUM / EXTRACELLULAR - native scores and recognition motifs

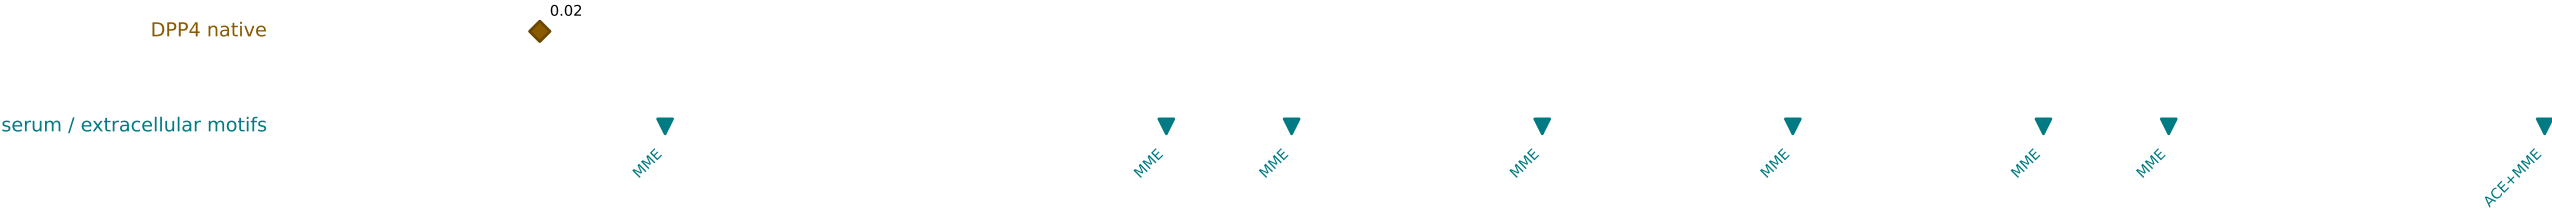


Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

H1-2 p.Ala197_Lys201del | CeGaT | 16 aa

minimal epitope/window not disclosed for this SLP

INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

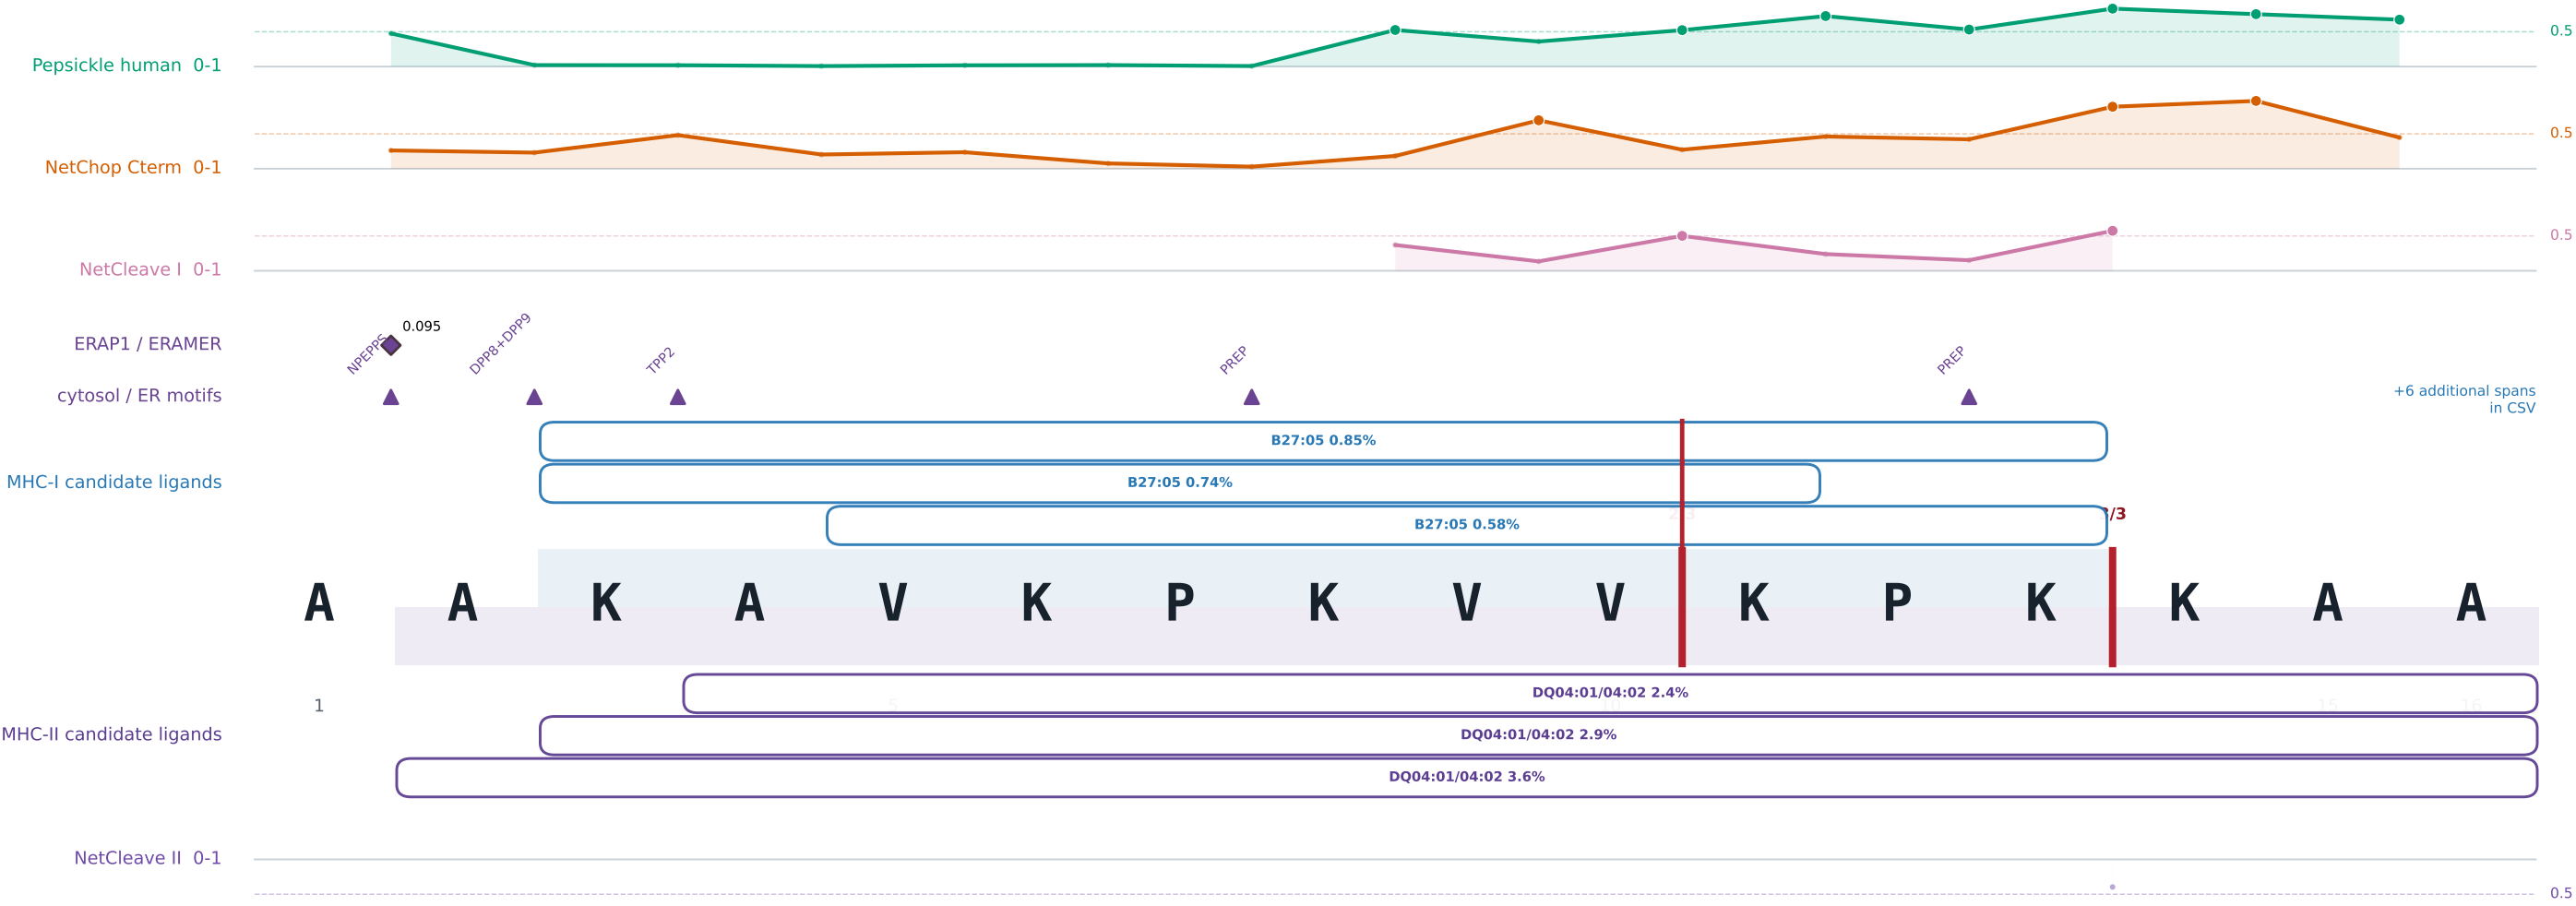

SERUM / EXTRACELLULAR - native scores and recognition motifs




Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

MAP2 p.Leu867fs | JLF V3 | 23 aa

disclosed minimal epitope RVVPFTKAL at 9-17


INTRACELLULAR / CLASS-I PROCESSING - red slash = 2/3 or 3/3 displayed tracks at >=0.5

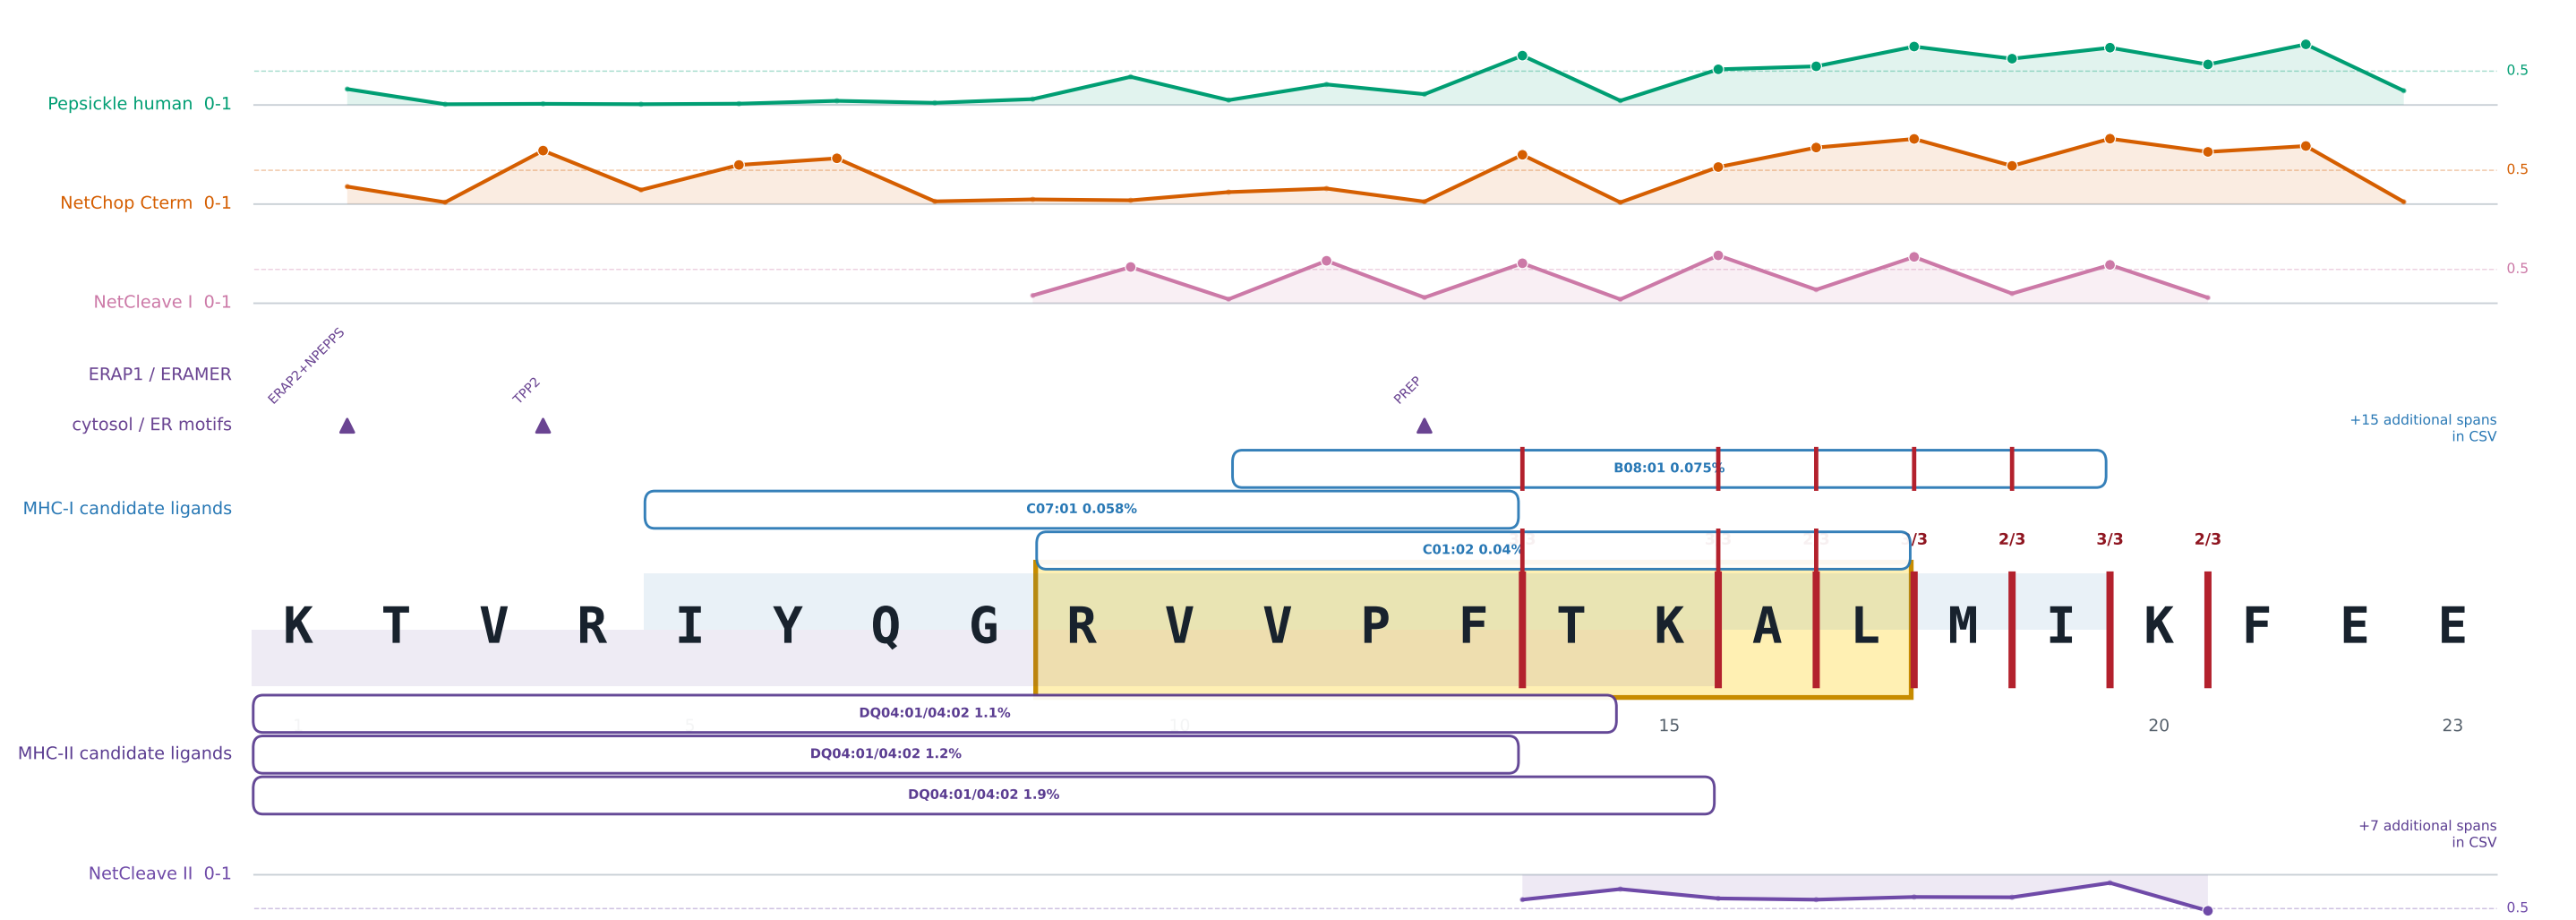

Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

EPG5 p.Ala869Thr | JLF V1 | 20 aa


minimal epitope/window not disclosed for this SLP

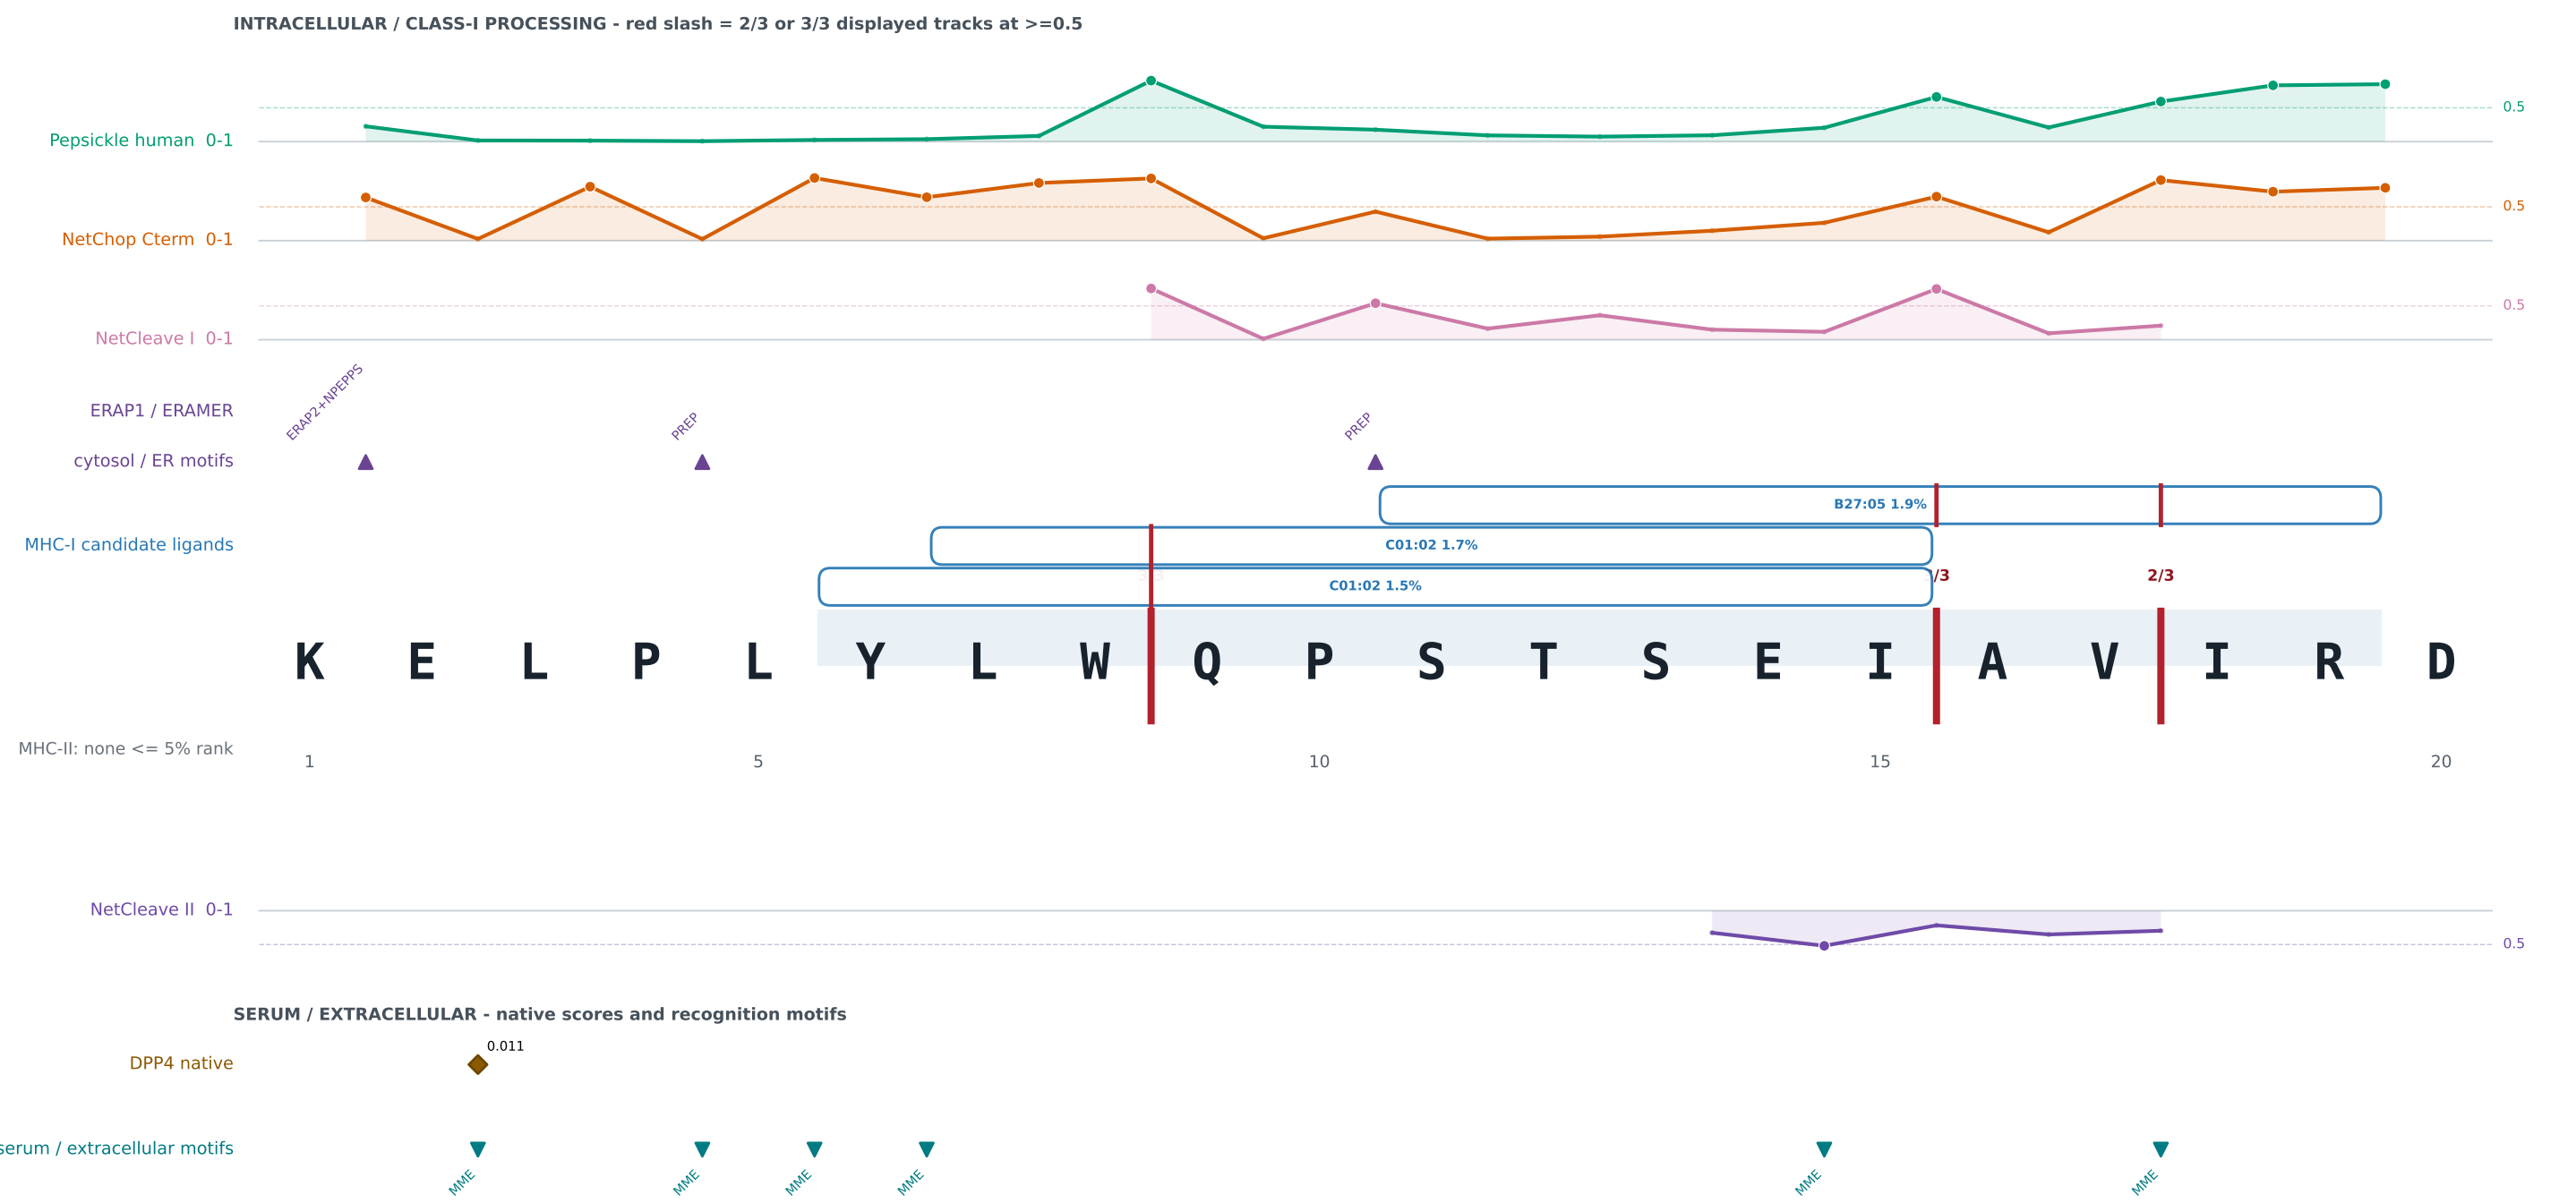

Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

EPG5 p.Ala869Thr | JLF V2 | 23 aa


minimal epitope/window not disclosed for this SLP

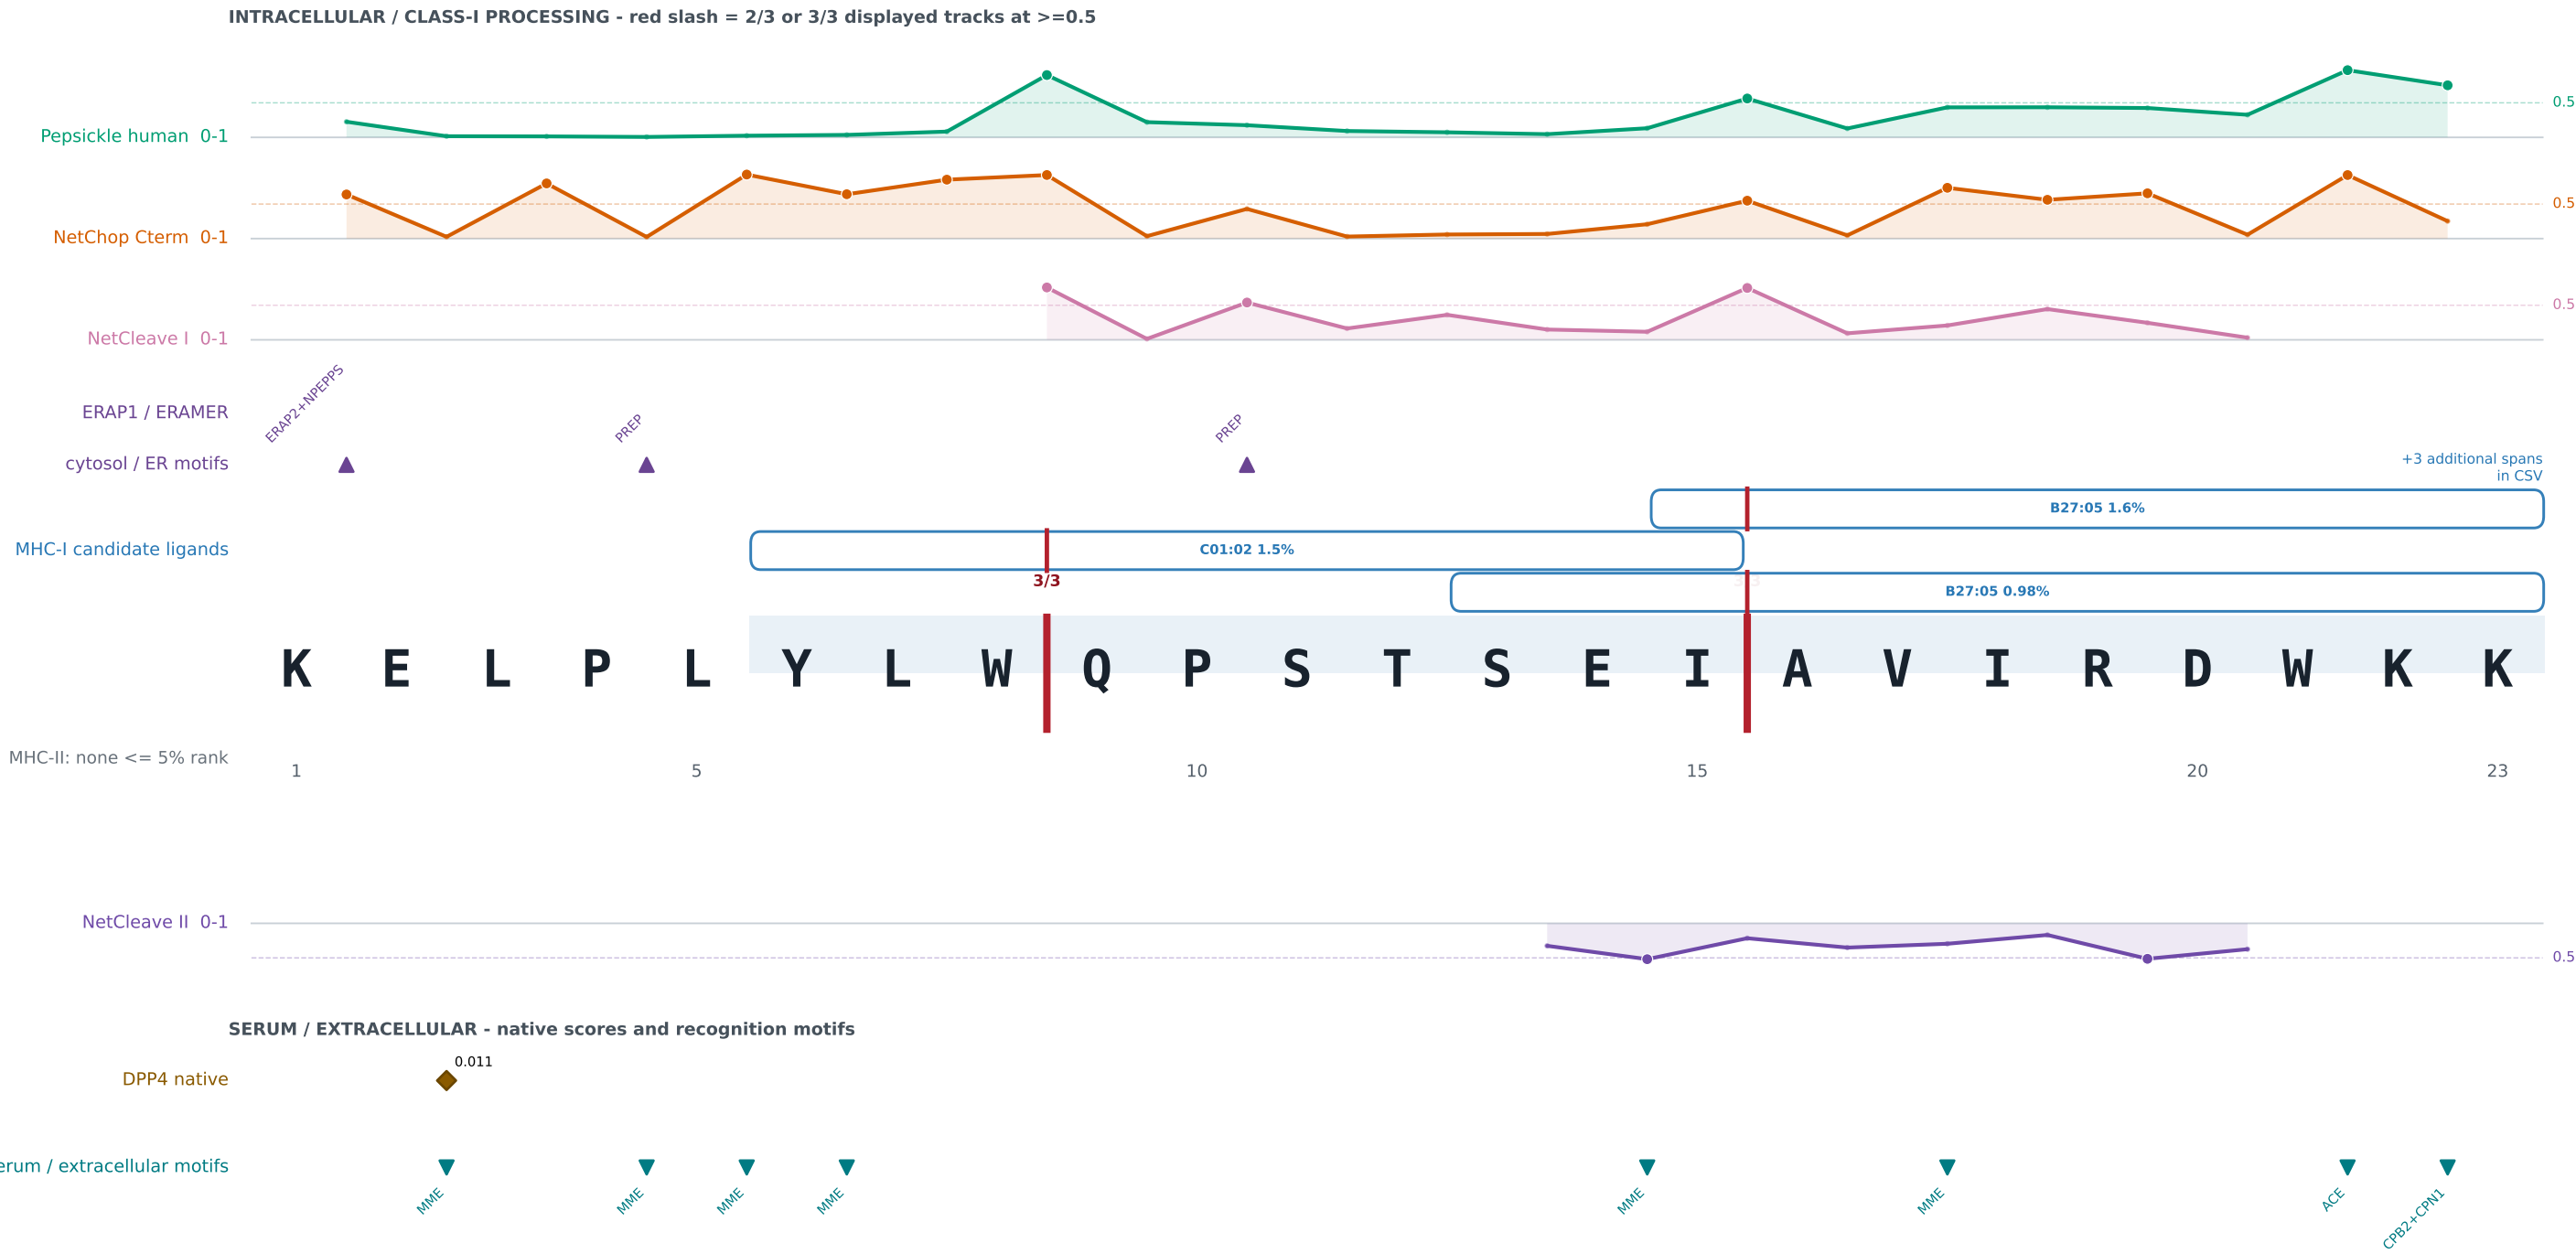

Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

KDM3B p.Pro633Ser | JLF V2, JLF V1 | 26 aa


minimal epitope/window not disclosed for this SLP

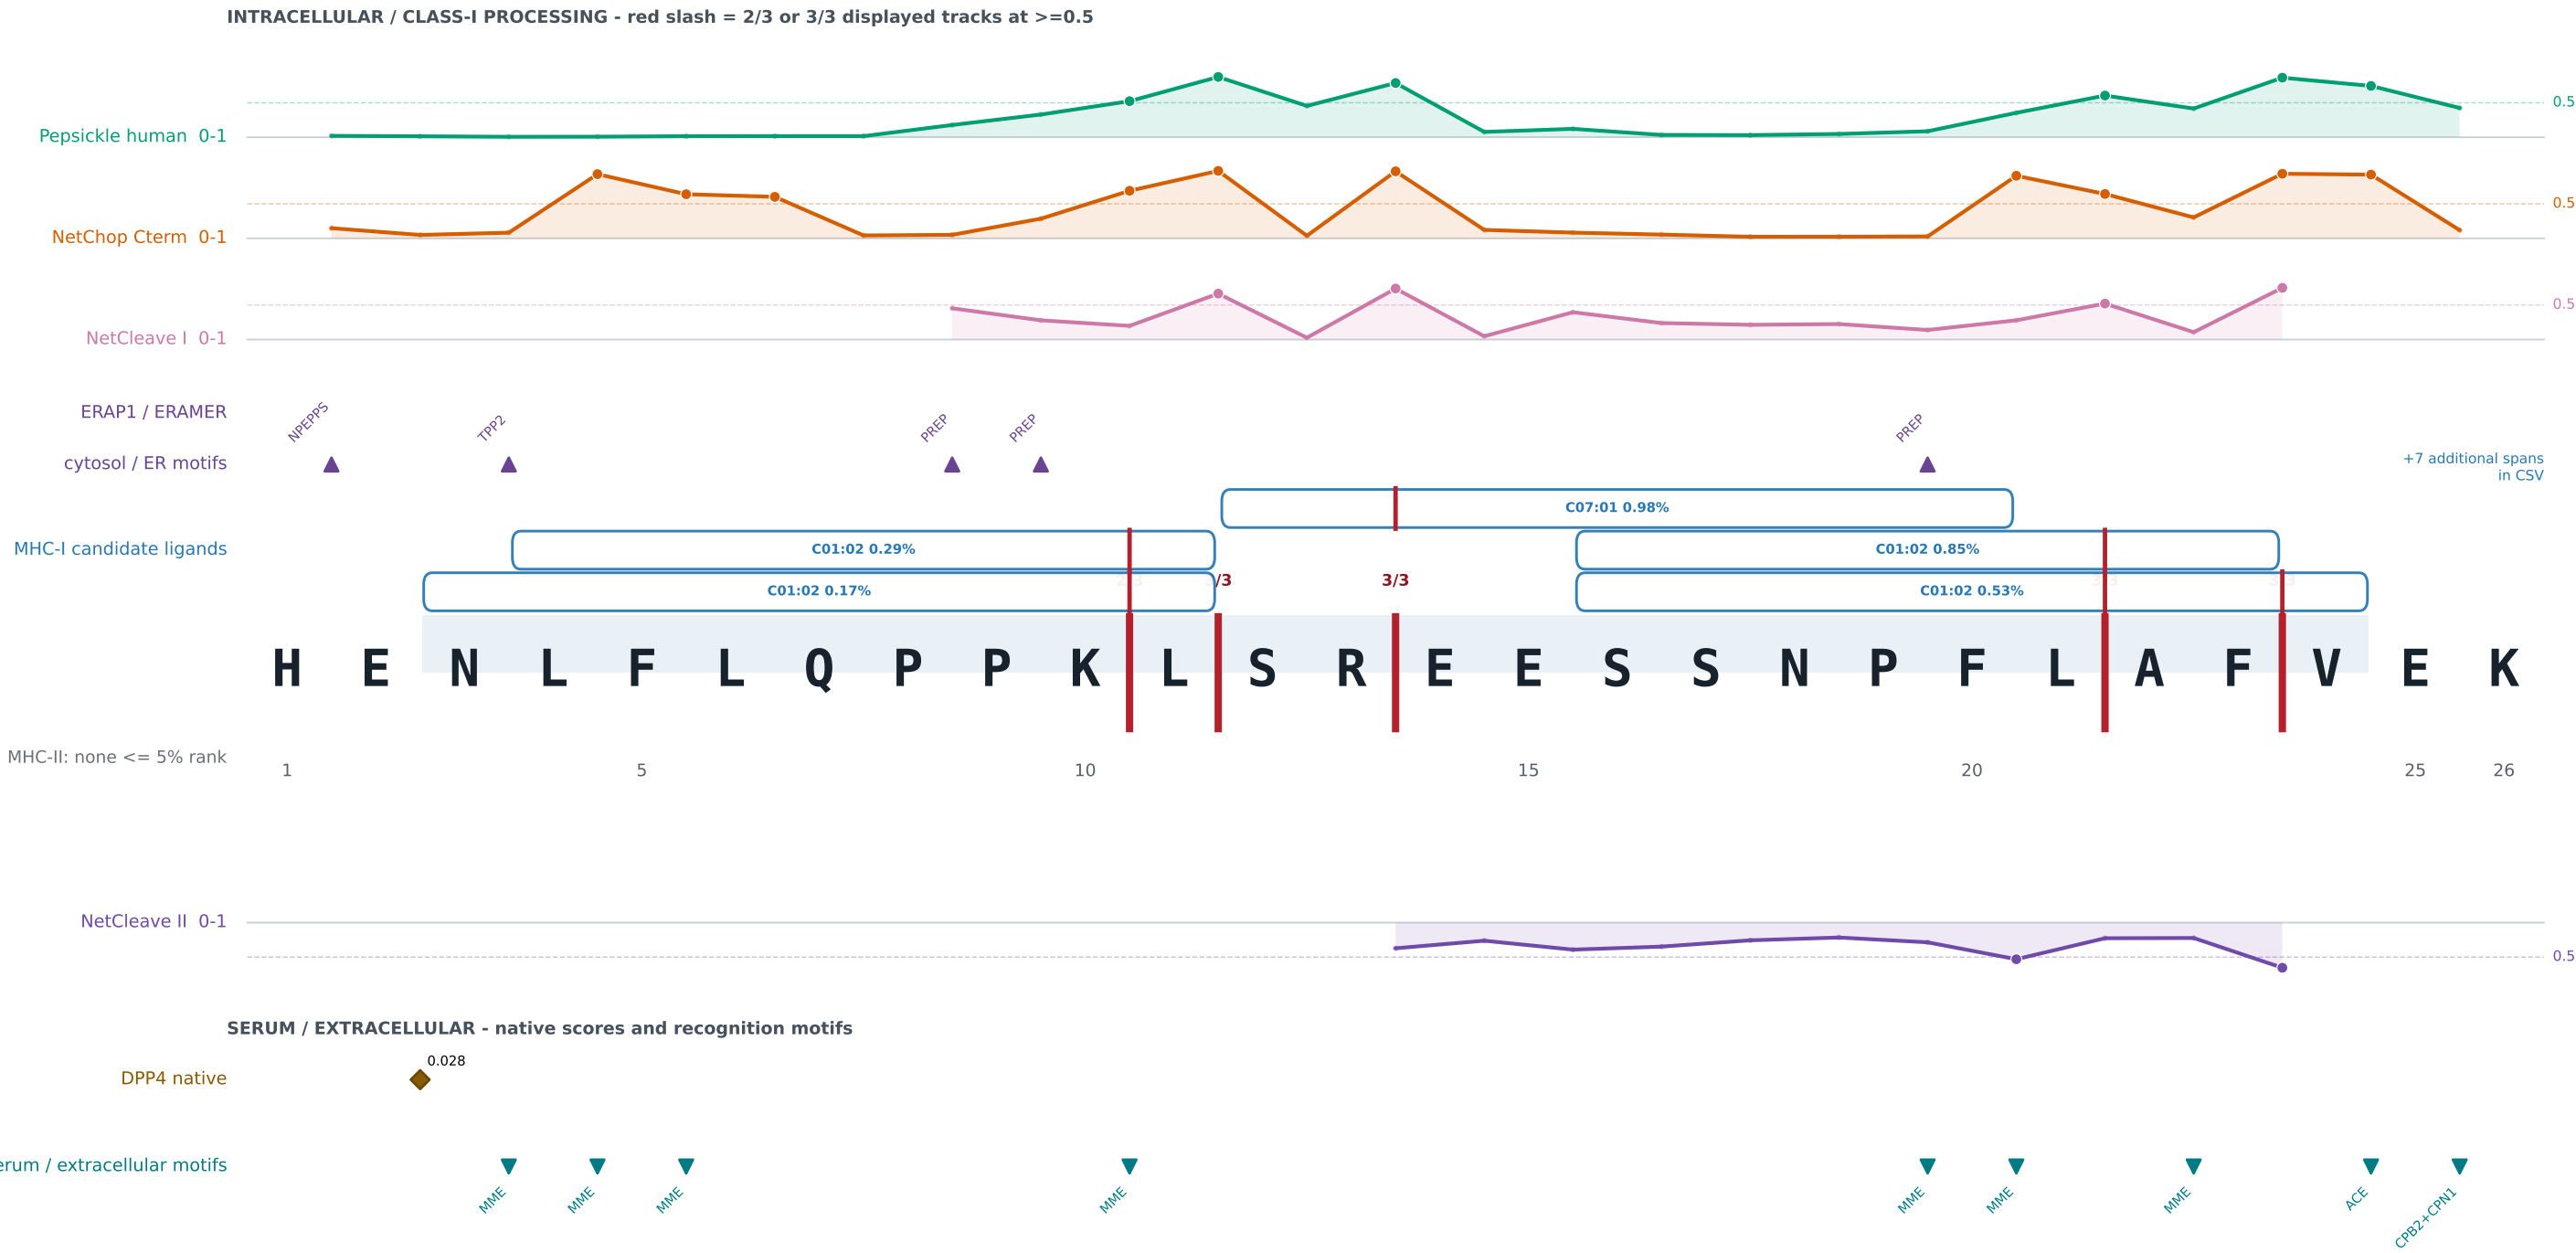

Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.

MT-ND5 p.Ala220Thr | CeGaT | 17 aa

minimal epitope/window not disclosed for this SLP

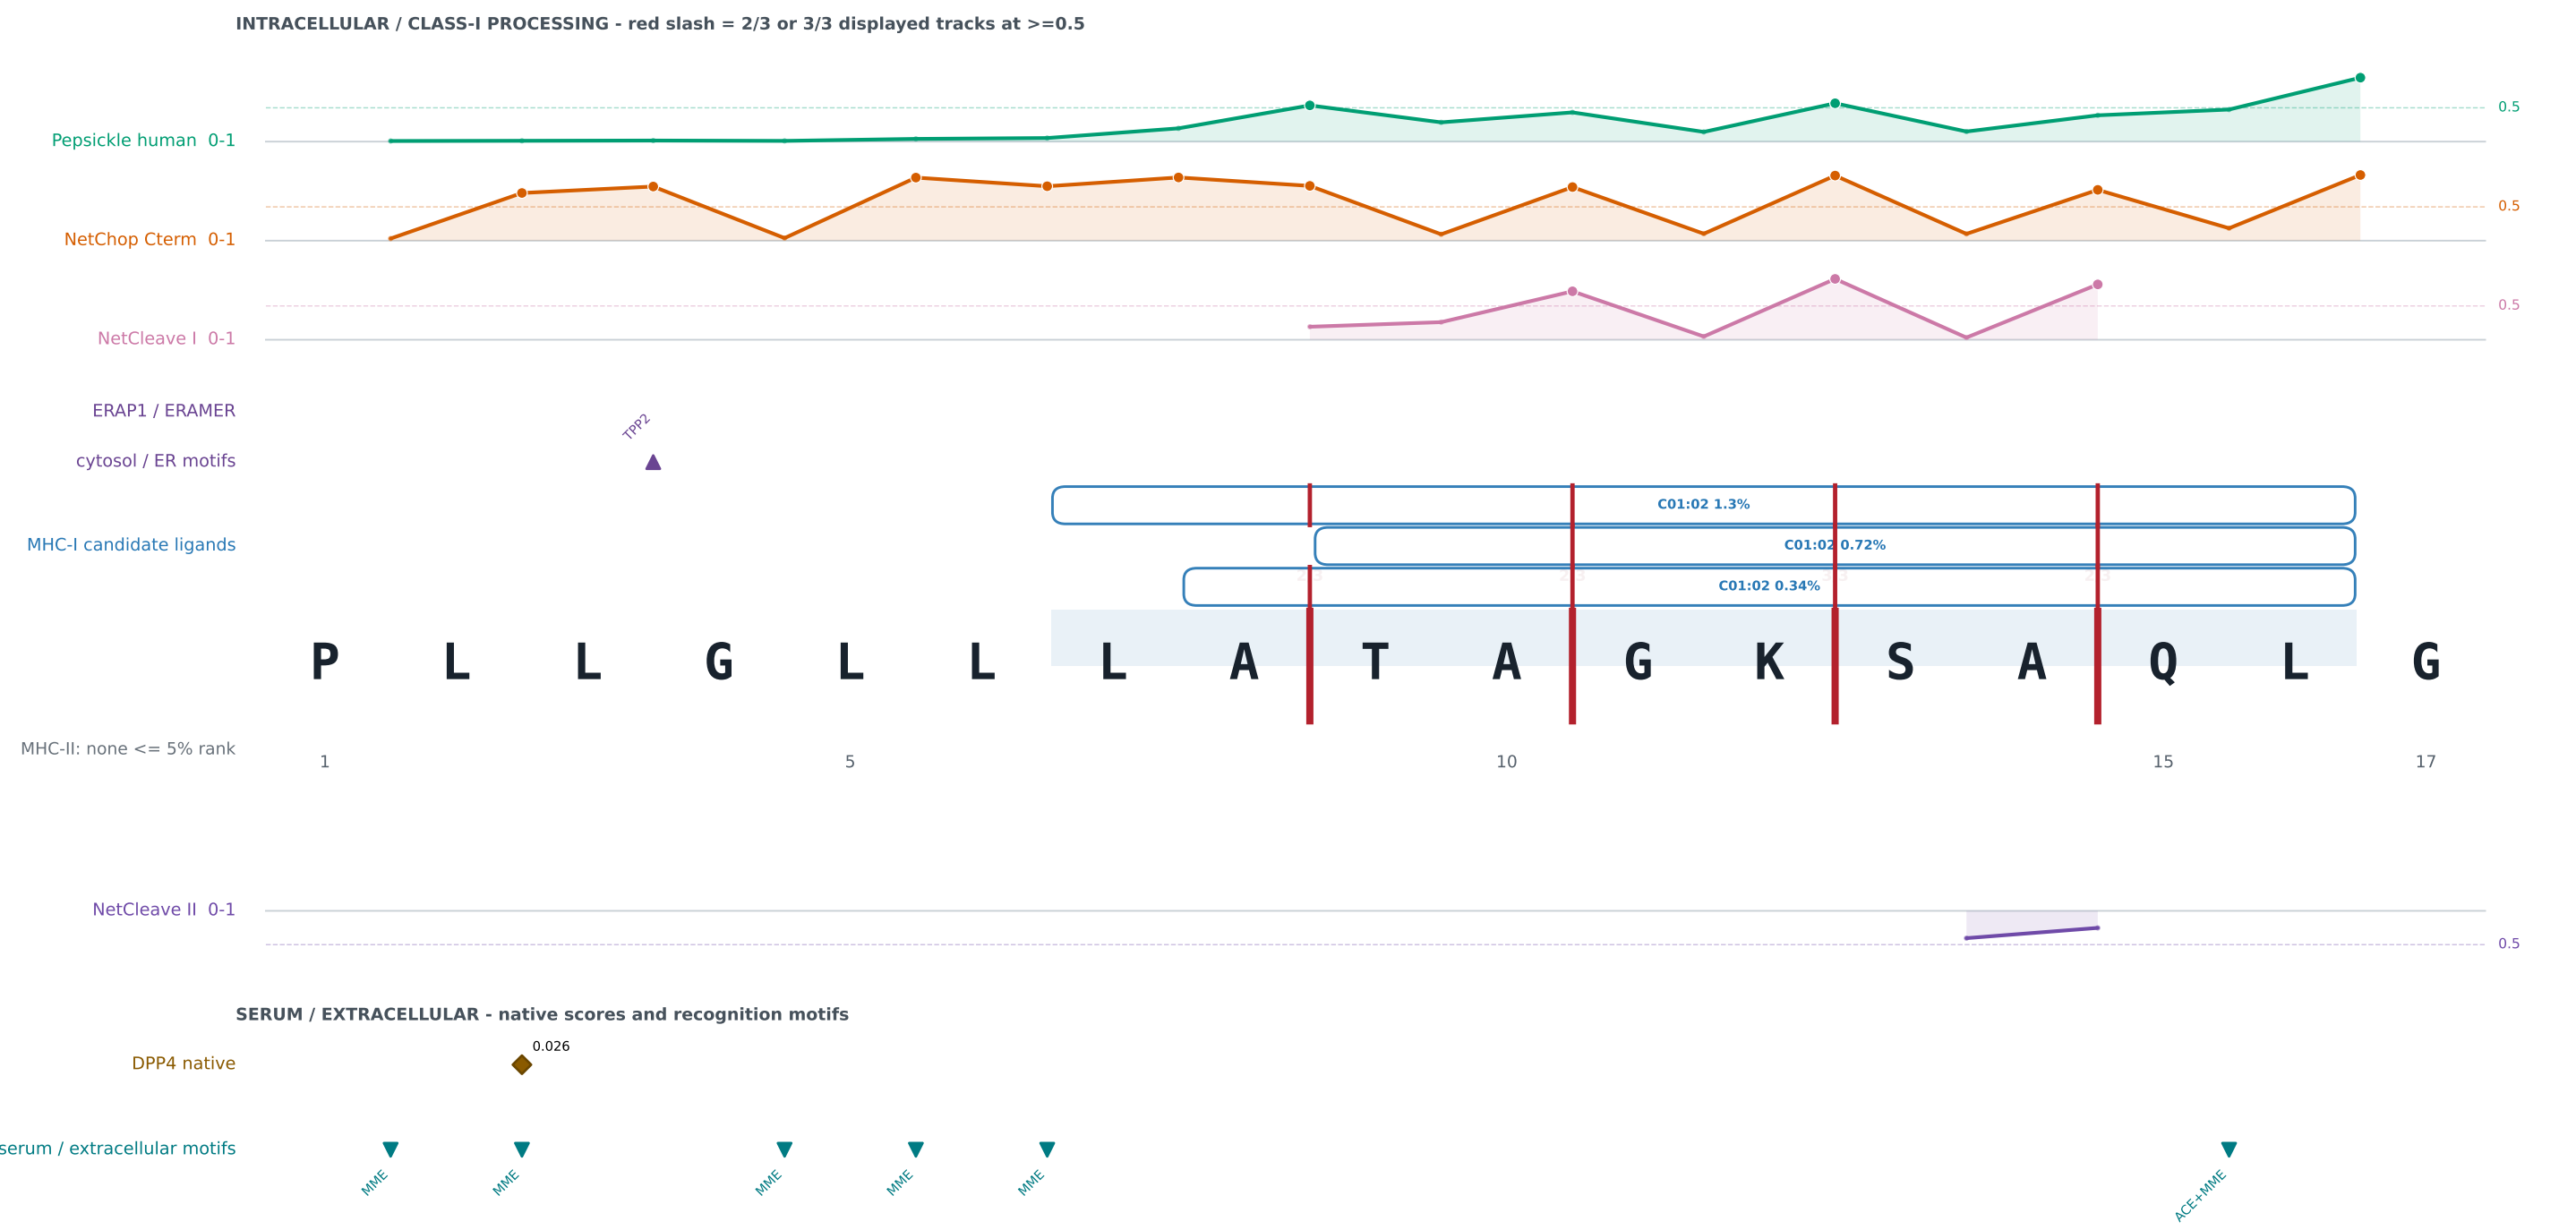

Reading the map. Each profile joins exact scores at adjacent assessed bonds; it is not smoothed, averaged, or calibrated, and gaps are unassessed. Dots at or beyond the dashed 0.5 line are display candidates. A red slash is drawn only when all three displayed intracellular tracks assess that bond and >=2 score >=0.5; its label is the supporting fraction (2/3 or 3/3), not a probability. Pale blue/purple sequence tint marks coverage by a displayed MHC window; outlined windows identify the individual candidate MHC ligands at <=2%/<=5% rank (top-ranked non-overlapping spans shown; all rows are in the CSV); red ticks inside them are internal candidate cuts before binding. These counts are not probabilities, and ligand bars do not model binding occupancy, timing, or post-binding protection.