HaUI | SCHOOL OF INFORMATION & COMMUNICATIONS TECHNOLOGY

STUDENT RESEARCH CONFERENCE 2026

# Title of the Research Paper Goes Here

Optional subtitle or tagline

**Nguyen Van A, Tran Thi B**

SICT, Hanoi University of Industry

Hanoi, October 2026



# Outline

1. Introduction
2. Proposed Method
3. Experiments & Results
4. Conclusion & Future Work



# 01

# Introduction

# Background and Motivation

- Background: briefly describe the field and the practical problem.
- Research gap:
  - Limitations of existing methods.
  - Lack of data or evaluation for the target setting.
- Research question: state it clearly and make it measurable.

## Objective

Propose a new method that improves accuracy while reducing computational cost.

## Key Contributions

A model, a dataset, and experimental results.

## Note

Replace this sample text with your own content.

# 02

# Proposed Method

# Workflow

1. Collect and preprocess the data.
2. Build the proposed model.
3. Train and tune the hyperparameters.
4. Evaluate with standard metrics: $F_1 = \dfrac{2PR}{P+R}$.

# 03

# Experiments & Results

# Experimental Setup and Main Results

**Setup**

- Dataset: describe source, size, train/val/test split.
- Baselines: ResNet-50 [1], ViT-B/16 [2].
- Optimizer: Adam [3], lr $= 10^{-4}$.
- Metrics: Accuracy, $F_1$, inference time.

**Table 1:** Comparison on the test set (%).

| Method | Acc. | $F_1$ | Time (ms) |
|---|---|---|---|
| ResNet-50 [1] | 86.4 | 85.1 | 12.3 |
| ViT-B/16 [2] | 88.9 | 87.6 | 21.8 |
| **Ours** | **91.2** | **90.3** | 14.1 |

**Takeaway**

+2.3 points of accuracy over the best baseline at lower cost.

# Performance Analysis

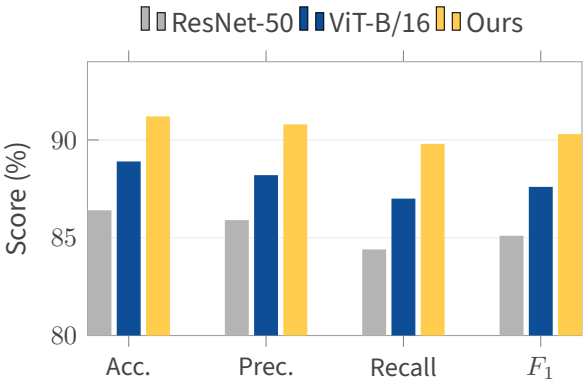



**Figure 1:** Metric comparison across methods.

- Consistent gains on all four metrics.
- Largest improvement on Recall: +2.8 over ViT.
- Ablation: removing module A drops $F_1$ by 1.9 points.

**Insight**

Explain *why* the method works, not only that it works.

# 04

# Conclusion & Future Work

# Conclusion and Future Work

## Conclusion

- Proposed a method that reaches 91.2% accuracy.
- Cuts inference time by 35% versus ViT-B/16 [2].
- Released code and dataset for reproducibility.

## Future Work

1. Evaluate on larger, multi-domain datasets.
2. Model compression for edge deployment.
3. Self-supervised pre-training with unlabeled data.

## Limitations

Results are reported on a single dataset; generalization remains to be verified.

# References


[1] **K. He, X. Zhang, S. Ren, J. Sun.**

**Deep residual learning for image recognition.**

In *Proc. IEEE CVPR*, pp. 770–778, 2016.

[2] **A. Dosovitskiy *et al.***

**An image is worth 16x16 words: Transformers for image recognition at scale.**

In *Proc. ICLR*, 2021.

[3] **D. P. Kingma, J. Ba.**

**Adam: A method for stochastic optimization.**

In *Proc. ICLR*, 2015.

[4] **A. Vaswani *et al.***

**Attention is all you need.**

In *Advances in NeurIPS*, vol. 30, 2017.




# Thank you!

## Questions & Discussion

quang.do@fit-haui.edu.vn | sict.haui.edu.vn