HaUI | SCHOOL OF INFORMATION & COMMUNICATIONS TECHNOLOGY

STUDENT RESEARCH CONFERENCE 2026

Title of the Research Paper Goes Here

Optional subtitle or tagline

Nguyen Van A, Tran Thi B

SICT, Hanoi University of Industry

Hanoi, October 2026

Outline

1. Introduction
2. Proposed Method
3. Experiments & Results
4. Conclusion & Future Work



01

Introduction

Background and Motivation

- Background: briefly describe the field and the practical problem.
- Research gap:
  - Limitations of existing methods.
  - Lack of data or evaluation for the target setting.
- Research question: state it clearly and make it measurable.

Objective

Propose a new method that improves accuracy while reducing computational cost.

Key Contributions

A model, a dataset, and experimental results.

Note

Replace this sample text with your own content.

02

Proposed Method

Workflow

1. Collect and preprocess the data.
2. Build the proposed model.
3. Train and tune the hyperparameters.
4. Evaluate with standard metrics: $F_1 = \dfrac{2PR}{P+R}$.

03

Experiments & Results

Experimental Setup and Main Results

Setup

- Dataset: describe source, size, train/val/test split.
- Baselines: ResNet-50 [1], ViT-B/16 [2].
- Optimizer: Adam [3], lr $= 10^{-4}$.
- Metrics: Accuracy, F_1, inference time.

Table 1: Comparison on the test set (%).

Method	Acc.	F_1	Time (ms)
ResNet-50 [1]	86.4	85.1	12.3
ViT-B/16 [2]	88.9	87.6	21.8
Ours	**91.2**	**90.3**	14.1

Takeaway

+2.3 points of accuracy over the best baseline at lower cost.

Performance Analysis

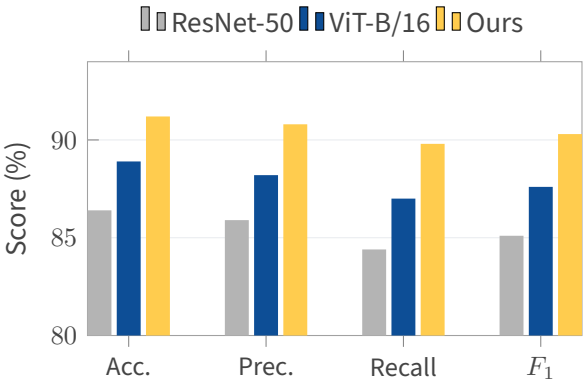


Figure 1: Metric comparison across methods.

- Consistent gains on all four metrics.
- Largest improvement on Recall: +2.8 over ViT.
- Ablation: removing module A drops F_1 by 1.9 points.

Insight

Explain *why* the method works, not only that it works.

04

Conclusion & Future Work

Conclusion and Future Work

Conclusion

- Proposed a method that reaches 91.2% accuracy.
- Cuts inference time by 35% versus ViT-B/16 [2].
- Released code and dataset for reproducibility.

Future Work

1. Evaluate on larger, multi-domain datasets.
2. Model compression for edge deployment.
3. Self-supervised pre-training with unlabeled data.

Limitations

Results are reported on a single dataset; generalization remains to be verified.

References

[1] **K. He, X. Zhang, S. Ren, J. Sun.**

Deep residual learning for image recognition.

In *Proc. IEEE CVPR*, pp. 770–778, 2016.

[2] **A. Dosovitskiy *et al.***

An image is worth 16x16 words: Transformers for image recognition at scale.

In *Proc. ICLR*, 2021.

[3] **D. P. Kingma, J. Ba.**

Adam: A method for stochastic optimization.

In *Proc. ICLR*, 2015.

[4] **A. Vaswani *et al.***

Attention is all you need.

In *Advances in NeurIPS*, vol. 30, 2017.



Thank you!

Questions & Discussion

quang.do@fit-haui.edu.vn | sict.haui.edu.vn