

1-using apt install apache2:

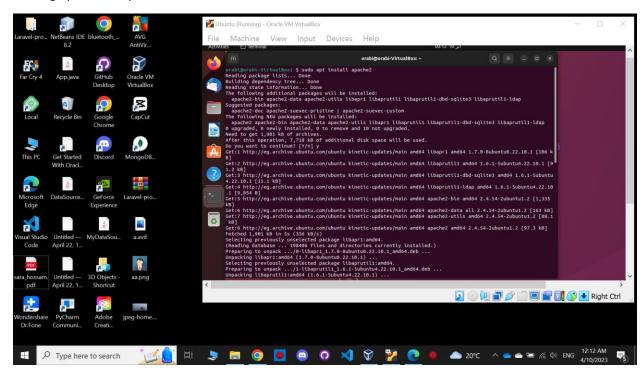

2-install php for apache2:

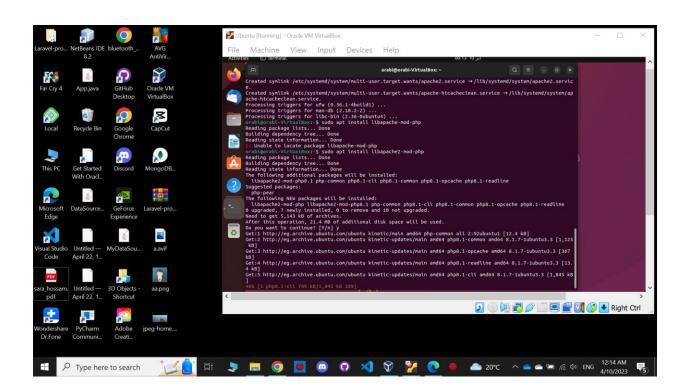

3-create new virtual host:

```
rtualHost *:80>

# The ServerName directive sets the request scheme, hostname and port >

# the server uses to identify itself. This is used when creating

# redirection URLs. In the context of virtual hosts, the ServerName

# specifies what hostname must appear in the request's Host: header to

# match this virtual host. For the default virtual host (this file) th>

# value is not decisive as it is used as a last resort host regardless.

# However, you must set it for any further virtual host explicitly.

ServerName www.admin2lab4.local

ServerAdmin admin@localhost
DocumentRoot /var/www/admin2lab4
```

4-configure /etc/hosts for php site :

GNU nano 6.2	hosts
127.0.0.1	localhost
127.0.0.1	admin2lab4.local

5- disable dir for the new virtual host:

```
# The ServerName directive sets the request scheme, hostname and port # the server uses to identify itself. This is used when creating # redirection URLs. In the context of virtual hosts, the ServerName # specifies what hostname must appear in the request's Host: header to # match this virtual host. For the default virtual host (this file) the # value is not decisive as it is used as a last resort host regardless # However, you must set it for any further virtual host explicitly. ServerName www.admin2lab4.local

ServerAdmin admin@localhost
DocumentRoot /var/www/admin2lab4
```